

# BE6500 Whole Home Mesh Wi-Fi 7 AP

MODEL: HB410



### **Overview**

Leveraging the cutting-edge Wi-Fi 7 technology and our expertise in Wi-Fi technology, HB410 offers fast Wi-Fi speeds up to 6.5 Gbps, faster than Wi-Fi 6. Enjoy improved Wi-Fi experiences with higher speeds and lower latency thanks to a groundbreaking mix of 4K-QAM, multi-link operation, multi-RU, and 6 simultaneous spatial streams. With 2.5 GbE WAN/LAN ports, a 2.5 GbE LAN port, and two gigabit ports, you can enjoy multi-gig internet access, fast wired connections, and a robust smart mesh network that covers your entire home.



### 6.5 Gbps Dual Band Wi-Fi

Deliver total Wi-Fi speeds up to 6.5 Gbps across 5 GHz and 2.4 GHz bands with lower latency and better online experiences.



# 2.5G Multi-Gig Connectivity

Boost whole internet throughput up to 2.5 Gbps for smoother and faster online activities. A 2.5 GbE LAN port and two gigabit LAN port enables both fast and flexible internet access.



# Increased Capacity

Connect over 200 devices simultaneously, enjoy a more efficient network that loads faster with high performance.



## Multi-link Operation (MLO)

Achieve higher throughput for each device with lower latency and higher reliability via multi-link aggregation across two bands.



### **Features**



#### Easy to Set Up and Use

Set up your device and network in minutes, whether you prefer the powerful Aginet app or the intuitive web interface.



#### **EasyMesh Compatible**

HB410 adopts standard EasyMesh technology. All compatible units can work together to form a mesh network to cover every corner of a home.



#### **Easy Remote Management**

TR-069/TR-369 protocols and TAUC (TP-Link Aginet Unified Cloud) are supported, service providers can manage multiple devices remotely.



#### Whole Home Coverage


All units work together to form a unified mesh network that covers every corner of your home based on standard EasyMesh technology.



### **Enhanced Security**

WPA3 encryption, Multi-SSID, and parental controls provide personalized and safer online experience.

## **Hardware Description**

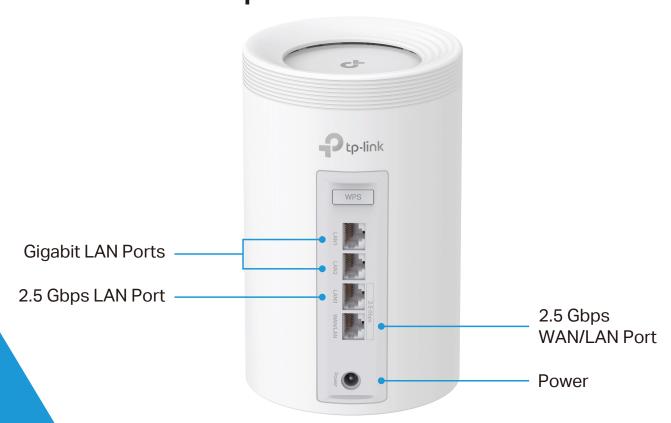



## **Specifications**

#### Hardware

• Ethernet Port

1× 10/100/1000/2500 Mbps RJ45 WAN/LAN Port,

1× 10/100/1000/2500 Mbps RJ45 LAN Port,

2× 10/100/1000 Mbps RJ45 LAN Ports

• Button

1× RESET button at the bottom,

1× WPS button on the back

• Power Consumption

27.5 W max (without power adapter)

• Dimensions (W × D × H)

4.23 × 4.23 × 6.93 in (107.5 × 107.5 × 176 mm)

• Power Adapter Input

100-240V~50/60Hz

· Power Adapter Output

12V/2A

• CPU

Quad-core @ 1.5 GHz CPU

• Antenna

Internal Wi-Fi antennas

#### Wireless

· Wireless Standards

IEEE 802.11be/ax/ac/n/a 5 GHz, IEEE 802.11be/ax/n/g/b 2.4 GHz

Mesh protocol

802.11k/v/r

• Frequency

5 GHz, 2.4 GHz

Signal Rate

5 GHz: 5760 Mbps (802.11be) 2.4 GHz: 688 Mbps (802.11be)

• Transmit Power

CE: <23 dBm(6 GHz), <30 dBm(5 GHz), <20 dBm(2.4 GHz)

Wireless Security

WPA/WPA2/WPA3 Personal

#### **Software**

• Working Mode

Router Mode, Access Point Mode

WAN Type

Dynamic IP/Static IP/PPPoE/L2TP/PPTP(Multi-EWAN)

DHCP

Server, DHCP Client List, Address Reservation

Protocols

Supports IPv4 and IPv6

Guest Network

1× 5 GHz Guest Network 1× 2.4 GHz Guest Network

Features

Multi-Link Operation (MLO), 4K-QAM, Multi-RU, MU-MIMO, OFDMA, BSS Color, Parental Control, QoS (Quality of Service), Port Forwarding, Cloud Firmware Upgrade, Firewall, Network Diagnostics, CWMP, Traffic Statistic

Management

Local management: WebGUI management, Aginet app management Remote management: TR-069, TR-181, TR-369, TR-111,TR-143 Cloud management: TAUC

• Multi SSID

Up to 3 SSIDs for each band (including main SSID)

Dynamic DNS

NO-IP, DynDNS, TP-Link

VPN Server

PPTP, OpenVPN, IPSec

VPN Pass-Through

IPSec, PPTP, L2TP

· Access Control

Parental Control, Local Management, Host List, White/Black List

· Firewall Security

DoS, SPI Firewall, IP and MAC Address Binding

#### **Others**

Certification

CE, RoHS

Environment

Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90%RH Storage Humidity: 5%~90%RH

• Package Contents for HB410

1× BE6500 Whole Home Mesh Wi-Fi 7 AP HB410

1× RJ45 Ethernet cable

1× Power adapter

1× Quick Installation Guide