



EAP610-Outdoor

EAP Product List

Outdoor 802.11n/ac/ax AP			
Picture			
Model	EAP610-Outdoor		
Product	AX1800 Indoor/Outdoor Wi-Fi 6 Access Point		
Speed	2.4 GHz: 574 Mbps		
	5 GHz: 1201 Mbps		
Ethernet Port	1x Gigabit Ethernet Port		
Power Supply	802.3at PoE /		
	48V Passive PoE		
Internal Antennas	2 Internal Dual-Band Omni Antennas		
	2.4 GHz: 4 dBi; 5 GHz: 5 dBi		


Specifications

Outdoor 802.11ax AP				
Model		EAP610-Outdoor		
Name		AX1800 Indoor/Outdoor Wi-Fi 6 Access Point		
	LAN Interfaces	1x Gigabit Ethernet Port		
	Wi-Fi Standards	IEEE 802.11a/b/g/n/ac/ax		
	Maximum Data Rate	574 Mbps (2.4 GHz) + 1201 Mbps (5 GHz)		
Main Design	Wireless Client Capacity	256		
	Antennas	2 Internal Dual-Band Omni Antennas		
	Transmit Power	2.4 GHz; 4 dBi; 5 GHz; 5 dBi CE: < 20 dBm (2.4 GHz, EIRP), < 30 dBm (5 GHz, EIRP); FCC: < 25 dBm (2.4 GHz), < 25 dBm (5 GHz)		
	Omada Software Controller	• CE. \ 20 dBH (2.4 GHz, EIRP), \ 30 dBH (3 GHz, EIRP), \ \ CC. \ 23 dBH (2.4 GHz), \ \ 23 dBH (3 GHz)		
Centralized Management	Omada Hardware Controller	•		
Centralized Management	Omada APP			
		•		
	Captive Portal Authentication			
	Access Control			
	Maximum number of MAC Filter	4000		
Coough	Wireless Isolation between Clients	•		
Security	VLAN	•		
		• -		
	Rogue AP Detection	WDA Donosol/Estandia WDA Donosol/Estandia WDA Donosol/Estandia		
	Wireless Encryption	WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise		
	802.1X Support			
	Multiple SSIDs	16 (8 for each band)		
	Enable/Disable Wireless Radio			
	Enable/Disable SSID Broadcast	•		
	Guest Network	•		
	Automatic Channel Assignment			
	Transmit Power Control	Adjust transmit Power on dBm		
	QoS (WMM)	•		
	Seamless Roaming	•		
	Mesh	•		
	Beamforming	•		
Wireless Function	MU-MIMO	•		
	Rate Limit	Based on SSID/Client		
	Load Balance	•		
	Airtime Fairness	•		
	Band Steering	•		
	RADIUS Accounting	•		
	MAC Authentication	•		
	Reboot Schedule	•		
	Wireless Schedule	•		
	Wireless Statistics	•		
	Static IP/Dynamic IP	•		
	802.11ax	8 Mbps to 1201 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80)		
	802.11ac	6.5 Mbps to 1083.3 Mbps (MCS0-MCS9, NSS = 1 to 2 VHT20/40/80)		
Cupport Data Datas	802.11n	6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40)		
Support Data Rates	802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps		
	802.11b	1, 2, 5.5, 11 Mbps		
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps		

Outdoor 802.11ax AP				
Model		EAP610-Outdoor		
	LED ON/OFF Control	•		
	Management MAC Access			
	Control			
	Web-based Management	•		
	SNMP	v1, v2c, v3		
Management	SSH	•		
	Restore & Backup	•		
	Firmware update via Web	•		
	NTP	•		
	System Log	•		
	Email Alerts	•		
	Power Supply	802.3at PoE or 48V Passive PoE (PoE Adapter Included)		
	Maximum Power Consumption	EU: 12.5W (802.3at PoE or Passive PoE)		
Physical & Environment		US: 14.7W (802.3at PoE or Passive PoE)		
	Reset	•		
	Mounting	Pole/Wall mouting (Kits included)		
	Certifications	CE, FCC, RoHS		
	Lightning Protection	±6KV		
	Dimensions (W x D x H)	280.4 × 106.5 × 56.8 mm		
Others	Environment	Operating Temperature: -30 °C-70 °C (-22 °F-158 °F);		
Others		Storage Temperature: -40 °C-70 °C (-40 °F-158 °F);		
		Operating Humidity: 10%–90% non-condensing;		
		Storage Humidity: 5%–90% non-condensing;		



Antenna Radiation Patterns

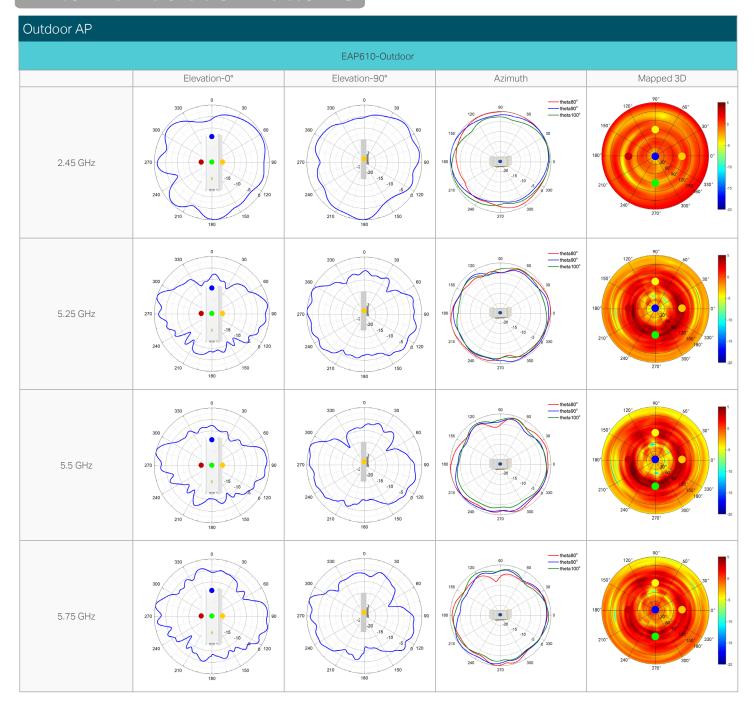

Disclaimers

Wireless Speed and Range Disclaimer

Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Range and coverage specifications were defined according to test results under normal usage conditions. Actual wireless transmission rate and wireless coverageare not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.

Wireless Client Capacity Disclaimer

Wireless client capacity specifications were defined according to test results under normal usage conditions. Actual wireless client capacity is not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.

Ethernet Port Limitation Disclaimer

Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, Internet service provider factors and other environmental conditions.

MU-MIMO Disclaimer

(Only for certain devices)

MU-MIMO capability requires client devices that also support MU-MIMO.

Seamless Roaming Disclaimer

(Only for certain devices)

Seamless roaming requires both the access point and client devices to support 802.11k and 802.11v protocols.

Lightning and Electro-Static Discharge Protection Disclaimer

(Only for outdoor devices)

Protection against lightning and electro-static discharge may be achieved through proper product setup, grounding and cable shielding. Refer to the instruction manual and consult an IT professional to assist with setting up this product.

PoE Disclaimer

PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: www.tp-link.com. Specifications are subject to change without notice.

© 2023 TP-Link

