

Omada Pro

Business Cloud SDN Solution

Omada Pro AP - Business Wi-Fi Series:

AP9670 / AP9650 / AP9635 / AP8635-I / AP7650



Omada SDN Controller



AP9670 / AP9650 / AP9635



AP7650



AP8635-I

Product List

Ceiling Mount AP

Picture			
Model	AP9670	AP9650	AP9635
Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	AX3000 Ceiling Mount Wi-Fi 6 Access Point	AX1800 Ceiling Mount Wi-Fi 6 Access Point
Speed	2.4 GHz: 574 Mbps 5 GHz: 4804 Mbps	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps	2.4 GHz: 574 Mbps 5 GHz: 1201 Mbps
Ethernet Port	1x 2.5Gbps Ethernet Port	1x Gigabit Ethernet Port	1x Gigabit Ethernet Port
Power Supply	802.3at PoE or 12V/1.5A DC	EU: 48V Passive PoE or 802.3at PoE or 12V/1A DC US: 48V Passive PoE or 802.3at PoE or 12V/1.5A DC	48V Passive PoE or 802.3at PoE or 12V/1.5A DC
Internal Antennas	2.4 GHz: 2x 4 dBi 5 GHz: 4x 5 dBi	2.4 GHz: 2x 4 dBi 5 GHz: 2x 5 dBi	2.4 GHz: 2x 4 dBi 5 GHz: 2x 5 dBi

Wall Plate AP

Picture	
Model	AP7650
Product	AX3000 Wall Plate Wi-Fi 6 Access Point
Speed	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps
Ethernet Port	4x Gigabit Ethernet Port
Power Supply	802.3af/at PoE
Internal Antennas	2.4 GHz: 2x 3 dBi 5 GHz: 2x 5 dBi

Outdoor AP

Picture	
Model	AP8635-I
Product	AX1800 Indoor/Outdoor Wi-Fi 6 Access Point
Speed	2.4 GHz: 574 Mbps 5 GHz: 1201 Mbps
Ethernet Port	1x Gigabit Ethernet Port
Power Supply	802.3at PoE / 48V Passive PoE
Internal Antennas	2 Internal Dual-Band Omni Antennas 2.4 GHz: 4 dBi; 5 GHz: 5 dBi

Specifications

Ceiling Mount AP

Model		AP9670	AP9650	AP9635
Name		AX5400 Ceiling Mount Wi-Fi 6 Access Point	AX3000 Ceiling Mount Wi-Fi 6 Access Point	AX1800 Ceiling Mount Wi-Fi 6 Access Point
Main Design	LAN Interfaces	1x 2.5Gbps Ethernet Port	1x Gigabit Ethernet Port	1x Gigabit Ethernet Port
	Wi-Fi Standards	IEEE 802.11 a/b/g/n/ac/ax		
	Maximum Data Rate	574 Mbps (2.4 GHz) +4804 Mbps (5 GHz)	574 Mbps (2.4 GHz) +2402 Mbps (5 GHz)	574 Mbps (2.4 GHz) +1201 Mbps (5 GHz)
	Wireless Client Capacity	250+	250+	1000+
	Antennas	2.4 GHz: 2x 4 dBi 5 GHz: 4x 5 dBi	2.4 GHz: 2x 4 dBi 5 GHz: 2x 5 dBi	2.4 GHz: 2x 4 dBi 5 GHz: 2x 5 dBi
	Transmit Power	CE: < 20 dBm (2.4 GHz, EIRP); < 23 dBm (5 GHz, band 1&band 2, EIRP); < 30 dBm (5 GHz, band 3, EIRP);	CE: < 20 dBm (2.4 GHz, EIRP); < 23 dBm (5 GHz, band 1/2, EIRP); < 28 dBm (5 GHz, band 3, EIRP);	CE: < 20 dBm (2.4GHz, EIRP); < 23dBm (5 GHz, band1&band 2, EIRP);< 30 dBm (5 GHz,band 3, EIRP);
Centralized Management	Omada Software Controller Pro	•		
	Omada Cloud-based Controller Pro	•		
	Omada APP	•		
Security	WIDS/WIPS	•		
	Captive Portal Authentication	•		
	Access Control	•		
	Maximum number of MAC Filter	4000		
	Wireless Isolation between Clients	•		
	VLAN	•		
	Rogue AP Detection	•		
	Wireless Encryption	WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise		
	802.1X Support	•		

Ceiling Mount AP

Model		AP9670	AP9650	AP9635
Wireless Function	Multiple SSIDs	16 (8 on each band)		
	Enable/Disable Wireless Radio	•		
	Enable/Disable SSID Broadcast	•		
	Guest Network	•		
	Automatic Channel Assignment	•		
	Transmit Power Control	Adjust transmit Power on dBm		
	QoS (WMM)	•		
	Seamless Roaming	•		
	Mesh	•		
	Beamforming	•		
	MU-MIMO	•		
	Rate Limit	Based on SSID/Client		
	Load Balance	•		
	Airtime Fairness	•		
	Band Steering	•		
	RADIUS Accounting	•		
	PPSK Pro	•		
	Hotspot 2.0	• (*To be supported with subsequent software update)		
	MAC Authentication	•		
	Reboot Schedule	•		
	Wireless Schedule	•		
	Wireless Statistics	•		
	Static IP/Dynamic IP	•		
Support Data Rates	802.11ax	8 Mbps to 4804 Mbps (MCS0-MCS11, NSS = 1 to 4 HE20/40/80/160)	8 Mbps to 2402 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80/160)	8 Mbps to 1201 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80)
	802.11ac	6.5 Mbps to 4333.3 Mbps (MCS0-MCS11, NSS = 1 to 4 VHT20/40/80/160)	6.5 Mbps to 2166.7 Mbps (MCS0-MCS11, NSS = 1 to 2 VHT20/40/80/160)	6.5 Mbps to 1083.3 Mbps (MCS0-MCS11, NSS = 1 to 2 VHT20/40/80)
	802.11n	6.5 Mbps to 600 Mbps(MSC0-MCS31, HT20/40)	6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40)	6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40)
	802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps		
	802.11b	1, 2, 5.5, 11 Mbps		
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps		

Ceiling Mount AP

Model		AP9670	AP9650	AP9635
Management	Intelligent Anomaly Detection and Analysis	•		
	Intelligent Network Optimization	•		
	LED ON/OFF Control	•		
	Management MAC Access Control	•		
	Web-based Management	•		
	SNMP	v1, v2c, v3		
	SSH	•		
	Restore & Backup	•		
	Firmware update via Web	•		
	NTP	•		
	System Log	•		
	Email Alerts	•		
Physical & Environment	Power Supply	802.3at PoE or 12V/1.5A DC	EU: 48V Passive PoE or 802.3at PoE or 12V/1A DC US: 48V Passive PoE or 802.3at PoE or 12V/1.5A DC PoE Adapter Not Included	48V Passive PoE or 802.3at PoE or 12V/1.5A DC
	Maximum Power Consumption	EU: 18.05 W (For PoE); 16.39 W (for DC) US: 19.8 W (For PoE); 17.8 W (for DC)	EU: 12.7 W (For PoE); 11.43 W (for DC) US: 13.98 W (For PoE); 12.58 W (for DC)	EU: 14.4 W (For PoE); 13.1 W (for DC) US: 14.9 W (For PoE); 13.4 W (for DC)
	Reset	•		
	Mounting	Ceiling / Wall mouting (Kits included)	Ceiling / Wall mouting (Kits included) / Junction Box mouting	
Others	Certifications	CE, FCC, RoHS, IC		
	Dimensions (W x D x H)	243 x 243 x 64 mm	160 x 160 x 33 mm	160 x 160 x 33 mm
	Environment	Operating Temperature: 0 °C–40 °C (32 °F–104 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing;		

Wall Plate AP		
Model		AP7650
Name		AX3000 Wall Plate Wi-Fi 6 Access Point
Main Design	LAN Interfaces	4x Gigabit Ethernet Port
	Wi-Fi Standards	IEEE 802.11 a/b/g/n/ac/ax
	Maximum Data Rate	574 Mbps (2.4 GHz) + 2402 Mbps (5 GHz)
	Wireless Client Capacity	100+
	Antennas	2.4 GHz: 2x 3 dBi 5 GHz: 2x 5 dBi
	Transmit Power	CE: < 20 dBm(2.4GHz, EIRP); <23dBm (5 GHz,band1&band 2,EIRP);< 26 dBm (5 GHz,band 3, EIRP);
Centralized Management	Omada Software Controller Pro	•
	Omada Cloud-based Controller Pro	•
	Omada APP	•
Security	WIDS/WIPS	•
	Captive Portal Authentication	•
	Access Control	•
	Maximum number of MAC Filter	4000
	Wireless Isolation between Clients	•
	VLAN	•
	Rogue AP Detection	•
	Wireless Encryption	WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise
	802.1X Support	•
Wireless Function	Multiple SSIDs	16 (8 on each band)
	Enable/Disable Wireless Radio	•
	Enable/Disable SSID Broadcast	•
	Guest Network	•
	Automatic Channel Assignment	•
	Transmit Power Control	Adjust transmit Power on dBm
	QoS (WMM)	•
	Seamless Roaming	•
	Mesh	-
	Beamforming	•
	MU-MIMO	-
	Rate Limit	Based on SSID/Client
	Load Balance	•
	Airtime Fairness	•
	Band Steering	•
	RADIUS Accounting	•
	PPSK Pro	•
	Hotspot 2.0	• (*To be supported with subsequent software update)
	MAC Authentication	•
	Reboot Schedule	•
	Wireless Schedule	•
	Wireless Statistics	•
	Static IP/Dynamic IP	•

Wall Plate AP

Model		AP7650
Support Data Rates	802.11ax	8 Mbps to 2402 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80/160)
	802.11ac	6.5 Mbps to 2166.7 Mbps (MCS0-MCS9, NSS = 1 to 2 VHT20/40/80/160)
	802.11n	6.5 Mbps to 500 Mbps (MCS0-MCS15, 1024QAM, HT20/40)
	802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11b	1, 2, 5.5, 11 Mbps
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
Management	Intelligent Anomaly Detection and Analysis	•
	Intelligent Network Optimization	•
	LED ON/OFF Control	•
	Management MAC Access Control	•
	Web-based Management	•
	SNMP	v1, v2c, v3
	SSH	•
	Restore & Backup	•
	Firmware update via Web	•
	NTP	•
	System Log	•
	Email Alerts	•
Physical & Environment	Power Supply	802.3af/at PoE
	Maximum Power Consumption	EU: 12W (802.3at PoE) US: 12.6W (802.3at PoE)
	Reset	•
	Mounting	Wall mouting (Kits included)
Others	Certifications	FCC, RoHS
	Dimensions (W x D x H)	143 x 86 x 42.6 mm
	Environment	Operating Temperature: 0 °C–40 °C (32 °F–104 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing;

Outdoor AP

Model		AP8635-I
Name		AX1800 Indoor/Outdoor Wi-Fi 6 Access Point
Main Design	LAN Interfaces	1x Gigabit Ethernet Port
	Wi-Fi Standards	IEEE 802.11a/b/g/n/ac/ax
	Maximum Data Rate	574 Mbps (2.4 GHz) + 1201 Mbps (5 GHz)
	Wireless Client Capacity	1000+
	Antennas	2 Internal Dual-Band Omni Antennas 2.4 GHz: 4 dBi; 5 GHz: 5 dBi
	Transmit Power	CE: < 20 dBm (2.4 GHz, EIRP), < 23 dBm (5 GHz Band1&2, EIRP), < 28dBm (5 GHz Band3, EIRP);
Centralized Management	Omada Software Controller Pro	•
	Omada Cloud-based Controller Pro	•
	Omada APP	•
Security	WIDS/WIPS	•
	Captive Portal Authentication	•
	Access Control	•
	Maximum number of MAC Filter	4000
	Wireless Isolation between Clients	•
	VLAN	•
	Rogue AP Detection	•
	Wireless Encryption	WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise, 802.11i, AES, TKIP
	802.1X Support	•
Wireless Function	Multiple SSIDs	16 (8 for each band)
	Enable/Disable Wireless Radio	•
	Enable/Disable SSID Broadcast	•
	Guest Network	•
	Automatic Channel Assignment	•
	Transmit Power Control	Adjust transmit Power on dBm
	QoS (WMM)	•
	Seamless Roaming	•
	Mesh	•
	Beamforming	•
	MU-MIMO	•
	Rate Limit	Based on SSID/Client
	Load Balance	•
	Airtime Fairness	•
	Band Steering	•
	RADIUS Accounting	•
	PPSK Pro	•
	Hotspot 2.0	• (*To be supported with subsequent software update)
	MAC Authentication	•
	Reboot Schedule	•
	Wireless Schedule	•
	Wireless Statistics	•
	Static IP/Dynamic IP	•
Support Data Rates	802.11ax	8 Mbps to 1201 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80)
	802.11ac	6.5 Mbps to 1083.3 Mbps (MCS0-MCS11, NSS = 1 to 2 VHT20/40/80)
	802.11n	6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40)
	802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11b	1, 2, 5.5, 11 Mbps
	802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps


Outdoor AP

Model		AP8635-I
Management	Intelligent Anomaly Detection and Analysis	•
	Intelligent Network Optimization	•
	LED ON/OFF Control	•
	Management MAC Access Control	•
	Web-based Management	•
	SNMP	v1, v2c, v3
	SSH	•
	Restore & Backup	•
	Firmware update via Web	•
	NTP	•
	System Log	•
	Email Alerts	•
Physical & Environment	Power Supply	802.3at PoE or 48V Passive PoE (PoE Adapter Not Included)
	Maximum Power Consumption	EU: 12.5W (802.3at PoE or Passive PoE) US: 14.7W (802.3at PoE or Passive PoE)
	Reset	•
	Mounting	Pole/Wall mouting (Kits included)
Others	Certifications	CE, FCC, RoHS
	Dimensions (W x D x H)	280.4 × 106.5 × 56.8 mm
	Environment	Operating Temperature: -30 °C–70 °C (-22 °F–158 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing;

Antenna Radiation Patterns

Ceiling Mount AP


AP9670

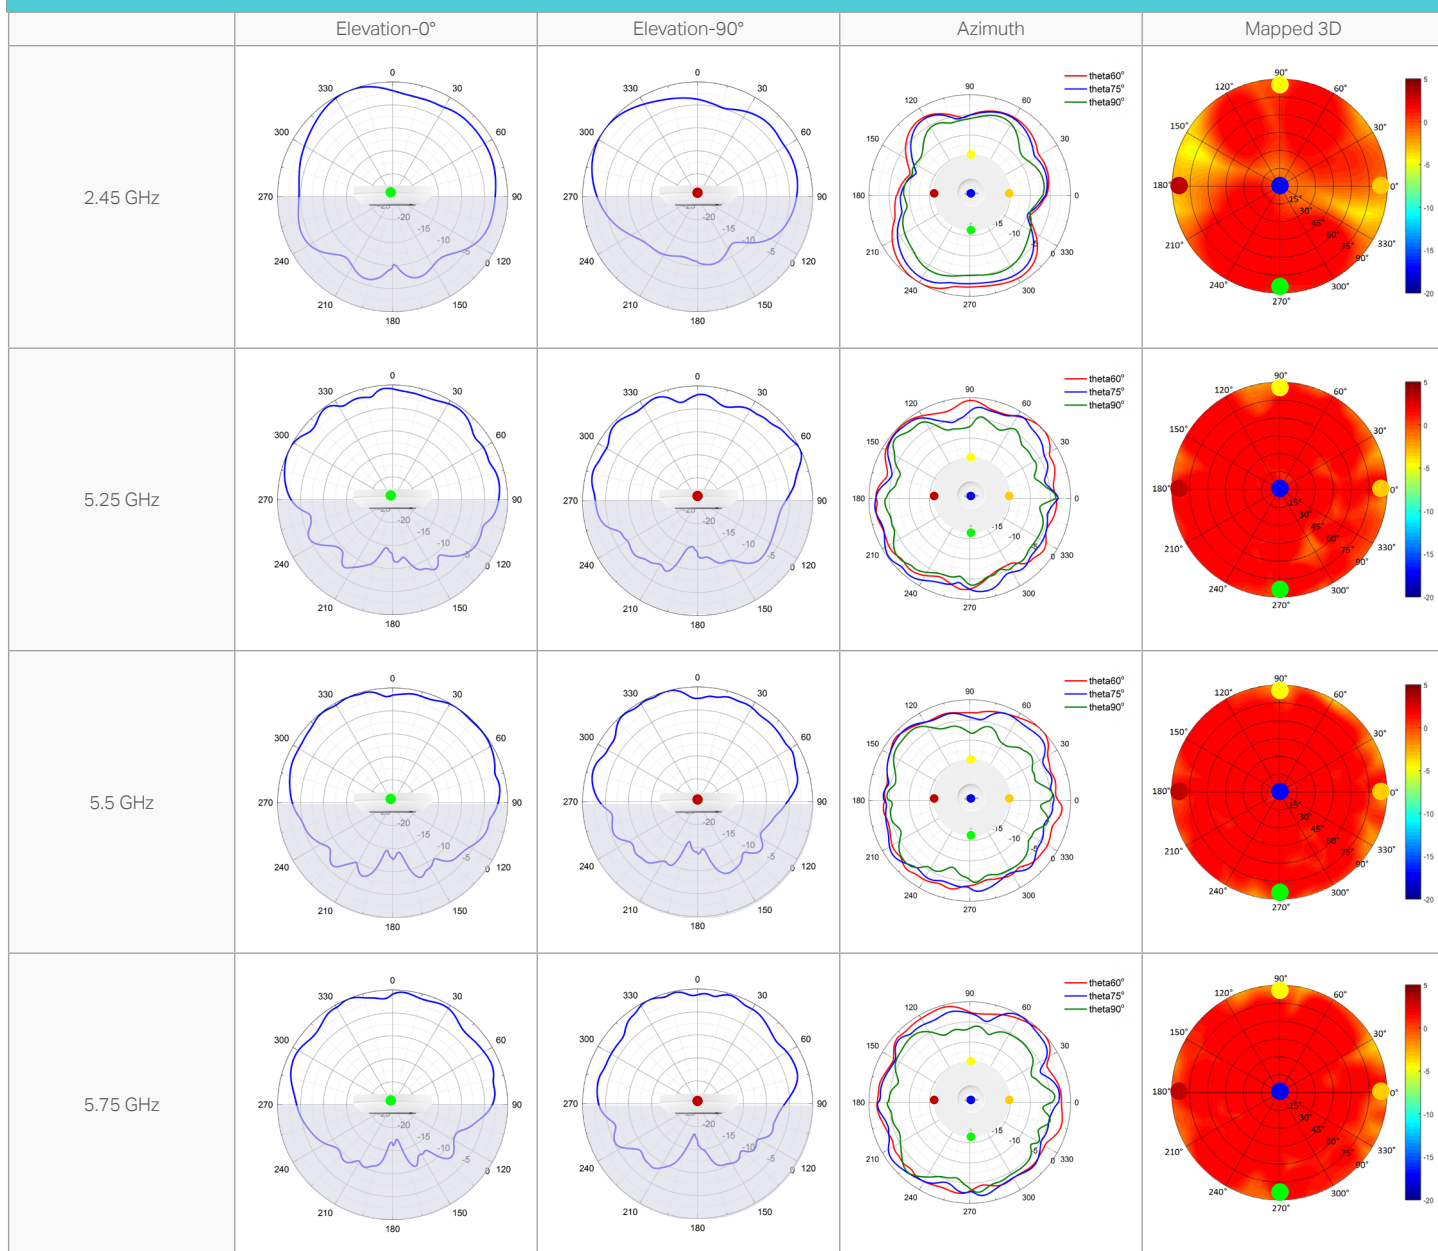

Antenna Radiation Patterns

Ceiling Mount AP


AP9650

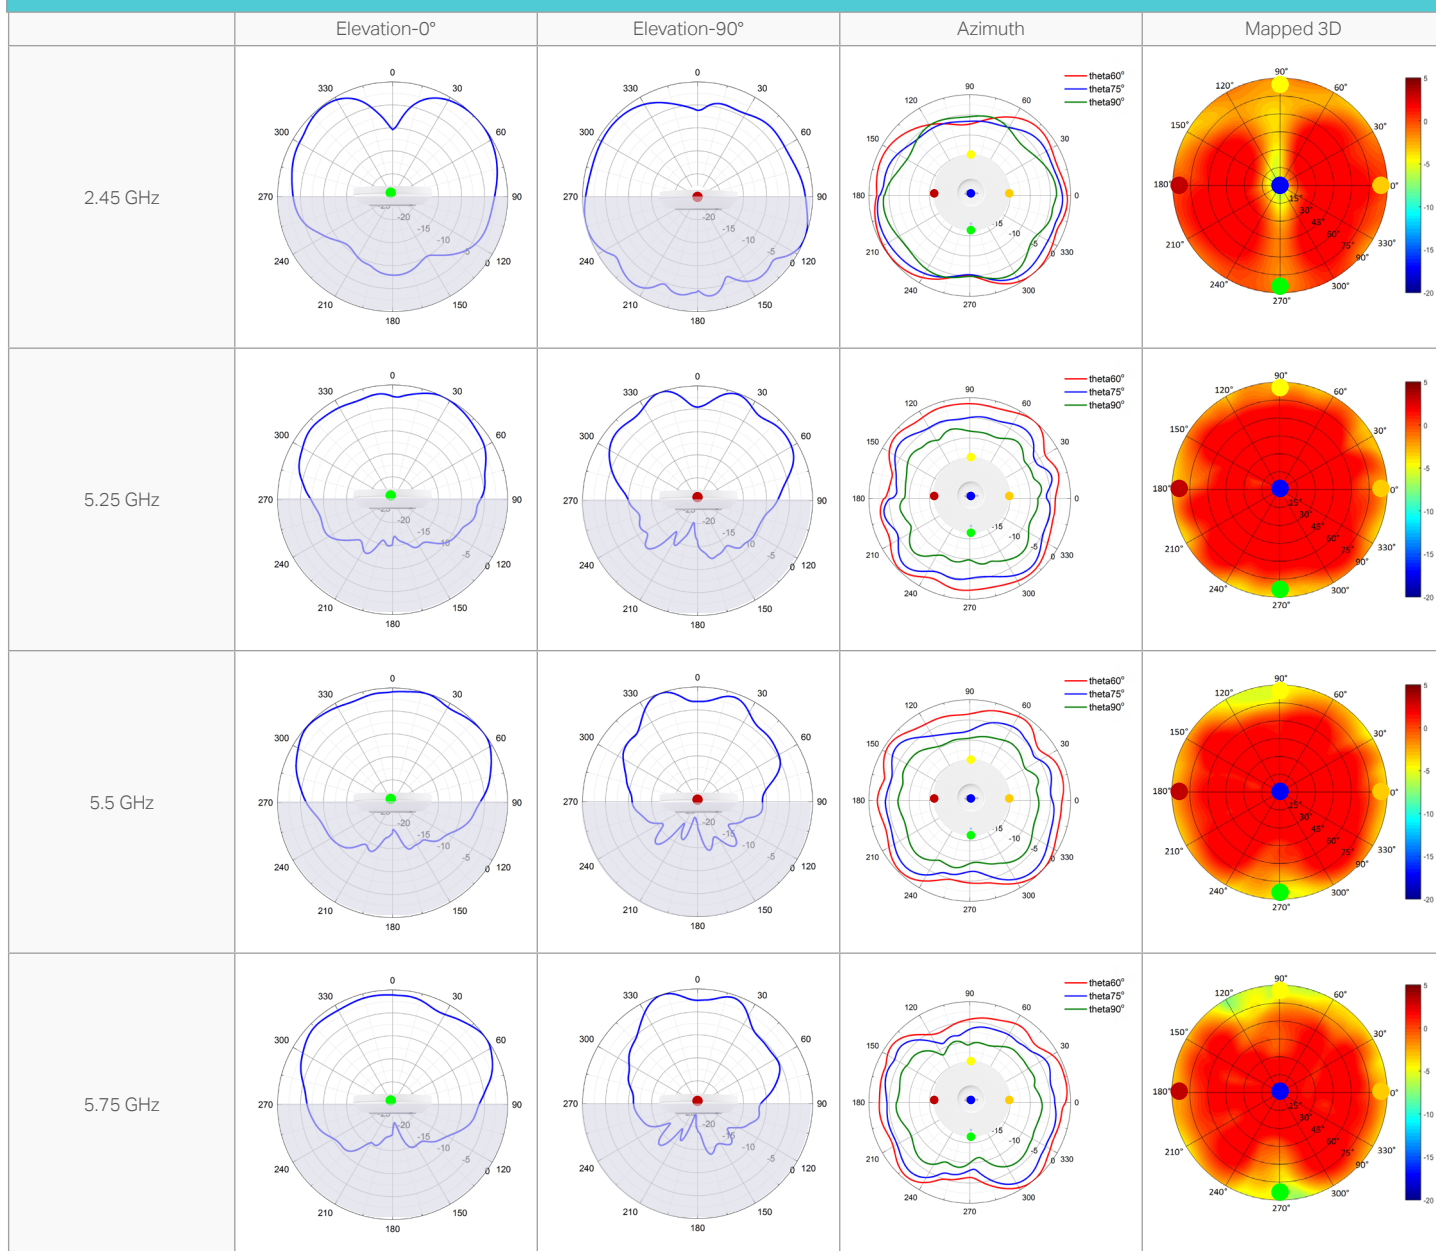

Antenna Radiation Patterns

Ceiling Mount AP


AP9635

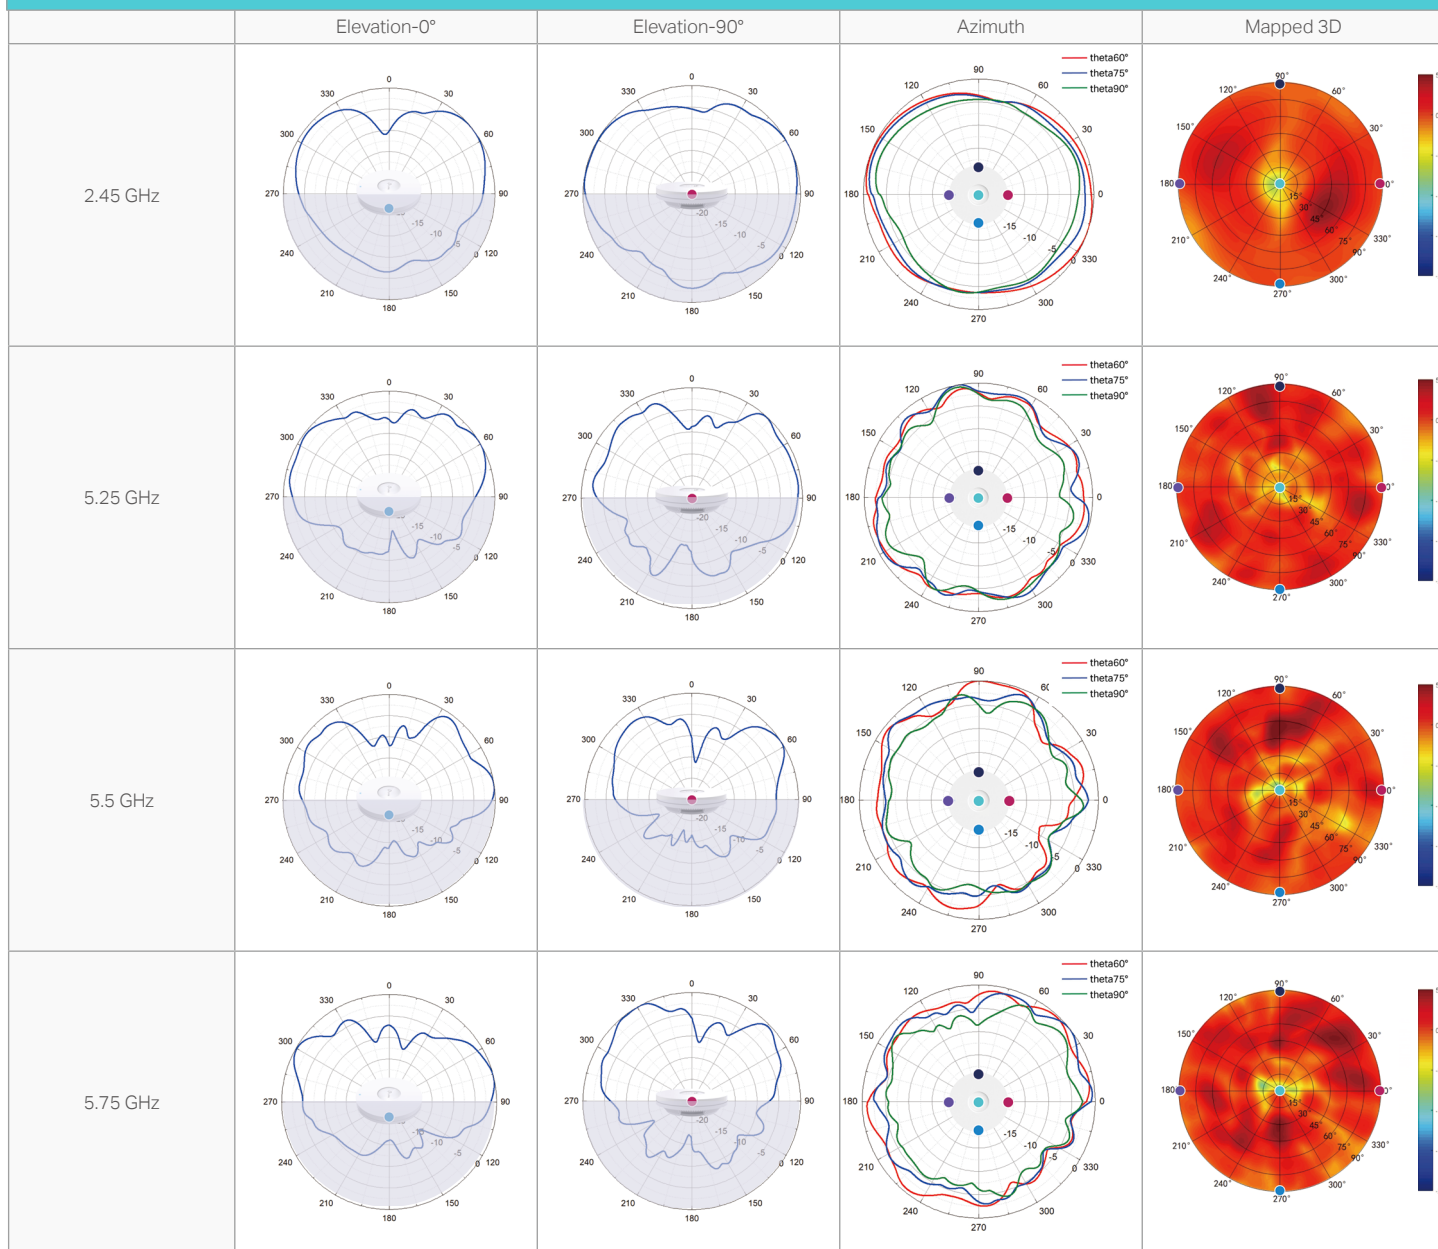

Antenna Radiation Patterns

Wall Plate AP


AP7650

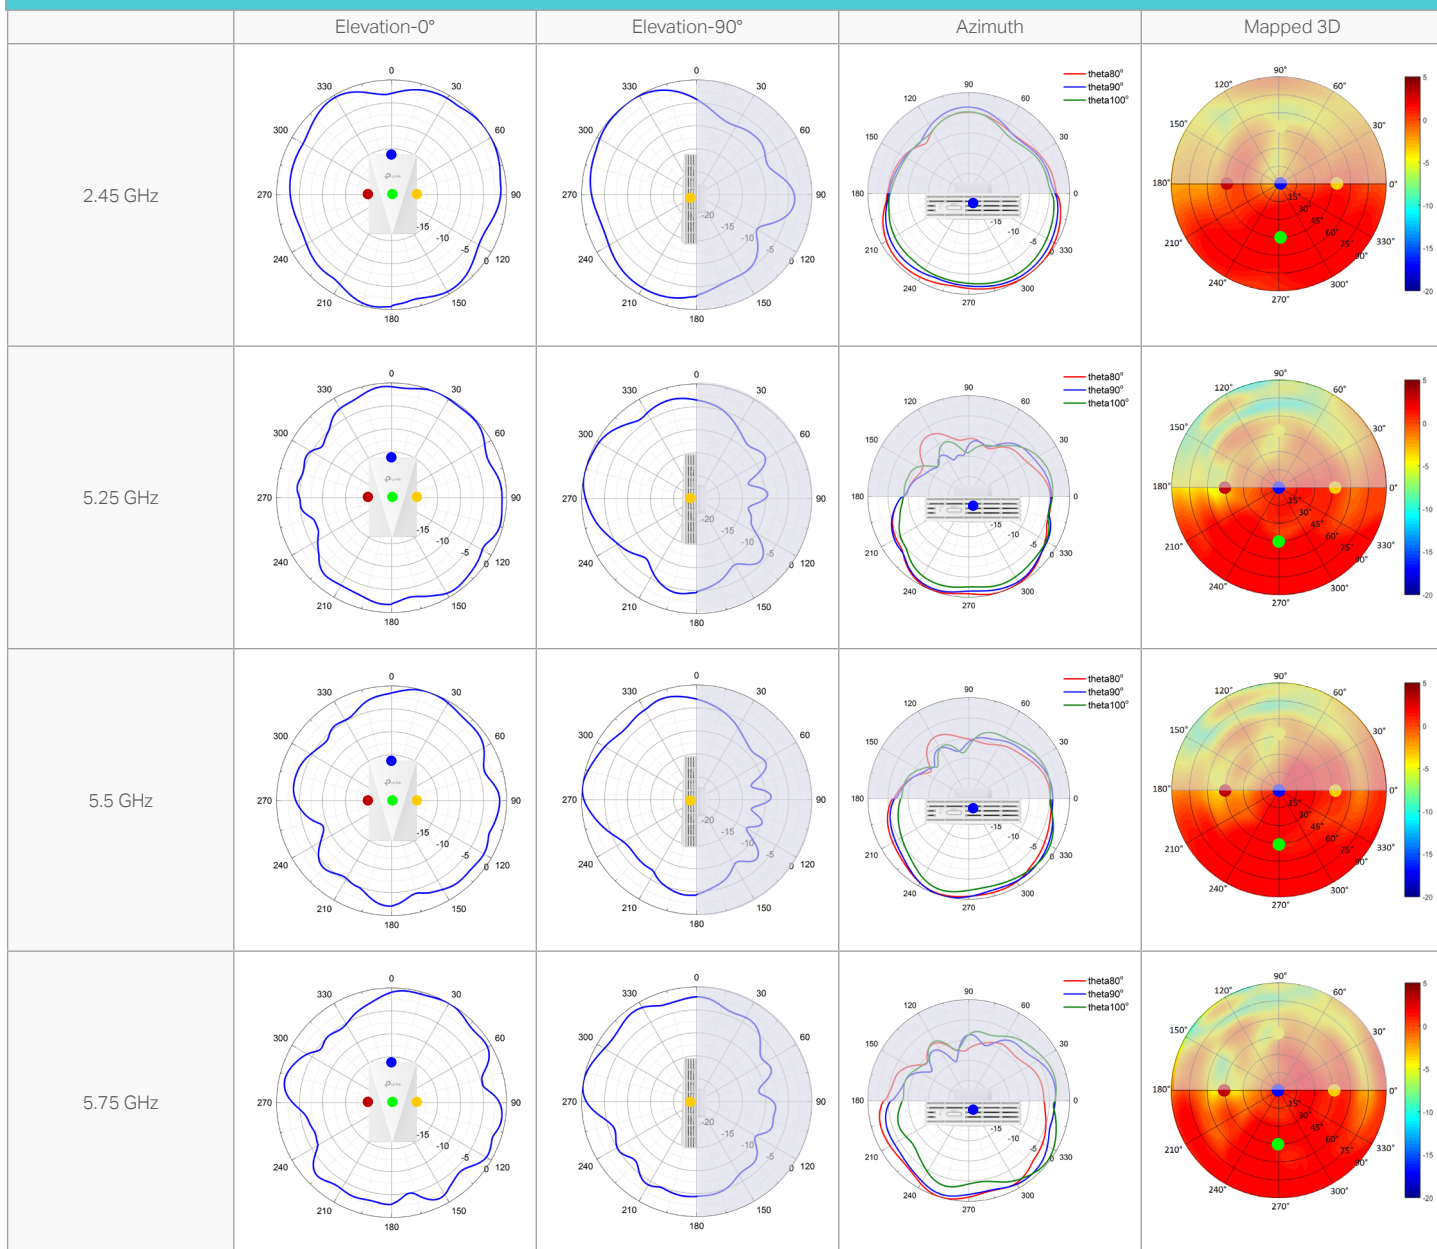

Antenna Radiation Patterns

Outdoor AP

AP8635-I

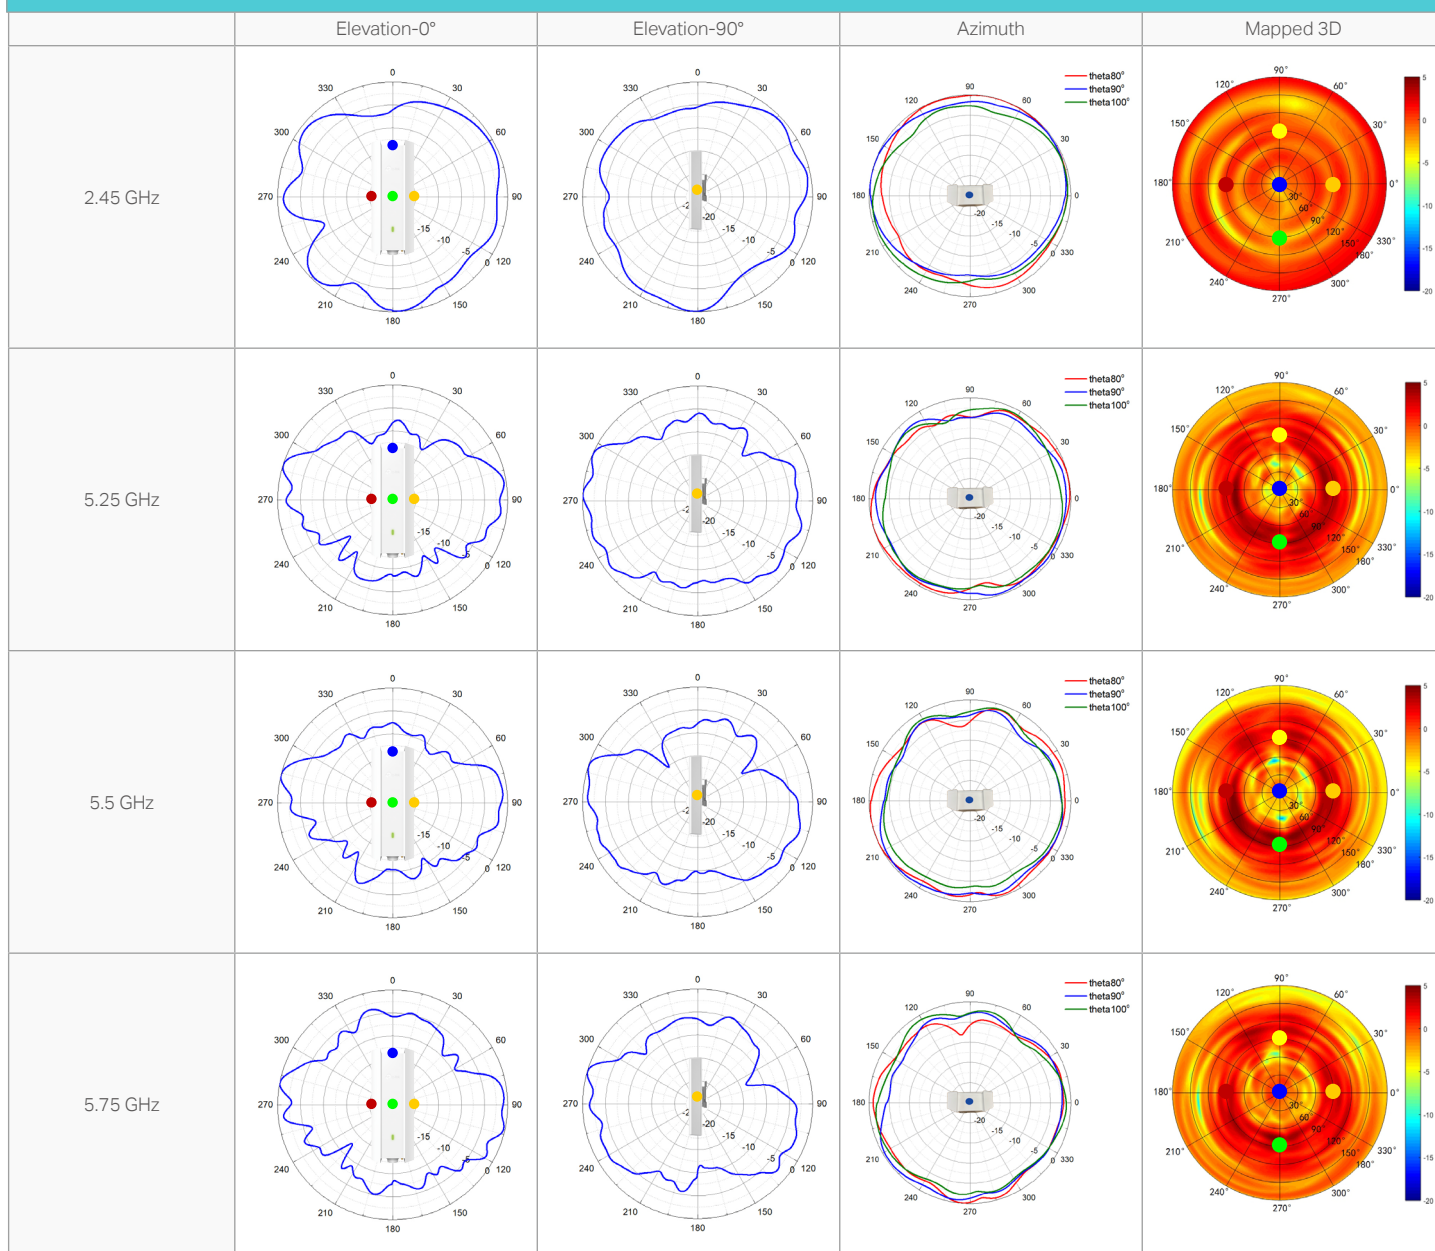

Wireless Speed and Range Disclaimer

Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Range and coverage specifications were defined according to test results under normal usage conditions. Actual wireless transmission rate and wireless coverage are not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.

Wireless Client Capacity Disclaimer

Wireless client capacity specifications were defined according to test results under normal usage conditions. Actual wireless client capacity is not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.

Ethernet Port Limitation Disclaimer

Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, Internet service provider factors and other environmental conditions.

MU-MIMO Disclaimer

(Only for certain devices)

MU-MIMO capability requires client devices that also support MU-MIMO.

Seamless Roaming Disclaimer

(Only for certain devices)

Seamless roaming requires both the access point and client devices to support 802.11k and 802.11v protocols.

Lightning and Electro-Static Discharge Protection Disclaimer

(Only for outdoor devices)

Protection against lightning and electro-static discharge may be achieved through proper product setup, grounding and cable shielding. Refer to the instruction manual and consult an IT professional to assist with setting up this product.

PoE Disclaimer

PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.