



# Omada Easy Managed Switch | Datasheet

---

## ES206GP



Omada 6-Port Gigabit Easy Managed Switch with 4-Port PoE+



## Highlights

- 6× 10/100/1000Mbps RJ45 ports (4× 802.3af/at-compliant PoE+)
- 65W Power Budget, with up to 30W for each PoE port\*
- Easy to Use: Supports plug-and-play for instant connectivity and simple configuration for additional features
- Centralized Cloud Management via the web or the Omada app<sup>†</sup>
- Up to 250m PoE\*\*, QoS<sup>^</sup>, PoE Auto Recovery<sup>‡</sup>, and Port Isolation for reliable surveillance networking
- Automatic Loop Prevention, VLAN, and IGMP Snooping
- Fanless design for silent operation
- Durable metal casing and desktop/wall mounting design

# Product Pictures

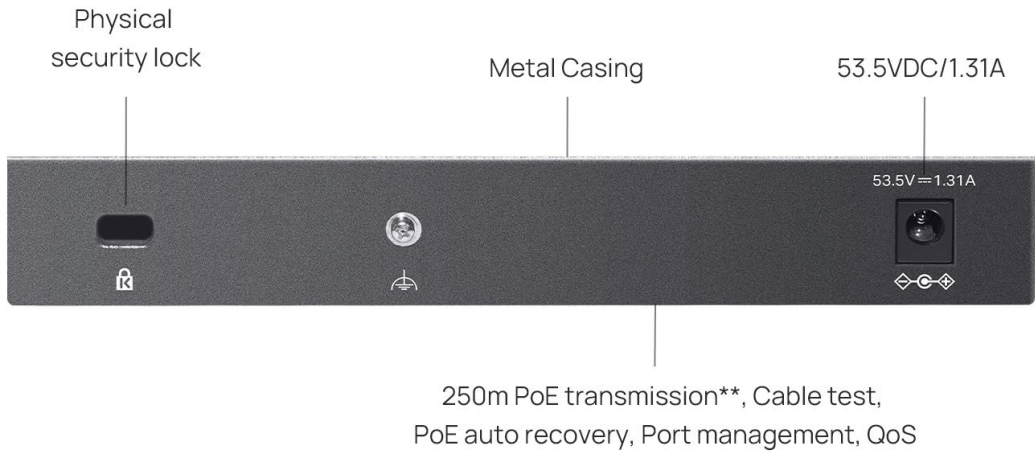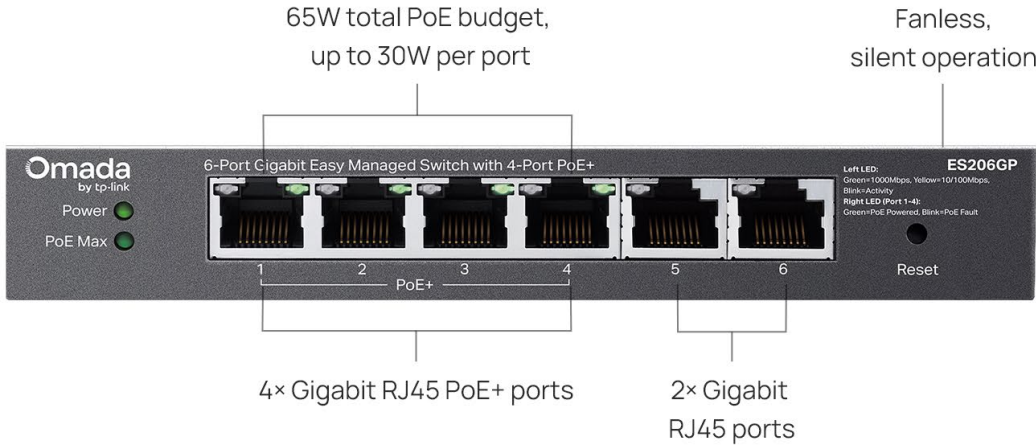

# Specifications

Hardware Features & Performance		
Model		ES206GP
General	Interface	4× 10/100/1000 Mbps PoE+ RJ45 Ports 2× 10/100/1000 Mbps RJ45 Ports
	Flash	64 Mbit
	Port Standard	IEEE 802.3: Ethernet Media Access Control (MAC) Protocol IEEE 802.3i:10BASE-T Ethernet IEEE 802.3u:100BASE-X Fast Ethernet IEEE 802.3ab:1000BASE-T Gigabit Ethernet IEEE 802.3x: Flow Control IEEE 802.1p: Traffic Class Expediting and Dynamic Multicast Filtering IEEE 802.1q: Virtual Bridged Local Area Networks IEEE 802.1ab: Station and Media Access Control Connectivity Discovery (LLDP)
PoE	PoE Standard	802.3af/at
	PoE Ports	4, up to 30 W per port
	PoE Power Budget	65 W
	Fast PoE	YES
	Perpetual PoE	YES
Performance	Switching Capacity	12 Gbps
	Packet Forwarding Rate	8.93 Mpps
	MAC Address Table	8K
	Packet Buffer	4 Mbit
	Transmission Method	Store and Forward
	Jumbo Frame	15 KB
Physical & Environment	Power Supply	53.5 VDC/1.31 A
	Standby Power Consumption	2.9 W (110V/60 Hz)
	Max Power Consumption	76.6 W (110V/60Hz) (with 65 W PD connected)
	Max Heat Dissipation	260.44 BTU/hr (110 V/60 Hz) (with 65 W PD connected)
	MTBF	390422h @ 25°C
	Dimensions (W x D x H)	6.2×4.0×1.0 in (158×100.7×25.4 mm)
	Net Weight	0.45 kg (0.99 lbs)
	Fan Quantity	Fanless
	Installation	Desktop / Wall Mounting
	Operating Temperature	-5 °C to 40 °C (23 °F to 104 °F)
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
	Operation Humidity	10% to 90% RH, non-condensing
	Storage Humidity	5% to 90% RH, non-condensing
	Surge Protection	±6 kV in common mode for Ethernet Ports
	ESD Protection	Air: ±8 kV, Contact: ±4 kV
	Certification	CE, FCC, RoHS

Software Features	
Model	ES206GP
SDN Support	<ul style="list-style-type: none"> <li>• Support Hardware Controller, Software Controller, Cloud-Based Controller</li> <li>• Automatic Device Discovery</li> <li>• Batch Configuration</li> <li>• Batch Firmware Upgrading</li> <li>• Unified Configuration</li> </ul>
L2 Features	<ul style="list-style-type: none"> <li>• Link Aggregation <ul style="list-style-type: none"> <li>- Static Link Aggregation</li> <li>- Up to 2 aggregation groups and up to 4 ports per group</li> </ul> </li> <li>• Loopback Detection</li> <li>• Flow Control <ul style="list-style-type: none"> <li>- 802.3x Flow Control</li> </ul> </li> <li>• Mirroring <ul style="list-style-type: none"> <li>- Port Mirroring</li> <li>- One-to-One</li> <li>- Many-to-One</li> <li>- Ingress/Egress/Both</li> </ul> </li> <li>• Port Statistics <ul style="list-style-type: none"> <li>- Port Mirror Status</li> <li>- Traffic Statistics</li> </ul> </li> <li>• 802.1ab LLDP</li> </ul>
L2 Multicast	<ul style="list-style-type: none"> <li>• IGMP Snooping <ul style="list-style-type: none"> <li>- IGMP v1/v2/v3 Snooping</li> <li>- Fast Leave</li> </ul> </li> </ul>
VLAN	<ul style="list-style-type: none"> <li>• MTU VLAN</li> <li>• Port-Based VLAN</li> <li>• 802.1Q Tag VLAN <ul style="list-style-type: none"> <li>- Max 32 VLAN Groups</li> <li>- 4K VID</li> </ul> </li> </ul>
QoS	<ul style="list-style-type: none"> <li>• 802.1p DSCP Priority</li> <li>• 8 Priority Queues</li> <li>• Priority Schedule Mode <ul style="list-style-type: none"> <li>- WRR (Weighted Round Robin)</li> </ul> </li> <li>• Queue Weight Config</li> <li>• Bandwidth Control <ul style="list-style-type: none"> <li>- Port-Based Rating Limit</li> </ul> </li> <li>• Storm Control <ul style="list-style-type: none"> <li>- Multiple Control Modes (kbps/pps)</li> <li>- Broadcast/Multicast/Unknown-Unicast Control</li> </ul> </li> </ul>
Management Features	<ul style="list-style-type: none"> <li>• Web-based GUI</li> <li>• DHCP Client</li> <li>• Cable Diagnostics</li> </ul>

<sup>†</sup>These functions require the use of the Omada Controller. Zero-Touch Provisioning requires the use of the Omada Cloud-Based Controller (Omada Cloud Standard or Omada Cloud Essentials). Go to the Omada Cloud-Based Controller (Omada Cloud Standard) Product List or Omada Cloud Essentials Product List to find all the supported models.

<sup>‡</sup>This switch supports PoE Auto Recovery under Standalone Mode (managed separately without a controller) and supports manual PoE Recovery under Controller Mode (centrally managed with a controller).

<sup>Δ</sup>QoS and Priority Mode are supported under Standalone Mode.

\*PoE budget calculations are based on laboratory testing. The actual PoE power budget is not guaranteed and will vary due to client limitations and environmental factors.

\*\*The speed of the ports that support 250m PoE transmission will be downgraded to 10 Mbps. Actual transmission distance may vary depending on the quality of the cables.