



## **Omada Omnidirectional AX3000 Wi-Fi 6 Indoor/Outdoor Access Point**


Model: EAP650-Outdoor

# Product Overview

EAP650-Outdoor is an Omada Omnidirectional AX3000 Wi-Fi 6 Indoor/Outdoor Access Point, providing reliable and stable outdoor network connections. It is suitable for outdoor scenarios such as yards, swimming pools, and parks.

- **Dual-Band 4-Stream Wi-Fi 6:** Up to 3.0 Gbps<sup>†</sup>
- **Long-Range Omnidirectional Coverage:** Features dual-band antennas with MU-MIMO technology, delivering extended coverage up to 984 ft (300 m)<sup>‡</sup>
- **Outdoor-Ready Durability:** Features an IP68-rated weatherproof enclosure and 6 kV lightning protection
- **Flexible Deployment with PoE Support:** 1× Gigabit PoE+ port reduces costs by delivering power and data over a single Ethernet cable
- **Quick and Easy Setup:** Features wall/pole mounting with Omada SDN for one-click setup
- **Advanced Features:** Centralized management, mesh, and seamless roaming<sup>△</sup>

## Product Appearance

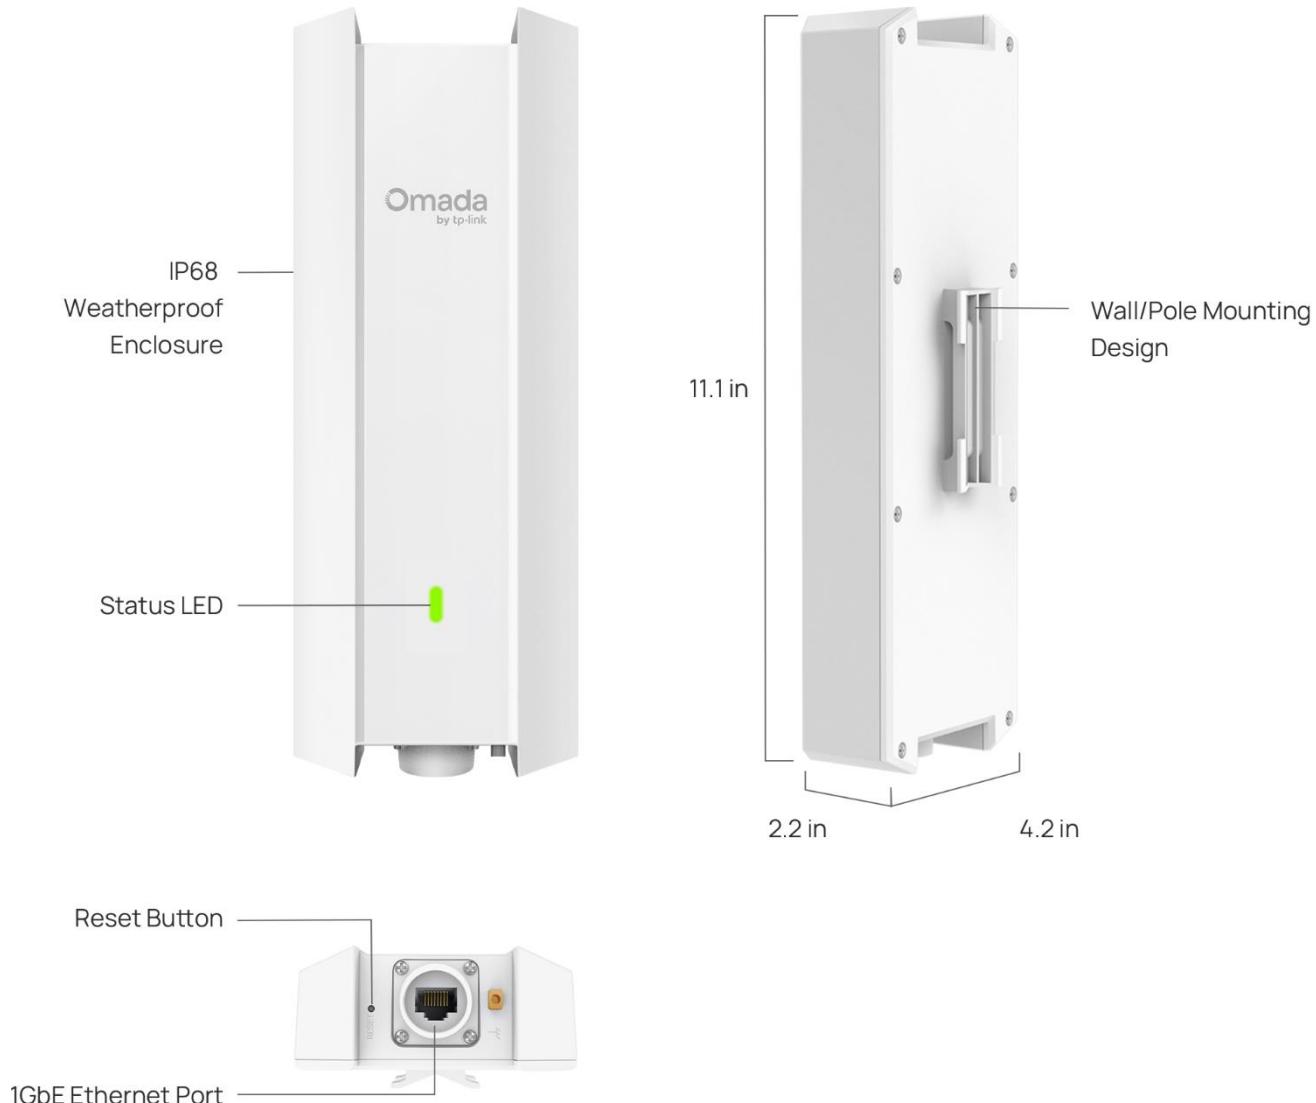

# Feature Descriptions

## Omada Wi-Fi 6 Technology\*

Wi-Fi 6 (802.11ax) delivers 8×8 UL/DL MU-MIMO, OFDMA, 1024-QAM, and a 4× longer OFDMA symbol that extends coverage while improving data transmission speeds by 11% compared to Wi-Fi 5- making it the ideal solution for high-performance, high-density wireless networks.



HE160



1024 QAM



MU-MIMO



OFDMA

## Long-Range Omnidirectional Coverage

Internal antennas equipped with high-power amplifiers utilize Wi-Fi 6 technology to provide strong and expansive wireless coverage to various outdoor environments, delivering extended coverage up to 656 ft (200 m) over 2.4 GHz and 984 ft (300 m) over 5 GHz.

## Outdoor-Ready Design for Extreme Conditions

EAP650-Outdoor offers complete dustproof protection and the ability to withstand prolonged submersion in water. It supports IP68 weatherproof and 6 kV lightning protection. Additionally, an extended temperature tolerance of -30 °C to 70 °C makes it ideal for extremely hot and cold environments.

## Flexible Deployment with PoE Support

1× Gigabit PoE+ port delivers both power and data through a single cable, cutting deployment costs and outdoor wiring complexity. Works with standard PoE+ switches or the included passive PoE adapter for flexible installation.

## Quick and Easy Setup

Flexible installation options, including wall and pole mounts, enable quick deployment in diverse settings. Integration with Omada SDN allows for one-click adoption and automatic device discovery, streamlining the setup process.

## Cloud-Based Centralized Management

As part of Omada's unified SDN ecosystem, EAP650-Outdoor works with Omada switches, gateways, and controllers. Businesses gain end-to-end visibility, automated optimization, zero-touch provisioning, and batch configuration—all managed from a single cloud interface.

## Seamless Connectivity with Mesh and Roaming

Ensures customers enjoy uninterrupted streaming when moving around by switching clients automatically to the access points with the optimal signal.

# Specifications

## Hardware Specifications

Item	Description	
Wi-Fi Standards	5 GHz: IEEE 802.11a/n/ac/ax 2.4 GHz: IEEE 802.11b/g/n/ax	
802.11ax	Spatial Streams	<ul style="list-style-type: none"> <li>2.4 GHz: 2x2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> <li>5 GHz: 2x2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> </ul>
	Frequency Bands	<p>2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM</p> <p><b>*Note: Country-Specific Restriction Apply</b></p>
	Bandwidth	<p>2.4 GHz: 20 MHz/40 MHz 5 GHz: 20 MHz/40 MHz/80 MHz/160 MHz</p> <p><b>*Note: Country-Specific Restriction Apply</b></p>
	Wireless Data Rate	<ul style="list-style-type: none"> <li>2.4 GHz: 8.6 Mbps to 573 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40)</li> <li>5 GHz: 8.6 Mbps to 2402 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40/80/160)</li> </ul> <p><b>*Note: Country-Specific Restriction Apply</b></p>
	Radio Technology	Uplink/Downlink OFDMA (Orthogonal Frequency-Division Multiple Access)
	Modulation Type	1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>TWT (Target Wake Time)</li> <li>MRC (Maximal Ratio Combining)</li> <li>TxBF (Transmit Beamforming)</li> <li>DFS (Dynamic Frequency Selection)</li> <li>CDD (Cycle Delay Diversity)</li> <li>CSD (Cycle Shift Diversity)</li> <li>STBC (Space-Time Block Coding)</li> <li>LDPC (Low-Density Parity-Check)</li> </ul>
	Spatial Streams	<ul style="list-style-type: none"> <li>5 GHz: 2x2 Downlink MU-MIMO with 2 spatial streams</li> </ul>
802.11ac	Frequency Bands	<p>5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM</p> <p><b>*Note: Country-Specific Restriction Apply</b></p>
	Bandwidth	5 GHz: 20 MHz/40 MHz/80 MHz/160 MHz

Item	Description	
802.11n	Wireless Data Rate	<ul style="list-style-type: none"> <li>5 GHz: 6.5 Mbps to 1733M Mbps (MCS0-MCS9, NSS=1 to 2, VHT20/40/80/160)</li> </ul>
	Radio Technology	OFDM (Orthogonal Frequency-Division Multiplexing)
	Modulation Type	256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>MRC (Maximal Ratio Combining)</li> <li>TxBF (Transmit Beamforming)</li> <li>DFS (Dynamic Frequency Selection)</li> <li>CDD (Cycle Delay Diversity)</li> <li>CSD (Cycle Shift Diversity)</li> <li>STBC (Space-Time Block Coding)</li> <li>LDPC (Low-Density Parity-Check)</li> </ul>
	Spatial Streams	<ul style="list-style-type: none"> <li>2.4 GHz: 2x2 MIMO with 2 spatial streams</li> <li>5 GHz: 2x2 MIMO with 2 spatial streams</li> </ul>
	Frequency Bands	<p>2.400 to 2.4835 GHz ISM        5.150 to 5.250 GHz U-NII-1        5.250 to 5.350 GHz U-NII-2A        5.470 to 5.725 GHz U-NII-2C        5.725 to 5.850 GHz U-NII-3/ISM</p> <p><b>*Note: Country-Specific Restriction Apply</b></p>
	Bandwidth	20 MHz/40 MHz
	Wireless Data Rate	<ul style="list-style-type: none"> <li>2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40)</li> <li>5 GHz: 6.5 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40)</li> </ul>
	Radio Technology	OFDM (Orthogonal Frequency-Division Multiplexing)
Antenna	Modulation Type	64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>MRC (Maximal Ratio Combining)</li> <li>TxBF (Transmit Beamforming)</li> <li>DFS (Dynamic Frequency Selection)</li> <li>CDD (Cycle Delay Diversity)</li> <li>CSD (Cycle Shift Diversity)</li> <li>STBC (Space-Time Block Coding)</li> <li>LDPC (Low-Density Parity-Check)</li> </ul>
	Wi-Fi	<p>2.4 GHz:</p> <ul style="list-style-type: none"> <li>2 x 4 dBi (peak gain), internal omnidirectional antennas</li> </ul> <p>5 GHz:</p> <ul style="list-style-type: none"> <li>2 x 5 dBi (peak gain), internal omnidirectional antennas</li> </ul> <p><b>*Note: The gains above are the single-antenna peak gains.</b></p>

Item	Description	
Interfaces	<ul style="list-style-type: none"> <li>• 1 x 10M/100M/1000M Ethernet Port (RJ45); PoE in</li> <li>• 1 x Grounding Terminal</li> </ul>	
Memory	<ul style="list-style-type: none"> <li>• Flash: 1024 Mbit</li> <li>• DRAM: 4096 Mbit*1</li> </ul>	
Button	1 x Reset button: Press the button for longer than 5 seconds to make the device restore to factory settings.	
Indicator	1 x multi-color system LED indicates on the front: <ul style="list-style-type: none"> <li>• Power-on status</li> <li>• Firmware initialization or upgrade status</li> <li>• Uplink service status</li> <li>• Error status</li> </ul>	
Reliability	MTBF (Mean Time between Failure)	CE: <ul style="list-style-type: none"> <li>• 508000 hours at the operating temperature of 25°C (77°F)</li> <li>• 299000 hours at the operating temperature of 40°C (104°F)</li> </ul> FCC: <ul style="list-style-type: none"> <li>• 436298 hours at the operating temperature of 25°C (77°F)</li> <li>• 249274 hours at the operating temperature of 40°C (104°F)</li> </ul>
Power Supply	Input	802.3at PoE+: 42.5 - 57 V == 0.6 A
	Output	/
Power Consumption	<ul style="list-style-type: none"> <li>• 802.3at (PoE+): 14.7 W, 2.4GHz radio 2×2, 5GHz radio 2×2, wired link rate can be up to 1 Gbps, etc.</li> <li>• Idle mode: 5.3 W (PoE)</li> </ul>	
Surge/Lightning Protection	Ethernet Ports: ±6 kV	
ESD/EMP Protection	<ul style="list-style-type: none"> <li>• Air discharge: ±8 kV</li> <li>• Contact discharge: ±4 kV</li> </ul> <p><b>*Note: ESD/EMP Protection means Electrostatic Discharge/Electromagnetic Pulse Protection independently.</b></p>	
Tx Power	Maximum transmit power	CE (EIRP) <ul style="list-style-type: none"> <li>• 2.4 GHz: 20 dBm</li> <li>• 5 GHz: 23 dBm in U-NII-1, 23 dBm in U-NII-2A, 28 dBm in U-NII-2C,</li> </ul> FCC (Conducted Power) <ul style="list-style-type: none"> <li>• 2.4 GHz: 25 dBm</li> <li>• 5 GHz: 25 dBm in U-NII-1, 25 dBm in U-NII-2A, 25 dBm in U-NII-2C, 25 dBm in U-NII-3</li> </ul>
		<p><b>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</b></p>

Item	Description	
Minimum transmit power	<p>CE (EIRP)</p> <ul style="list-style-type: none"> <li>• 2.4 GHz: 6 dBm</li> <li>• 5 GHz: 7 dBm in U-NII-1, 7 dBm in U-NII-2A, 7 dBm in U-NII-2C</li> </ul> <p>FCC (Conducted Power)</p> <ul style="list-style-type: none"> <li>• 2.4 GHz: 4 dBm</li> <li>• 5 GHz: 4 dBm in U-NII-1, 4 dBm in U-NII-2A, 4 dBm in U-NII-2C, 4dBm in U-NII-3</li> </ul> <p><b>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</b></p>	
Adjustable power increment	1 dBm	
Environment	Temperature	<ul style="list-style-type: none"> <li>• Operating: -30°C to +70°C (-22°F to +158°F)</li> <li>• Storage: -40°C to +70°C (-40°F to +158°F)</li> </ul>
	Humidity	<ul style="list-style-type: none"> <li>• Operating: 10% to 90% (non-condensing)</li> <li>• Storage: 5% to 90% (non-condensing)</li> </ul>
	Altitude	<ul style="list-style-type: none"> <li>• Storage: up to + 2000m (6561feet)</li> <li>• Operating: up to + 2000m (6561feet)</li> </ul>
	Windproof	/
	Weatherproof Enclosure	IP68
Unit	Dimensions (WxDxH)	<ul style="list-style-type: none"> <li>• Main Unit: 280.4*106.5*56.8 mm (11.04 in. x 4.35 in. x 2.24 in.)</li> <li>• Shipping Unit: 325*241*67 mm (12.80 in. x 9.49 in. x 2.64 in.)</li> </ul>
	Weight	<ul style="list-style-type: none"> <li>• Main Unit: 0.81 kg (1.79 lbs)</li> <li>• Mounting Bracket: 0.09 kg (0.20 lbs)</li> <li>• Shipping Unit: 1.41kg (3.11 lbs)</li> </ul>
	Mounting	<ul style="list-style-type: none"> <li>• Pole Mount (Kits included)</li> <li>• Wall Mount (Kits included)</li> </ul>

## Software Specifications

Item	Description	
Wireless Functions	Maximum number of BSSIDs	16 (8 on each band)
	Maximum number of associated STAs	256
	Guest Network	Yes
	ACS (Automatic Channel Selection)	Yes
	Airtime Fairness	Yes
	Band Steering	Yes
	802.11 Rate Control	Yes
	Rogue AP Detection	Yes
	URL Filtering	Yes
	RF Scan	No
	WLAN Optimization	Yes
	WIDS/WIPS	No
	Lock to AP	Yes
	Rate Limit	<ul style="list-style-type: none"> <li>SSID Rate Limit</li> <li>Client Rate Limit</li> </ul>
	Load Balance	<ul style="list-style-type: none"> <li>Maximum Associated Clients</li> <li>RSSI Threshold</li> </ul>
	MLO	<ul style="list-style-type: none"> <li>No</li> </ul>
	Roaming	<ul style="list-style-type: none"> <li>802.11k</li> <li>802.11v</li> <li>802.11r</li> <li>Non-Stick Roaming</li> <li>Ping-Pong Roaming Suppression</li> <li>AI Roaming</li> </ul> <p>*Note: Only support Layer 2 Roaming currently.</p>
	Multicast/Broadcast Management	<ul style="list-style-type: none"> <li>Multicast-to-Unicast Conversion</li> <li>ARP-to-Unicast Conversation</li> <li>Multicast Filtering</li> <li>Multicast/Broadcast Rate Limit</li> </ul>
	QoS (Quality of Service)	<ul style="list-style-type: none"> <li>WMM (Wi-Fi Multimedia)</li> <li>DSCP (Differentiated Services Code Point)</li> <li>U-APSD (Unscheduled Automatic Power Save Delivery)</li> </ul>
Security and Authentication	ACL	

Item	Description
Management methods	MAC Filter
	802.1X Authentication
	MAC-Based Authentication <ul style="list-style-type: none"> <li>• None</li> <li>• Enhanced Open</li> <li>• WPA/WPA2/WPA3-Personal</li> <li>• WPA/WPA2/WPA3-Enterprise</li> </ul>
	Radius Accounting <ul style="list-style-type: none"> <li>• PPSK without Radius</li> <li>• PPSK with Radius (Generic Radius with bound MAC/EKMS/Generic Radius with unbound MAC)</li> </ul>
	Captive Portal <ul style="list-style-type: none"> <li>• No Authentication</li> <li>• Simple Password</li> <li>• Hotspot (Voucher / Local User / SMS / RADIUS / Form Auth)</li> <li>• RADIUS Server</li> <li>• External LDAP Server</li> <li>• External Portal Server</li> <li>• Pre-Authentication Access</li> <li>• Authentication-Free Client</li> </ul>
	EAP Types <ul style="list-style-type: none"> <li>• EAP-TLS</li> <li>• EAP-TTLS</li> <li>• EAP-PEAP</li> <li>• EAP-CHAP</li> <li>• EAP-SIM</li> <li>• EAP-AKA</li> <li>• EAP-GTC</li> <li>• EAP-FAST</li> <li>• EAP-PEAP</li> <li>• EAP-MD5</li> <li>• EAP-MSCHAPv2</li> <li>• PEAPv0</li> <li>• PEAPv1</li> </ul>
	Omada Controller <ul style="list-style-type: none"> <li>• Omada Controller V5.15 and above</li> <li>• Omada Essential V5.15 and above</li> </ul>
	App <ul style="list-style-type: none"> <li>• Omada App V4.25 and above</li> </ul>
	Standalone Management <ul style="list-style-type: none"> <li>• Yes</li> </ul>
	Standalone Mesh <ul style="list-style-type: none"> <li>• Yes</li> </ul>
Management methods	SSH <ul style="list-style-type: none"> <li>• Yes</li> </ul>
Management methods	SNMP <ul style="list-style-type: none"> <li>• v1, v2c, v3</li> </ul>
Operating Modes	AP <ul style="list-style-type: none"> <li>• Yes</li> </ul>

Item	Description	
System Feature	Repeater	Yes
	Mesh	Yes
	System Log	Yes
	Reboot Schedule	Yes
	WLAN Schedule	Yes
	NTP (Network Time Protocol)	Yes
	Email Alerts	Yes
	Firmware Upgrade	Yes
	Restore & Backup	Yes
	LED Control	Yes
Network Features	VLAN	<ul style="list-style-type: none"> <li>• SSID VLAN</li> <li>• Dynamic VLAN</li> <li>• Management VLAN</li> </ul>
	Static IP / DHCP Client	Yes
	IPv4/IPv6	Yes
	LLDP (Link Layer Discovery Protocol)	Yes
	mDNS	Yes
Tools		<ul style="list-style-type: none"> <li>• Ping / Traceroute / DNSLookup / ARP Table</li> <li>• Packet Capture</li> <li>• Terminal</li> </ul>

# Standards Compliance and Certifications


Item	Category	Description
Standards compliance	IEEE Standards	<ul style="list-style-type: none"> <li>• IEEE 802.11a/b/g/n/ac/ax</li> <li>• IEEE 802.11e/i/k/v/r</li> <li>• IEEE 802.1x/q</li> <li>• IEEE 802.3at</li> <li>• IEEE 802.3ab</li> <li>• IEEE 802.3x</li> </ul>
	Radio Standards	<ul style="list-style-type: none"> <li>• ETSI EN 300 328</li> <li>• ETSI EN 301 893</li> <li>• FCC Part 15E</li> <li>• FCC Part15C</li> <li>• RSS-247 Issue 3, RSS-GEN Issue 5</li> <li>• LP0002</li> </ul>
	EMC standards	<ul style="list-style-type: none"> <li>• EN 55032</li> <li>• EN 55035</li> <li>• EN 301489-1</li> <li>• EN 301489-17</li> <li>• EN 61000-3-3</li> <li>• EN IEC 61000-3-2</li> <li>• EN 60601-1-2:2015+A1:2021</li> <li>• FCC Part 15B</li> <li>• ICES-003 Issue 7</li> <li>• VCCI-CISPR 32:2016</li> <li>• CNS 15936</li> </ul>
	Safety Standards	<ul style="list-style-type: none"> <li>• EN 62368-1</li> <li>• IEC 62368-1</li> <li>• CNS15598-1</li> </ul>
	RoHS	<ul style="list-style-type: none"> <li>• Directive 2011/65/EU, Directive (EU) 2015/863</li> <li>• EN IEC 63000: 2018</li> </ul>
	Others	<ul style="list-style-type: none"> <li>• Equipment Radio Regulations: 2008 (including amendments)</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>• FCC/CE/MIC,VCCI,ISED, BSMI, NCC</li> </ul>	

# RF Performance


Frequency Band	Wi-Fi Protocol & Bandwidth	MCS Index / Data Rate	EU/US Maximum Transmit Power (dBm) per transmit chain	Receiver Sensitivity (dBm) per receive chain
2.4 GHz	802.11n, HT20	MCS0	15/22	-96.0
		MCS7	15/19	-76.5
	802.11n, HT40	MCS0	15/22	-92.5
		MCS7	15/19	-73.0
	802.11ax, HE20	MCS0	15/22	-96.5
		MCS11	15/18	-65.5
	802.11ax, HE40	MCS0	15/19	-93.5
		MCS11	15/18	-62.5
5 GHz	802.11n, HT20	MCS0	22/22	-96.0
		MCS7	19/19	-75.5
	802.11n, HT40	MCS0	22/22	-92.5
		MCS7	19/19	-72.5
	802.11ac, VHT20	MCS0	22/22	-96.0
		MCS9	18.5/18.5	-72.0
	802.11ac, VHT40	MCS0	22/22	-92.5
		MCS9	18.5/18.5	-69.0
	802.11ac, VHT80	MCS0	22/22	-89.5
		MCS9	18.5/18.5	-65.5
	802.11ax, HE20	MCS0	22/22	-93.5
		MCS11	18/18	-66.0
	802.11ax, HE40	MCS0	22/22	-90.5
		MCS11	18/18	-63.0
	802.11ax, HE80	MCS0	22/22	-87.5
		MCS11	18/18	-60.5
	802.11ax, HE160	MCS0	22/19	-84.5
		MCS11	18/18	-57.5

# Antenna Radiation Patterns

2.4 GHz

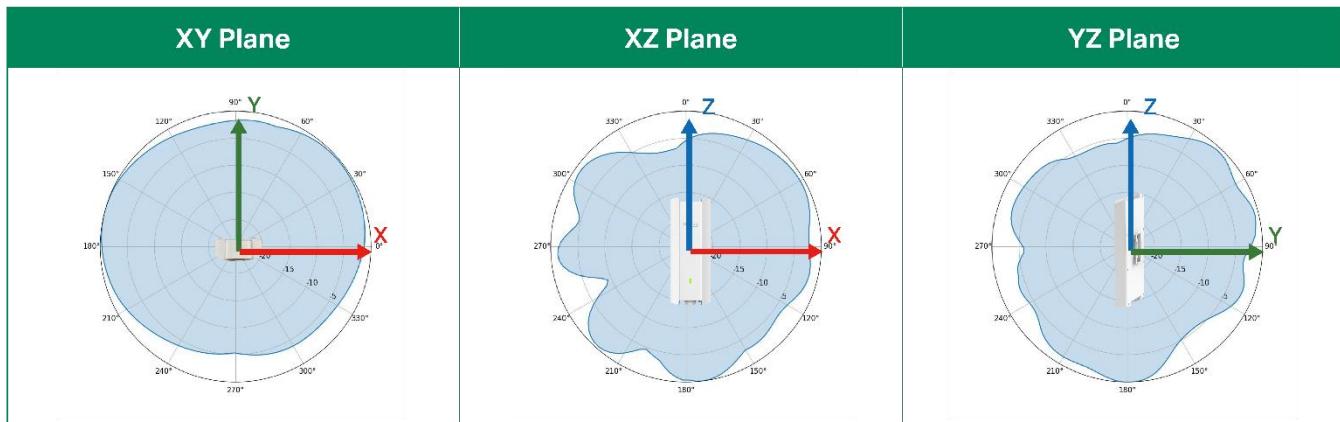

5 GHz

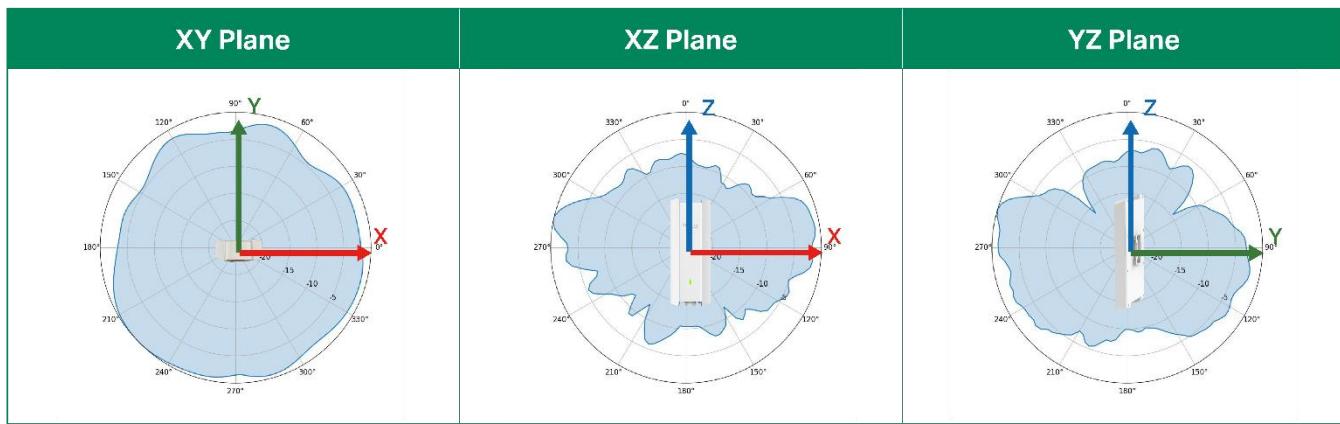

# Package Contents

Item	Quantity
EAP650-Outdoor	1
Passive PoE Adapter	1
Power Cord	1
Waterproof Kit	1
Mounting Kit	1
Installation Guide	1

# Support Services

We are committed to providing you with comprehensive and reliable support services to ensure seamless experience with Omada products.

- Contact Support: <https://support.omadanetworks.com/#contact-us>
- Warranty Services: <https://www.omadanetworks.com/support/replacement-warranty/>

# Revision History

Version	Date	Description
V1.0	2026-1-16	Initial release.

<sup>†</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

<sup>#</sup>Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.

<sup>^</sup>Omada Mesh, Seamless Roaming, Captive Portal, and Cloud Access require the use of an Omada controller. Please refer to the User Guides of Omada controllers for configuration methods.

<sup>\*</sup>Use of Wi-Fi 6 (802.11ax) and its features, including OFDMA, 1024-QAM, and more, requires clients to support the corresponding features.