



Omada AX3000
Ceiling Mount
Wi-Fi 6 Access Point


Model: EAP653 UR

Product Overview

The Omada AX3000 Dual-Band Ceiling Mount Access Point EAP653 UR delivers blazing-fast speeds and extended coverage, leveraging Wi-Fi 6 efficiencies to support more devices over larger areas with stable performance.

- **4-Stream Dual-Band Wi-Fi 6:** 2,402 Mbps on 5 GHz and 574 Mbps on 2.4 GHz[†]
- **Ultra-Range Coverage:** Up to 2,000 ft² (185 m²) coverage of stable connectivity in expansive deployments.*
- **1× Gigabit Port:** Ensures fast connectivity throughout the network.
- **Low Latency and Interference:** 160 MHz Bandwidth, MU-MIMO, OFDMA, and 1024-QAM ensure high performance for your network.‡
- **Flexible Deployment and Easy Setup:** Supports both 802.3at PoE and DC Power supply for flexible installation. Omada SDN for one-click setup.
- **Advanced Features:** Supports centralized cloud management, mesh, and seamless roaming.[△]
- **More Connections:** Supports up to 510+ concurrent connections.**

Product Appearance

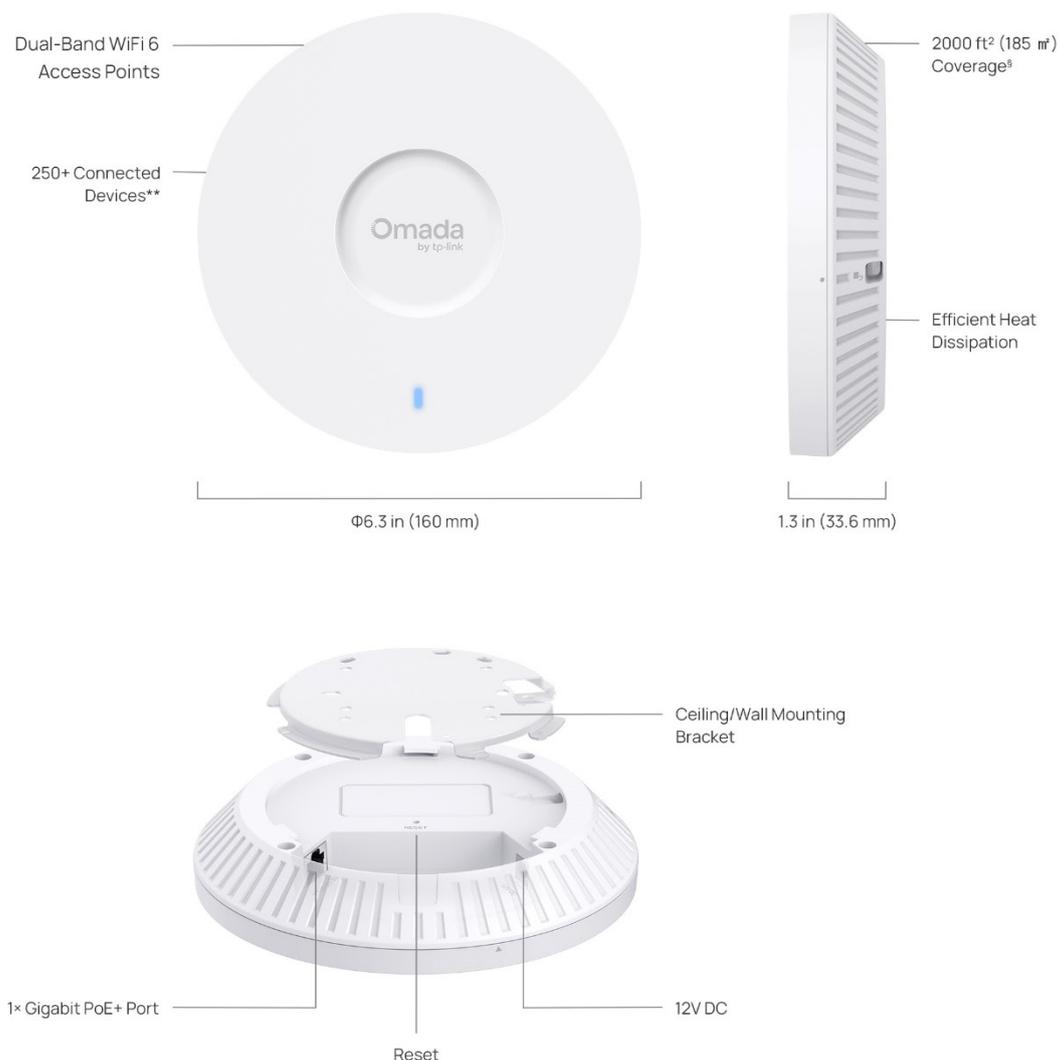


**The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.

‡Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.

Feature Descriptions

Omada Wi-Fi 6 Technology

Wi-Fi 6 (802.11ax) supports up to 160 MHz Bandwidth, MU-MIMO, OFDMA, and 1024-QAM, making it an ideal choice for high-performance wireless networks. 160 MHz bandwidth delivers faster speeds and lower latency, enabling smoother streaming, gaming, and multitasking on multiple devices. OFDMA allows multiple devices to share channels efficiently, reducing latency and improving performance in dense environments. MU-MIMO supports more simultaneous device connections, enhancing overall network capacity. 1024-QAM increases data transmission rates, delivering 25% faster speeds compared to Wi-Fi 5.

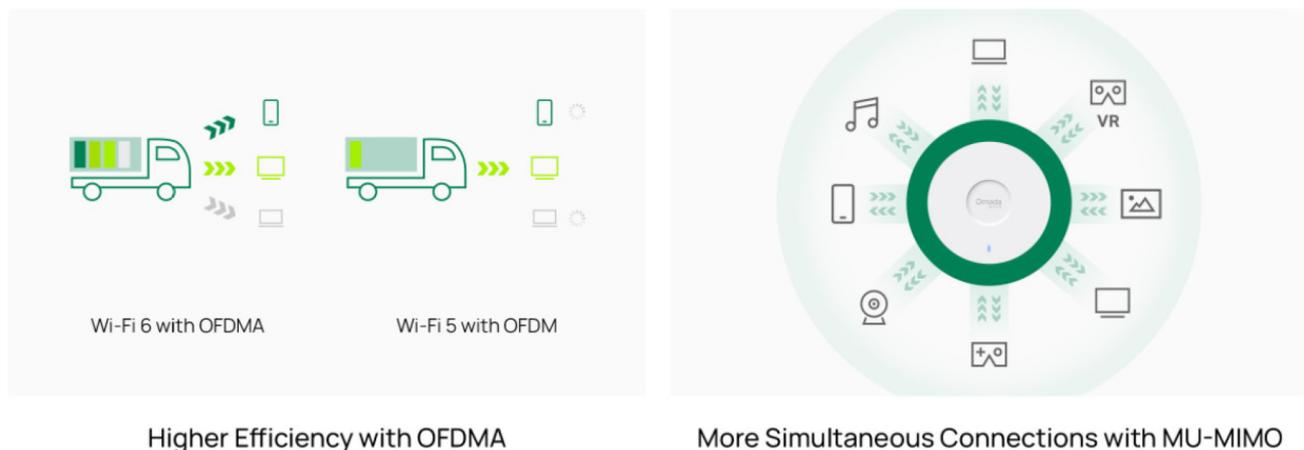

Higher Efficiency with OFDMA

More Simultaneous Connections with MU-MIMO

Ultra-Range Wireless Coverage

Equipped with high-power dual-band internal antennas, EAP653 UR delivers exceptional signal strength and extended wireless coverage, penetrating walls and minimizing dead zones—ideal for expansive business environments.

Gigabit PoE Ports for Optimized Wired Performance

Boost overall network efficiency with a high-performance gigabit PoE port, delivering blazing-fast data speeds. Compatibility with 802.3at PoE is ideal for flexible deployment.

Easy Setup via the Omada app, web browser, or SDN

The Omada SDN supports quick setup of EAP653 UR through automatic device identification and one-click adoption. Configure and manage on the go via the Omada app or web browser.

Boosted Network Security

EAP653 UR offers advanced security features, including a secure guest network with up to 16 SSIDs, SMS login for enhanced business authentication, WPA3 encryption for worry-free open public access, and rogue AP detection, ensuring safer and more reliable network experiences for both guests and business operations.

Cloud-Based Centralized Management

As part of Omada's unified SDN ecosystem, the EAP653 UR works harmoniously with Omada switches, gateways, and controllers. Businesses gain end-to-end visibility, automated optimization, zero-touch provisioning, and batch configuration— all managed from a single cloud interface.

Specifications

Hardware Specifications

Item	Description	
Wi-Fi Standards	5 GHz: IEEE 802.11a/n/ac/ax 2.4 GHz: IEEE 802.11b/g/n/ax	
802.11ax	Spatial Streams	<ul style="list-style-type: none"> 2.4 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams 5 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams
	Frequency Bands	2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM Note: Country-Specific Restriction Apply
	Bandwidth	2.4 GHz: 20 MHz/40 MHz 5GHz: 20 MHz/40 MHz/80MHz/160MHz Note: Country-Specific Restriction Apply
	Wireless Data Rate	<ul style="list-style-type: none"> 2.4G+5G: 2976Mbps 2.4GHz: 8.6 Mbps to 574 Mbps (MCS0—MCS11,NSS=1 to 2, HE20/40) 5 GHz: 8.6 Mbps to 2402 Mbps (MCS0—MCS11,NSS=1 to 2, HE20/40/80/160) Note: Country-Specific Restriction Apply
	Radio Technology	Uplink/downlink OFDMA (Orthogonal Frequency-Division Multiple Access)
	Modulation Type	1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx
	Others	<ul style="list-style-type: none"> MRC (Maximal Ratio Combining) TxBF (Transmit Beamforming) WPA3 (Wi-Fi Protect Access 3) DFS (Dynamic Frequency Selection) CDD (Cycle Delay Diversity) CSD (Cycle Shift Diversity) STBC (Space-Time Block Coding) LDPC (Low-Density Parity-Check)
802.11ac	Spatial Streams	<ul style="list-style-type: none"> 5 GHz: 2×2 Downlink MU-MIMO with 2 spatial streams
	Frequency Bands	5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM Note: Country-Specific Restriction Apply
	Bandwidth	5 GHz: 20 MHz/40 MHz/80 MHz/160 MHz

Item	Description	
	Wireless Data Rate	<ul style="list-style-type: none"> 5 GHz: 6.5 Mbps to 1732 Mbps (MCS0-MCS9, NSS=1 to 2, VHT20/40/80/160)
	Radio Technology	OFDM (Orthogonal Frequency-Division Multiplexing)
	Modulation Type	256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx
	Others	<ul style="list-style-type: none"> MRC (Maximal Ratio Combining) TxBF (Transmit Beamforming) WPA3 (Wi-Fi Protect Access 3) DFS (Dynamic Frequency Selection) CDD (Cycle Delay Diversity) CSD (Cycle Shift Diversity) STBC (Space-Time Block Coding) LDPC (Low-Density Parity-Check)
802.11n	Spatial Streams	<ul style="list-style-type: none"> 2.4 GHz: 2×2 MIMO with 2 spatial streams 5 GHz: 2×2 MIMO with 2 spatial streams
	Frequency Bands	2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM Note: Country-Specific Restriction Apply
	Bandwidth	20 MHz/40 MHz
	Wireless Data Rate	<ul style="list-style-type: none"> 2.4 GHz: 6.5Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40) 5 GHz: 6.5Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40)
	Radio Technology	OFDM (Orthogonal Frequency-Division Multiplexing)
	Modulation Type	64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx
	Others	<ul style="list-style-type: none"> MRC (Maximal Ratio Combining) TxBF (Transmit Beamforming) WPA3 (Wi-Fi Protect Access 3) DFS (Dynamic Frequency Selection) CDD (Cycle Delay Diversity) CSD (Cycle Shift Diversity) STBC (Space-Time Block Coding) LDPC (Low-Density Parity-Check)
Antenna	Wi-Fi	<ul style="list-style-type: none"> 2.4 GHz: 2 × 5 dBi (peak gain), internal omnidirectional antennas 5 GHz: 3 × 5 dBi (peak gain), internal omnidirectional antennas Note: The gains above are the single-antenna peak gains.

Item	Description	
Interfaces	<ul style="list-style-type: none"> 1 x 10M/100M/1000M Multigigabit Ethernet Port (RJ45); PoE in 1 x DC power interface: 12VDC 	
IoT	<ul style="list-style-type: none"> BLE5.2,1Mbps 	
Memory	<ul style="list-style-type: none"> Flash: 1Gbit DRAM: 4Gbit 	
Button	1 x Reset button: Press the button for longer than 5 seconds to make the device restore to factory settings.	
Indicator	1 x single-color system LED indicates on the front: <ul style="list-style-type: none"> Power-on status Firmware initialization or upgrade status Uplink service status Error status 	
Reliability	MTBF (Mean Time between Failure)	EU: 249924H@25°C, 211357H@40°C US: 188977H@25°C, 158209H@40°C
Power Supply	Input	<ul style="list-style-type: none"> 48V Passive POE or 802.3at POE DC: 12V/1.5A
	Output	/
Power Consumption	<ul style="list-style-type: none"> EU: 14.8W, 2.4GHz radio 2x2, 5GHz radio 2x2 US: 16.4W, 2.4GHz radio 2x2, 5GHz radio 2x2 Note: Actual power consumption may vary depending on the AP usage.	
Surge/Lightning Protection	Ethernet Ports: ±4 kV	
ESD/EMP Protection	<ul style="list-style-type: none"> Air discharge: ±8 kV Contact discharge: ±4 kV Note: ESD/EMP Protection means Electrostatic Discharge/Electromagnetic Pulse Protection independently.	
Tx Power	Maximum transmit power	CE (EIRP) <ul style="list-style-type: none"> 2.4GHz: 20 dBm 5GHz: 23 dBm in U-NII-1, 23 dBm in U-NII-2A, 29 dBm in U-NII-2C FCC (conducted power) <ul style="list-style-type: none"> 2.4GHz: 26 dBm 5GHz: 27 dBm in U-NII-1, 23 dBm in U-NII-2A, 23 dBm in U-NII-2C, 27 dBm in U-NII-3 Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.
	Minimum transmit power	CE (EIRP) <ul style="list-style-type: none"> 2.4GHz: 7 dBm 5GHz: 6 dBm in U-NII-1, 6 dBm in U-NII-2A, 6 dBm in U-NII-2C FCC (conducted power) <ul style="list-style-type: none"> 2.4GHz: 4 dBm 5GHz: 4 dBm in U-NII-1, 4 dBm in U-NII-2A, 4 dBm in U-NII-2C, 4 dBm in U-NII-3 Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.

Item	Description	
	Adjustable power increment	1 dB
Environment	Temperature	<ul style="list-style-type: none"> • Operating: 0°C to +40°C (32°F to +104°F) • Storage: -40°C to +70°C (-40°F to +158°F)
	Humidity	<ul style="list-style-type: none"> • Operating: 10% to 90% (non-condensing) • Storage: 5% to 90% (non-condensing)
	Altitude	<ul style="list-style-type: none"> • Storage: up to + 2000 m (6561feet) • Operating: up to + 2000 m (6561feet)
Unit	Dimensions (W×D×H)	<ul style="list-style-type: none"> • Main Unit: 160 × 160 × 33.6 mm (6.3 × 6.3 × 1.3 in.) • Shipping Unit: 245 × 228 × 65 mm (9.7 × 9.0 × 2.6 in.)
	Weight	<ul style="list-style-type: none"> • Main Unit: 0.41 kg (0.9 lbs) • Mounting Bracket: 0.054 kg (0.119 lbs) • Shipping Unit: 0.8 kg (1.8 lbs)
	Mounting	<ul style="list-style-type: none"> • Ceiling /Wall/Junction Box/T-Bar Mounting (Kits included)

Software Specifications

Item	Description	
Wireless Functions	Maximum number of BSSIDs	16 (8 on each band)
	Maximum number of associated STAs	250+
	Guest Network	Yes
	ACS (Automatic Channel Selection)	Yes
	Airtime Fairness	Yes
	Band Steering	Yes
	802.11 Rate Control	Yes
	Rogue AP Detection	Yes
	URL Filtering	Yes
	RF Scan	No
	WLAN Optimization	Yes
	WIDS/WIPS	No
	Lock to AP	Yes
	Rate Limit	<ul style="list-style-type: none"> • SSID Rate Limit • Client Rate Limit
	Load Balance	<ul style="list-style-type: none"> • Maximum Associated Clients • RSSI Threshold
MLO	No	
Roaming	<ul style="list-style-type: none"> • 802.11 k • 802.11v • 802.11r • Non-Stick Roaming • Ping-Pong Roaming Suppression • AI Roaming <p style="color: green; margin-top: 5px;">*Note: Only support Layer 2 Roaming currently.</p>	
Multicast/Broadcast Management	<ul style="list-style-type: none"> • Multicast-to-Unicast Conversion • ARP-to-Unicast Conversation • Multicast Filtering • Multicast/Broadcast Rate Limit 	
QoS (Quality of Service)	<ul style="list-style-type: none"> • WMM (Wi-Fi Multimedia) • DSCP (Differentiated Services Code Point) • U-APSD (Unscheduled Automatic Power Save Delivery) 	
Security and Authentication	ACL	

Item	Description	
	MAC Filter	
	MAC-Based Authentication	
	<ul style="list-style-type: none"> • None • Enhanced Open • WPA/WPA2/WPA3-Personal • WPA/WPA2/WPA3-Enterprise 	
	Radius Accounting	
	<ul style="list-style-type: none"> • PPSK without Radius • PPSK with Radius (Generic Radius with bound MAC/EKMS/Generic Radius with unbound MAC) 	
	Captive Portal	<ul style="list-style-type: none"> • No Authentication • Simple Password • Hotspot (Voucher / Local User / SMS / RADIUS / Form Auth) • RADIUS Server • External LDAP Server • External Portal Server • Pre-Authentication Access • Authentication-Free Client
Management methods	EAP Types	<ul style="list-style-type: none"> • EAP-TLS • EAP-TTLS • EAP-PEAP • EAP-CHAP • EAP-SIM • EAP-AKA • EAP-GTC • EAP-FAST • EAP-PEAP • EAP-MD5 • EAP-MSCHAPv2 • PEAPv0 • PEAPv1
	Omada Controller	<ul style="list-style-type: none"> • Omada Local Controller V6.1 and above • Omada CBC V6.1 and above
	App	Omada App V5.0 and above
	Standalone Management	Yes
	Standalone Mesh	Yes
	SSH	Yes
Operating Modes	SNMP	v1, v2c, v3
Operating Modes	AP	Yes
	Mesh	Yes
System Feature	System Log	Yes

Item	Description	
	Reboot Schedule	Yes
	WLAN Schedule	Yes
	NTP (Network Time Protocol)	Yes
	Email Alerts	Yes
	Firmware Upgrade	Yes
	Restore & Backup	Yes
	LED Control	Yes
Network Features	VLAN	<ul style="list-style-type: none"> • SSID VLAN • Dynamic VLAN • Management VLAN
	Static IP / DHCP Client	Yes
	IPv4/IPv6	Yes
	LLDP (Link Layer Discovery Protocol)	Yes
	mDNS	Yes
	Tools	<ul style="list-style-type: none"> • Ping / Traceroute / DNSLookup • Packet Capture • Terminal

Standards Compliance and Certifications

Item	Category	Description
Standards compliance	IEEE Standards	<ul style="list-style-type: none"> • IEEE 802.11a/b/g/n/ac/ax • IEEE 802.11e/i/k/v/r • IEEE 802.1x/q • IEEE 802.3at • IEEE 802.3ab • IEEE 802.3x
	Radio Standards	<ul style="list-style-type: none"> • ETSI EN 300 328 • ETSI EN 301 893 • FCC Part 15E • FCC Part15C • RSS-247 Issue 3, RSS-GEN Issue 5 • EN 62311 • EN 50665
	EMC standards	<ul style="list-style-type: none"> • EN 55032 • EN 55035 • EN 301489-1 • EN 301489-17 • EN 61000-3-3 • EN IEC 61000-3-2 • EN 60601-1-2:2015+A1:2021 • FCC Part 15B • ICES-003 Issue 7 • VCCI-CISPR 32:2016
	Safety Standards	<ul style="list-style-type: none"> • EN 62368-1 • IEC 62368-1
	Security Standards	/
	RoHS	<ul style="list-style-type: none"> • Directive 2011/65/EU, Directive (EU) 2015/863 • EN IEC 63000: 2018
	Others	<ul style="list-style-type: none"> • Equipment Radio Regulations: 2008 (including amendments)
	Certifications	<ul style="list-style-type: none"> • FCC/CE/MIC,VCCI,ISED


RF Performance

Frequency Band	Wi-Fi Protocol & Bandwidth	MCS Index / Data Rate	EU/US Maximum Transmit Power (dBm) per transmit chain	Receiver Sensitivity (dBm) per receive chain
2.4 GHz	802.11n, HT20	MCS0	EU:14 US:23	-95
		MCS7	EU:14 US:20	-76.5
	802.11n, HT40	MCS0	EU:14 US:22	-92
		MCS7	EU:14 US:20	-73.5
	802.11ax, HE20	MCS0	EU:14 US:23	-96
		MCS11	EU:14 US:18	-66
	802.11ax, HE40	MCS0	EU:14 US:22	-94
		MCS11	EU:14 US:18	-64
5 GHz	802.11n, HT20	MCS0	EU:22 US:22	-96
		MCS7	EU:20 US:20	-77.5
	802.11n, HT40	MCS0	EU:22 US:22	-93.5
		MCS7	EU:20 US:20	-74.5
	802.11ac, VHT20	MCS0	EU:22 US:22	-96
		MCS8	EU:19.5 US:19.5	-75
	802.11ac, VHT40	MCS0	EU:22 US:22	-93
		MCS9	EU:19 US:19	-71
	802.11ac, VHT80	MCS0	EU:22 US:22	-90
		MCS9	EU:19 US:19	-67
	802.11ax, HE20	MCS0	EU:22 US:22	-95
		MCS11	EU:18	-65


Frequency Band	Wi-Fi Protocol & Bandwidth	MCS Index / Data Rate	EU/US Maximum Transmit Power (dBm) per transmit chain	Receiver Sensitivity (dBm) per receive chain
			US:18	
	802.11ax, HE40	MCS0	EU:22 US:22	-93
		MCS11	EU:18 US:18	-63
	802.11ax, HE80	MCS0	EU:22 US:22	-91
		MCS11	EU:18 US:18	-61
	802.11ax, HE160	MCS0	EU:22 US:18	-87
		MCS11	EU:18 US:18	-58

Antenna Radiation Patterns

2.4 GHz

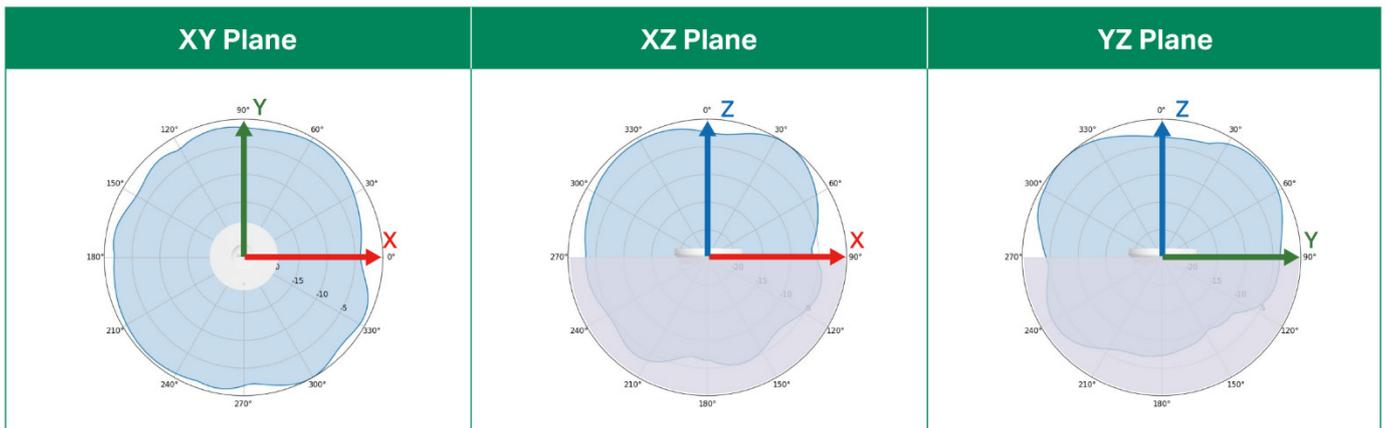


5 GHz

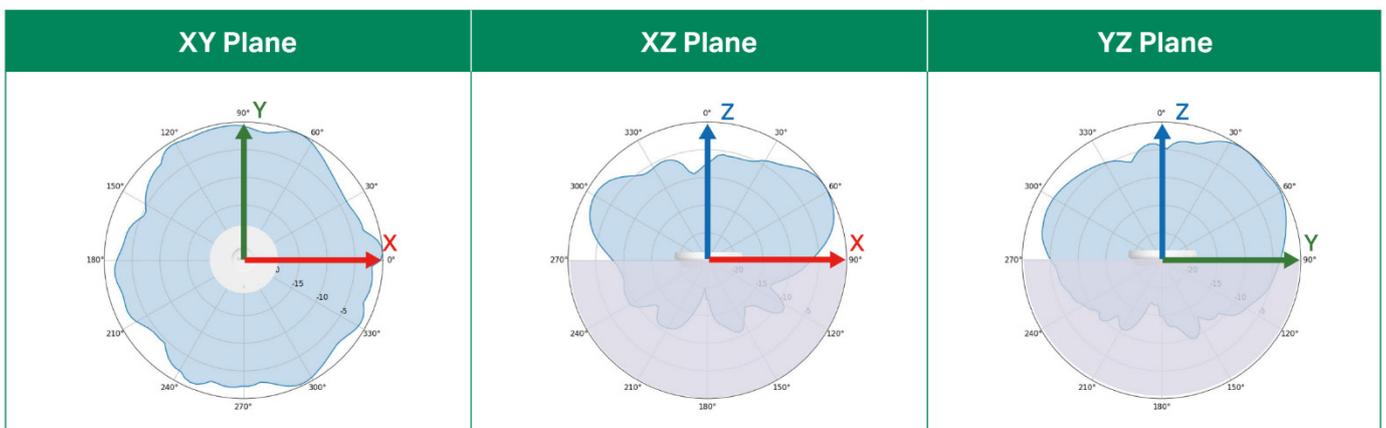

Package Contents

Item	Quantity
EAP653 UR	1
Installation Guide	1
Mounting Kit	1

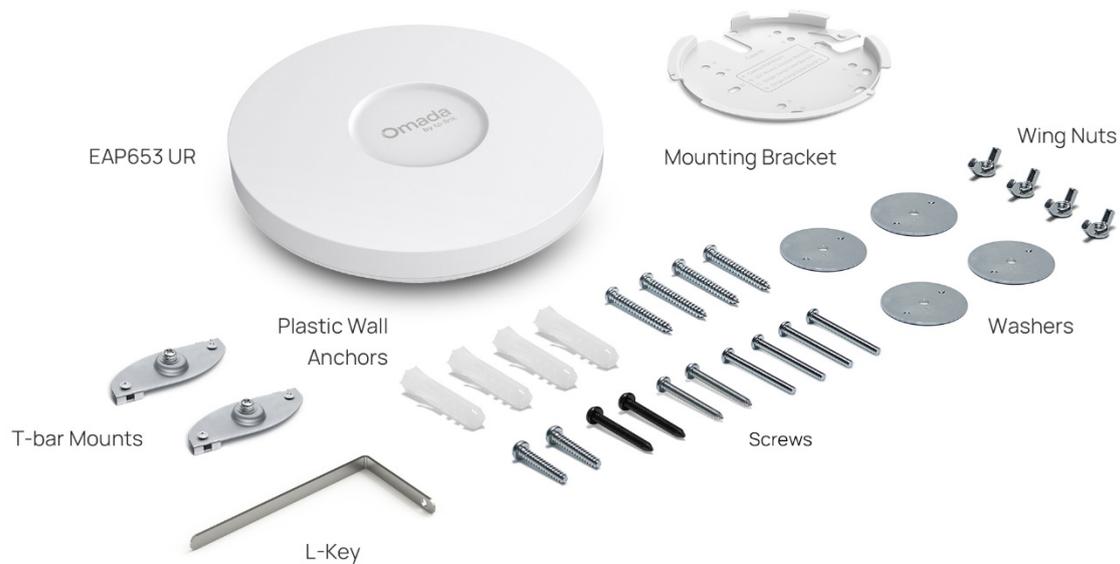

*The accessories may vary by country/region. Please refer to the actual product.

Support Services

We are committed to providing you with comprehensive and reliable support services to ensure seamless experience with Omada products.

- Contact Support: <https://support.omadanetworks.com/#contact-us>
- Warranty Services: <https://www.omadanetworks.com/support/replacement-warranty/>

Revision History

Version	Date	Description
V1.0	2026-02-12	Initial release.
V1.1	2026-03-27	Added BLE info.

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and connected devices are not guaranteed and will vary as a result of internet service provider factors, network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

‡Use of Wi-Fi 6 (802.11ax), and features including 160 MHz Bandwidth, OFDMA, MU-MIMO, and 1024-QAM requires clients to also support the corresponding features. The 160 MHz bandwidth is only available on 5 GHz band and may be unavailable in some regions/countries due to regulatory restrictions.

*Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.

**The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.

△Omada Mesh, Seamless Roaming, Captive Portal, and Cloud Access require the use of an Omada controller.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: <https://www.omadanetworks.com>. Specifications are subject to change without notice.