



Omada BE11000(US) / BE9300(EU)
Tri-Band Ceiling Mount
Wi-Fi 7 Access Point


Model: EAP772

Product Overview

Omada EAP772 delivers high-speed, low-latency wireless performance with enhanced multi-user efficiency, meeting the demands of modern businesses.

- 6-Stream Tri-Band Wi-Fi 7: Up to 11.0 Gbps for the US and up to 9.3 Gbps for the EU.[†]
- Long-Range 6 GHz Coverage with AFC: Unlock stronger signals and wider 6 GHz coverage through AFC.[#]
- 1× 2.5G Port: Ensures fast connectivity throughout the network.
- Low Latency and Interference: 320MHz Bandwidth, Multi-Link Operation, Multi-Rus, and 4K -QAM ensure high performance of your network.[‡]
- Flexible Deployment and Easy Setup: Supports both 802.3at PoE and DC Power supply for flexible installation. Omada SDN for one-click setup.
- Advanced Features: Supports centralized management, Mesh, and Seamless Roaming.[△]
- More Capacity and Wider Coverage: Supports 380+ concurrent clients* and covers up to 1500 ft² (140 m²)** for reliable and extensive wireless connectivity.

Product Appearance

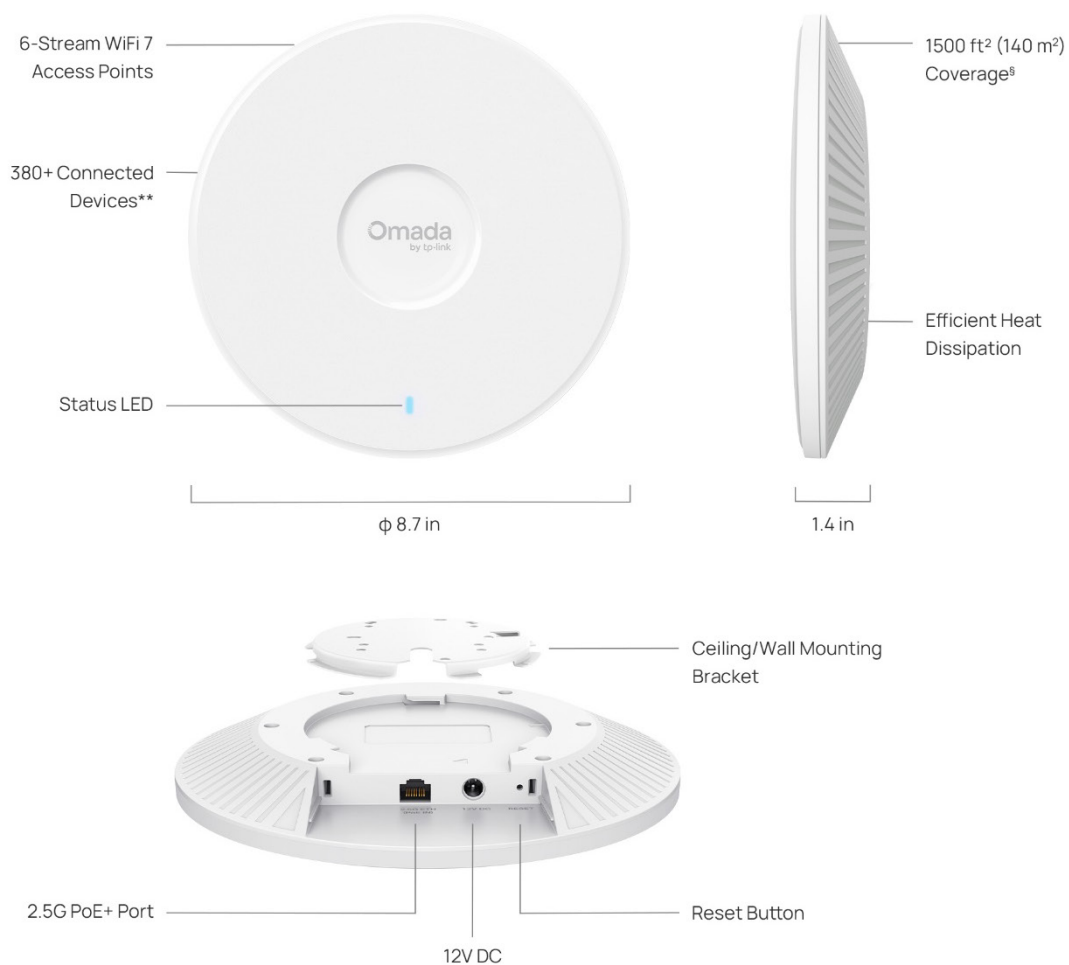

**The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.


§Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.

Feature Descriptions

Omada Wi-Fi 7 Technology: Swifter, Smoother, Stronger


Featuring superb Wi-Fi 7 technologies including Multi-Link Operation, 6 GHz, 320 MHz Bandwidth, 4K-QAM, and Multi-RUs, Omada EAP772 significantly enhances throughput, connection stability, and concurrent capacity, ensuring faster and higher quality connections for more devices.

3x More Reliable with Multi-Link Operation

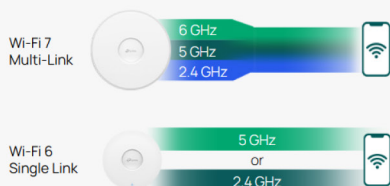


Wi-Fi 6 devices primarily rely on a single link for data transmission. In contrast, Wi-Fi 7 introduces Multi-Link Operation (MLO), enabling devices to utilize multiple links simultaneously, thereby achieving higher throughput, lower latency, and improved reliability.

Faster and Higher Capacity with the New 6 GHz Band

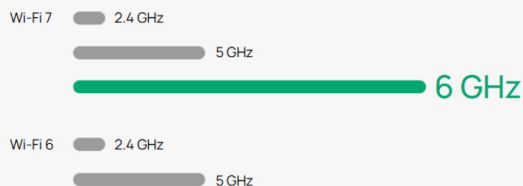


The new 6 GHz band offers a larger spectrum and cleaner channels compared to traditional bands, delivering higher capacity, faster connectivity, and less interference.

2x Bandwidth with 320 MHz




With 320 MHz ultra-wide channels, Wi-Fi 7 doubles the bandwidth of Wi-Fi 6's 160 MHz and the number of subcarriers, delivering dramatically higher data transfer rates.

20% More Data Transmission with 4K-QAM

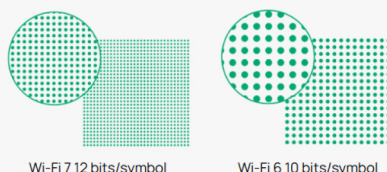

4096-QAM enables each symbol to carry 12 bits instead of 10, increasing theoretical transmission rates by 20% compared to Wi-Fi 6's 1024-QAM. This higher transmission rate boosts data throughput, delivering enhanced speeds and improved network reliability.

↓ Reduced Latency with Multi-RU

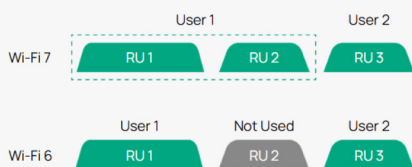

Wi-Fi 6 restricts each user to a single resource unit (RU), limiting spectrum flexibility. Wi-Fi 7 overcomes this limitation by allowing multiple RUs to be allocated to a single user and enabling RU aggregation, improving data throughput and spectral efficiency.

Long-Range 6 GHz Coverage with AFC

With AFC support, EAP772 safely accesses additional 6 GHz spectrum, intelligently selecting and managing Wi-Fi channels to reduce interference and maximize spectrum efficiency. This enables stronger signals, wider coverage, and more stable connections in high-demand indoor environments, delivering improved performance for all connected devices.

AFC availability varies by region and country. For supported areas, please visit:
<https://www.omadanetworks.com/support/faq/4373/>

Optimized Wired Performance with 2.5G PoE+ Port

With a 2.5 Gigabit Ethernet Port, EAP772 delivers remarkable multi-gigabit performance for higher bandwidth and faster WiFi. Compatibility with 802.3at PoE is ideal for flexible deployment.

Easy Setup via the Omada App or Web Browser, Powered by SDN.

The SDN supports quickly set up the EAP772 through automatic device identification and one-click adoption. Access convenient configuration and on-the-go management via the Omada app or web browser.

Boosted Network Security

EAP772 offers advanced security features, including a secure guest network with up to 24 SSIDs, SMS login for enhanced business authentication, WPA3 encryption for worry-free open public access, and rogue AP detection, ensuring safer and more reliable network experiences for both guests and business operations.

Cloud-Based Centralized Management

As part of Omada's unified SDN ecosystem, the EAP772 works harmoniously with Omada switches, gateways, and controllers. Businesses gain end-to-end visibility, automated optimization, zero-touch provisioning, and batch configuration— all managed from a single cloud interface.

Specifications

Hardware Specifications

| Item | Description | |
|-----------------|--|--|
| Wi-Fi Standards | 6 GHz: IEEE 802.11ax/be 5 GHz: IEEE 802.11a/n/ac/ax/be 2.4 GHz: IEEE 802.11b/g/n/ax/be | |
| 802.11be | Spatial Streams | <ul style="list-style-type: none"> 2.4 GHz: 2×2 Uplink/Downlink with 2 spatial streams 5 GHz: 2×2 Uplink/Downlink with 2 spatial streams 6 GHz: 2×2 Uplink/Downlink with 2 spatial streams Support MU-MIMO |
| | Frequency Bands | 2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM 6.105 to 6.425 GHz U-NII-5 6.425 to 6.525 GHz U-NII-6 6.525 to 6.875 GHz U-NII-7 6.875 to 7.125 GHz U-NII-8 *Note: Country-Specific Restriction Apply |
| | Bandwidth | 2.4 GHz: 20 MHz/40 MHz 5 GHz: 20 MHz/40 MHz/80 MHz/160/240 MHz 6 GHz: 20 MHz/40 MHz/80 MHz/160 MHz/320 MHz *Note: Country-Specific Restriction Apply |
| | Wireless Data Rate | 2.4 GHz + 5 GHz + 6 GHz: 10777 Mbps <ul style="list-style-type: none"> 2.4 GHz: 8.6 Mbps to 688 Mbps (MCS0-MCS13, NSS=1 to 2, EHT20/40) 5 GHz: 8.6 Mbps to 4324 Mbps (MCS0-MCS13, NSS=1 to 2, EHT20/40/80/160/240) 6 GHz: 8.6 Mbps to 5765 Mbps (MCS0-MCS13, NSS=1 to 2, EHT20/40/80/160/320) |
| | Radio Technology | Uplink/downlink OFDMA (Orthogonal Frequency-Division Multiple Access) |
| | Modulation Type | 4096-QAM, 1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK |
| | Frame Aggregation | <ul style="list-style-type: none"> A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx |

| Item | Description | |
|----------|--------------------|--|
| | Others | <ul style="list-style-type: none"> • Preamble Puncturing • BSS Coloring • Multi-Link Operation (MLO) • TWT (Target Wake Time) • Maximal Ratio Combining (MRC) • Transmit Beamforming (TxBF) • Wi-Fi Protect Access 3 (WPA3) • Dynamic Frequency Selection (DFS) • Cycle Delay Diversity (CDD) • Cycle Shift Diversity (CSD) • Space-Time Block Coding (STBC) • Low-Density Parity Check (LDPC) |
| 802.11ax | Spatial Streams | <ul style="list-style-type: none"> • 2.4 GHz: 2×2 Uplink/Downlink with 2 spatial streams • 5 GHz: 2×2 Uplink/Downlink with 2 spatial streams • 6 GHz: 2×2 Uplink/Downlink with 2 spatial streams • Support MU-MIMO |
| | Frequency Bands | 2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM 6.105 to 6.425 GHz U-NII-5 6.425 to 6.525 GHz U-NII-6 6.525 to 6.875 GHz U-NII-7 6.875 to 7.125 GHz U-NII-8 *Note: Country-Specific Restriction Apply |
| | Bandwidth | 2.4 GHz: 20 MHz/40 MHz 5 GHz: 20 MHz/40 MHz/80 MHz/160 MHz 6 GHz: 20 MHz/40 MHz/80 MHz/160 MHz *Note: Country-Specific Restriction Apply |
| | Wireless Data Rate | <ul style="list-style-type: none"> • 2.4 GHz: 8.6 Mbps to 574 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40) • 5 GHz: 8.6 Mbps to 2402 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40/80/160) • 6 GHz: 8.6 Mbps to 2402 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40/80/160) *Note: Country-Specific Restriction Apply |
| | Radio Technology | Uplink/downlink OFDMA (Orthogonal Frequency-Division Multiple Access) |
| | Modulation Type | 1024-QAM, 256-QAM. 64-QAM, 16-QAM, QPSK, BPSK |
| | Frame Aggregation | <ul style="list-style-type: none"> • A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx • A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx |

| Item | Description | |
|----------|--------------------|---|
| | Others | <ul style="list-style-type: none"> • TWT (Target Wake Time) • MRC (Maximal Ratio Combining) • TxBF (Transmit Beamforming) • WPA3 (Wi-Fi Protect Access 3) • DFS (Dynamic Frequency Selection) • CDD (Cycle Delay Diversity) • CSD (Cycle Shift Diversity) • STBC (Space-Time Block Coding) • LDPC (Low-Density Parity-Check) |
| 802.11ac | Spatial Streams | <ul style="list-style-type: none"> • 5 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams |
| | Frequency Bands | 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM *Note: Country-Specific Restriction Apply |
| | Bandwidth | 5 GHz: 20 MHz/40 MHz/80/160 MHz |
| | Wireless Data Rate | <ul style="list-style-type: none"> • 5 GHz: 6.5 Mbps to 1733 Mbps (MCS0-MCS9, NSS=1 to 2, VHT20/40/80/160) |
| | Radio Technology | OFDM (Orthogonal Frequency-Division Multiplexing) |
| | Modulation Type | 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK |
| | Frame Aggregation | <ul style="list-style-type: none"> • A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx • A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx |
| 802.11n | Spatial Streams | <ul style="list-style-type: none"> • 2.4 GHz: 2×2 MIMO with 2 spatial streams • 5 GHz: 2×2 MIMO with 2 spatial streams |
| | Frequency Bands | 2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM *Note: Country-Specific Restriction Apply |
| | Bandwidth | 20 MHz/40 MHz |
| | Wireless Data Rate | <ul style="list-style-type: none"> • 2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40) • 5 GHz: 6.5 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40) |
| | Radio Technology | OFDM (Orthogonal Frequency-Division Multiplexing) |

| Item | Description | |
|----------------------------|--|--|
| | Modulation Type | 64-QAM, 16-QAM, QPSK, BPSK |
| | Frame Aggregation | <ul style="list-style-type: none"> A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx |
| | Others | <ul style="list-style-type: none"> MRC (Maximal Ratio Combining) TxBF (Transmit Beamforming) DFS (Dynamic Frequency Selection) CDD (Cycle Delay Diversity) CSD (Cycle Shift Diversity) STBC (Space-Time Block Coding) LDPC (Low-Density Parity-Check) |
| Antenna | Wi-Fi | <ul style="list-style-type: none"> 2.4 GHz: 2 × 4 dBi (peak gain), onboard omnidirectional antennas 5 GHz: 2 × 5 dBi (peak gain), onboard omnidirectional antennas 6 GHz: 2 × 5 dBi (peak gain), onboard omnidirectional antennas <p><i>*Note: The gains above are the single-antenna peak gains.</i></p> |
| | IoT | <ul style="list-style-type: none"> Bluetooth: 1 × 4 dBi (peak gain), onboard omnidirectional antennas |
| Interfaces | <ul style="list-style-type: none"> 1 × 10M/100M/1000M/2.5Gbps Multigigabit Ethernet Port (RJ45); PoE in 1 × 1 DC power interface: 12VDC | |
| IoT | BLE 5.2, 1Mbps | |
| Memory | <ul style="list-style-type: none"> Flash: 1024Mbit DRAM: 8192Mbit | |
| Button | 1 × Reset button: Press the button for longer than 5 seconds to make the device restore to factory settings. | |
| Indicator | 1 × blue system LED indicates on the front: | |
| | LED status | indication |
| | blue | Power-on status |
| | Flash twice and then stay blue | Initialization is completed |
| | Flashing blue | Firmware update |
| | flashing blue 5 times | reset the device |
| | Quickly flashing blue | Locate the device |
| Slowly flashing blue | The device is in an isolated state. | |
| Reliability | MTBF (Mean Time between Failure) | 295992 hours at the operating temperature of 25°C (77°F) |
| Power Supply | Input | 802.3at PoE+: 42.5 - 57 V, 0.6A 12VDC/2.5A |
| | Output | / |
| Power Consumption | <ul style="list-style-type: none"> 802.3at (PoE+): 25.4W, 2.4GHz radio 2×2, 5GHz radio 2×2, 6GHz radio 2×2, wired link rate can be up to 2.5 Gbps, etc. Idle mode: 9.4W(PoE) | |
| Surge/Lightning Protection | Ethernet Ports: ±4 kV | |

| Item | Description | |
|--------------------|---|---|
| ESD/EMP Protection | <ul style="list-style-type: none"> Air discharge: ±8 kV Contact discharge: ±4 kV <p>*Note: ESD/EMP Protection means Electrostatic Discharge/Electromagnetic Pulse Protection independently.</p> | |
| Tx Power | Maximum transmit power | CE (ERIP) <ul style="list-style-type: none"> 2.4 GHz: 20 dBm 5 GHz: 23 dBm in U-NII-1, 23 dBm in U-NII-2A, 28 dBm in U-NII-2C, 6 GHz: 23 dBm FCC (Conducted Power) <ul style="list-style-type: none"> 2.4 GHz: 25 dBm 5 GHz: 25 dBm in U-NII-1, 24 dBm in U-NII-2A, 24 dBm in U-NII-2C, 25 dBm in U-NII-3 6 GHz: 23 dBm <p>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</p> |
| | Minimum transmit power | CE (ERIP) <ul style="list-style-type: none"> 2.4 GHz: 6 dBm 5 GHz: 6 dBm in U-NII-1, 6 dBm in U-NII-2A, 6 dBm in U-NII-2C, 7 dBm in U-NII-3 6 GHz: 6 dBm FCC (Conducted Power) <ul style="list-style-type: none"> 2.4 GHz: 4 dBm 5 GHz: 4 dBm in U-NII-1, 4 dBm in U-NII-2A, 4 dBm in U-NII-2C, 4dBm in U-NII-3 6 GHz: 4 dBm <p>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</p> |
| | Adjustable power increment | 1 dBm |
| Environment | Temperature | <ul style="list-style-type: none"> Operating: 0°C to +40°C (33.8°F to +104°F) Storage: -30°C to +70°C (-22°F to +158°F) |
| | Humidity | <ul style="list-style-type: none"> Operating: 10% to 90% (non-condensing) Storage: 5% to 90% (non-condensing) |
| | Altitude | <ul style="list-style-type: none"> Storage: up to + 2000 m (6561 feet) Operating: up to + 2000 m (6561 feet) |
| Unit | Dimensions (W×D×H) | <ul style="list-style-type: none"> Main Unit: 220 × 220 × 32.5 mm (8.7 × 8.7× 1.4 in.) Shipping Unit: 540 × 300 × 300 mm (21.3 × 11.8 × 11.8 in.) |
| | Weight | <ul style="list-style-type: none"> Main Unit: 0.7 kg (1.54 lb) Mounting Bracket: 0.05 kg (0.11 lb) Shipping Unit: 9.02 kg (19.88 lb) |
| | Mounting | <ul style="list-style-type: none"> Ceiling /Wall Mounting (Kits included) Junction Box Mounting (Kits included) T-Bar Mounting (Kits included) |

Software Specifications

| Item | Description | |
|--------------------------------|---|--|
| Wireless Functions | Maximum number of BSSIDs | 24 (8 on each band) |
| | Maximum number of associated STAs | 380+ |
| | Guest Network | Yes |
| | ACS (Automatic Channel Selection) | Yes |
| | Airtime Fairness | Yes |
| | Band Steering | Yes |
| | 802.11 Rate Control | Yes |
| | Rogue AP Detection | Yes |
| | URL Filtering | Yes |
| | RF Scan | Yes |
| | WLAN Optimization | Yes |
| | WIDS/WIPS | No |
| | Lock to AP | Yes |
| | Rate Limit | <ul style="list-style-type: none"> • SSID Rate Limit • Client Rate Limit |
| | Load Balance | <ul style="list-style-type: none"> • Maximum Associated Clients • RSSI Threshold |
| MLO | <ul style="list-style-type: none"> • 2.4 GHz+5 GHz • 2.4 GHz+6 GHz • 5 GHz+6 GHz • 2.4 GHz+5 GHz+6 GHz | |
| Roaming | <ul style="list-style-type: none"> • 802.11 k • 802.11v • 802.11r • Non-Stick Roaming • Ping-Pong Roaming Suppression • AI Roaming <p style="color: green; margin-top: 5px;">*Note: Only support Layer 2 Roaming currently.</p> | |
| Multicast/Broadcast Management | <ul style="list-style-type: none"> • Multicast-to-Unicast Conversion • ARP-to-Unicast Conversation • Multicast Filtering • Multicast/Broadcast Rate Limit | |

| Item | Description | |
|-----------------------------|---|---|
| | QoS (Quality of Service) | <ul style="list-style-type: none"> • WMM (Wi-Fi Multimedia) • DSCP (Differentiated Services Code Point) • U-APSD (Unscheduled Automatic Power Save Delivery) |
| Security and Authentication | ACL | |
| | MAC Filter | |
| | 802.1X Authentication | |
| | MAC-Based Authentication | |
| | <ul style="list-style-type: none"> • None • Enhanced Open • WPA/WPA2/WPA3-Personal • WPA/WPA2/WPA3-Enterprise | |
| | Radius Accounting | <ul style="list-style-type: none"> • PPSK without Radius • PPSK with Radius (Generic Radius with bound MAC/EKMS/Generic Radius with unbound MAC) |
| | Captive Portal | <ul style="list-style-type: none"> • No Authentication • Simple Password • Hotspot (Voucher / Local User / SMS / RADIUS / Form Auth) • RADIUS Server • External LDAP Server • External Portal Server • Pre-Authentication Access • Authentication-Free Client |
| | EAP Types | <ul style="list-style-type: none"> • EAP-TLS • EAP-TTLS • EAP-PEAP • EAP-CHAP • EAP-SIM • EAP-AKA • EAP-GTC • EAP-FAST • EAP-PEAP • EAP-MD5 • EAP-MSCHAPv2 • PEAPv0 • PEAPv1 |
| Management methods | Omada Controller | <ul style="list-style-type: none"> • Omada Controller v5.15.24 and above • Omada Essential v5.15.24 and above |
| | App | Omada app v4.24 |
| | Standalone Management | Yes |

| Item | Description | |
|------------------|--------------------------------------|---|
| | Standalone Mesh | No |
| | SSH | Yes |
| | SNMP | v1, v2c, v3 |
| Operating Modes | AP | Yes |
| | Repeater | No |
| | Mesh | Yes |
| System Feature | System Log | Yes |
| | Reboot Schedule | Yes |
| | WLAN Schedule | Yes |
| | NTP (Network Time Protocol) | Yes |
| | Email Alerts | Yes |
| | Firmware Upgrade | Yes |
| | Restore & Backup | Yes |
| | LED Control | Yes |
| Network Features | VLAN | <ul style="list-style-type: none"> • SSID VLAN • Dynamic VLAN • Management VLAN |
| | Static IP / DHCP Client | Yes |
| | IPv4/IPv6 | Yes |
| | LLDP (Link Layer Discovery Protocol) | Yes |
| | mDNS | Yes |
| | Tools | <ul style="list-style-type: none"> • Ping / Traceroute / DNSLookup / ARP Table • Packet Capture • Terminal |

Standards Compliance and Certifications

| Item | Category | Description |
|----------------------|--------------------|---|
| Standards compliance | IEEE Standards | <ul style="list-style-type: none"> • IEEE 802.11a/b/g/n/ac/ax/be • IEEE 802.11e/i/k/v/r • IEEE 802.1x/q • IEEE 802.3at • IEEE 802.3ab • IEEE 802.3bz • IEEE 802.3x |
| | Radio Standards | <ul style="list-style-type: none"> • ETSI EN 300 328 • ETSI EN 301 893 • EN 303 413 • EN 303 687 • EN 50385 EN50665 EN IEC 62311 • FCC Part 15E • RSS-247, RSS-GEN • LP0002 |
| | EMC standards | <ul style="list-style-type: none"> • EN 55032 • EN 55035 • EN 301489-1 • EN 301489-17 • EN 301489-19 • FCC Part 15C • ICES-003 issue7 • CNS 15936 |
| | Safety Standards | <ul style="list-style-type: none"> • EN 62368-1 • IEC 62368-1 • CNS 15598-1 |
| | Security Standards | <ul style="list-style-type: none"> • WPA-Personal/Enterprise • WPA2-Personal/Enterprise • WPA3-Personal/Enterprise • OWE |
| | RoHS | <ul style="list-style-type: none"> • Directive 2011/65/EU, Directive (EU) 2015/863 • EN IEC 63000: 2018 |
| | Others | <ul style="list-style-type: none"> • Equipment Radio Regulations: 2008 (including amendments) • VCCI-CISPR 32 |
| | Certifications | <ul style="list-style-type: none"> • Wi-Fi Alliance: Wi-Fi 7 (R1), Wi-Fi 6 (R2), Wi-Fi 6E, WPA3-R3, WPA3-Suite B, Enhanced Open Security • FCC/CE/NCC/VCCI/JRF/BSMI/WFA |


RF Performance

| Frequency Band | Wi-Fi Protocol & Bandwidth | MCS Index / Data Rate | EU/US Maximum Transmit Power (dBm) per transmit chain | Receiver Sensitivity (dBm) per receive chain | |
|-----------------|----------------------------|-----------------------|---|--|-----|
| 2.4 GHz | 802.11n, HT20 | MCS0 | 14/22 | -96 | |
| | | MCS7 | 14/22 | -78 | |
| | 802.11n, HT40 | MCS0 | 14/22 | -93 | |
| | | MCS7 | 14/22 | -75 | |
| | 802.11ax, HE20 | MCS0 | 14/22 | -96 | |
| | | MCS11 | 14/20 | -66.5 | |
| | 802.11ax, HE40 | MCS0 | 14/22 | -93 | |
| | | MCS11 | 14/20 | -64 | |
| | 5 GHz | 802.11n, HT20 | MCS0 | 22/22 | -94 |
| | | | MCS7 | 20/20 | -75 |
| 802.11n, HT40 | | MCS0 | 22/22 | -91 | |
| | | MCS7 | 20/20 | -72 | |
| 802.11ac, HT20 | | MCS0 | 22/22 | -94 | |
| | | MCS7 | 20/20 | -75 | |
| 802.11ac, HT40 | | MCS0 | 22/22 | -91.5 | |
| | | MCS9 | 19/19 | -66 | |
| 802.11ac, HT80 | | MCS0 | 22/22 | -89 | |
| | | MCS9 | 19/19 | -63 | |
| 802.11ax, HE20 | | MCS0 | 22/22 | -94 | |
| | | MCS11 | 18/18 | -66 | |
| 802.11ax, HE40 | | MCS0 | 22/22 | -91 | |
| | | MCS11 | 18/18 | -64 | |
| 802.11ax, HE80 | | MCS0 | 22/22 | -89 | |
| | | MCS11 | 18/18 | -61 | |
| 802.11ax, HE160 | | MCS0 | 22/22 | -86 | |
| | | MCS11 | 18/18 | -60 | |
| 802.11be, EHT20 | | MCS0 | 22/22 | -94 | |
| | | MCS13 | 17/17 | -63 | |
| 802.11be, EHT40 | MCS0 | 22/22 | -90.5 | | |


| Frequency Band | Wi-Fi Protocol & Bandwidth | MCS Index / Data Rate | EU/US Maximum Transmit Power (dBm) per transmit chain | Receiver Sensitivity (dBm) per receive chain |
|----------------|----------------------------|-----------------------|---|--|
| | | MCS13 | 17/17 | -60 |
| | | MCS0 | 22/22 | -88 |
| | 802.11be, EHT80 | MCS13 | 17/17 | -57.5 |
| | | MCS0 | 22/22 | -85 |
| | 802.11be, EHT160 | MCS13 | 17/17 | -55.5 |
| | | | | |
| 6 GHz | 802.11ax, HE20 | MCS0 | 17/21 | -93 |
| | | MCS11 | 17/18 | -65 |
| | 802.11ax, HE40 | MCS0 | 17/21 | -90 |
| | | MCS11 | 17/18 | -62 |
| | 802.11ax, HE80 | MCS0 | 17/21 | -87.5 |
| | | MCS11 | 17/17 | -59 |
| | 802.11ax, HE160 | MCS0 | 17/21 | -85 |
| | | MCS11 | 17/17 | -58 |
| | 802.11be, EHT20 | MCS0 | 17/21 | -93 |
| | | MCS13 | 17/17 | -63 |
| | 802.11be, EHT40 | MCS0 | 17/21 | -90 |
| | | MCS13 | 17/17 | -60 |
| | 802.11be, EHT80 | MCS0 | 17/21 | -87.5 |
| | | MCS13 | 17/17 | -57.5 |
| | 802.11be, EHT160 | MCS0 | 17/21 | -84 |
| | | MCS13 | 16/16 | -55 |
| | 802.11be, EHT320 | MCS0 | 17/21 | -81.5 |
| | | MCS13 | 15/15 | -52.5 |

Antenna Radiation Patterns


2.4 GHz

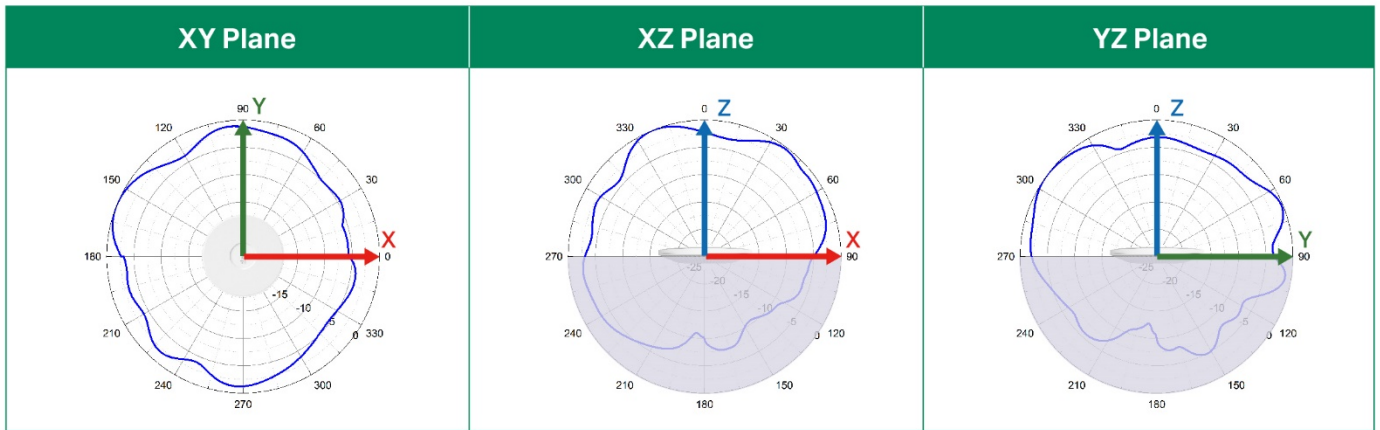

5 GHz

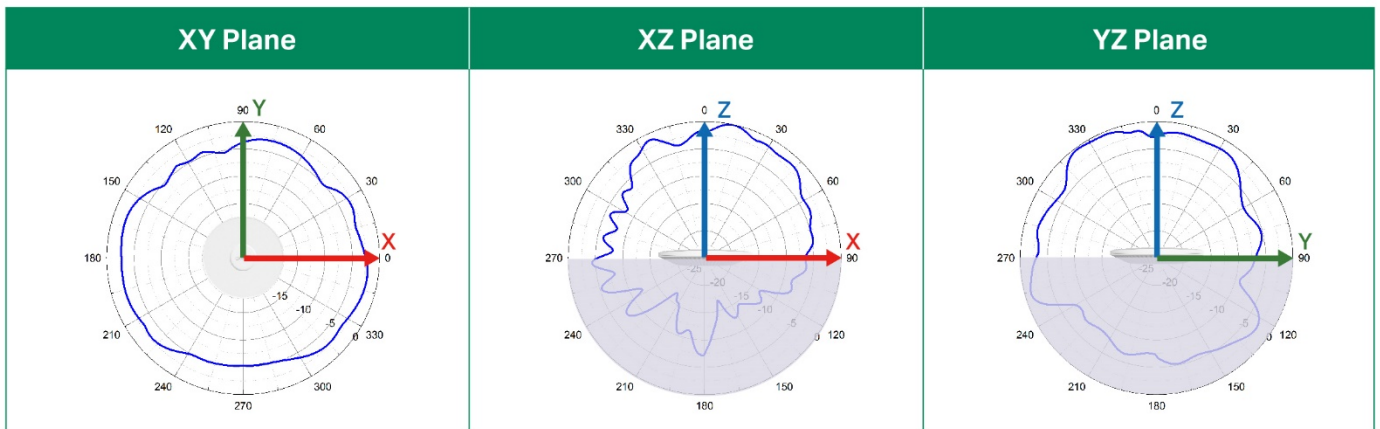


6 GHz

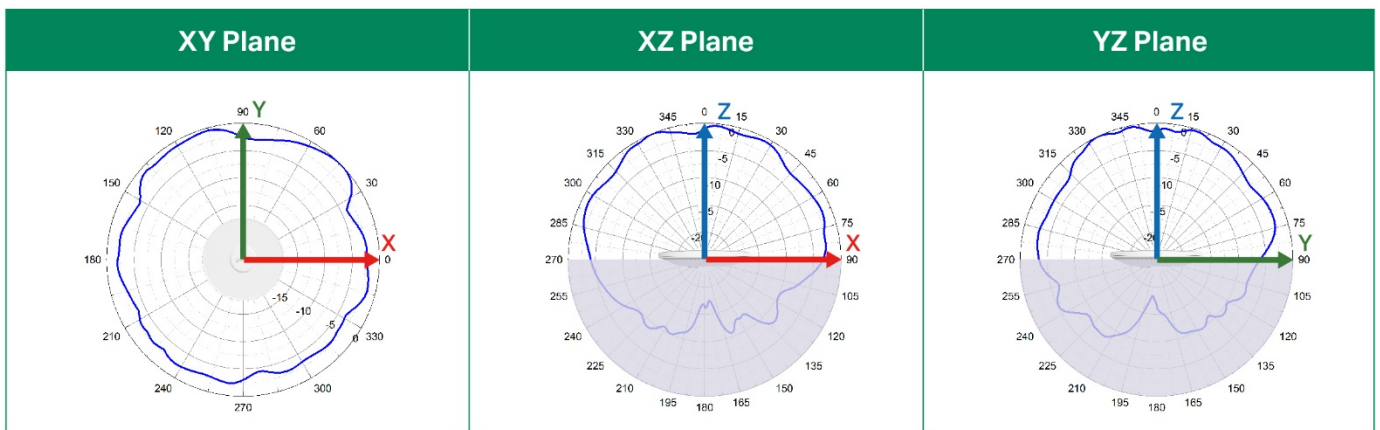

Package Contents


| Item | Quantity |
|-------------------------|----------|
| EAP772 | 1 |
| Installation Guide | 1 |
| Mounting Kit | 1 |
| Cable Compartment Cover | 1 |

US:

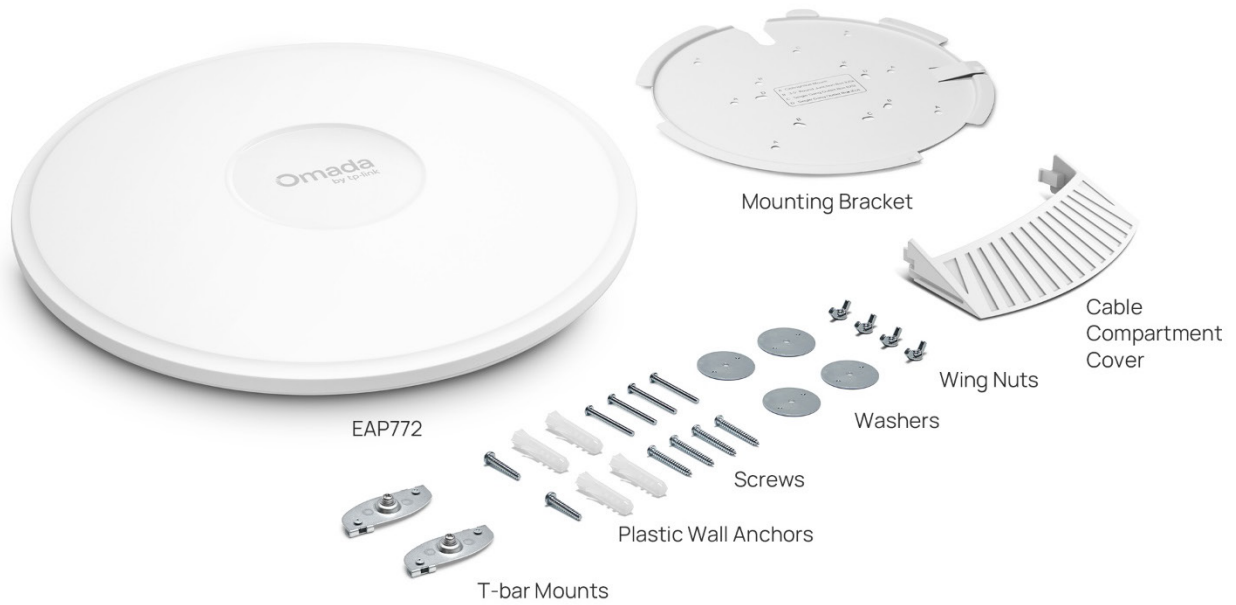

*The accessories may vary by country/region. Please refer to the actual product.

EU:

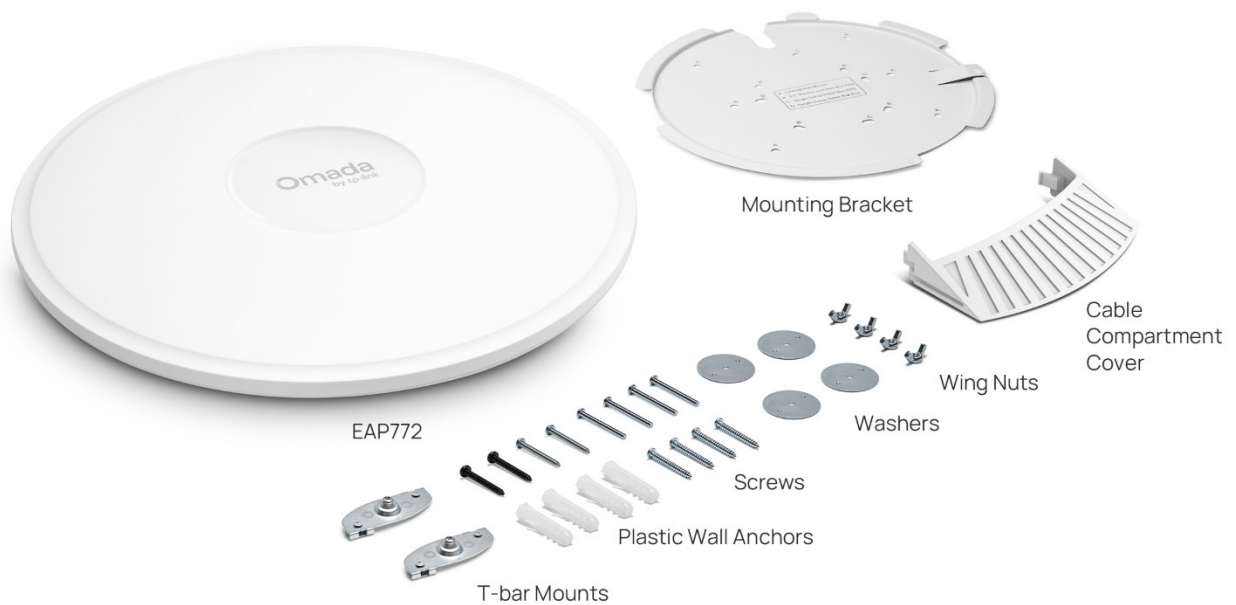

*The accessories may vary by country/region. Please refer to the actual product.

Support Services

We are committed to providing you with comprehensive and reliable support services to ensure seamless experience with Omada products.

- Contact Support: <https://support.omadanetworks.com/#contact-us>
- Warranty Services: <https://www.omadanetworks.com/support/replacement-warranty/>

Revision History

| Version | Date | Description |
|---------|------------|------------------|
| V1.0 | 2025-09-19 | Initial release. |

AFC availability varies by region and country. For supported areas, please visit:
<https://www.omadanetworks.com/support/faq/4373/>

† Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. The 320 MHz bandwidth is only available on the 6 GHz band. Simultaneously, the 160 MHz and 240 MHz bandwidths or the 320 MHz bandwidth might not be available on the 5 GHz band or the 6 GHz band, respectively, in some regions/countries due to regulatory restrictions. Actual wireless data throughput, wireless coverage, and connected devices are not guaranteed and will vary as a result of internet service provider factors, network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

‡ Use of Wi-Fi 7 (802.11be), Wi-Fi 6 (802.11ax), and features including Multi-Link Operation (MLO), 160 MHz Bandwidth, 4K-QAM, Multi-RUs, OFDMA, and MU-MIMO requires clients to also support the corresponding features.

* Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.

** The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.

△ Omada Mesh, Seamless Roaming, Captive Portal, and Cloud Access require the use of an Omada controller. Please refer to the User Guides of Omada controllers for configuration methods.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: <https://www.omadanetworks.com>. Specifications are subject to change without notice.

© 2025 TP-Link