

# Hardware Controller | Datasheet

---

## OC400



## Highlights

- Centralized Management: for up to 1,000 Omada access points, 200 Omada switches, and 100 Omada Gateways.
- 2× 10GE SFP+ Slots, 4× GE RJ45 Ports, and 2× USB 3.0 Ports.
- Redundant power supplies offer a reliable networking architecture.
- Free cloud access with the Omada app or Web UI from anywhere, anytime.
- On-premises manages to locally monitor and manage devices.
- The easy-to-use dashboard and real-time network topology make network monitoring easy.
- Batch and multi-site management benefit network maintenance.

# Omada Solution




## Free Cloud Access

Remotely control the whole network without license fees




## On-Premises Management

Complete privacy

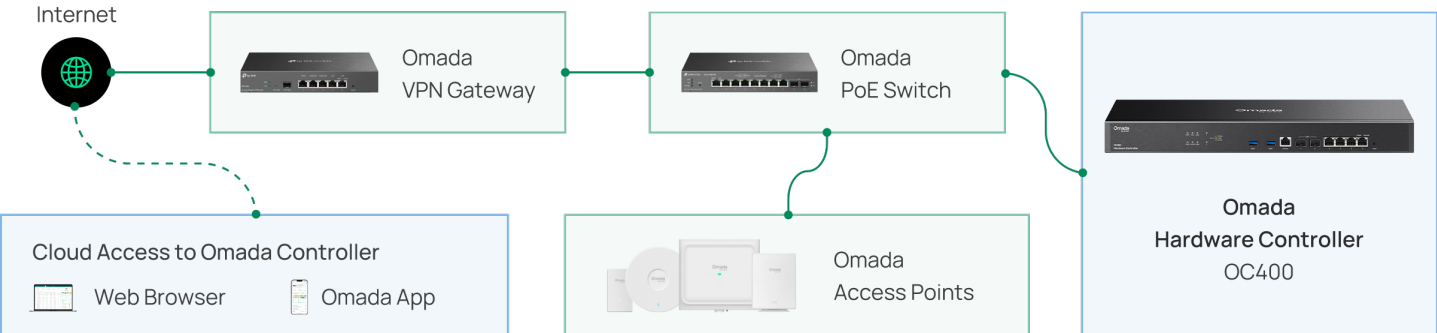

# Product Pictures

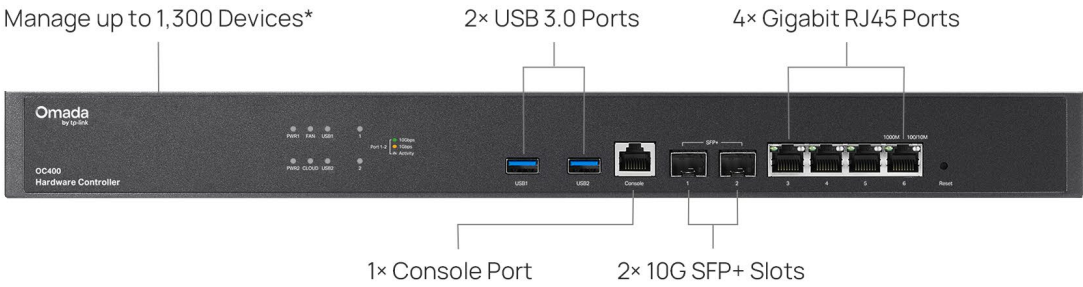

# Specifications

Model		OC400
Main Design	Processor	Quad-Core A72 @ 2.2 GHz
	Memory Information	8 GB DDR4
	Storage	4 MB Nor Flash; 32 GB eMMC
	SFP+ Port	2× 1/10G SFP+
	RJ45 Port	4× 10/100/1000 Mbps Ethernet Ports
	USB Port	2× USB 3.0
	Console	1× RJ45 Console Port
	Interface	1× Kensington Lock; 1× Reset; 1× Ground Screw
Hardware Design	Power Supply	100-240 V ~ 50/60 Hz AC
	Max Power Consumption	22.8W (no USB port connected); 33.1W (with 2 USB ports connected)
	Redundant Power Supplies	2 internal fixed Power Supplies
	FAN	1 FAN
	Dimensions	17.3 × 7.1 × 1.7 in (440 × 180 × 44 mm)
	Net Weight	2.09 Kg
	MTBF	389456h@25°C 221236h@40°C
System Management	Multi-Site Management	√
	Multi-tenant Management (Role/Site/Device Privileges)	√
	Cloud Access	√
	Migration (Site Migration/Controller Migration)	√
	Account Management	√
	Maximum Number of Sites	100
	Maximum Number of Accounts	1,000
	Maximum Number of Local Accounts	500
	Maximum Number of Cloud Accounts	500
	Maximum Number of Vouchers	60,000
	Maximum Number of Local Users	60,000
	Maximum Simultaneously Used VLANs	4,090 per site*
	Maximum Number of WLAN Groups	500
	Maximum Number of SSIDs	24 in each WLAN Group**
	Maximum Number of ACL	For each site: Gateway: 64 Switch: 32*** EAP: 16
	Maximum Number of Free Authentication/ Pre-Authentication Access Entries	96 in each site (including 32 auto-generated Authentication Free Policy entries)
	Maximum Number of Reboot Schedules	8 in each site
	Maximum Number of PoE Schedules	8 in each site
	Maximum Number of MAC Filter Groups	8 in each site
	Maximum Number of IP Groups	16 in each site
	Maximum Number of MAC Addresses in Each MAC Filter Group	500 (4,000 in total per controller)
	Maximum Number of Static Routing Entries	64 in each site (for Gateway) 32 in each site (for Switch)
	Maximum Number of Policy Routing Entries	64 in each site
	Maximum Number of Session Limit	64 in each site
	Maximum Number of Bandwidth Control Entries	64 in each site
	Maximum Number of Port Forwarding Entries	32 in each site
	Maximum Number of Radius Profiles	64 in each site
Backup & Restore	√	
Auto Backup	√	
Customized UI Interface	√	
Open API	√	

\* The actual number of VLANs depends on the switch capacity and it may be less than 4090.

\*\*The maximum number depends on the connected device type.

\*\*\* The actual number of ACL depends on the configuration and it may be less than 32.

\*\*\*\*The actual number depends on the device capability.

Model		OC400
Network Management	Wired Network	√
	Wireless Network	√
	Network Security (ACL/URL Filtering/Attack Defense)	√
	Transmission (Routing/NAT/Session Limit/Bandwidth Control)	√
	VPN (SSL/Wireguard/IPSec/L2TP/PPTP/OpenVPN)	√
	Portal (Voucher/Local User/SMS/RADIUS/ External Portal Server)	√
	802.1x	√
	RADIUS (Authentication/MAC Auth/Accounting)	√
Device Management	Management Device Type	Omada EAP, Omada Switch**, Omada Gateway**, DeltaStream GPON OLTs**
	Management Scale***	1000APs, 100 Gateways, up to 200 Switches*, up to 10 DeltaStream GPON OLTs Note: The number of supported Omada Switches decreases by 5 for each DeltaStream GPON OLT added. The DeltaStream GPON OLTs supported by the controller are DS-P7001-04 and DS-P7001-08.
	Device Automatic Discovery	√
	Batch configuration	√
	Online upgrade	√
	Reboot Schedule	√
	PoE Schedule	√
	WLAN Scheduler	√
	DDNS	√
	SNMP	√
SSH	√	
Monitoring	DPI	√
	IPS/IDS	√
	Dashboard (Custom Dashboard)	√
	Statistics (Performance/Switch Stats)	√
	Network topology	√
	Network Map	√
	Devices List (Custom Table)	√
	Clients List (Custom Table)	√
	Insights (Known Clients/Past Connections/Past Portal Authorizations/Rogue APs)	√
Logs (Alerts/Events/Custom Notifications)	√	
Others	Certifications	CE, FCC, RoHS
	Operating Temperature	0 °C–40 °C (32 °F–104 °F)
	Storage Temperature	-40 °C–70 °C (-40 °F–158 °F)
	Operating Humidity	10%–90% non-condensing
	Storage Humidity	5%–90% non-condensing

\*\*Some models are manageable. Please refer to the official website for more information.

\*\*\*The actual management scale will vary as a result of network environment, bandwidth and different settings.