


Enterprise Solution

Omada Fusion G+ Gateway

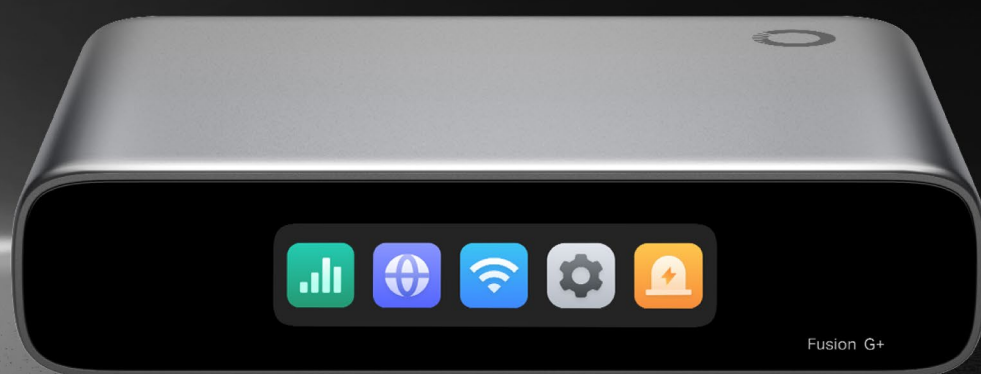

Model: Fusion G+

Product Overview

Omada Fusion G+ Gateway integrates a gateway and controller into a single device. Positioned at the center of the Omada networking ecosystem, Fusion G+ unifies networking and centralized management with license-free cloud control straight out of the box. Bluetooth-based setup simplifies deployment, cuts installation time, and reduces on-site visits through touchscreen-based troubleshooting — helping increase profitability while delivering projects more efficiently.

- License-Free Cloud Management for Multi-Site Work
- Simplified Setup with Auto Device Detection via Bluetooth and One-Tap Bulk Device Adoption
- Enterprise-Grade Performance: High-Performance Quad-Core CPU, 5× RJ45 ports (1× 2.5G WAN, 4× Gigabit LAN/WAN), up to 4-WAN load balancing with auto failover, and 2.1 Gbps-Class IDS/IPS Throughput*
- Quick Troubleshooting via Touchscreen for Less On-Site Work
- Secure Remote Network Access in One Click with Omada LightLink VPN
- Advanced Software Capabilities: App-Based ACL, One-Click Auto QoS, Full-Mesh SD-WAN, Content Filtering
- Flexible Mounting Options: Desktop, Wall-Mountable**, Rack-Mountable**

Product Appearance



*Actual throughput with IPS/IDS enabled may vary and is not guaranteed. Performance is subject to traffic conditions, enabled features, and network environment.

**Magnetic-mount plate and rack-mount kit are sold separately.

Feature Descriptions

License-Free Cloud Management

Fusion G+ features a built-in controller, enabling full access to all features from day one. No additional licenses required. It supports centralized multi-site management and allows administrators to remotely access and control the network through the Omada Cloud portal via web or the Omada app.

Simplified Setup via Bluetooth

Easily set up the Fusion Gateway via Bluetooth using the Omada app. Automatically discover and batch adopt all other Omada networking devices at once, significantly reducing setup time. Support for desktop, wall-mounted, and rack-mounted installations ensures flexibility across different scenarios.

Enterprise-Grade Performance

Featuring a high-performance quad-core CPU and five RJ45 ports (1× 2.5G WAN and 4× Gigabit LAN/WAN), Fusion G+ delivers stable, high-throughput performance across multiple connections. Support for up to 4-WAN load balancing with auto failover enhances network reliability, while integrated IPS/IDS provides robust threat protection without compromising network performance.

Touchscreen for On-Site Troubleshooting

An integrated 2.51-inch touchscreen gives you instant access to network health scores, speed tests, alerts, and real-time traffic for basic diagnostics and troubleshooting right on the device.

Secure Remote Network Access

Fusion G+ supports Omada LightLink VPN for secure remote access. Smart Split Tunneling optimizes traffic routing to maintain performance. It also supports mainstream VPN protocols, including WireGuard, OpenVPN, IPsec, SSL, L2TP, and PPTP, plus Full-Mesh SD-WAN connectivity across up to 20 sites — even without public IP addresses at each site — enabling flexible and scalable inter-site connectivity.

Advanced Software Capabilities

Fusion G+ supports application- and category-level access control. QoS enables traffic prioritization through predefined profiles and custom rules, ensuring critical applications receive sufficient bandwidth. It also supports content filtering with flexible, category- and time-based rules for centralized policy enforcement.

Specifications

Overview	
Built-In Omada OS Applications	Network Application
Managed Omada Devices	Recommended for up to 30 devices
Client Capacity	Recommended for up to 300 connected clients
Interface	<ul style="list-style-type: none">• 1× 2.5G RJ45 WAN port• 4× 1G RJ45 LAN/WAN ports• Up to 4 simultaneous WAN ports
Mounting	<ul style="list-style-type: none">• Desktop• Wall-mount (magnetic-mount plate sold separately)**• Rack-mount (rackmount kit sold separately)**
Dimensions	5.1 × 3.7 × 1.2 in (130 × 95 × 30 mm)
Hardware	
Standards and Protocols	IEEE 802.3, IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.1q, IEEE 802.1p, IEEE 802.1ab, TCP/IP, DHCP, ICMP, NAT, PPPoE, NTP, HTTP, HTTPS, DNS, IPSec, PPTP, L2TP, OpenVPN, WireGuard VPN, SNMP, LLDP
Network Media	10BASE-T: UTP category 3, 4, 5 cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 100BASE-TX: UTP category 5, 5e cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 1000BASE-T: UTP category 5, 5e, 6 cable (Max 100 m) 2.5GBASE-T: UTP category 5, 5e, 6 cable (Max 100 m)
CPU	Quad-core ARM Cortex-A73 @ 1.8 GHz
Memory	2 GB DDR4
Storage	64 Mbit NOR flash + 16 GB eMMC
Touchscreen	2.51-inch color LCM touchscreen
Button	Reset Button
Enclosure	Polycarbonate
LED	Ethernet
Fan	Fanless
Antenna	1× BLE Antenna
Net Weight	0.77 lb (351 g)
Power Supply	USB Type C (5V DC / 3A) (Adapter included)
Max Power Consumption	6.18 W, with power adapter
Surge Protection	4 kV surge protection
ESD Protection	±8 kV (Air) ±4 kV (Contact)
Onboarding	Bluetooth or Ethernet
MTBF	677,324 h @ 25 °C

**Magnetic-mount plate and rack-mount kit are sold separately.

Performance[†]	
Concurrent Sessions	150,000
New Sessions/Second	7,800
Static IP NAT Throughput (Upload/Download)	947 Mbps / 947 Mbps
DHCP NAT Throughput (Upload/Download)	946 Mbps / 947 Mbps
PPPoE NAT Throughput (Upload/Download)	942 Mbps / 942 Mbps
L2TP NAT Throughput (Upload/Download)	898 Mbps / 884 Mbps
PPTP NAT Throughput (Upload/Download)	904 Mbps / 912 Mbps
66 Byte Packet Forwarding Rate (Upload/Download)	1,453,325 pps / 1,453,461 pps
1,518 Byte Packet Forwarding Rate (Upload/Download)	81,266 pps / 81,273 pps
Omada LightLink VPN Throughput	527 Mbps
IPSec VPN Throughput	ESP-SHA1-AES256: 1,023 Mbps ESP-SHA256-AES256: 1,073 Mbps ESP-SHA384-AES256: 972 Mbps ESP-SHA512-AES256: 1,087 Mbps
OpenVPN Throughput	223 Mbps
L2TP VPN Throughput	892 Mbps
PPTP VPN Throughput	193 Mbps
SSL VPN Throughput	250 Mbps
WireGuard VPN Throughput	605 Mbps
IPS Throughput (Upload/Download)	2,183 Mbps / 2,152 Mbps [^]
DPI Throughput (Upload/Download)	2,206 Mbps / 2,219 Mbps [^]
Networking	
WAN Connection	Static IP / Dynamic IP / PPPoE / PPTP / L2TP / MAP-E / DS-Lite
Multi-WAN Failover & Load Balancing	√
DHCP	DHCP Server DHCP Options Customization DHCP Address Reservation Multi-IP Interfaces Multi-Net DHCP WAN DHCP Option 60
VLAN	802.1Q VLAN
MAC Clone	√ (Customizable WAN MAC Address)
Bridge VLAN	√
Virtual WAN	WAN Connection Type: Static IP, Dynamic IP, PPPoE Max Virtual WAN Entries: 3

[†] Rated specifications may vary depending on traffic conditions, enabled features, and network environment.

[^] The value is calculated based on laboratory testing with 1 WAN port and 3 LAN ports. Performance is subject to traffic conditions, enabled features, and network environment.

Networking	
Bandwidth Control	√
QoS	√
Routing	Static Routing Policy Routing
NAT	Virtual Server NAT-DMZ FTP/H.323/SIP/IPSec/PPTP ALG UPnP One-to-One NAT Disable NAT
Dynamic DNS	Dyndns, No-IP, Peanuthull, Comexe, TP-Link DDNS, DDNS Customization
IPv6	Static IP / SLAAC / DHCPv6 / PPPoE / 6to4 Tunnel / Pass-Through / Non-Address Mode
Bonjour / mDNS	√
IPTV	IGMP v2/v3 Proxy, Custom Mode, Bridge Mode
Session Limit	IP-Based Session Limit
Security	
IDS/IPS	Signature-Based IPS/IDS Threat Detection
DPI	Deep Packet Inspection (DPI) Application Filter Rules
ACL	Source/Destination IP-Based ACL Application-Based ACL Stateful ACL IPv4/IPv6 ACL Nation-Based ACL FQDN
Content Filtering	URL Category, Ad Block, Allow List, Block List
Safe Search	√
Secure DNS	DNSSEC, DoH, DoT, DNS Redirection
Firewall	Stateful Firewall Attack Defense
ARP Inspection	√
MAC Filtering	√
IP-MAC Binding	√
VPN & SD-WAN	
Site-to-Site VPN	WireGuard VPN / IPsec VPN
VPN Server	WireGuard VPN / OpenVPN / IPsec VPN / SSL VPN / L2TP VPN / PPTP VPN
VPN Client	WireGuard VPN / OpenVPN / L2TP VPN / PPTP VPN
SD-WAN [§]	Full Mesh Mode
Omada LightLink VPN	Invite by Link Invite by Email Max LightLink Clients: 253

[§]SD-WAN can only be configured via the Omada Cloud Portal.

VPN & SD-WAN	
IPSec VPN	Max IPSec VPN Tunnels: 20 LAN-to-LAN, Client-to-LAN Main and Aggressive Negotiation Modes DES, 3DES, AES128, AES192, and AES256 Encryption Algorithms IPSec Failover IKE v1/v2 MD5, SHA1, SHA256, SHA384, and SHA512 Authentication Algorithms NAT Traversal (NAT-T) Dead Peer Detection (DPD) Perfect Forward Secrecy (PFS)
PPTP VPN	PPTP VPN Server Max PPTP VPN Clients: 10 Max PPTP VPN Tunnels: 16 PPTP with MPPE Encryption
L2TP VPN	L2TP VPN Server Max L2TP VPN Clients: 10 Max L2TP VPN Tunnels: 16 L2TP over IPSec
OpenVPN	OpenVPN Server Max OpenVPN Clients: 10 Max OpenVPN Tunnels: 110 "Certificate + Account" Mode Full Mode Split Mode
SSL VPN	Max SSL VPN Tunnels: 80
Built-in Omada Controller[§]	
Cloud Access	√
Local Management	√
Omada App	√
Multi-Site Management	Via the Omada Cloud Management Platform
Restore & Backup	√
Automatic Device Discovery	√
Network Topology	√
Dashboard	√
Device List / Client List	√
Logs / Alerts / Events	√
Batch Firmware Upgrade	√
Health Monitoring	√
Internet Activity	√
Captive Portal	√
RADIUS / LDAP Authentication	√
802.1X Authentication	√
OUI-Based VLAN	√
Diagnostics Tools	Ping Test, Packet Capture, Terminal, Cable Test, Interference Detection, Remote Access, IntelliRecover, Port Mirroring
SNMP	v1/v2c/v3

[§]Controller and management features may vary depending on connected Omada devices, software versions, and deployment modes.

Management & Maintenance	
Management	Cloud, local, and Omada App management
Maintenance	<ul style="list-style-type: none"> Web Management Interface Remote Management Export & Import Configuration SNMP v1/v2c/v3 Diagnostics (Ping & Traceroute) NTP Synchronization Port Mirroring Syslog Support
Environment & Certifications	
Environment	<ul style="list-style-type: none"> Operating Temperature: 14°F to 104°F (-10 °C to 40 °C) Storage Temperature: -22°F to 158°F (-30 °C to 70 °C) Operating Humidity: 10% to 90% non-condensing Storage Humidity: 5% to 90% non-condensing
Certifications	CE, FCC, RoHS