



**Omada 5 GHz  
867 Mbps Long-Range  
Indoor/Outdoor Wireless Bridge**


Model: EAP215-Bridge KIT

# Product Overview

Omada 5 GHz 867 Mbps Long-Range Indoor/Outdoor Wireless Bridge EAP215 Bridge KIT is an enterprise-grade Wi-Fi bridge kit engineered for transmission up to 3.1 miles (5 km). It delivers reliable PtP or PtMP connectivity in remote outdoor environments—ideal for farms, additional offices, parking lots, and other locations where extending network access and monitoring is critical.

- Up to 3.1 mi (5 km) Wireless Transmission: With 14 dBi high-gain directional antennas.\*
- Equipped with Omada SmartBridging: Our unique design for the most effortless and easy bridge setup ever, like instant auto-pairing with preconfigured kit and multi-bridge auto-pairing<sup>‡</sup>.
- App-Guided Alignment: Visualized app-guided alignment for long-distance setups and instant speed testing for installation verification.
- Simple PoE Deployment and Power Supply: 1× Gigabit PoE port supports both 802.3af PoE and Passive PoE for simplified wiring and lower deployment costs.
- Designed for Outdoor Durability & Reliability: IP65 weatherproof enclosure, 6 kV lightning protection and operating range of -40 °C to +70 °C (-40°F to +158 °F).\*\*
- Remote Monitoring & Management: Standalone mode or Omada SDN mode for remote centralized management via Web UI or App.<sup>†</sup>

# Product Appearance

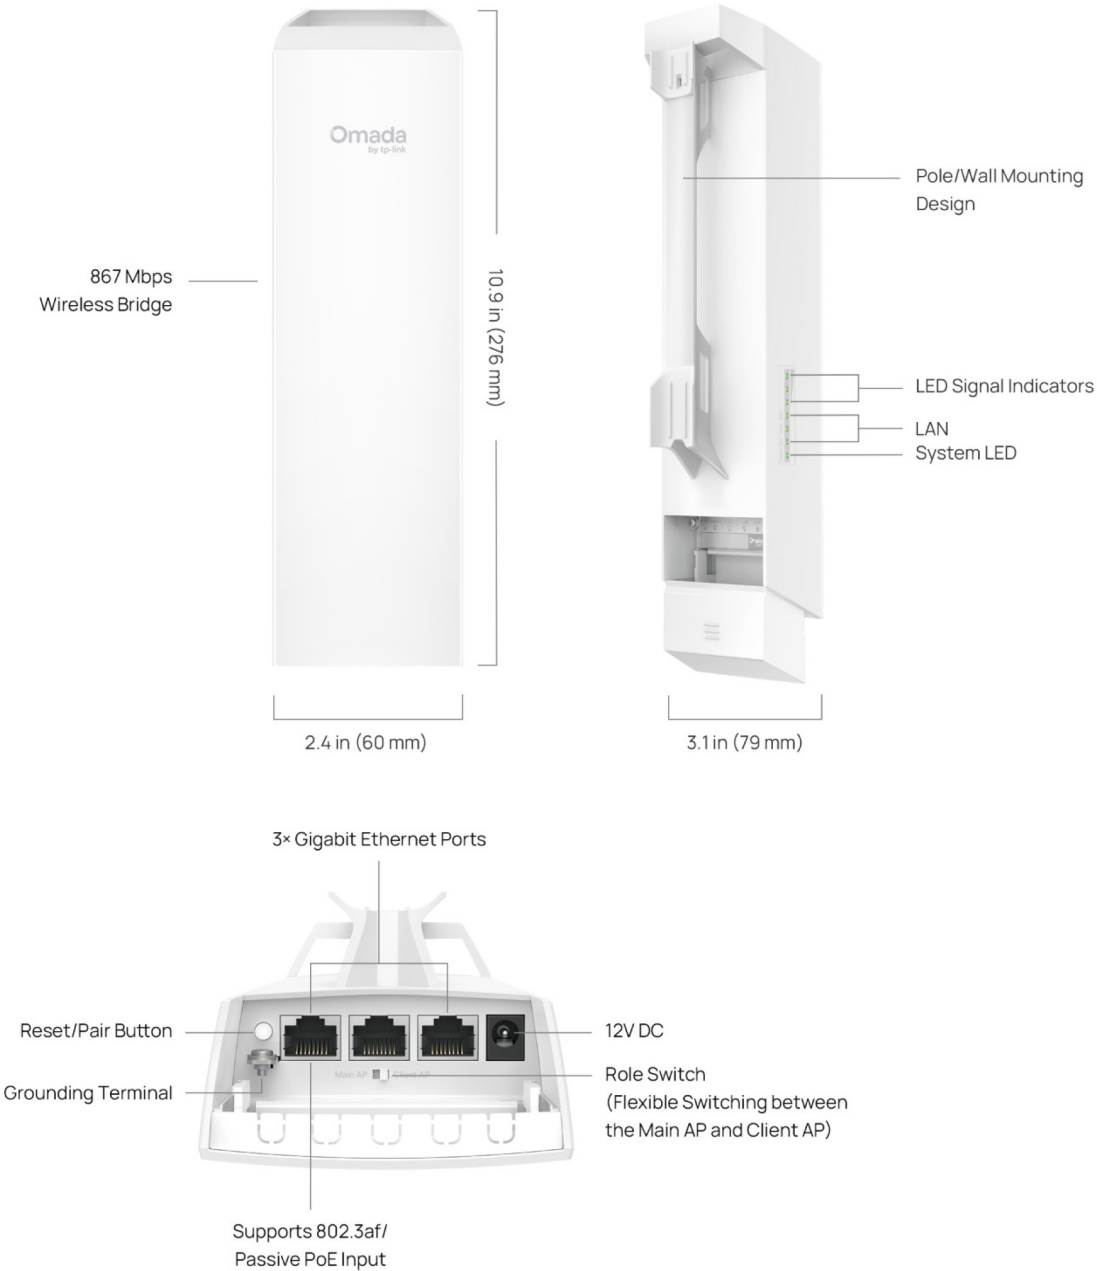

# Feature Descriptions

## Up to 3.1 mi (5 km) Wi-Fi Connectivity

It delivers reliable Wi-Fi with low latency and strong signal integrity, equipped with 14 dBi high-gain directional antennas for uninterrupted wireless transmission, and it is ideal for connecting remote sites in rural and hard-to-wire environments.

## Omada SmartBridging: The Most Effortless Bridge Setup

Preconfigured for instant PtP auto-pairing, the bridges deliver instant connectivity right out of the box. Simply power on and go, ideal for quick and easy deployments.

Effortlessly connect multiple bridges with PtMP Auto-Pairing<sup>†</sup>. Simply dial the role switch and press the Pair/Reset button<sup>‡</sup>-no portal login needed. Supports up to 1-to-4 multi-bridge connections.

## App-Guided Alignment for Optimal Performance

Simply bridge alignment with real-time signal strength visualization on the Omada app. Perfect for installations where bridges are far apart, this feature ensures optimal alignment and connectivity. The Omada app also allows users to easily verify installations, test transmission speeds, and troubleshoot connections for optimal performance.

## Simple Deployment with PoE Support

1× Gigabit PoE port delivers both power and data through a single cable, cutting deployment costs and outdoor wiring complexity. It supports both 802.3af PoE and Passive PoE power supply.

## Outdoor-Ready Design for Extreme Conditions

EAP215-Bridge KIT supports IP65 weatherproof and 6 kV lightning protection safeguard your network in harsh outdoor environments. Additionally, an extended temperature tolerance of -40 °C to 70 °C (-40 °F to +158 °F) makes it ideal for extremely hot and cold environments.

## Remote Monitoring & Management

Use the Omada app for easy on-site setup-no internet required. For additional flexibility, switch to Omada SDN, enabling cloud management via the Omada app or web portal for seamless control, and monitor from anywhere.

# Specifications

## Hardware Specifications

| Item                  | Description              |                                                                                                                                                                                                            |
|-----------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wi-Fi Standards       | 5 GHz: IEEE 802.11a/n/ac |                                                                                                                                                                                                            |
| Transmission Distance | 5km                      |                                                                                                                                                                                                            |
| 802.11ac              | Spatial Streams          | <ul style="list-style-type: none"> <li>5 GHz: 2×2 Downlink MU-MIMO with 2 spatial streams</li> </ul>                                                                                                       |
|                       | Frequency Bands          | 5.150 to 5.250 GHz U-NII-1<br>5.250 to 5.350 GHz U-NII-2A (DFS Channel)<br>5.470 to 5.725 GHz U-NII-2C (DFS Channel)<br>5.725 to 5.850 GHz U-NII-3/ISM<br><i>*Note: Country-Specific Restriction Apply</i> |
|                       | Bandwidth                | 5 GHz: 20 MHz/40 MHz/80 MHz                                                                                                                                                                                |
|                       | Wireless Data Rate       | <ul style="list-style-type: none"> <li>5 GHz: 8.6 Mbps to 866 Mbps (MCS0-MCS9, NSS=1 to 2, VHT20/40/80)</li> </ul>                                                                                         |
|                       | Radio Technology         | OFDM (Orthogonal Frequency-Division Multiplexing)                                                                                                                                                          |
|                       | Modulation Type          | 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK                                                                                                                                                                        |
|                       | Frame Aggregation        | <ul style="list-style-type: none"> <li>A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>                                          |
| 802.11n               | Spatial Streams          | <ul style="list-style-type: none"> <li>5 GHz: 2×2 MIMO with 2 spatial streams</li> </ul>                                                                                                                   |
|                       | Frequency Bands          | 5.150 to 5.250 GHz U-NII-1<br>5.250 to 5.350 GHz U-NII-2A (DFS Channel)<br>5.470 to 5.725 GHz U-NII-2C (DFS Channel)<br>5.725 to 5.850 GHz U-NII-3/ISM<br><i>*Note: Country-Specific Restriction Apply</i> |
|                       | Bandwidth                | 20 MHz/40 MHz                                                                                                                                                                                              |
|                       | Wireless Data Rate       | <ul style="list-style-type: none"> <li>5 GHz: 8.6 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40)</li> </ul>                                                                                             |
|                       | Radio Technology         | OFDM (Orthogonal Frequency-Division Multiplexing)                                                                                                                                                          |
|                       | Modulation Type          | 64-QAM, 16-QAM, QPSK, BPSK                                                                                                                                                                                 |
|                       | Frame Aggregation        | <ul style="list-style-type: none"> <li>A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>                                          |

| Item         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Antenna      | Wi-Fi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Internal 2×2 dual-polarized directional MIMO antennas<br>5 GHz: 14.0 dBi<br>Horizontal: 43°, Vertical: 18°<br><i>*Note: The gains above are the single-antenna peak gains.</i> |
|              | IoT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>None</li> </ul>                                                                                                                         |
| Interfaces   | <ul style="list-style-type: none"> <li>3 x 10M/100M/1000Mbps Gigabit Ethernet Port (RJ45)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                |
| IoT          | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                |
| Memory       | <ul style="list-style-type: none"> <li>Flash: 128Mbit</li> <li>DRAM: 1024Mbit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |
| Button       | <p>1 × System Mode Selection Button: Slide the switch to switch the device roles (Main AP or Client AP)</p> <p>1 × Pair/Reset button<sup>‡</sup>: Press the button for longer than 5 seconds to make the device restore to factory settings; Press this button on the Main AP and the Client AP to establish a network connection.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                |
| Indicator    | <p>1x system LED:</p> <ul style="list-style-type: none"> <li>On: Working normally/Initializing</li> <li>Off: Working abnormally/Power off/LED is turned off.</li> <li>Flash: <ul style="list-style-type: none"> <li>Flashes twice: Initialization is complete.</li> <li>Flashes quickly: The AP is resetting, or the Omada Controller is locating the device</li> <li>Flashes once per second: The AP is upgrading.</li> <li>On with periodic off: The AP is in the isolated state.</li> </ul> </li> </ul> <p>3 × LAN LEDs</p> <p>On: The port is connected but not active.</p> <p>Flash: The port is connected and active.</p> <p>Off: The port is not connected.</p> <p>3 × Singal LEDs</p> <ul style="list-style-type: none"> <li>On: <ul style="list-style-type: none"> <li>Working as Main AP: All LEDs remain solid during normal operation.</li> <li>Working as Client AP: More lit LEDs indicates better wireless signal strength.</li> </ul> </li> <li>Blinking: Pairing<sup>‡</sup></li> <li>Off: No signal</li> </ul> |                                                                                                                                                                                |
| Reliability  | MTBF (Mean Time between Failure)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 360000- hours at the operating temperature of 25°C (77°F)                                                                                                                      |
| Power Supply | Input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 12V/1A DC<br>802.3af PoE<br>24V Passive PoE                                                                                                                                    |
|              | Output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | /                                                                                                                                                                              |

| Item                       | Description                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Consumption          | <ul style="list-style-type: none"> <li>Max with DC:9.9W</li> <li>Max with PoE:11.5W</li> <li>Standby with DC:3.5W</li> <li>Standby with PoE:4.9W</li> </ul>                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                  |
| Surge/Lightning Protection | Ethernet Ports: ±6 kV                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                  |
| ESD/EMP Protection         | <ul style="list-style-type: none"> <li>Air discharge: ±8 kV</li> <li>Contact discharge: ±4 kV</li> </ul> <p><i>*Note: ESD/EMP Protection means Electrostatic Discharge/Electromagnetic Pulse Protection independently.</i></p> |                                                                                                                                                                                                                                                                                                                                                                                                  |
| Tx Power                   | Maximum transmit power                                                                                                                                                                                                         | CE (ERIP) <ul style="list-style-type: none"> <li>5 GHz: 23 dBm in U-NII-1, 23 dBm in U-NII-2A, 30 dBm in U-NII-2C,</li> </ul> FCC (Conducted Power) <ul style="list-style-type: none"> <li>5 GHz: 23.5 dBm in U-NII-1, 25 dBm in U-NII-3</li> </ul> <p><i>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</i></p>          |
|                            | Minimum transmit power                                                                                                                                                                                                         | CE (ERIP) <ul style="list-style-type: none"> <li>5 GHz: 6 dBm in U-NII-1, 6 dBm in U-NII-2A, 6 dBm in U-NII-2C, 6 dBm in U-NII-3</li> </ul> FCC (Conducted Power) <ul style="list-style-type: none"> <li>5 GHz: 4 dBm in U-NII-1, 4dBm in U-NII-3</li> </ul> <p><i>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</i></p> |
|                            | Adjustable power increment                                                                                                                                                                                                     | 1 dBm                                                                                                                                                                                                                                                                                                                                                                                            |
| Environment                | Temperature                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>Operating: -40°C to +70°C (-40°F to +158°F)</li> <li>Storage: -40°C to +70°C (-40°F to +158°F)</li> </ul>                                                                                                                                                                                                                                                 |
|                            | Humidity                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>Operating: 10% to 90% (non-condensing)</li> <li>Storage: 5% to 90% (non-condensing)</li> </ul>                                                                                                                                                                                                                                                            |
|                            | Altitude                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>Storage: up to + 2000 m (6561 feet)</li> <li>Operating: up to + 2000 m (6561 feet)</li> </ul>                                                                                                                                                                                                                                                             |
|                            | Windproof                                                                                                                                                                                                                      | Class 16                                                                                                                                                                                                                                                                                                                                                                                         |
|                            | Weatherproof Enclosure                                                                                                                                                                                                         | IP65 for Pole Mount                                                                                                                                                                                                                                                                                                                                                                              |
| Unit                       | Dimensions (W×D×H)                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Main Unit: 275.8×79×60.3 mm (10.8×3.1×2.3 in.)</li> <li>Shipping Unit: 318×250×105 mm (12.5×9.8×4.1 in.)</li> </ul>                                                                                                                                                                                                                                       |
|                            | Weight                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>Main Unit: 0.86 kg (1.89 lb)</li> <li>Mounting Unit: 0.056 kg (0.12 lb)</li> <li>Shipping Unit: 2 kg (4.4 lb)</li> </ul>                                                                                                                                                                                                                                  |
|                            | Mounting                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>Pole Mount (Kits included)</li> </ul>                                                                                                                                                                                                                                                                                                                     |

## Software Specifications

| Item                        | Description                                                                                |                                                                                                                                                                                                                                                               |
|-----------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | Maximum number of associated STAs                                                          | 8                                                                                                                                                                                                                                                             |
|                             | Guest Network                                                                              | Yes                                                                                                                                                                                                                                                           |
|                             | ACS (Automatic Channel Selection)                                                          | Yes                                                                                                                                                                                                                                                           |
|                             | Airtime Fairness                                                                           | No                                                                                                                                                                                                                                                            |
|                             | TDMA                                                                                       | No                                                                                                                                                                                                                                                            |
|                             | Speed Test                                                                                 | Yes                                                                                                                                                                                                                                                           |
|                             | PtP                                                                                        | Yes                                                                                                                                                                                                                                                           |
|                             | PtMP                                                                                       | 4                                                                                                                                                                                                                                                             |
|                             | Channel Optimization                                                                       | Yes                                                                                                                                                                                                                                                           |
|                             | Antenna Alignment                                                                          | Yes                                                                                                                                                                                                                                                           |
|                             | 802.11 Rate Control                                                                        | No                                                                                                                                                                                                                                                            |
|                             | Rogue AP Detection                                                                         | Yes                                                                                                                                                                                                                                                           |
|                             | WLAN Optimization                                                                          | No                                                                                                                                                                                                                                                            |
|                             | Lock to AP                                                                                 | No                                                                                                                                                                                                                                                            |
|                             | Rate Limit                                                                                 | <ul style="list-style-type: none"> <li>SSID Rate Limit</li> <li>Client Rate Limit</li> </ul>                                                                                                                                                                  |
|                             | Load Balance                                                                               | No                                                                                                                                                                                                                                                            |
|                             | MLO                                                                                        | No                                                                                                                                                                                                                                                            |
|                             | Multicast/Broadcast Management                                                             | <ul style="list-style-type: none"> <li>Multicast/Broadcast Rate Limit</li> </ul>                                                                                                                                                                              |
| Security and Authentication | ACL                                                                                        |                                                                                                                                                                                                                                                               |
|                             | <ul style="list-style-type: none"> <li>None</li> <li>WPA/WPA2</li> <li>WPA/WPA2</li> </ul> |                                                                                                                                                                                                                                                               |
|                             | Radius Accounting                                                                          |                                                                                                                                                                                                                                                               |
|                             | EAP Types                                                                                  | <ul style="list-style-type: none"> <li>EAP-TLS</li> <li>EAP-TTLS</li> <li>EAP-PEAP</li> <li>EAP-CHAP</li> <li>EAP-SIM</li> <li>EAP-AKA</li> <li>EAP-GTC</li> <li>EAP-FAST</li> <li>EAP-PEAP</li> <li>EAP-MD5</li> <li>EAP-MSCHAPv2</li> <li>PEAPv0</li> </ul> |



| Item               | Description                          |                                                                                                                                   |
|--------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
|                    |                                      | <ul style="list-style-type: none"> <li>PEAPv1</li> </ul>                                                                          |
| Management methods | Omada Controller                     | <ul style="list-style-type: none"> <li>Omada Controller V5.15.24 and above</li> <li>Omada Essential V5.15.24 and above</li> </ul> |
|                    | App                                  | Omada App V4.25 and above                                                                                                         |
|                    | Standalone Management                | Yes                                                                                                                               |
|                    | Standalone Mesh                      | No                                                                                                                                |
|                    | SSH                                  | Yes                                                                                                                               |
|                    | SNMP                                 | v1, v2c, v3                                                                                                                       |
| Operating Modes    | AP                                   | Yes                                                                                                                               |
|                    | Repeater                             | No                                                                                                                                |
|                    | Mesh                                 | No                                                                                                                                |
| System Feature     | System Log                           | Yes                                                                                                                               |
|                    | Reboot Schedule                      | Yes                                                                                                                               |
|                    | WLAN Schedule                        | Yes                                                                                                                               |
|                    | NTP (Network Time Protocol)          | Yes                                                                                                                               |
|                    | Email Alerts                         | Yes                                                                                                                               |
|                    | Firmware Upgrade                     | Yes                                                                                                                               |
|                    | Restore & Backup                     | Yes                                                                                                                               |
|                    | LED Control                          | Yes                                                                                                                               |
| Network Features   | VLAN                                 | <ul style="list-style-type: none"> <li>SSID VLAN</li> <li>Management VLAN</li> </ul>                                              |
|                    | Static IP / DHCP Client              | Yes                                                                                                                               |
|                    | IPv4                                 | Yes                                                                                                                               |
|                    | LLDP (Link Layer Discovery Protocol) | Yes                                                                                                                               |
|                    | mDNS                                 | Yes                                                                                                                               |
|                    | Tools                                | <ul style="list-style-type: none"> <li>Ping / Traceroute</li> <li>Packet Capture</li> <li>Terminal</li> </ul>                     |

# Standards Compliance and Certifications


| Item                 | Category                                                                 | Description                                                                                                                                                                                          |
|----------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards compliance | IEEE Standards                                                           | <ul style="list-style-type: none"> <li>• IEEE 802.11a/n/ac</li> <li>• IEEE 802.1q</li> <li>• IEEE 802.3af</li> <li>• IEEE 802.3ab</li> <li>• IEEE 802.3x</li> </ul>                                  |
|                      | Radio Standards                                                          | <ul style="list-style-type: none"> <li>• RSS-247, RSS-Gen</li> <li>• ETSI EN 301 893, EN 62311&amp; EN 50665</li> <li>• FCC Part 15E</li> </ul>                                                      |
|                      | EMC standards                                                            | <ul style="list-style-type: none"> <li>• EN 55032</li> <li>• EN 55035</li> <li>• ICES-003</li> <li>• EN 301489-1</li> <li>• EN 301489-17</li> <li>• FCC Part 15B</li> <li>• VCCI-CISPR 32</li> </ul> |
|                      | Safety Standards                                                         | <ul style="list-style-type: none"> <li>• EN 62368-1</li> <li>• IEC 62368-1</li> <li>• IEC 60950-22</li> </ul>                                                                                        |
|                      | Security Standards                                                       | <ul style="list-style-type: none"> <li>• WPA-Personal/Enterprise</li> <li>• WPA2-Personal/Enterprise</li> </ul>                                                                                      |
|                      | RoHS                                                                     | <ul style="list-style-type: none"> <li>• Directive 2011/65/EU, Directive (EU) 2015/863</li> <li>• EN IEC 63000: 2018</li> </ul>                                                                      |
|                      | Others                                                                   |                                                                                                                                                                                                      |
| Certifications       | <ul style="list-style-type: none"> <li>• FCC/CE/ISED/VCCI/MIC</li> </ul> |                                                                                                                                                                                                      |

# RF Performance

| Frequency Band | Wi-Fi Protocol & Bandwidth | MCS Index / Data Rate | EU/US Maximum Transmit Power (dBm) per transmit chain | Receiver Sensitivity (dBm) per receive chain |
|----------------|----------------------------|-----------------------|-------------------------------------------------------|----------------------------------------------|
| 5 GHz          | 802.11a                    | 6M                    | 16/22                                                 | -94                                          |
|                |                            | 54M                   | 16/19                                                 | -78                                          |
|                | 802.11ac, VHT20            | MCS0                  | 16/22                                                 | -94                                          |
|                |                            | MCS8                  | 16/17.5                                               | -71                                          |
|                | 802.11ac, VHT40            | MCS0                  | 16/22                                                 | -90.5                                        |
|                |                            | MCS9                  | 16/16.5                                               | -66.5                                        |
|                | 802.11ac, VHT80            | MCS0                  | 16/20                                                 | -87.5                                        |
|                |                            | MCS9                  | 16/16.5                                               | -63                                          |

## Antenna Radiation Patterns

5 GHz

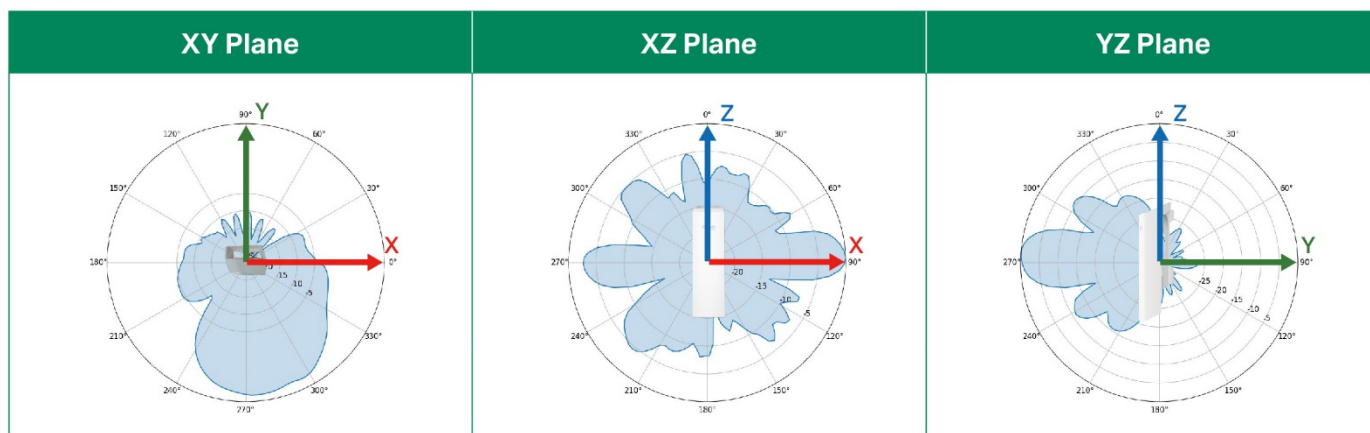

# Package Contents

| Item                | Quantity |
|---------------------|----------|
| EAP215-Bridge       | 2        |
| Passive PoE Adapter | 2        |
| Power Cord          | 2        |
| Mounting Kit        | 2        |
| Installation Guide  | 1        |



## Support Services

We are committed to providing you with comprehensive and reliable support services to ensure seamless experience with Omada products.

- Contact Support: <https://support.omadanetworks.com/#contact-us>
- Warranty Services: <https://www.omadanetworks.com/support/replacement-warranty/>

# Revision History

| Version | Date       | Description      |
|---------|------------|------------------|
| V1.0    | 2026-07-27 | Initial release. |

Note: Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection, quality, and client condition.

\*The advertised coverage is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of the performance of the equipped antennas, client limitations, and environmental factors.

\*\*Protection against lightning and electro-static discharge may be achieved through proper product setup, grounding, and cable shielding. Refer to the instruction manual and consult an IT professional to assist with setting up this product.

†These functions require the use of an Omada controller.

‡Pairing with the Pair/Reset button requires firmware upgrade if the button is labeled as "Reset" only.

Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: <https://www.omadanetworks.com>. Specifications are subject to change without notice.