


Quick Installation Guide

AC750 Wireless Dual Band Router
Archer C20

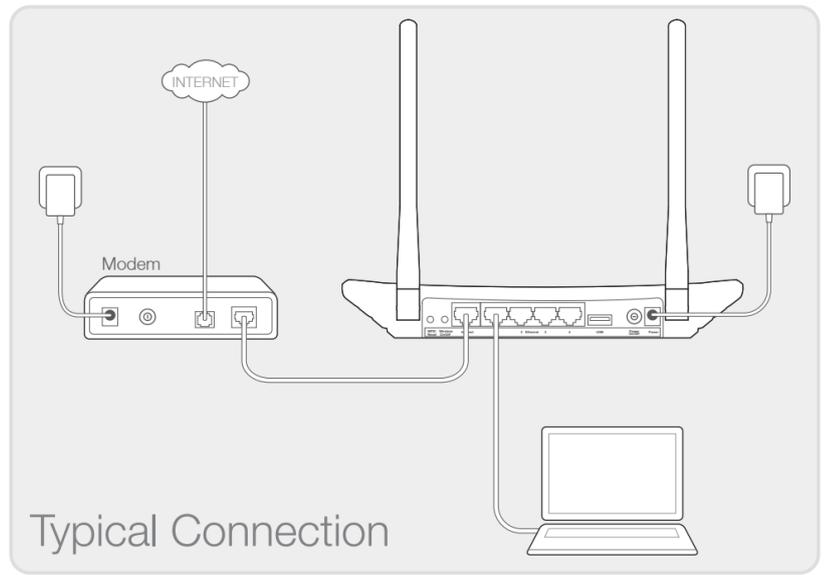

1. Connect the Hardware

1 **Power off** the modem, and remove the backup battery if any.

2 Connect the modem to the Internet port on your router using an Ethernet cable.

3 **Power on** the modem, wait for 2 minutes and then **power on** the router.

4 Check the following LED lights to ensure the hardware connection is correct.

Note: If your Internet comes via an Ethernet cable from the wall instead of any DSL/Cable/Satellite modems, please connect the Ethernet cable directly to the router's Internet port.

2. Configure the Router

1 Connect your computer to the router (Wired or Wireless).

• Wired

Turn off the Wi-Fi on your computer and connect devices as shown below:

• Wireless

Connect wirelessly by using the default network name (SSID) and password on the product label printed on the bottom of the router.

Or

2 Open a web browser on the computer and configure the router according to the following main clues.

a Enter **http://tplinkwifi.net** in the address bar. Alternatively, enter **http://192.168.0.1** or **http://192.168.1.1**.

Type in your user name and password (admin/admin by default) and click **Login**.

Note: If the login window does not appear, please refer to FAQ->Q1.

b The Quick Setup will pop up. Click **Next** to continue.

c For IPTV/ VOIP users, please choose your connection type from **Exstream**, **Unifi**, **Maxis** or **Custom** and proceed with Step **1**. For others, please choose **Normal** and skip to Step **1**. If you do not know which type to choose, please contact with your ISP. Click **Next** to continue.

d Here we take **Unifi** mode as an example. Choose LAN type and enter the correct VLAN ID. Click **Next** to continue.

e Enter the **Username** and **Password** provided by your ISP. These fields are case-sensitive. Click **Next** to skip to Step **1**.

f Select your Connection Type and if you are unsure what your connection type is, select **Auto-Detect**. Click **Next** and follow the instruction to continue.

Quick Setup - WAN Connection Type

Auto-Detect

Dynamic IP (Most Common Cases)

Static IP

PPPoE/Russian PPPoE

L2TP/Russian L2TP

PPTP/Russian PPTP

Back Next

g The **Dynamic IP** is the suitable connection type for most cases. Here we take it as an example. On the next page, the cable modem users may need to clone the MAC address from their main computer - the computer connected with the cable modem. Click **Next** to continue.

Quick Setup - MAC Clone

No, I do NOT need to clone MAC address.

YES, I need to clone MAC address.

WAN MAC Address: Restore Factory MAC

Your PC's MAC Address: Clone MAC Address

Back Next

h Choose the frequency you prefer and then click **Next**.

Quick Setup-Wireless Dual Band Selection

2.4GHz

5GHz

Back Next

i Click **Next** to continue.

Note: You may rename your 2.4GHz/5GHz wireless network name and create your own password. Once done, the wireless connection will disconnect automatically, and you must then sign in with the new name and password to regain access to the Internet.

Quick Setup - Wireless 2.4GHz/5GHz

Wireless Network Name:

Region:

Security:

Password:

Back Next

j Confirm all parameters and then click **Save**.

Quick Setup - Confirm

Parameters Summary:

Working Mode: XXX

Connection Type: XXX

Wireless 2.4GHz: Enabled

Wireless 5GHz: Enabled

Back Save

k Click **Reboot**.

Configurations will take effect after the device reboots.

Quick Setup - Complete

Setup Status:

XXXX: Success

XXXX: Success

XXXX: Success

XXXX: Success

Quit Reboot



Tether App

TP-LINK Tether app lets you conveniently access the router and:

- View information about the clients on your network.
- Block network access from specific users or devices.
- Set up Parental Control with access time and content restrictions.
- Change the basic wireless network settings easily.

How to begin?

- 1 Scan the QR code to download the TP-LINK Tether app from the Apple App Store or Google Play.
- 2 Ensure your smart device is wirelessly connected to the network.
- 3 Launch the Tether app and start managing your home network.




USB Features

The USB port can be used for media sharing, storage sharing and print sharing across your local network. You can also set up the FTP server to access your files remotely by connecting to the Internet.



Note: To learn more about the USB features, please visit <http://tp-link.com/app/usb> or simply scan the QR code.

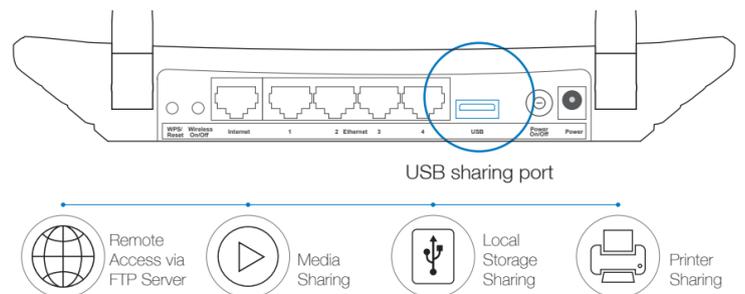

Frequently Asked Questions (FAQ)

Q1. What can I do if the login window does not appear?

- A1. If the computer is set to a static or fixed IP address, change it to obtain an IP address automatically from the router.
- A2. Verify <http://tplinkwifi.net> is correctly entered in the web browser. Alternatively, enter <http://192.168.0.1> or <http://192.168.1.1> in the web browser and press Enter.
- A3. Use another web browser and try again.
- A4. Reboot your router and try again.
- A5. Disable the network adapter used currently then enable it again.

Q2. What can I do if I cannot access the Internet?

- A1. Check if the Internet is working properly by connecting a computer directly to the modem via Ethernet. If not, contact your Internet Service Provider.
- A2. Open a web browser, enter <http://tplinkwifi.net> and try to set up again.
- A3. Reboot your router and try again.

Note: For cable modem users, reboot the modem first. If the problem still exists, go to Network > MAC Clone, then click Clone MAC Address and Save.

MAC Clone


WAN MAC Address: Restore Factory MAC

Your PC's MAC Address: Clone MAC Address

Save

Q3. How do I restore the router to its factory default settings?

- A1. While the router is powered on, press and hold the WPS/Reset button on the rear panel of the router until all LEDs turn on momentarily.
- A2. Log in to the Web Management page of the router, and go to System tools > Factory Defaults, click Restore, then wait until the progress bar loading finishes.

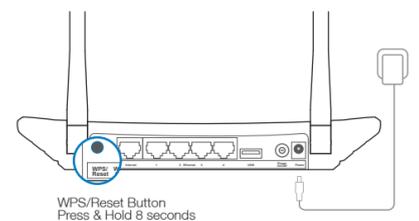

Q4. What can I do if I forget my password?

- **Web Management page password:**
 - A. Restore the router to its factory default settings and then use the default User Name 'admin' and Password 'admin' to log in.
- **Wireless Network password:**
 - A1. The factory default password can be found on the product label printed on the bottom of the router.
 - A2. If you have changed your password, log in to the router's Web Management page, go to Wireless > Wireless Security to obtain or reset your password.

Note: If your questions are not answered here, please refer to <http://www.tp-link.com/en/support/faq> and click Contact Technical Support for further assistance.

LED Indicators

Name	Status	Indication
(Power)	Off On	Power is off. Power is on.
(Wireless 2.4G/5G)	Off On	The wireless function is disabled. The wireless function is enabled. The router is working on 2.4GHz or 5GHz or both radio band.
(Ethernet)	Off On	No device is connected to the Ethernet ports. At least one device has connected to the Ethernet ports.
(Internet)	Off On	The Internet connection is not available. The network is available with a successful Internet connection.
(WPS)	Slow Flash On Quick Flash	A wireless device is connecting to the network by WPS function. This process will last in the first 2 minutes. A wireless device has been successfully added to the network by WPS function. A wireless device failed to be added to the network by WPS function.
(USB)	Off Flashing On	No USB device is plugged into the USB port. A plugged-in USB device is being recognized. The USB device has been successfully recognized.