


Quick Installation Guide

Portable 3G/3.75G Battery Powered Wireless N Router

MODEL NO. TL-MR3040

Package Contents

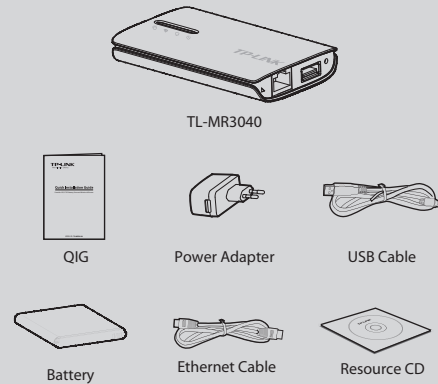

System Requirement

The following operating systems are supported:


- Windows XP
- Windows Vista
- Windows 7
- Windows 98
- Windows 2000
- Windows 2003
- Windows Me
- Mac
- iOS
- Linux
- Android

The following browsers are supported:

- Internet Explorer
- FireFox
- Safari
- Chrome

7-106603794

1 Physical Description

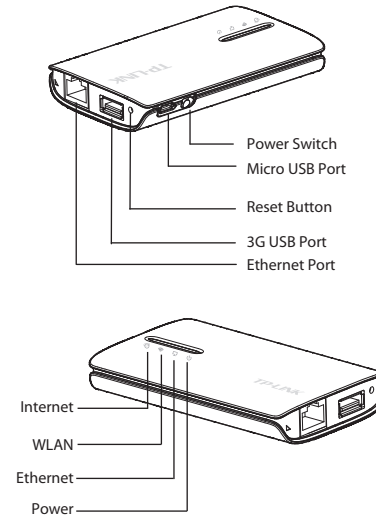


Item	Description
Power Switch	This switch is used to power on the Router.
Micro USB Port	This port is used to be connected to the provided power adapter.
Reset Button	With the Router powered on, press and hold the Reset button for at least 10 seconds, and then the Router will restore to the default setting.
3G USB Port	This port is used to plug a 3G modem/card into.
Ethernet Port	This Port can be used as either a LAN port or WAN port.


LED	Status	Description
Power	Solid (Green)	The battery is full or the power supply is normal.
	Solid (Orange)	The battery is being charged.
	Solid (Red)	The battery power is low, you need to charge it.
	Flashing (Red)	The battery is abnormal.
Ethernet	Solid	The Ethernet port is connected, but there is no data being transferred.
	Flashing	The Ethernet port is transferring data.
WLAN	Solid	Wireless is enabled.
	Flashing	There is data being transferred through wireless.
Internet	Solid	The 3G Modem/Card is identified.
	Flashing	The Router is connected to the Internet and is transferring data.

2 Hardware Connection

Install the Battery



Lift and remove the rear cover of the Router as the arrow on the left figure shown.



Insert the battery as the arrow on the left figure shown and press the battery until it snaps into place.




Then install the rear cover.

NOTE: Push the power switch to the left to turn on the Router.

Connecting the Device


3G Router Mode (Default)

In this mode, the TL-MR3040 is connected to a 3G USB modem and wirelessly share the 3G mobile connection to multiple users.




WISP Client Router Mode

In this mode, the TL-MR3040 is wirelessly connected to the WISP (Wireless Internet Service Provider) and share the Internet to multiple users.




Travel Router (AP) Mode

In this mode, the TL-MR3040 is connected to a wired network and transforms the wired Internet access into wireless so that multiple users can share the Internet.



Wireless Router Mode

In this mode, the TL-MR3040 is connected to a DSL or cable modem and works as a regular wireless router so that multiple users can wirelessly share the Internet. The Ethernet port on the TL-MR3040 works as a WAN port.

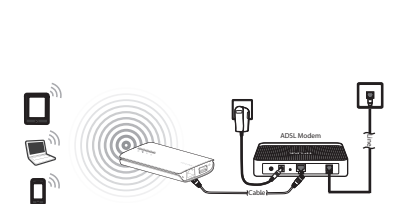



NOTE: In Standard AP Mode, the TL-MR3040 also provides the other three sub modes: Repeater\Client\Bridge, please refer to the user guide on the Resource CD for more details.

3 Connect to Network


Here we take Wireless Network Connection as example, please make sure your device is wireless enabled.


For Windows XP

- 1 Click the icon  at the bottom of your desktop.
- 2 Click **Refresh network list**, and then select the SSID (network name) of TL-MR3040. Click **Connect**.





For Windows 7

- 1 Click the icon  at the bottom of your desktop.
- 2 Click refresh button, and then select the target network. Click **Connect**.




For MAC OS

- 1 Click the icon  at the right top of your desktop.
- 2 Make sure the status of Airport is On, and then select the SSID (network name) of TL-MR3040 and click it.




For Tablet/Smart Phone

Go to the Wi-Fi Settings of your tablet/smart phone and select the SSID of TL-MR3040.



For Android



For iOS


NOTE: The default SSID of the network is **TP-LINK_POCKET_3040_xxxxxx**. (The xxxxxx is the last six characters of the Router's MAC address.)

4 Router Configuration

- 1 Open a Web browser, type **192.168.0.1** in the address field, and press **Enter**. At the prompt, enter the default **User Name** and **Password**, which are both **admin**. Click **OK** to enter the Router's management page.
- 2 When you login for the first time please click **Quick Setup** and follow through the prompts as described below.

- 1 Choose the operation mode and click **Next**. Here we take the 3G Router Mode as example.
- 2 Choose the Internet Access type, and then click **Next**. It is recommended to choose **3G Only**.
- 3 Select your **location** and **Mobile ISP**. If you don't find your location in the pull-down menu, You should tick "**Set the Dial Number, APN, Username and Password manually**" to manually set them according to the information your 3G ISP provided. Then click **Next**.
- 4 Set your wireless parameters and then click **Next**. It is recommended that you rename your **SSID** (wireless network name) and set a **Security Type/Password** within this screen.

NOTE: The default access mode of the Router is **3G Router**. If you want to use other modes, select the **Operation Mode** as shown in the following figure and click **Save**. For the detailed configuration of each mode, please refer to the User Guide on the Resource CD.

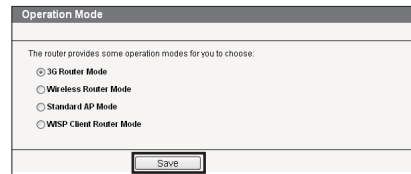

- 3 If the Router reboots, you should reconnect to the network according to **Step 3 Connect to Network**.

Troubleshooting

What should I do when the "Unknown Modem" message displays?

- (1) Please check and make sure that your 3G modem/card is on our Compatibility List: <http://www.tp-link.com/common/?3g>
- (2) If your 3G modem/card is on our list but the router shows "Unknown Modem", please go to our website to download the latest firmware and upgrade the router.
- (3) If the latest firmware cannot support your modem/card, please contact our technical support.

What should I do if I cannot get Internet access with an identified 3G USB Modem?

- (1) Please insert a suited SIM/UIM card into the 3G modem/card correctly.
- (2) Please plug your 3G modem/card directly into your PC and disable the PIN verification via modem utility.
- (3) Please verify that your Internet connection is working on your PC.
- (4) Ask your ISP for the latest dial number and APN, correct the pre-set information manually.

What should I do if I want to update the firmware?

- (1) We're continuously testing newly emerged 3G modem/card worldwide to provide the best compatibility between our 3G router and the 3G USB modems. To enjoy the best user experience, we strongly suggest that you download the latest firmware from our website: <http://www.tp-link.com/en/support/download.aspx>.
- (2) Choose menu "System Tools" -> "Firmware Upgrade", you can update the latest version of firmware for the Router.

Technical Support

- For more troubleshooting help, go to www.tp-link.com/support/faq.asp
- To download the latest Firmware, Driver, Utility and User Guide, go to www.tp-link.com/support/download.asp
- For all other technical support, please contact us by using the following details.

Global Tel: +86 755 26504400 E-mail: support@tp-link.com Service time: 24hrs, 7days a week	Australia & New Zealand Tel: AU 1300 87 5465 NZ 0800 87 5465 E-mail: support@tp-link.com.au Service time: 24hrs, 7 days a week
Singapore Tel: +65 62840493 E-mail: support.sg@tp-link.com Service time: 24hrs, 7days a week	Malaysia Tel: 1300 88 875465 (1300 88TPLINK) E-mail: support.my@tp-link.com Service time: 24 hrs a day, 7days a week
UK Tel: +44 (0) 845 147 0017 E-mail: support.uk@tp-link.com Service time: 24hrs, 7days a week	Turkey Tel: 444 19 25 (Turkish Service) E-mail: support.tr@tp-link.com Service time: 9:00 AM to 6:00 PM, 7days a week
USA/Canada Toll Free: +1 866 225 8139 E-mail: support.usa@tp-link.com Service time: 24hrs, 7days a week	Brazilian Toll Free: 0800-770-4337 (Portuguese Service) E-mail: support.br@tp-link.com Service time: Monday to Saturday 08:00AM to 08:00PM
Indonesia Tel: (+62) 021 6259 135 E-mail: support.id@tp-link.com Service time: Monday to Friday 9:00 - 12:00, 13:00 - 18:00 *Except public holidays	Switzerland Tel: +41 (0)848 800998 (German service) E-mail: support.ch@tp-link.com Service time: Monday to Friday 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time)
Germany/Austria Tel: +49 1805 875465 (German Service) / +49 1805 TPLINK E-mail: support.de@tp-link.com Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42 EUR/min from mobile phone. Service time: Monday to Friday 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time in Germany) * Except bank holidays in Hesse	Russian Federation Tel: 8 (495) 223-55-60 8 (800) 250-55-60 (toll-free call from any RF region) E-mail: support.ru@tp-link.com Service time: From 10:00 to 18:00 (Moscow time) *Except weekends and holidays in Russian Federation
Italy Tel: +39 02 66987799 E-mail: support.it@tp-link.com Service time: 9:00 AM to 6:00 PM, from Monday to Friday	Poland Tel: +48 (0) 801 080 618/+48 22721 7563 (if calls from mobile phone) E-mail: support.pl@tp-link.com Service time: Monday to Friday 9:00 AM to 5:00 PM GMT+1 or GMT+2 (Daylight Saving Time)
Ukrainian Tel: +380 (44) 590-51-14 E-mail: support.ua@tp-link.com Service time: Monday 14:00 PM to 22:00 PM	