

Installation Guide

TL-R470T+ / TL-R600VPN

LED Explanation

Power Power

On: Power on
Off: Power off

System System

Flashing: System running normally
On/Off: System running abnormally

Link/Act


On: There is a device connected to the port but not active.
Off: There is no device connected to the corresponding port.
Flashing: Transmitting or receiving data

Package List

- Router
- Ethernet Cable
- Power Adapter
- Installation Guide

For simplicity, we take TL-R600VPN as an example throughout this Guide.

Connection

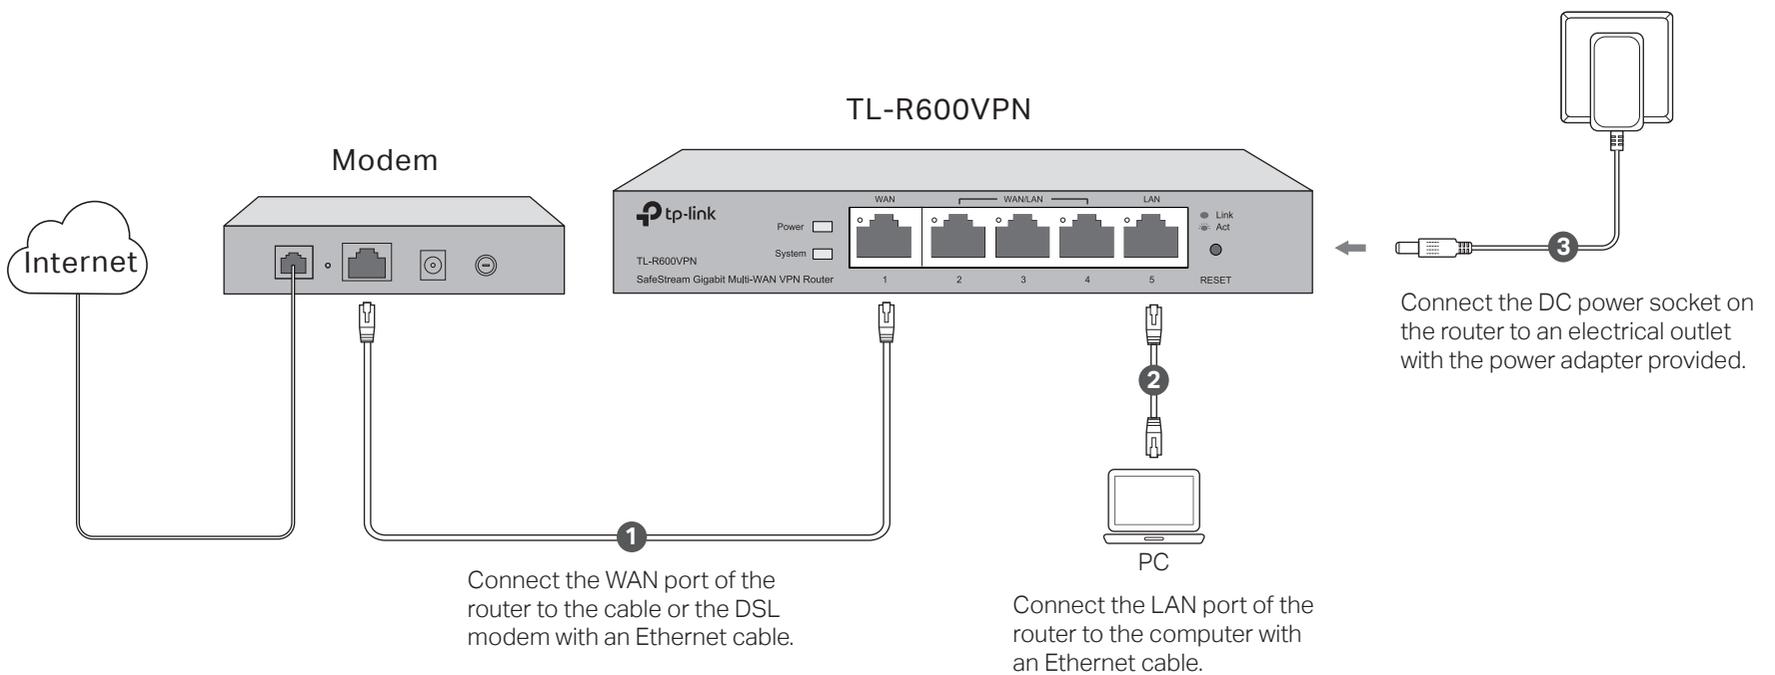

Configuration

1. Connect a PC to a LAN port of the router with an RJ45 cable properly. If your computer is configured with a fixed IP, change it to "Obtain an IP address automatically".

2. Open a web browser and type the default management address <http://192.168.0.1> in the address field of the browser, then press the Enter key.



3. Create a username and a password for subsequent login attempts.

tp-link

For device security, please set an administrator account.

User Name:

Password:

Confirm the Password:


Note: please remember your administrator account name and password for login. These will be required for subsequent login attempts. If you forget your login details, you will need to reset the device to its factory defaults. To reset the device, power it on and then press and hold the Reset button for 5 seconds.

Confirm

4. Use the username and password set above to log in to the webpage.



5. After a successful login, the main page will appear as shown below, and you can configure the function by clicking the setup menu on the left side of the screen.

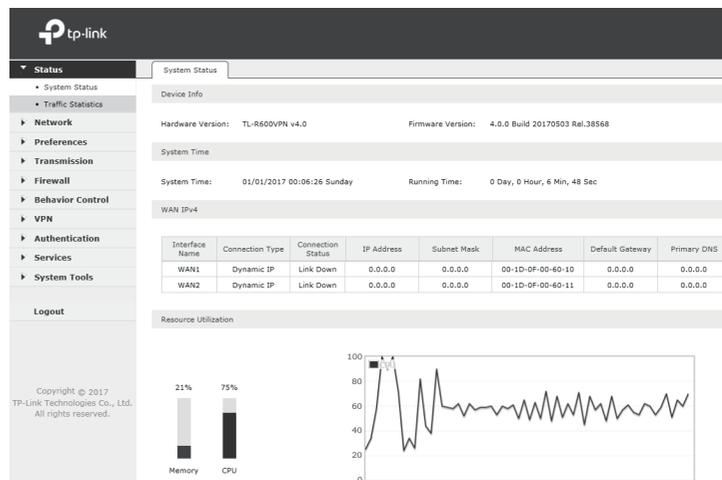

Appendix: Troubleshooting

How do I restore the router to its factory default settings?

- With the router powered on, use a pin to press and hold the RESET button (for about 5 seconds) until the System LED lights up and flashes quickly. Then release the button and wait while the router reboots, restoring it to its factory default settings.
- Log in to the web management page of the router. Go to **System Tools > Management > Factory Default Restore**, and click **Factory Restore**. The router will restore and reboot automatically.

Why is the Power LED working abnormally?

The Power LED should be lit when the power system is working normally. If it is not, please check the following:

- Make sure that the power cable is connected properly, and the power contact is normal.
- Make sure the voltage of the power supply meets the requirements for the input voltage of the router.

What should I do if I forget the user name and password for the router's web management page?

You can restore the router to factory defaults. The default management address of the router is <http://192.168.0.1>. You can manually set a new username and password for login. All current settings will be cleared once the router is restored. If you have a backup of your configurations, you can import it after the factory restore is completed.

Why is the web management page not displaying properly?

Please try the following:

- Update your web browser or try a different web browser.
- If pop-ups are being blocked, please lower the security level of your web browser.

What should I do if I can't access the web management page?

- Check every port LED on the router and make sure the cable is installed properly.
- Try another port on the router and make sure the cable meets the requirement and works normally.
- Turn off the power. After a while, turn on the power again.
- Make sure the IP address of your PC is set within the subnet of the router.
- If you still cannot access the configuration page, please restore the router to its factory defaults. Then the computer's IP address should be set as 192.168.0.x ("x" is any number from 2 to 254) and Subnet Mask as 255.255.255.0.



For technical support and other information, please visit <http://www.tp-link.com/support>, or simply scan the QR code.

Explanation of the symbols on the product label

	DC voltage
	RECYCLING This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

BSMI Notice

安全諮詢及注意事項

- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 請不要私自打開機殼，不要嘗試自行維修本產品，請由授權的專業人士進行此項工作。

限用物質含有情況標示聲明書

產品元件名稱	限用物質及其化學符號					
	鉛 Pb	鎘 Cd	汞 Hg	六價鉻 CrVI	多溴聯苯 PBB	多溴二苯醚 PBDE
PCB	○	○	○	○	○	○
外殼	○	○	○	○	○	○

備考： "○"系指該項限用物質之百分比含量未超出百分比含量基準值。

Safety Information

Use only power supplies which are provided by manufacturer and in the original packing of this product.

Do not use damaged charger or USB cable to charge the device. Adapter shall be installed near the equipment and be easily accessible.

⚠ Cautions

Do not use this product near water, for example, in a wet basement or near a swimming pool. Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.tp-link.com/en/ce>

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
 - This device must accept any interference received, including interference that may cause undesired operation.
- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CE Mark Warning

This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)



FCC STATEMENT