

# Installation Guide

Load Balance Broadband Router

TL-R470T+

## LED Explanation

**PWR** □ □ □ □ □  
1 2 3 4 5

On: Power on  
Off: Power off

**SYS** □ □ □ □ □  
1 2 3 4 5

Flashing: System running normally  
On/Off: System running abnormally


**WAN/LAN** □ □ □ □ □  
1 2 3 4 5

On (Yellow): Working as a WAN port, with an inactive device linked to it  
On (Green): Working as a LAN port, with an inactive device linked to it  
Flashing (Yellow): Working as a WAN port and transmitting/receiving data  
Flashing (Green): Working as a LAN port and transmitting/receiving data

## Package List

- TL-R470T+    • Ethernet Cable    • Power Cord    • Resource CD
- Installation Guide

## Connection

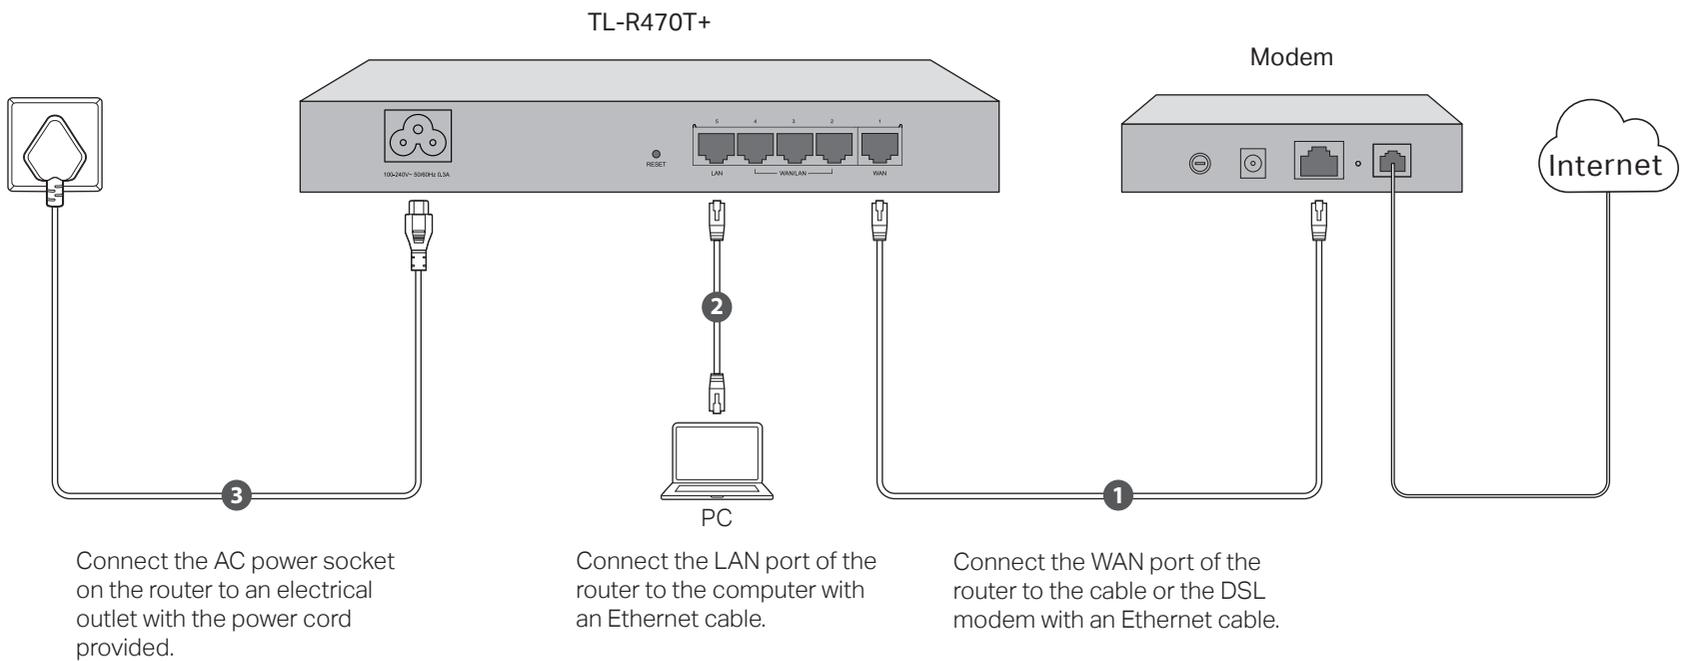


## Configuration


1. Enter <http://192.168.0.1> in the address bar of a web browser. Use **admin** for both User Name and Password, and click **Login**.




2. After a successful login, the **Quick Setup** screen will appear. If the prompt does not appear, click **Quick Setup** on the left of the main menu, then click **Next**.

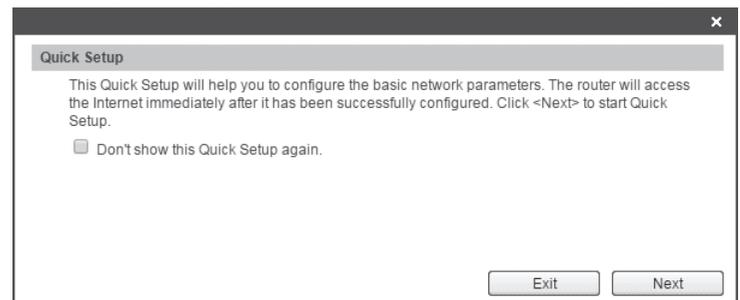

3. Select the total number of WAN ports you require. Then click **Next**.

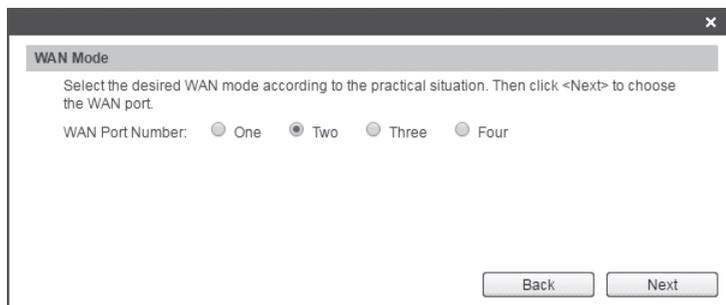


4. Select the WAN port to be configured, and click **Next**.

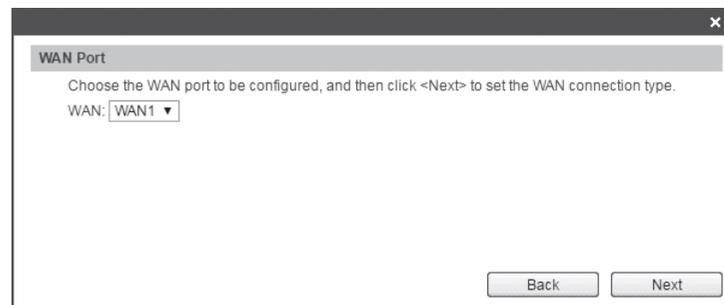

5. Select the connection type provided by your ISP. Three popular types are provided here. Click **Next** and follow the instruction to continue. For other connection types, go to **Network > WAN**.



6. Click **Finish** to complete the quick installation or click **Continue** to configure other WAN ports.

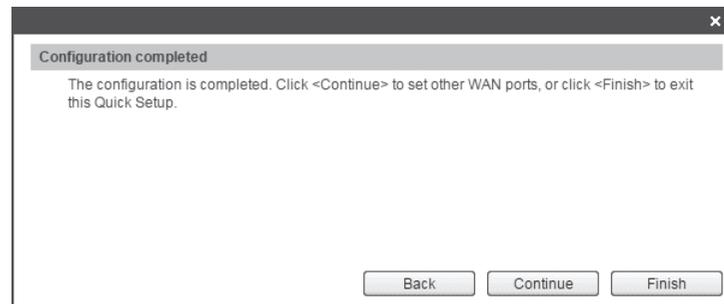


For detailed instructions, please refer to the User Guide from this product's Support page at [www.tp-link.com](http://www.tp-link.com).

## Appendix: Troubleshooting

### How do I restore the router to its factory default settings?

- With the router powered on, use a pin to press and hold the **RESET** button (for about 5 seconds) until the SYS LED lights up and flashes quickly. Then release the button and wait while the router reboots, restoring it to its factory default settings.

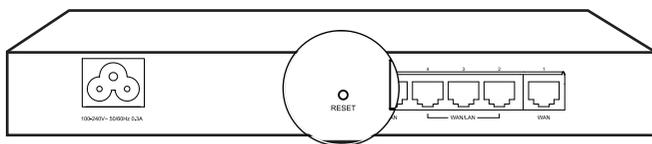

- Log in to the web management page of the router. Go to **Maintenance > Management > Factory Defaults**, and click **Restore to Factory Defaults**. The router will restore and reboot automatically.

### What should I do if I forget the user name and password for the router's web management page?

- You can restore the router to factory defaults. The default management address of the router is <http://192.168.0.1>. The default username and password are both **admin**. All current settings will be cleared once the router is restored. If you have a backup of your configurations, you can import it after the factory restore is complete.



For technical support and other information, please visit <http://www.tp-link.com/support>, or simply scan the QR code.

### EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU.

The original EU declaration of conformity may be found at <http://www.tp-link.com/en/ce>

### Why is the PWR LED working abnormally?

- The PWR LED should be lit when the power system is working normally. If it is not, please check the following:
  - 1) Make sure that the power cable is connected properly, and the power contact is normal.
  - 2) Make sure the voltage of the power supply meets the requirements for the input voltage of the router.

### Why is the web management page not displaying properly?

- Please try the following:
  - 1) Update your web browser or try a different web browser.
  - 2) If pop-ups are being blocked, please lower the security level of your web browser.

### What should I do if I can't access the web management page?

- If the computer is set to a static or fixed IP address, change its settings to obtain an IP address automatically.
- Enter <http://192.168.0.1> in the web browser and press Enter.
- Use another web browser and try again.
- Reboot your router and try again.
- Disable then enable the network adapter being used.

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A

