


Quick Installation Guide

150Mbps Wireless N Router


MODEL NO. TL-WR720N



Package Contents




TL-WR720N



Power Adapter




Ethernet Cable



QIG

1 Hardware Connection

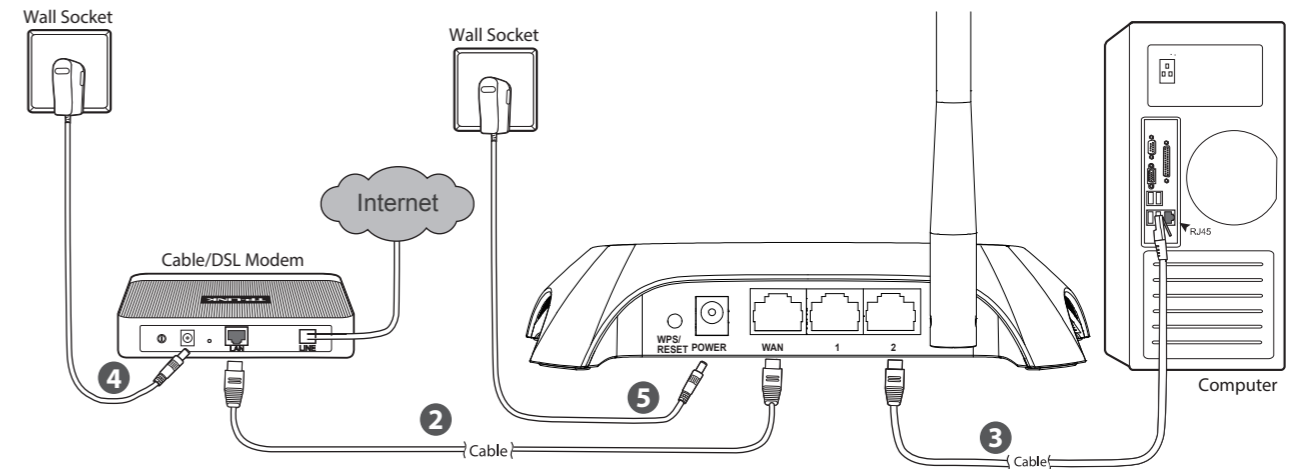


- ❶ Power on your modem.
- ❷ Connect the **WAN** port on your Router to the modem's **LAN** port with an Ethernet cable.
- ❸ Connect your computer to one of the LAN ports labeled **1~2** on the Router with an Ethernet cable.
- ❹ Power on the modem and wait for one minute.
- ❺ Plug the provided Power Adapter into the **POWER** jack on the back of the Router and the other end to a standard electrical wall socket.

2 Configuring the Router via Web Management Page


- ❶ Open your browser and type <http://tplinkwifi.net> in the address field, then use **admin** for both user name and password to log in.




- ❷ Click **Quick Setup** in the main menu and click **Next**.

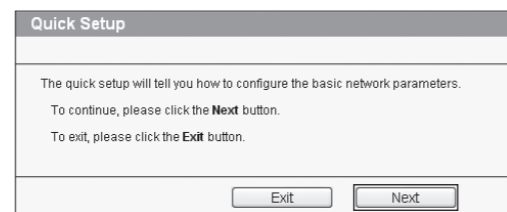


- ❸ Select the WAN connection type provided by your ISP. Or you can select **Auto-Detect** and click **Next** to continue.

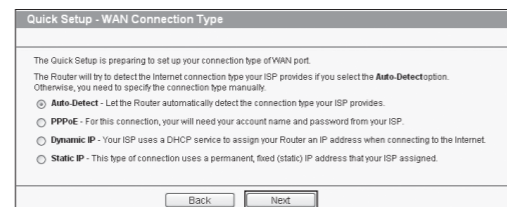

- ❹ The **Dynamic IP** is the suitable connection type for most cases. Here we take it as an example. On the next page, you can rename your wireless network and create your own password. The default wireless name is TP-LINK_XXXX, and the default wireless password, the same as the PIN code, is printed on the bottom label. Click **Next** to continue.

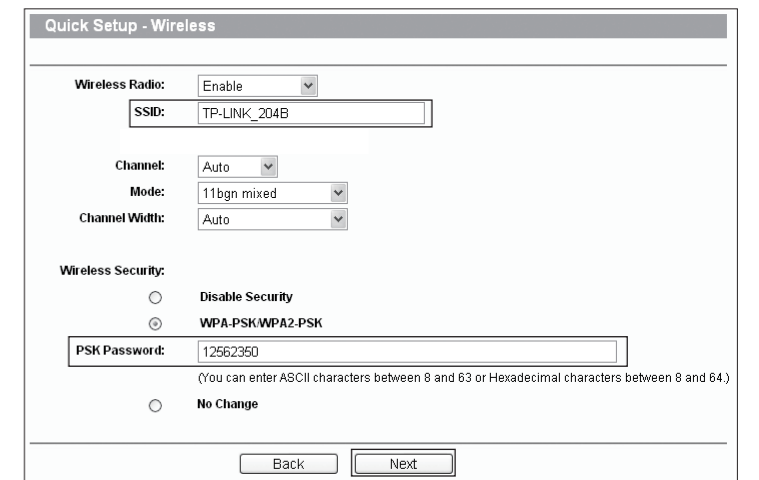

- ❺ Click **Reboot** or **Finish** to make your settings take effect.

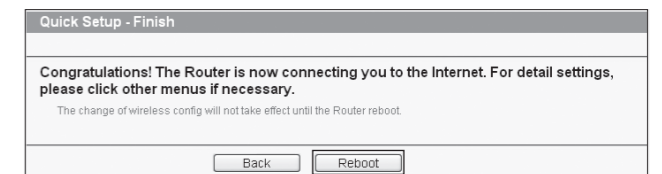

Appendix: Troubleshooting

1. What can I do if I cannot access the Internet?

- 1) Check to verify all connections are connected properly. Try with different Ethernet cables to ensure they are working properly.
- 2) Check to see if you are able to access the Router's web management page. If not, please refer to "What can I do if I cannot open the web management window?".
- 3) Log in the web management page <http://tplinkwifi.net>, click "Network > WAN", and ensure that the WAN Connection Type is Dynamic IP; this is the suitable connection type for most DSL/Cable modems and other networks.
- 4) For cable modem users, please click "Network > MAC Clone". Click **Clone MAC Address** button and then click **Save**. Reboot the modem first and then the Router, try to access the Internet from your computer. If the problem persists, please go to the next step.

MAC Clone		
WAN MAC Address:	00:0A:EB:13:7B:01	Restore Factory MAC
Your PC's MAC Address:	00:19:66:80:54:2B	Clone MAC Address
Save		

- 5) Connect your computer directly to your modem and attempt to access the Internet. If you are still unable to access the Internet, please contact your internet provider for further assistance.

2. What can I do if I cannot open the web management window?

- 1) **For Windows 7/Vista**

Go to "Start > Settings > Control Panel". Click "View network status and tasks > View status > Properties" and double-click "Internet Protocol Version 4 (TCP/IPv4)". Select "Obtain an IP address automatically", choose "Obtain DNS server address automatically" and click "OK".

- 2) **For Windows XP/2000**


Go to "Start > Control Panel". Click "Network and Internet Connections > Network Connections". Right-click "Local Area Connection", select "Properties" and then double-click "Internet Protocol (TCP/IP)". Select "Obtain an IP address automatically", choose "Obtain DNS server address automatically" and click "OK".

3. What can I do if I forget my password?

- 1) For default wireless password:
Please refer to the "Wireless Password/PIN" labeled on the bottom of the Router.
- 2) For the web management page password:
Reset the Router first and then use **admin** for both user name and password.

4. How do I restore my Router's configuration to its factory default settings?

If your router does not work properly, you can reset it and then configure it again. With the Router powered on, press and hold the **WPS/RESET** button on the rear panel for approximately 8 seconds before releasing it.

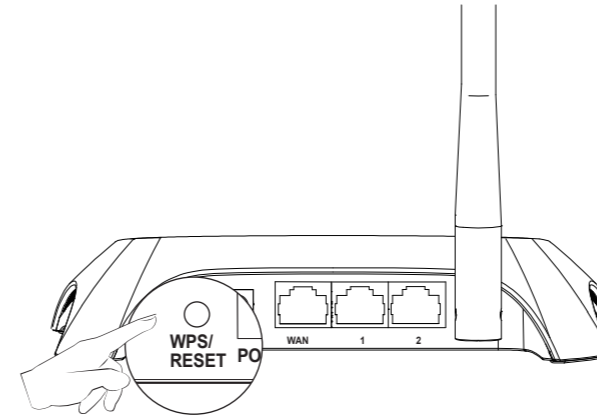

Technical Support

- For more troubleshooting help, go to www.tp-link.com/support/faq.asp
- To download the latest Firmware, Driver, Utility and User Guide, go to www.tp-link.com/support/download.asp
- For all other technical support, please contact us by using the following details:

Global

Tel: +86 755 26504400
E-mail: support@tp-link.com
Service time: 24hrs, 7days a week

Singapore

Tel: +65 62840493
E-mail: support.sg@tp-link.com
Service time: 24hrs, 7days a week

UK

Tel: +44 (0) 845 147 0017
E-mail: support.uk@tp-link.com
Service time: 24hrs, 7days a week

USA/Canada

Toll Free: +1 866 225 8139
E-mail: support.usa@tp-link.com
Service time: 24hrs, 7days a week

Malaysia

Tel: 1300 88 875465 (1300 88TPLINK)
E-mail: support.my@tp-link.com
Service time: 24 hrs a day, 7days a week

Turkey

Tel: 444 19 25 (Turkish Service)
E-mail: support.tr@tp-link.com
Service time: 9:00 AM to 6:00 PM, 7days a week

Poland

Tel: +48 (0) 801 080 618 / +48 22 7217563 (if calls from mobile phone)
E-mail: support.pl@tp-link.com
Service time: Monday to Friday 9:00 AM to 5:00 PM, GMT+1 or GMT+2 (Daylight Saving Time)

Germany / Austria

Tel: +49 1805 875465 (German Service) +49 1805 TPLINK
E-mail: support.de@tp-link.com
Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42 EUR/min from mobile phone
Service Time: Monday to Friday 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time in Germany)
* Except bank holidays in Hesse

Australia & New Zealand

Tel: AU 1300 87 5465
NZ 0800 87 5465
E-mail: support@tp-link.com.au
Service time: 24hrs, 7 days a week

Italy

Tel: +39 02 66987799
E-mail: support.it@tp-link.com
Service time: 9:00 AM to 6:00 PM, from Monday to Friday

Ukrainian

Tel: +380 (44) 590-51-14
E-mail: support.ua@tp-link.com
Service time: Monday to Friday 14:00 PM to 22:00 PM

Brazilian

Toll Free: 0800-770-4337 (Portuguese Service)
E-mail: support.br@tp-link.com
Service time: Monday to Saturday 08:00 AM to 08:00 PM

Indonesia

Tel: 444 19 25
E-mail: support.id@tp-link.com
Service time: Monday to Friday 9:00 -12:00; 13:00 -18:00
*Except public holidays

Switzerland

Tel: +41 (0) 848 800998 (German Service)
E-mail: support.ch@tp-link.com
Fee: 4-8 Rp/min, depending on rate of different time
Service time: Monday to Friday 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time)

Russian Federation

Tel: 8 (499) 754-55-60
8 (800) 250-55-60 (toll-free call from any RF region)
E-mail: support.ru@tp-link.com
Service time: from 10:00 to 18:00 (Moscow time)
*Except weekends and holidays in Russian Federation