

How to upgrade TP-Link Wireless 3G/4G Router?

Notice:

1. Before upgrading:

- Please verify the hardware version of your device for the firmware version. Wrong firmware upgrading may damage your device and void the warranty.

[How to check over the hardware version of a TP-Link device?](#)

- Backup the configuration in order to restore it after upgrading. Or, write down all the settings you changed from the default values, you may need to re-enter them manually after upgrading.

[How to Backup & Restore configuration of TP-Link Wireless Router?](#)


- It's recommended that users stop all Internet Applications on the computer, or simply disconnect Internet line from the device before upgrading.

2. During upgrading:


- DO NOT upgrade the firmware through wireless connection unless there is no LAN/Ethernet port on your TP-Link device.
- DO NOT turn off the power or disconnect the Ethernet cable during the firmware upgrade.

Steps about upgrading:

- Step 1** Find and navigate to the zip file from which you want to extract the content. Rightclick on the file and select Extract All from the context menu. Google Chrome & Windows system as example.

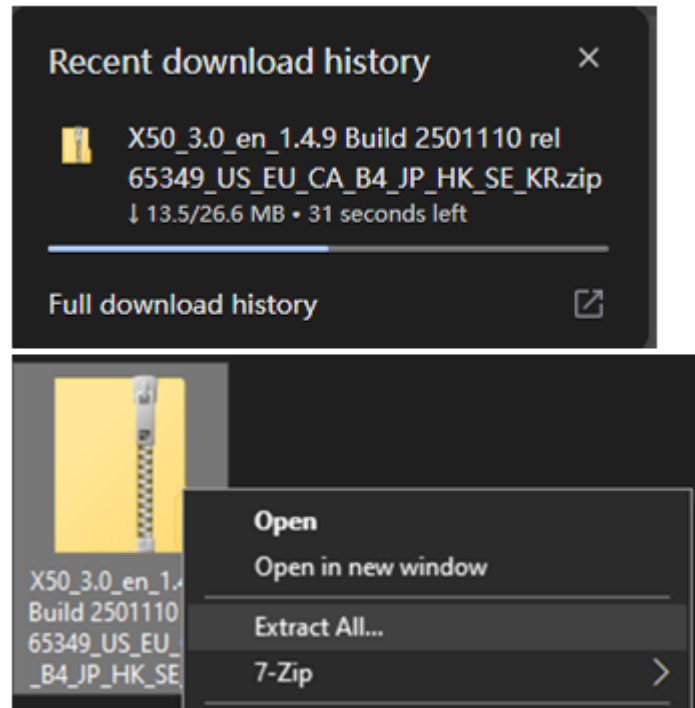

- Step 2** Connect your device to the router network (wired or wirelessly). Log into the TP-Link device by typing **http://tplinkmodem.net** in the address bar of any web browser (such as Chrome, Firefox). The default user name and password are both **admin** in lower case.

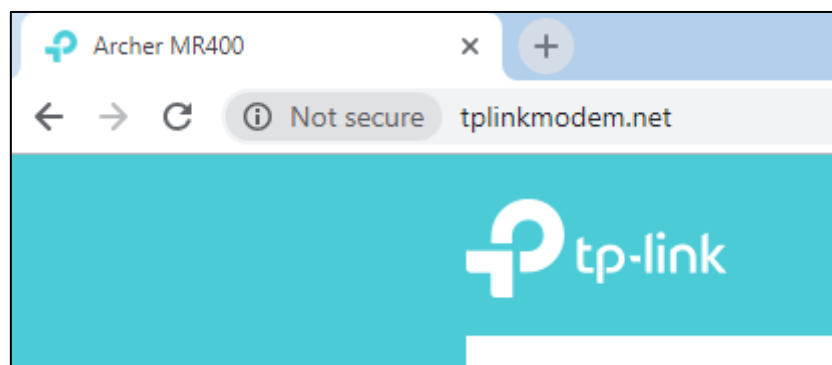

- Step 3** Navigate to **Advanced -> System Tools -> Firmware Upgrade**, click Browse to choose the firmware you already extracted in the folder. The firmware is usually named as **XXXX.bin**.

Note: Please double check the firmware and hardware version.

Device Information

Firmware Version:

1.4.0 0.9.1 v0001.0 Build 180509 Rel.40665n

Hardware Version:

Archer MR400 v1 00000001

Online Upgrade

Latest Version:

1.4.0 0.9.1 v0001.0 Build 180509 Rel.40665n

Check for Upgrades

Local Upgrade

New Firmware File:

Browse

Upgrade

Step 4 Click **Upgrade**. The device will reboot automatically after upgrading. Please wait several minutes.

Step 5 Verify that the router's firmware has been upgraded successfully or not in the same page.

How to check the hardware version of a TP-Link device?

1. Check from management page

Log into the device, click **Advanced** > **System Tools** > **Firmware Upgrade**. The software and hardware version will be shown as the following picture:

(As an example, in the following picture, the hardware version is 'V1')

Device Information	
Firmware Version:	1.4.0 0.9.1 v0001.0 Build 180509 Rel.40665n
Hardware Version:	Archer MR400 v1 00000001

2. Check from label

Turn over the device, you can see a label at the back of the device, there is a character string "Ver: X.Y" (for example Ver:1.0) and the number X is the hardware version of the device. If the string is "Ver: 1.1", it means that the hardware version is V1.




3. Check from the bottom of web interface.

After log in the web management interface, scroll down to the bottom. You will find relevant information.

Firmware Version: 1.4.0 0.9.1 v0001.0 Build 180509 Rel.40665n	Hardware Version: Archer MR400 v1 00000001
---	--

How to Backup & Restore configuration of TP-Link Wireless Router?

1. Log into the device, Click **Advanced > System Tools > Backup & Restore**.

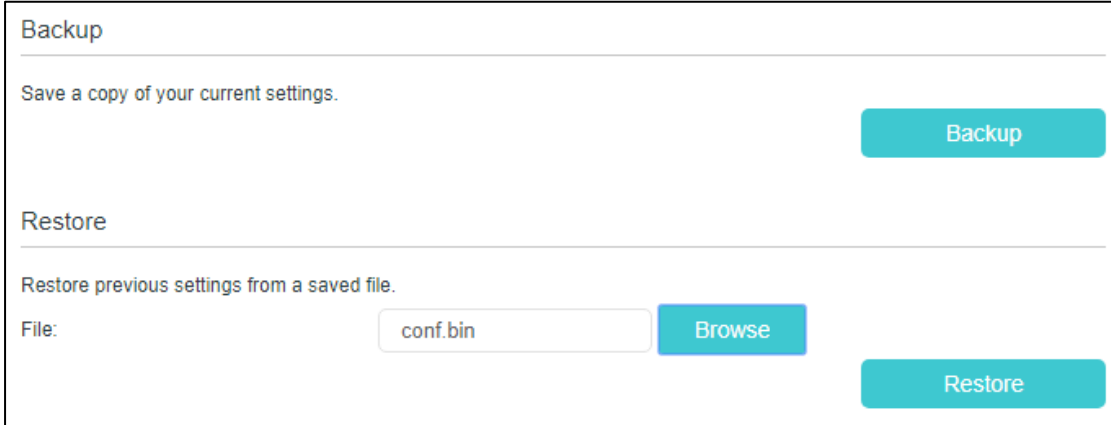

The screenshot shows the 'Backup & Restore' interface of a TP-Link router. It is divided into two main sections: 'Backup' and 'Restore'. The 'Backup' section has the instruction 'Save a copy of your current settings.' and a teal 'Backup' button. The 'Restore' section has the instruction 'Restore previous settings from a saved file.' and includes a 'File:' label, a text input field containing 'conf.bin', a teal 'Browse' button, and a teal 'Restore' button.

Backup	
Save a copy of your current settings.	<button>Backup</button>
Restore	
Restore previous settings from a saved file.	
File:	<input type="text" value="conf.bin"/> <button>Browse</button> <button>Restore</button>

2. Click **Backup** and save the file. The file name is **config.bin** by default.
3. After firmware upgrading, at the same page click **Browse** at the same page to locate the previous backup configuration file.
4. Finally, click **Restore**, wait 1 minute you can see configuration uploaded successfully. Then the device will reboot automatically.