

1 Connect the Hardware



- ⚠ Keep the router vertical while working. Refer to **Q5 of Need Help** to place the router for optimal Wi-Fi performance.
 - The combo port pairs a RJ45 port with an SFP+ port. **Only one port** in the pair can be used at a time.
- *Images may differ from your actual products.

- 1 Connect the router's **10 Gbps Combo** port to the internet via Ethernet or fiber network.


Note: If you want to change the WAN port for internet service, refer to Q1 of Need Help in this guide.

- 2 Connect the power adapter to the router and press the **Power** button to turn it on.


- 3 Wait until the LED screen cycles through graphics before moving on.



Keep the router vertical

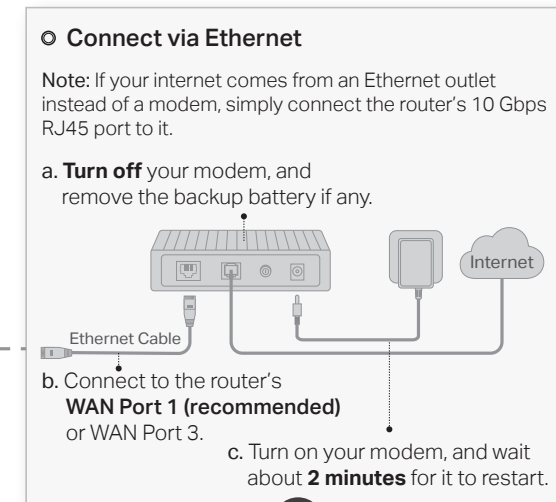


OR

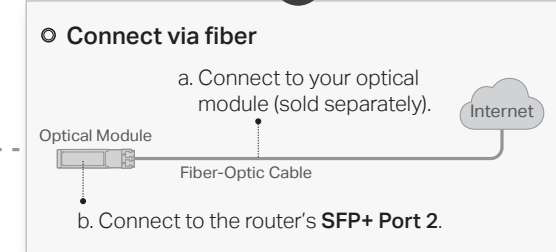

2 Set Up the Network

Method ONE: Via the TP-Link Tether App


1. Download the Tether app.



2. Open the Tether app and log in with your TP-Link ID.

Note: If you don't have an account, create one first.

3. Tap the **+** button in the Tether app and select **Wireless Router > Archer BE800**. Follow the steps to complete the setup and connect to the internet.




😊 Enjoy the internet!

To enjoy a more complete service from TP-Link, bind your TP-Link ID to the router.

Method TWO: Via a Web Browser


1. Connect your device to the router wirelessly or with an Ethernet cable.

The default wireless network names (SSIDs) and password are printed on the label at the back of the router.



2. Launch a web browser and enter <http://tplinkwifi.net> or <http://192.168.0.1> in the address bar. Create a password to log in.

Note: If the login window does not appear, please refer to Q2 of **Need Help** in this guide.

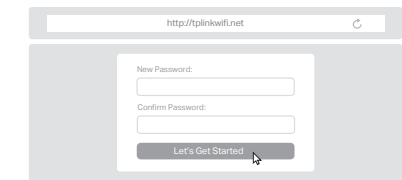

3. Follow the step-by-step instructions to set up the internet connection and register for the TP-Link Cloud service.

😊 Enjoy the internet!

LED Screen

Commonly used functions and information can be visually displayed: weather, graphics, time, and more.



Pulsing LEDs. The router is starting up or being reset.



Cycling graphics. The router is ready for setup.



Display the information set in Tether, and cycle through the emoji by default. The router works fine and can access the internet.



Establishing a WPS connection. If successful, a ✓ will appear, if failed, an ✕ will appear



The router is being upgraded.




The router is disconnected from the internet.



LEDs in the top are pulsing in a line, indicating Wi-Fi is off.

Button Explanation

Three physical buttons are located on the front of the router.

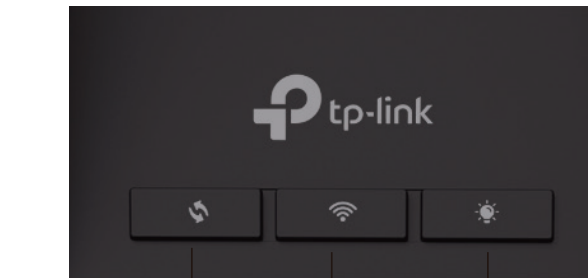

WPS Button Wi-Fi Button LED Button



Press the WPS button, and immediately press the WPS button on your client device to start the WPS process. A ✓ will appear on the LED screen, indicating a successful WPS connection.




Press and hold this button for about 2 seconds to turn on or off the wireless function of your router.



Press the LED button to turn on or off the LED of your router.

TP-Link HomeShield

TP-Link HomeShield premium security services keep your home network safe with cutting-edge features. Tap the HomeShield tab to enjoy.

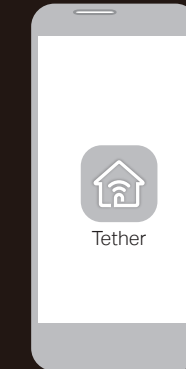

Network Protection

Detects cyber threats to keep your privacy and connected devices well protected.



Quality of Service (QoS)

Prioritize your bandwidth needs for a better networking experience.



Parental Controls

Manage online time and block inappropriate content to maintain healthy online habits.



Comprehensive Reports

Gain full statistics and insights to help you know your home network better.

For more details, visit <https://www.tp-link.com/homeshield>.



EasyMesh-Compatible

You can experience strong, stable, and seamless wireless connections throughout your home with EasyMesh.

Seamless Roaming

Connects mobile devices to your routers or extenders that provide the best coverage. Devices compatible with EasyMesh also share a single Wi-Fi name so you stay connected in every room.

One-Click Settings

Within 2 minutes, press the WPS button on the main router and the satellite device, then the EasyMesh network is all set up. TP-Link routers in factory settings can be connected to form an EasyMesh network directly without any redundant setup.

Flexible Scalability

Flexibly scale your home networking with different vendors,* different topologies, different Protocols and different product categories.
*Failure may be due to firmware conflicts of different vendors. A better network connection can be established between all APs from TP-Link.



For more information, visit <https://www.tp-link.com/easymesh/>

Scan for Setup Video



USB Applications

With the USB port, it's easy to share files and media with multiple devices. Visit <https://www.tp-link.com/app/usb> to learn more about the USB applications.

- **Remote Access:** Access the USB drive when you are away from home
- **Local Storage Sharing:** Share files from the USB drive with devices on your home network
- **Media Server:** Play media from the USB drive on your computer and smart devices

Need Help?

Q1. What should I do if I want to change the WAN port for internet service?

- Connect to your desired WAN port with an Ethernet cable. During the quick network setup, select the corresponding port as the internet port. Alternatively, go to **Tools > Internet Connection > Internet Port** (Tether app) or **Internet > Internet Port** (web management page) to change the internet port.

Q2. What should I do if I can't access the web management page?

- Reboot your router and try again.
- If the computer is set to a static IP, change its settings to obtain an IP address automatically.
- Verify that <http://tplinkwifi.net> is correctly entered in the web browser. Alternatively, enter <http://192.168.0.1> or <http://192.168.1.1> in the web browser.
- Use another web browser and try again.
- Disable and enable the network adapter in use.

Q3. What should I do if I can't access the internet?

- Power off your modem for about 5 minutes, then power it on and check the internet. If your modem has more than one Ethernet port, keep the other ports unconnected.
- Check if the internet is working normally by connecting a computer directly to the modem via an Ethernet cable. If it is not, contact your internet service provider.
- Log in to the web management page, and go to the **Network Map** page to check whether the internet IP address is valid or not. If it's valid, go to **Advanced > Network > Internet**, click **Advanced Settings**, select **Use the Following DNS Addresses**, set the primary DNS to 8.8.8.8, and set the secondary DNS to 8.8.4.4. If it is not, check the hardware connection or contact your internet service provider.
- For cable modem users, log in to the web management page of the router and go to **Advanced > Network > Internet > MAC Clone**. Select **Clone Current Device MAC** and click **SAVE**. Then reboot both the modem and the router.

Q4. What should I do if I forget my wireless password?

- If you have not changed the default wireless password, it can be found on the label at the bottom of the router.
- Connect a computer directly to the router using an Ethernet cable. Log in to the router's web management page at <http://tplinkwifi.net> and go to the **Wireless** page to retrieve or reset your wireless password.

Q5. How should I position my router for optimal Wi-Fi performance?

- Keep the router vertical while working.
- Don't place your router in a corner or in a closet.
- Avoid obstacles and high-powered appliances.
- Keep your router in a central location at a certain height.

Q6. Why can't my computer's speed reach 10 Gbps?

- Check if your computer is connected to the 10G LAN port of the router.
- Check if the network bandwidth provided by your ISP is 10 Gbps or higher.
- It is recommended to use Cat6/6a or above network cables to connect devices.
- If you need help, please contact our technical support.



For technical support, replacement services, user guides, and other information, please visit <https://www.tp-link.com/support>.

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use any other chargers than those recommended.
- Do not use damaged charger or USB cable to charge the device.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.



Quick Installation Guide

BE19000 Tri-Band Wi-Fi 7 Router



©2023 TP-Link 7106510284 REV1.0.2