

Quick Installation Guide


300Mbps High Gain Wireless USB Adapter
MODEL NO. TL-WN822N



For more information, please visit our website
<http://www.tp-link.com>
7106505739 REV6.0.0

1 Connect to a Computer

Insert the adapter into a USB port on your computer using the USB cable provided.

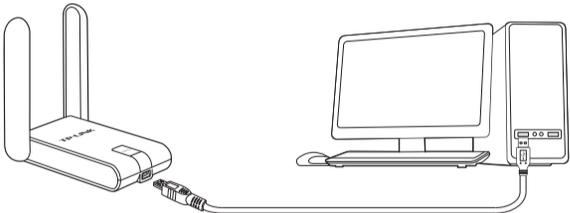

Note: In Windows XP, a Found New Hardware Wizard window will appear when the adapter is detected. Please click **Cancel**.

2 Install Driver and Utility

You can also download the driver and utility at www.tp-link.com.

① Insert the CD.



② For Windows

Run the **Autorun.exe** on the pop-up window.


Select **TL-WN822N** and click **Install Driver and Utility**, then follow the InstallShield Wizard to complete the installation.



For Mac OS X

Browse the CD, go to **TL-WN822N > Mac OS X Driver**, unzip the **Mac OS X 10.7_10.10.zip** file and run the Installer.

Follow the wizard to complete the installation.

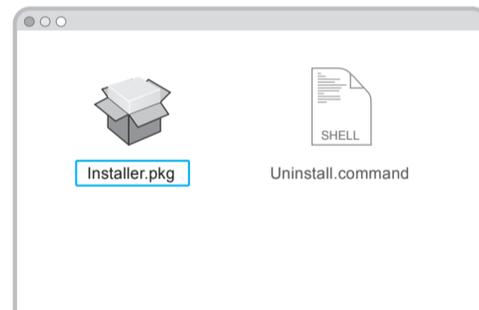

3 Join a Wireless Network

For Windows

Option 1: Via TP-LINK Utility


Select your Wi-Fi network from the pop-up utility window and click **Connect**. The symbol  indicates a successful connection.



Option 2: Via Wi-Fi Protected Setup (WPS)

A: Press the WPS button on your router.

B: Within 2 minutes, press and hold the WPS button on the adapter until the following screen appears.

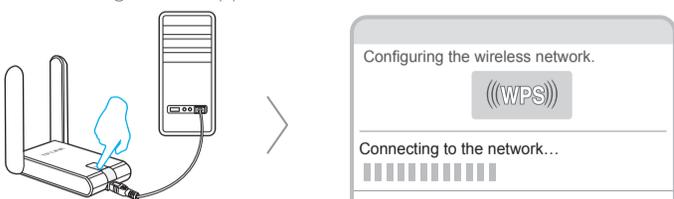

C: When you are prompted "Successfully connected to the network by WPS!", click **OK**.

Option 3: Via Windows Wireless Utility

Click  (Network icon) on the system tray, select your Wi-Fi network, and click **Connect**.


Note: In Windows XP, you need to close the TP-LINK Utility before using the Windows Wireless Utility.

For Mac OS X

Option 1: Via TP-LINK Utility

A: Select the **Available Network** tab of the pop-up utility window.


B: Select your Wi-Fi network and click **Connect**. The connection status can be viewed on the Link Status screen.

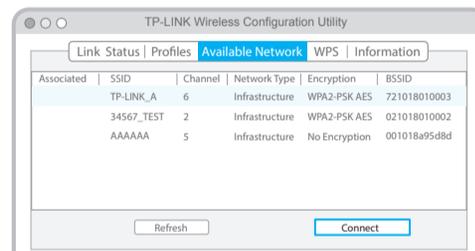

Option 2: Via Wi-Fi Protected Setup (WPS)

A: Press the WPS button on your router.

B: Within 2 minutes, press and hold the WPS button on the adapter until the following screen appears.

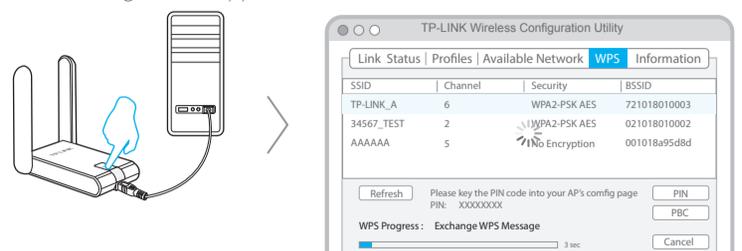

C: When you are prompted "WPS Protocol Finished", click **OK**.