


Quick Installation Guide

AC1350 Wireless Dual Band Router

Archer C58

Connect the Hardware

If your internet connection is through an Ethernet cable directly from the wall instead of through a DSL / Cable / Satellite modem, connect the Ethernet cable to the router's Internet port, and then follow Step 4 and 5 to complete the hardware connection.

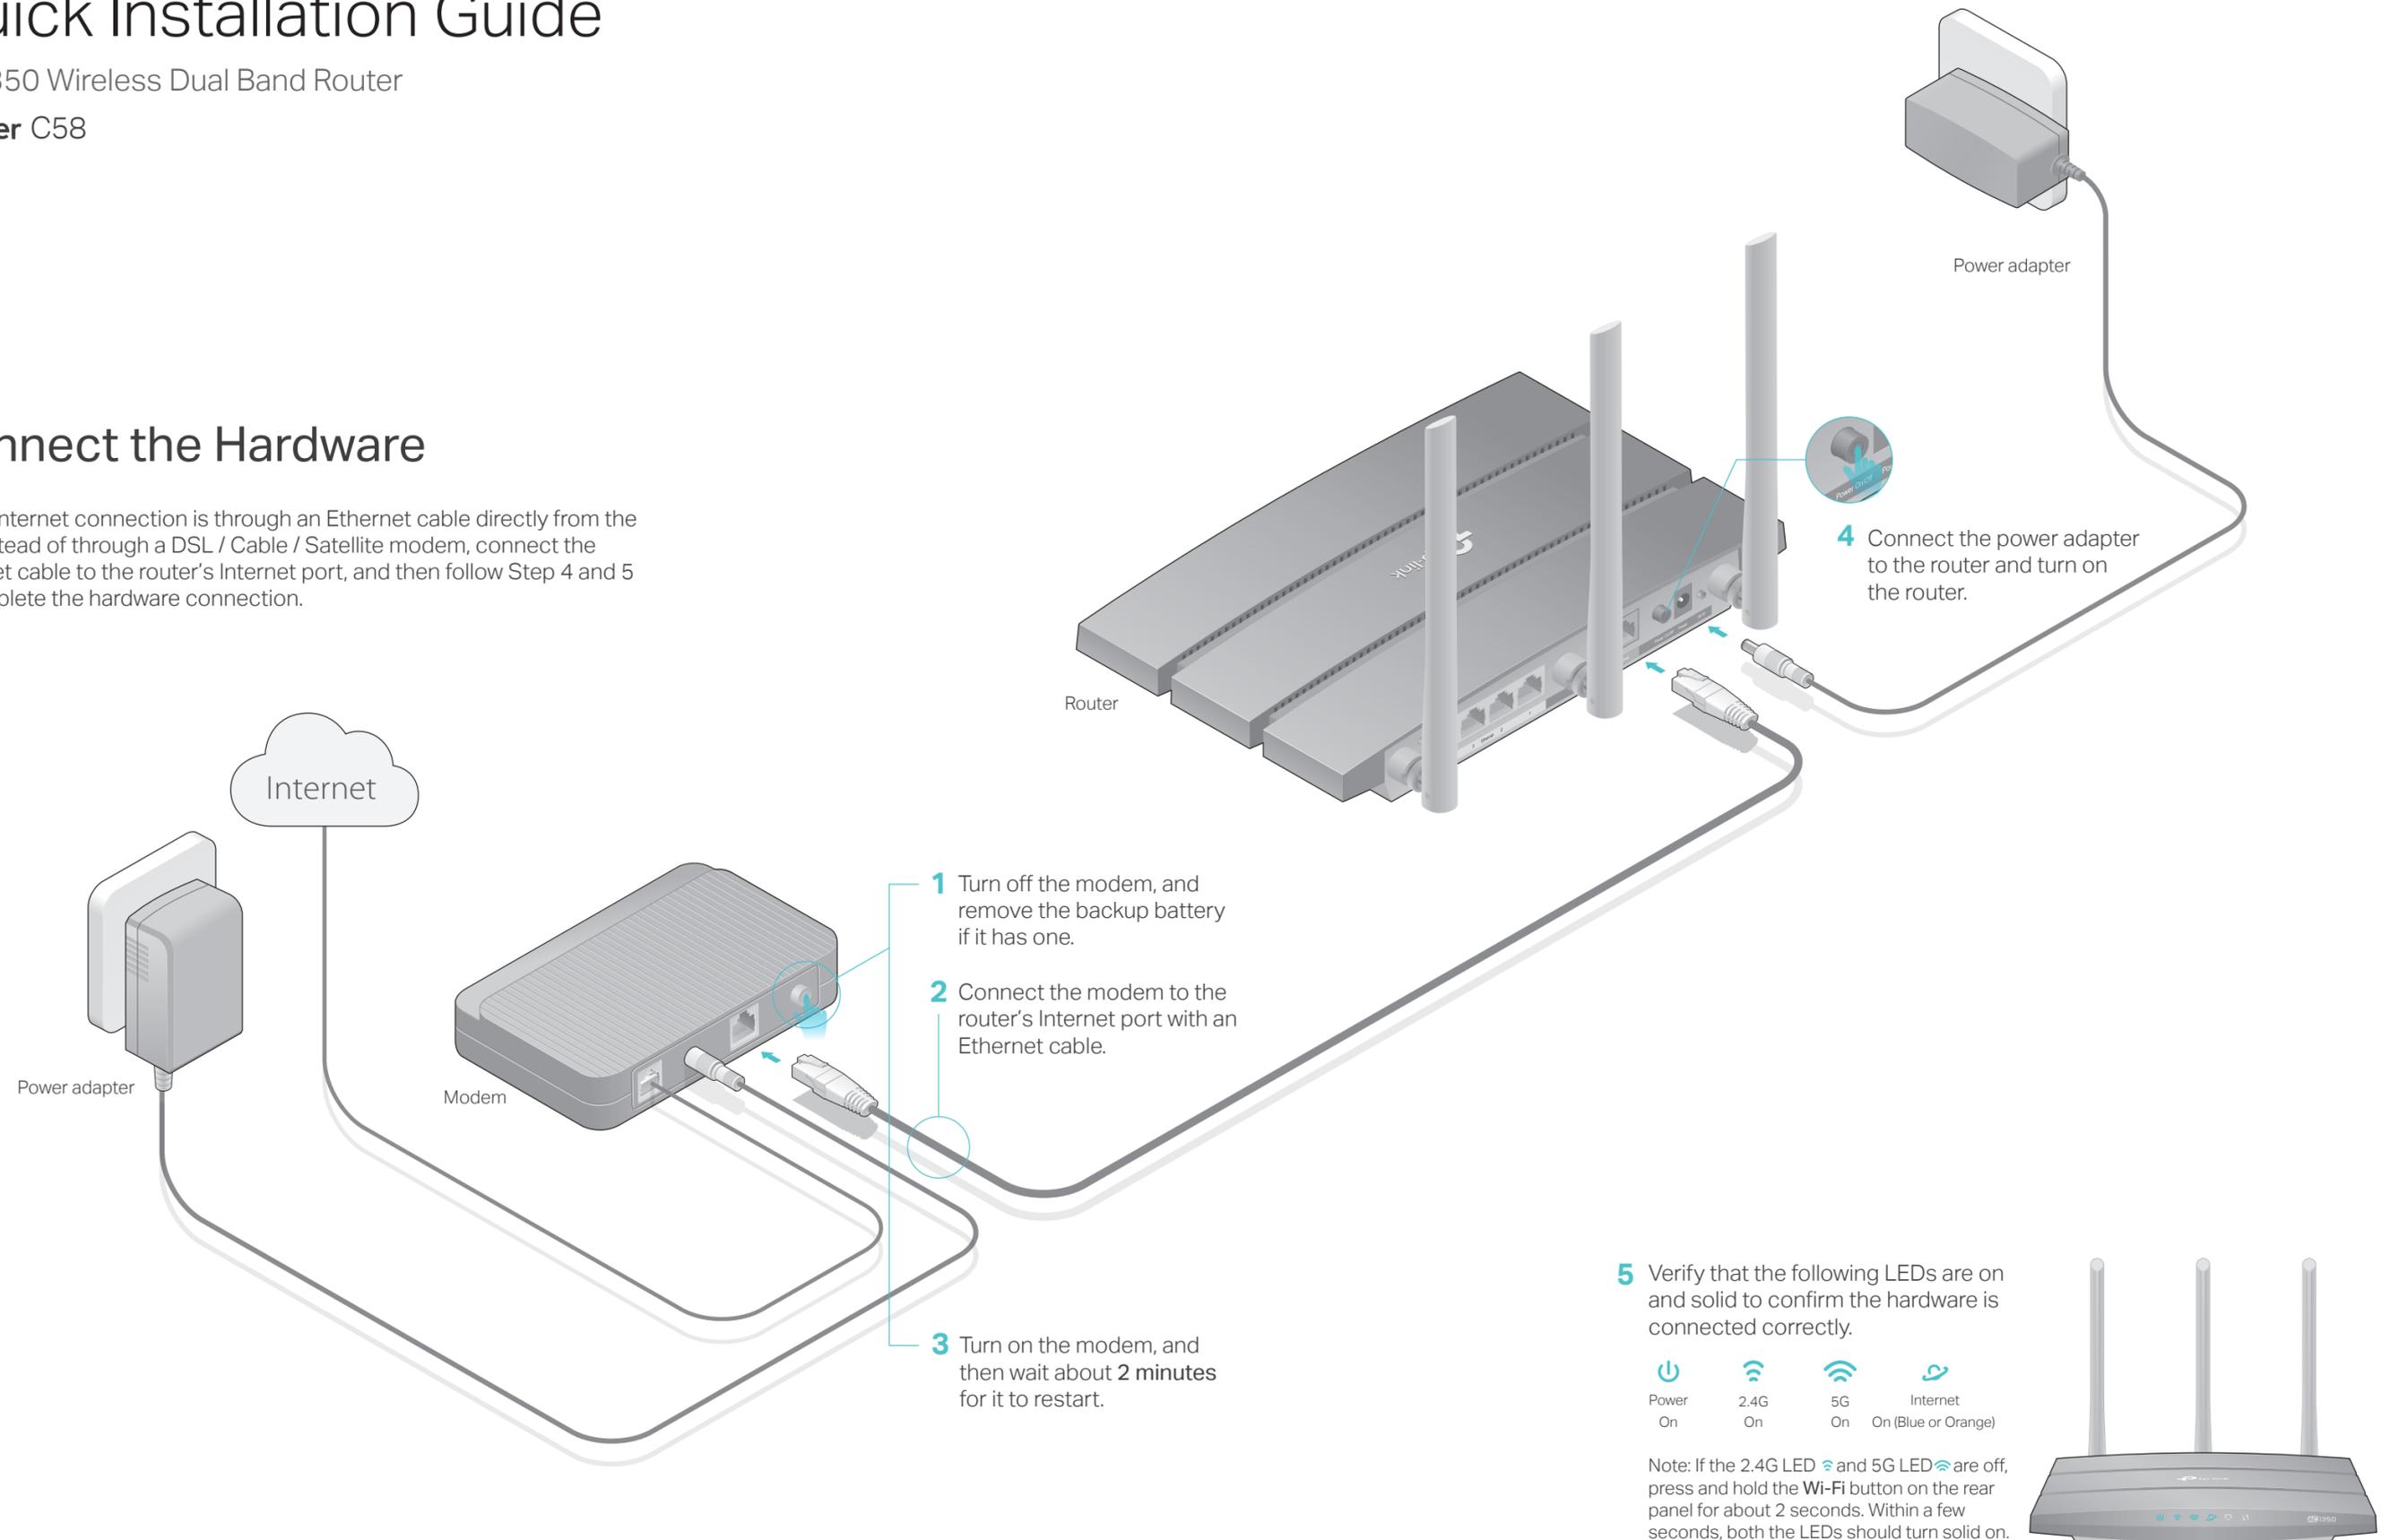

- 1** Turn off the modem, and remove the backup battery if it has one.
- 2** Connect the modem to the router's Internet port with an Ethernet cable.
- 3** Turn on the modem, and then wait about **2 minutes** for it to restart.

- 4** Connect the power adapter to the router and turn on the router.

- 5** Verify that the following LEDs are on and solid to confirm the hardware is connected correctly.

Power On	2.4G On	5G On	Internet On (Blue or Orange)

Note: If the 2.4G LED and 5G LED are off, press and hold the Wi-Fi button on the rear panel for about 2 seconds. Within a few seconds, both the LEDs should turn solid on.




Configure the Cloud Router

1. Connect your device to the router (wired or wireless).

• Wired

Turn off the Wi-Fi on your computer and connect the devices as shown below.

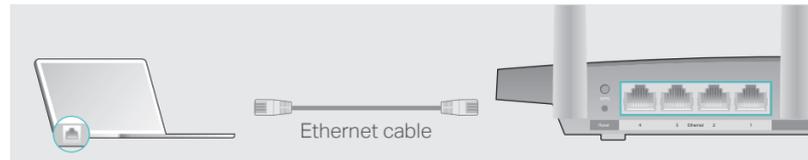


• Wireless

a Find the SSID and wireless password printed on the label at the bottom of the router.



b Click the network icon of your computer or go to Wi-Fi settings of your smart device, and then select the SSID to join the network.

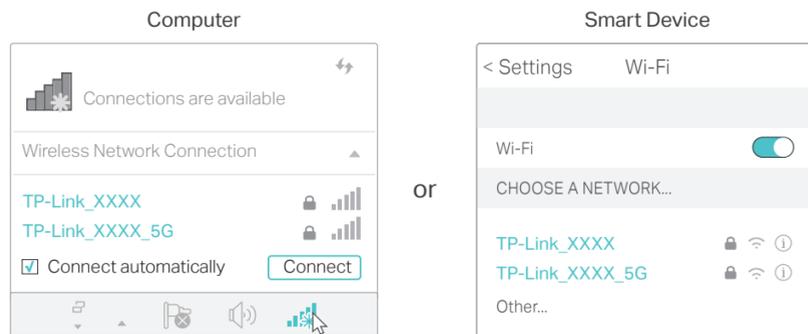


2. Connect the router to the internet.

A Launch a web browser, and enter <http://tplinkwifi.net> or <http://192.168.0.1> in the address bar. Create a login password and then click **Let's Get Started**.

Note: If the login window does not appear, please refer to Q1 of Need Help? in this guide.



B Follow the step-by-step instructions to set up the internet connection and register the TP-Link Cloud service.

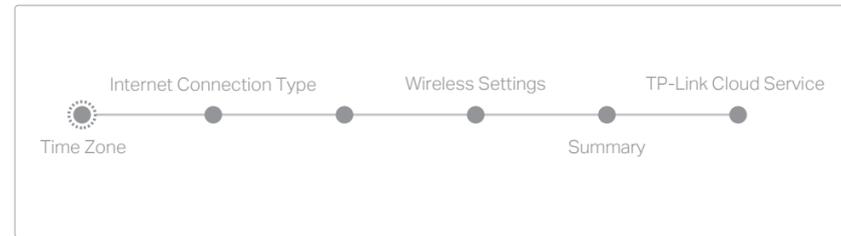

Note: If you are not sure of the Internet Connection Type, please click Auto Detect.

😊 Enjoy the internet !

Tether App

The TP-Link Tether app provides a simple, intuitive way to access and manage your router.



-  Block unwelcome users from connecting to your network
-  Change the basic wireless network settings
-  View information about clients connected to your router
-  Set up Parental Controls with access time

How to begin?

1. Download the TP-Link Tether app from the Apple App Store or Google Play Store.
2. Ensure your smart device is wirelessly connected to the home network.
3. Launch the Tether app and start managing your home network.



More Features

The TP-Link router supports various features, such as Guest Network, Parental Controls, Access Control and more. You can log in to the router's web management page <http://tplinkwifi.net> to apply these functions. For instructions, please refer to the **User Manual** at www.tp-link.com.

TP-Link Cloud Service

TP-Link Cloud service provides a better way to manage your cloud devices. For example:



Remote Management

Easily manage your home network when you are out and about via the Tether app on your smartphone or tablet.

Timely Upgrade Notifications

Keep informed of the latest firmware updates, ensuring your router stays at its best.

One for All

Manage multiple TP-Link Cloud devices, all from a single TP-Link ID.

You can set up and enjoy cloud functions via the **Tether app** or through the web management page at <http://tplinkwifi.net>.

To learn more about the TP-Link Cloud service and other useful features supported by the router (including Guest Network, Parental Controls, Access Control and more), please refer to the **User Manual** at www.tp-link.com.

Need Help?

Q1. What can I do if the login page does not appear?

- If the computer is set to a static or fixed IP address, change settings to obtain an IP address automatically.
- Verify that <http://tplinkwifi.net> is correctly entered in the web browser. Alternatively, enter <http://192.168.0.1> or <http://192.168.1.1> in the web browser and press **Enter**.
- Use another web browser and try again.
- Reboot your router and try again.
- Disable and enable the network adapter being used.

Q2. What can I do if I cannot access internet?

- Check if the internet is working normally by connecting a computer directly to the modem using an Ethernet cable. If it is not, contact your Internet Service Provider.
- Log in to the web management page of the router, and go to the **Basic > Network Map** page to check whether the Internet IP address is valid or not. If it is, please run the Quick Setup again; otherwise, recheck the hardware connection.
- Reboot your router and try again.
- For cable modem users, log in to the web management page of the router. Go to **Advanced > Network > Internet > MAC Clone**, click **Use Current Computer MAC Address** and click **Save**. Then reboot both the modem and the router.

Q3. How do I restore the router to its factory default settings?

- With the router powered on, press and hold the **Reset** button on the back until the Power LED blinks.
- Log in to the web management page of the router. Go to **Advanced > System Tools > Backup & Restore**, and click **Factory Restore**. The router will restore and reboot automatically.

Q4. What can I do if I forget my web management password?

- If you are using a TP-Link ID to log in, click **Forgot password?** on the login page and then follow the instructions to reset it.
- Alternatively, use a pin to press and hold the **Reset** button on the back until the Power LED blinks to reset the router, and then visit <http://tplinkwifi.net> to create a new login password.

Q5. What can I do if I forget my wireless network password?

- If you have not changed the default wireless password, it can be found on the label at the back of the router.
- Connect a computer directly to the router using an Ethernet cable. Log in to the router's web management page at <http://tplinkwifi.net>, and go to **Basic > Wireless** to retrieve or reset your wireless password.

If your questions are not listed here, please refer to the product's support page at www.tp-link.com.