

How to upgrade the firmware of 4G Mobile Wi-Fi ?



There are two methods to upgrade your 4G Mobile Wi-Fi, take M7350 as an example and please follow either one of them to upgrade your 4G Mobile Wi-Fi.

Method 1: Local upgrading

Step 1

First please download the latest firmware of M7350 from our website. Here is the download link:
<https://www.tp-link.com/download/M7350.html#Firmware>

Note: The firmware is a zipped file. Unzip it or double click to open the zipped file and you will find two PDF files and another zip file (file name displays Build xxxxxx) which is what we need at step 6. Please move or copy that zip file (Build xxxxxx) to the same folder or another path.

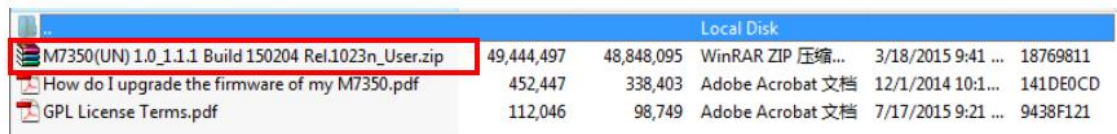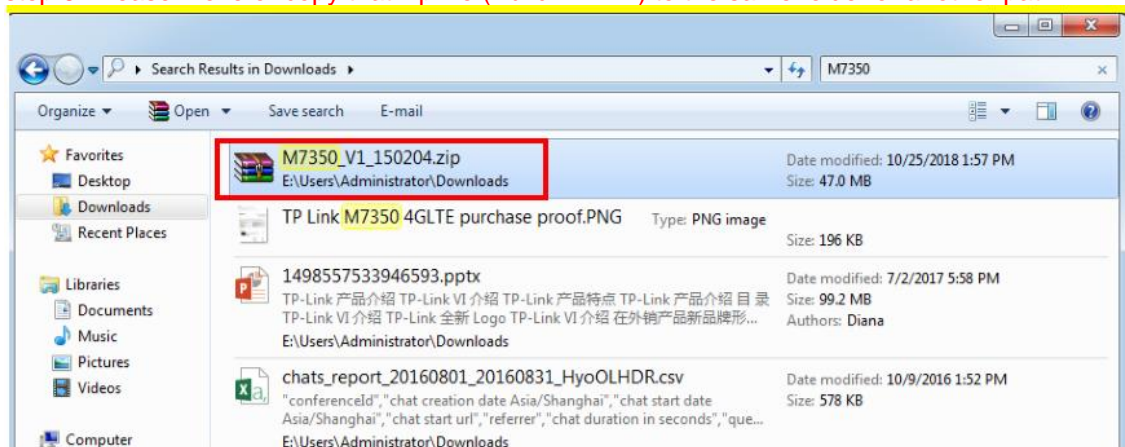

Step 2

Please connect your computer to M7350 wirelessly, then open the web browser and type the IP address of your M7350 (default is **192.168.0.1** or **http://tplinkmifi.net**) into the address bar. After that, please press Enter.



Step 3

Type the username and password in the login page (default username and password are both **admin**), and log into the management webpage of your M7350.

TP-LINK | M7350(UN)

Status

Connection Status:

Connected

Network Type:

WCDMA

SSID:

TP-LINK_M7350_735292

Wireless Band:

2.4GHz

Current Clients:

2

Total Used:

87.91 MB

admin|

.....

Login

Step4

Select **Advanced**→**Device**→**Firmware Update**, and the webpage will show as below:

TP-LINK

Wizard

Status

SMS

Advanced

Logout

Dial-up

Wireless

DHCP Server

Data Settings

Storage Sharing

Device

Firmware Update

Factory Defaults

Account Management

Shutdown

Time Settings

Firmware Update

Firmware Version: 1.0.8 Build 140924 Rel.1005n

☒ Update via the cloud server

Check for Updates

☐ Update via the local server

Update

Step 5

Select“**Update via the local server**”, and click **Browse**.

Firmware Update



Firmware Version: 1.0.8 Build 140924 Rel.1005n

☐ Update via the cloud server

☒ Update via the local server

Browse

Update

Step 6

Select the zip file (Build xxxxxx) of M7350 you have just downloaded from TP-LINK website on your computer, and click **OK**.


Firmware Update

Firmware Version: 1.0.7 Build 150630 Rel.1011n

☐ Update via the cloud server

☒ Update via the local server


Browse

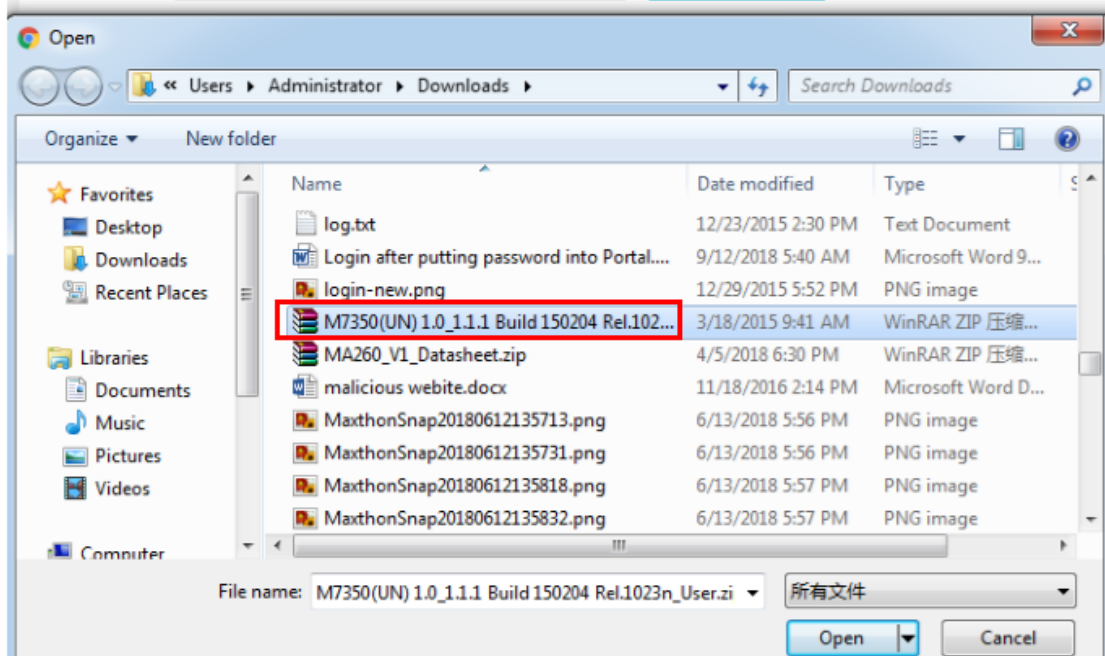

☒ Update via the local server


M7350(UN) 1.0_1.0.8 build 140924

Browse

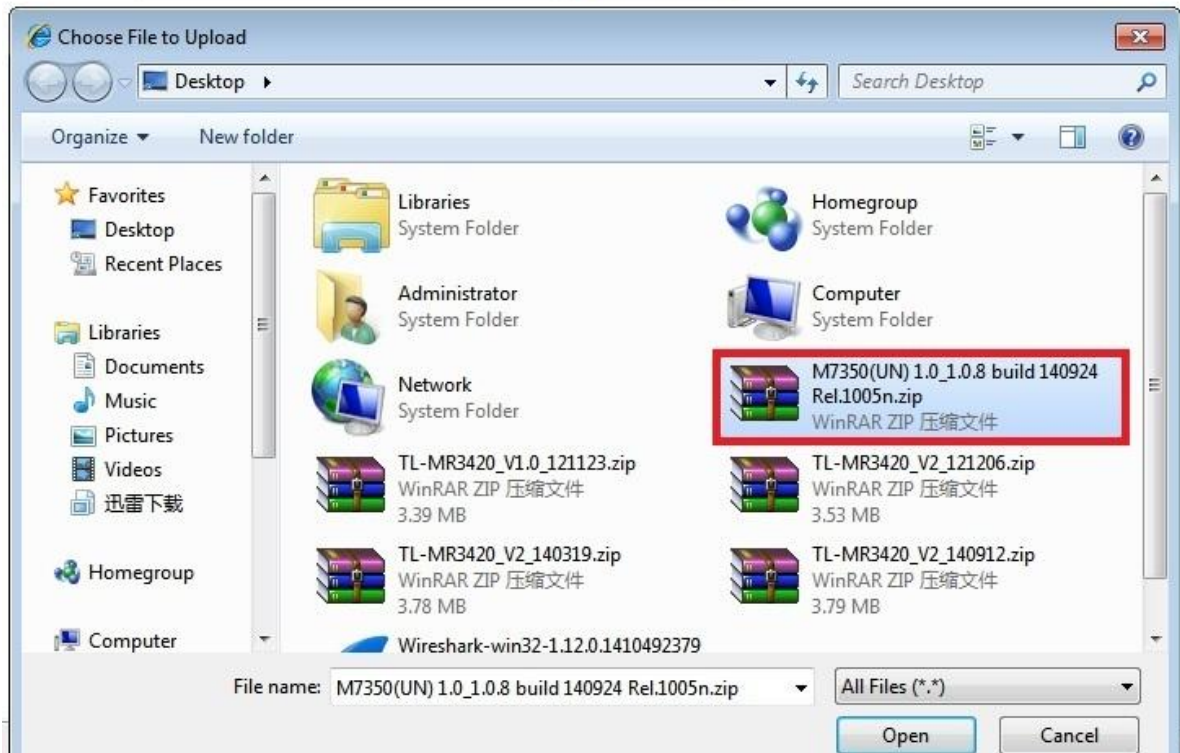

Step 7

Click **Upgrade** button to update your M7350's firmware, please wait for a few minutes until upgrading process is completed, and M7350 will reboot automatically.

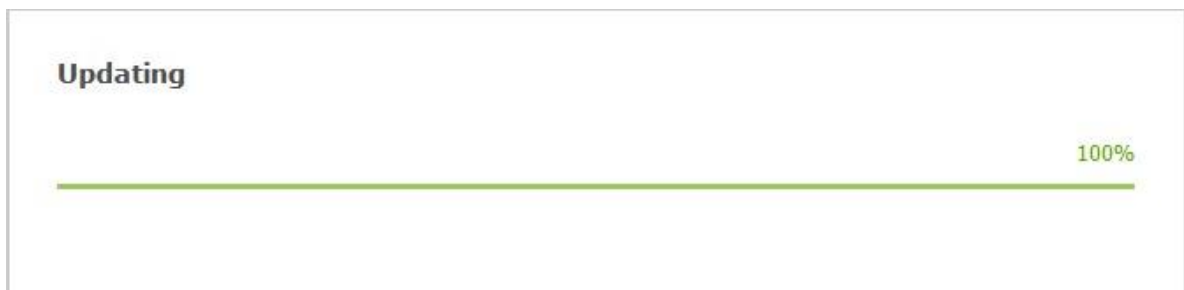

Method 2: Cloud upgrading

Step 1

Please connect your computer to M7350 wirelessly, then open the web browser and type the IP address of your M7350 (default is **192.168.0.1** or **http://tplinkmifi.net**) into the address bar. After it, please press Enter.





Step 2

Type the username and password in the login page (default username and password are both **admin**), and log into the management webpage of your M7350.

Step 3

Select **Advanced**—>**Device**—>**Firmware Update**, and the webpage will show like below:

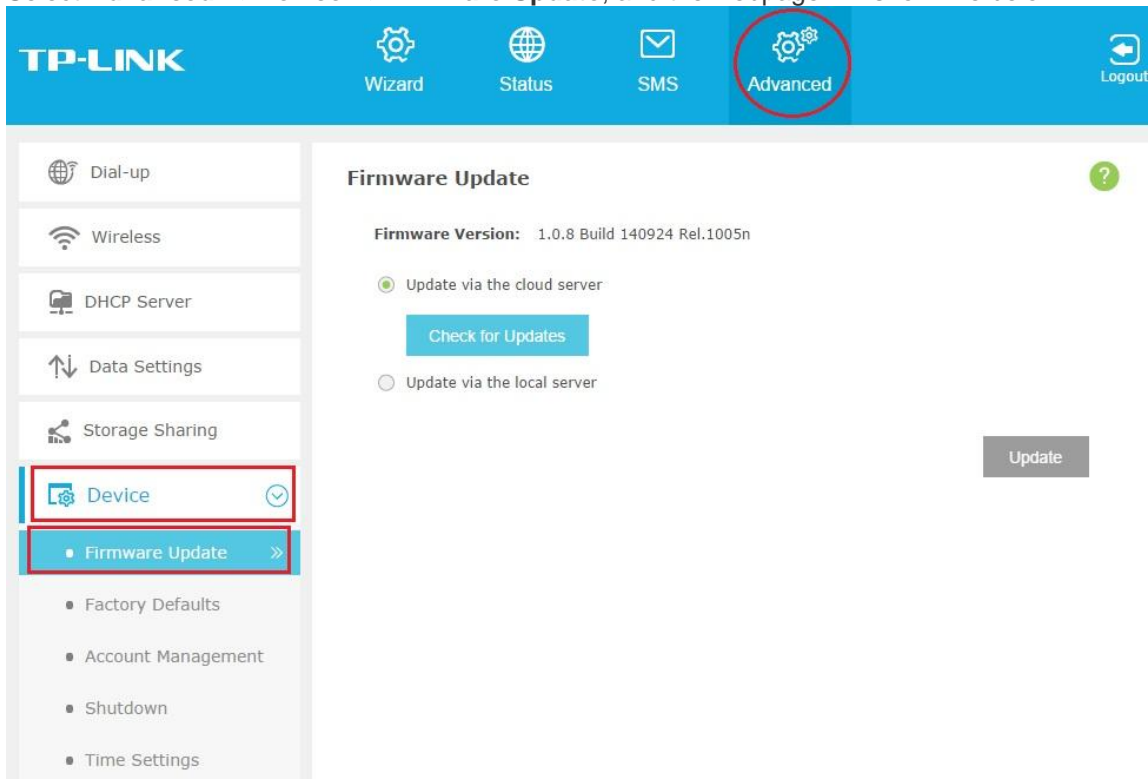

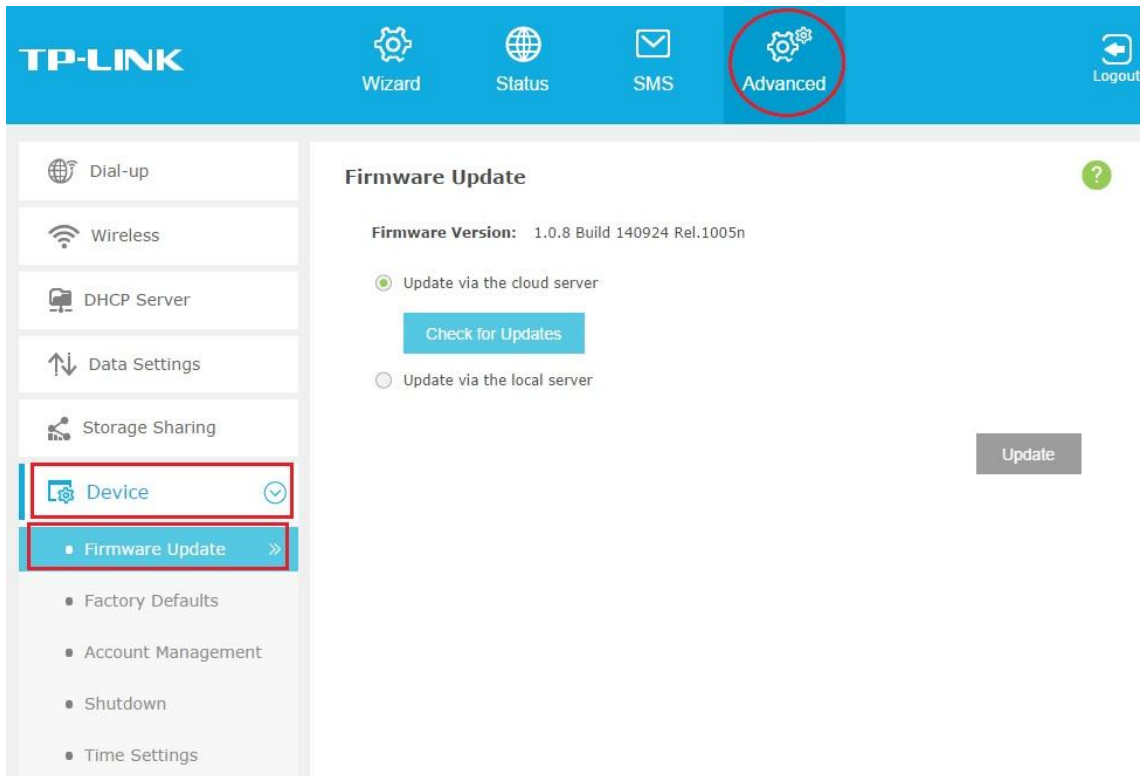

Step 4

Select **Update via the cloud server**, and click **Check for Updates**.

Note: Please ensure that your device can access the Internet at this time

Firmware Update

Firmware Version: 1.0.8 Build 140924 Rel.1005n

☒ Update via the cloud server

Check for Updates

☐ Update via the local server

Update

Step 5

If your M7350's firmware is already the latest, there will be following indication message **"Your current firmware is up to date"**.

☒ Update via the cloud server

Check for Updates

Your current firmware is up to date.

Step 6

If your M7350's firmware is not the latest, TP-Link cloud server will automatically push the latest firmware to your M7350 and the upgrading process will start automatically just like you upgrade your iPhone's IOS system.