

# Quick Installation Guide

## Range Extender



### Setup with videos

Scan the QR code, or visit <https://www.tp-link.com/support/setup-video/#range-extenders> and search for the setup video of your model.




Note: RE365 (EU version) is used for demonstration in this guide. Images may differ from your actual product.

1

## Power On

Plug the extender into a power outlet **next to** your router. Wait until its Power LED turns solid on.

Note: For safety, only plug the extender in the direction as shown below.

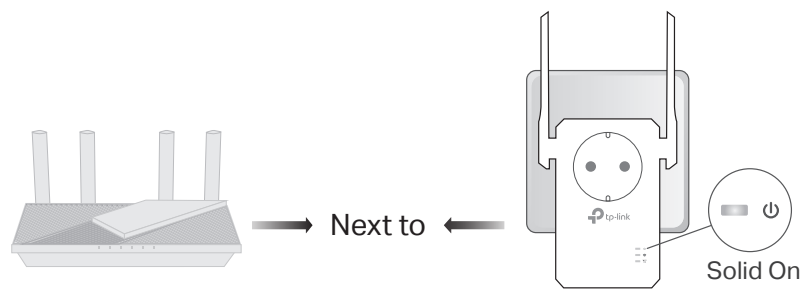


2

## Set Up

### Method 1: Via the WPS Button

1. Activate the WPS function on your router by pressing the WPS button.


Note: If you don't know how to do, refer to your router's user manual, or you can use other methods to set it up.



The WPS button might look like one of these:



2. Within 2 minutes, press the WPS button on the extender for 1 second, and the LED starts blinking. Wait for the LED, 2.4G/5G LED to turn solid on, indicating a successful connection.

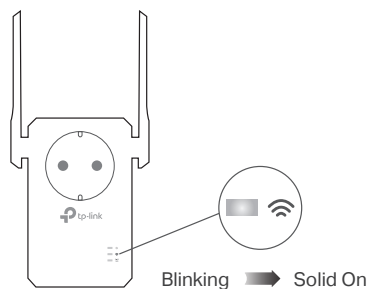

3. Done. You can connect to the extender's Wi-Fi.

#### Extended Network Names:

Router's network name with \_EXT at the end  
or  
Same as your EasyMesh router (see back for EasyMesh details)

#### Passwords:

Same as your router

### Method 2: Via the Tether App

1. Get the up-to-date Tether app from the Apple App Store or Google Play, or simply scan the QR code.



or



Scan for Tether




Tether

2. Launch the Tether app and log in with your TP-Link ID. If you don't have an account, create one first.

3. Tap the button and select Range Extender.

#### Notes:

1. If you cannot find your device, please refer to FAQ > Q1.
2. Due to Tether app updates, your actual user interface and pathway may differ from those depicted here.




4. Follow app instructions to complete the setup. The LED should turn solid on, indicating successful connection to your router.


Note: If the LED does not turn solid on, please refer to FAQ > Q2.

### Method 3: Via a Web Browser


1. Connect your computer or smartphone to the extender's network **TP-Link\_Extender**.

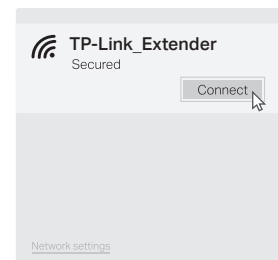

2. Visit <http://www.tplinkrepeater.net> or <http://192.168.0.254> in a web browser. Create a password to log in.

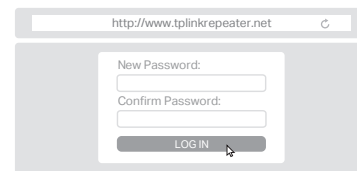

3. Follow web instructions to complete the setup.




3

## Relocate


1. Plug in the extender about **halfway** between your router and the Wi-Fi dead zone. The location you choose must be **within the range of your router**.
2. Wait for about 2 minutes until the LED turns **solid green**. If it doesn't, **relocate the extender closer to the router** to achieve better signal quality.

Tip: To place the extender for optimal Wi-Fi performance, access extender settings via the Tether app and go to find **Location Assistant**, or simply scan the QR code to visit <https://www.tp-link.com/support/faq/3103/>.

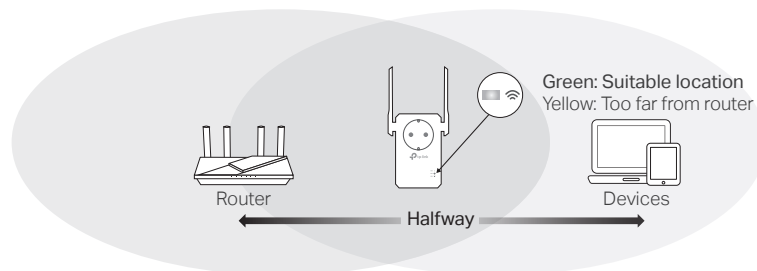

## Enjoy!

- Connect your devices to the extender wirelessly or via an Ethernet cable, then enjoy the internet. The password of your extended network is the same as your main router.
- You can also change the extender to **Access Point Mode** to transform your existing wired network to a wireless one. For details, see **Access Point Mode (AP Mode)** on the back page.



# Access Extender Settings



After setup, you can access extender settings via any of the methods below. You can reselect main network, change extended network settings and more.

Note: If your extender and router use the same network name, Method 1 is recommended.

## Method 1: Via the Tether App

1. Connect your smartphone to the extender's or router's network.
2. Launch the Tether app, select your extender, and log in.
3. View or change extender settings as needed.

## LED Explanation


LED	Status	Indication (For Range Extender Mode)
 (Power)	On/Off	The extender is on or off.
	Blinking	The system is starting up or firmware upgrade is in progress.
 (Signal)	Solid green	The extender is connected to your router's wireless network and is in a suitable location.
	Solid yellow	The extender is receiving a weak signal. Try relocating it closer to your router.
	Blinking	WPS connection is in progress.
	Off	No wireless connection is established.
2.4G /5G	On	The extender is connected to the 2.4 GHz and/or 5 GHz wireless network of your router.
	Off	The extender is not connected to either the 2.4 GHz or 5 GHz wireless network of your router.

## Access Point Mode (AP Mode)


Stable wireless performance and wired connection with a main router required. To change your extender to **Access Point Mode**, do the following:

Note: If you are using a mobile device, method b is recommended.

- a. By Web: **Login** → Find the change mode button on top.  
For details, refer to the user guide at <https://www.tp-link.com/support>.



- b. By Tether: Login to your extender → Find the **Operation Mode**

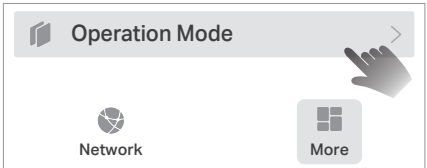

\*Due to Tether app updates, images may differ from your actual interface.

## Method 2: Via a Web Browser

1. Connect your computer or smartphone to the extender's network. If you are using a computer, unplug the Ethernet cable if any.
2. Launch a web browser, enter <http://www.tplinkrepeater.net> in the address bar, and log in.
3. View or change extender settings as needed.

## EasyMesh-Compatible

You can experience strong, stable, and seamless wireless connections throughout your home with EasyMesh, a whole home mesh standard that works across different access points for ultimate flexibility.



- **Seamless Roaming**  
Connects mobile devices to your routers or extenders that provide the best coverage. Devices compatible with EasyMesh also share a single Wi-Fi name so you stay connected in every room.
- **One-Click Settings**  
Press the WPS button on the main router and the extender within 2 minutes of each other, then the EasyMesh network will set up.
- **Flexible Scalability**  
Flexibly scale your home networking with different vendors,\* different topologies, different Protocols and different product categories.

\*TP-Link EasyMesh-compatible products can network with other devices that use EasyMesh. Failed connections may be due to firmware conflicts of different vendors. The EasyMesh-Compatible function is still being developed on some models and will be supported in subsequent software updates. This product is compatible with standardized EasyMesh technology but has not obtained the Wi-Fi EasyMesh™ certification.

For more information, visit <https://www.tp-link.com/easymesh/>.




Scan for Setup Video

## FAQ (Frequently Asked Questions)


### Q1. What should I do if the Tether app cannot find my device during setup?

- Try another method by following the steps below:
  1. Connect your smartphone to the extender's network TP-Link\_Extender.



2. Launch the Tether app, and select your extender.

Tip: If you have connected to the extender's Wi-Fi but still cannot find your device, try turning off your cellular data.



3. Follow app instructions to complete the setup.

If you are still having problems, contact our technical support.


### Q2. What should I do if the LED doesn't turn solid on after completing setup via the Tether app or web browser?

- You may have entered incorrect Wi-Fi passwords for your main router during the configuration. Check the passwords and try again.
- Make sure the extender is close to your router, preferably within 16 feet, and away from large electrical appliances.
- If you have enabled wireless MAC filtering, wireless access control, or access control list (ACL) on your router, disable them first, then follow any method on the front page to complete the configuration.
- Try setting it up via the WPS button.
- Reset the extender and go through the configuration again.

If you are still having problems, contact our technical support.

### Q3. How do I reset the extender?

- With the extender powered on, press the **RESET** button for 1 second. The extender will reboot.



? If you need more setup help, please visit <https://www.tp-link.com/support/faq/3074/>, or simply scan the QR code.



### Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- For passthrough devices, plug the power strips into the integrated electrical sockets of the devices, but devices of the same or another type not be stacked in normal use. Do not plug in a row.
- Plug the product into the wall outlets with earthing connection through the plug.

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011 /65/EU and (EU) 2015/863.

The original EU Declaration of Conformity may be found at <https://www.tp-link.com/en/support/ce>

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK Declaration of Conformity may be found at <https://www.tp-link.com/support/ukca>

To communicate with TP-Link users or engineers, please join the TP-Link Community at <https://community.tp-link.com>.

For technical support, replacement services, user manuals and other information, please visit <https://www.tp-link.com/support>, or simply scan the QR code.

