




AX3000 Wi-Fi 6 Bluetooth PCIe Adapter


Arm Your PC with Next-Gen
Wi-Fi Technology



Archer TX3000E

 Unrivaled Dual-Band Speed
2402 Mbps+574 Mbps†

 Low-Latency Gaming
OFDMA and MU-MIMO Supported‡

 Bluetooth 5.3
Enhances Reliability
and Security***

 Wider Signal Coverage
With High Gain Antennas

Highlights

Next-Gen Wi-Fi Technology

3× Faster Speed****

Powerful and consistent signals to perfectly pair with Wi-Fi 6 routers supported 160 MHz bandwidth.†

WI-FI 6  **2402 Mbps**

WI-FI 5  **867 Mbps**



Ultra-Low Latency

The revolutionary combo of OFDMA and MU-MIMO ensures the most efficient Wi-Fi connection for your PC, reducing latency for faster speeds.‡



Improved Security—WPA3

The latest security enhancements provide enhanced protection in personal password safety.**

Bluetooth 5.3 Technology

Archer TX3000E is compatible with the latest Bluetooth 5.3 Technology, achieving faster speed and broader coverage than Bluetooth 4.2 to connect as more devices as you want and enjoy the smoother experience than ever.***



Highlights


Broader Coverage Than Ever

Two multi-directional and high-performance antennas with a magnetized base make it incredibly easy to find the best location for optimum signal reception.***



Superior Wi-Fi Reception


Equipped with 1024-QAM and MU-MIMO technology, Archer TX3000E delivers faster and clearer Wi-Fi to take your PC's Wi-Fi reception to the next level and fully achieve the potential of your Wi-Fi 6 router.†

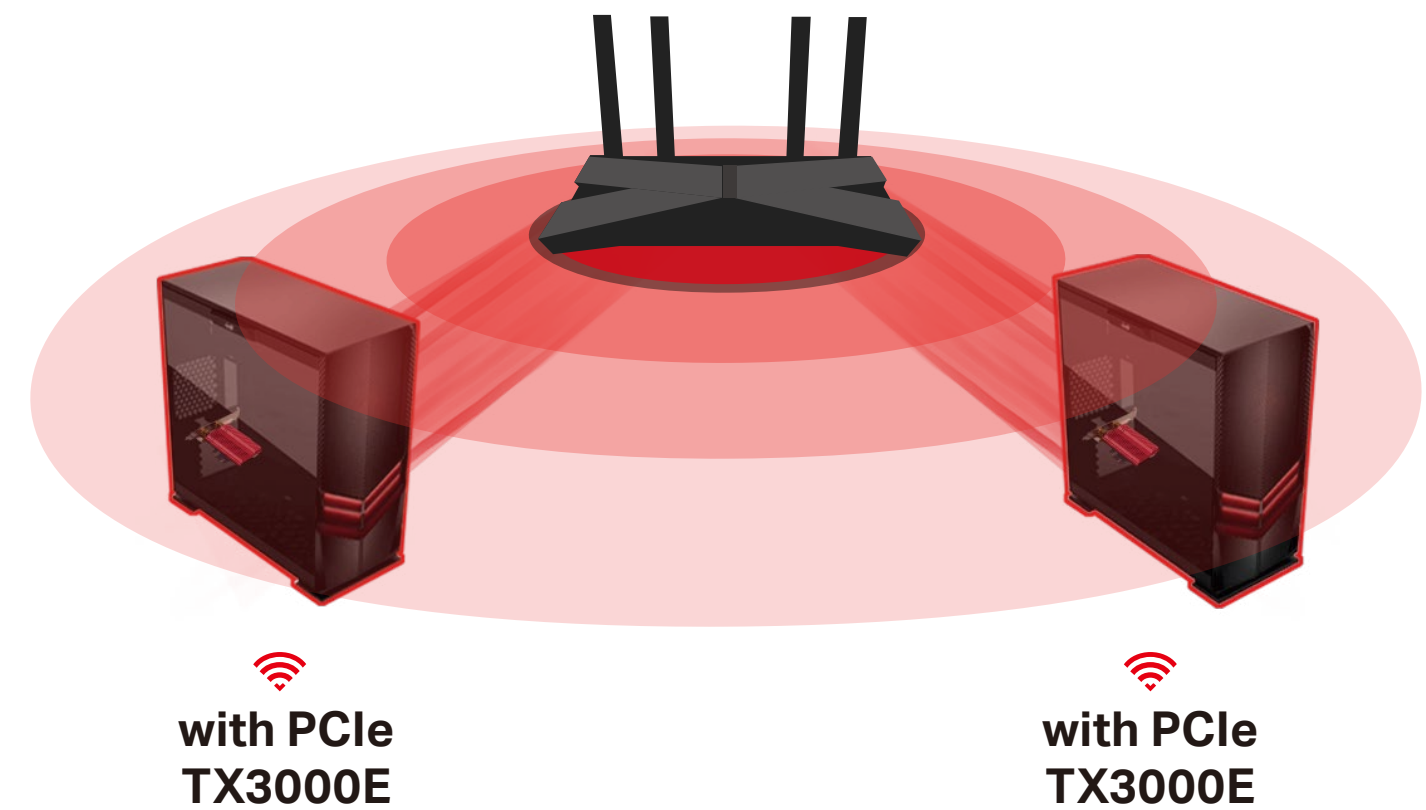

Highlights


Fine Crafting for Reliability

Built with a specialized heatsink crafted to improve stability and reliability even in hot environments. Careful attention to every detail, such as gold plating on every contactor to resist oxidation, delivers a superior network experience.

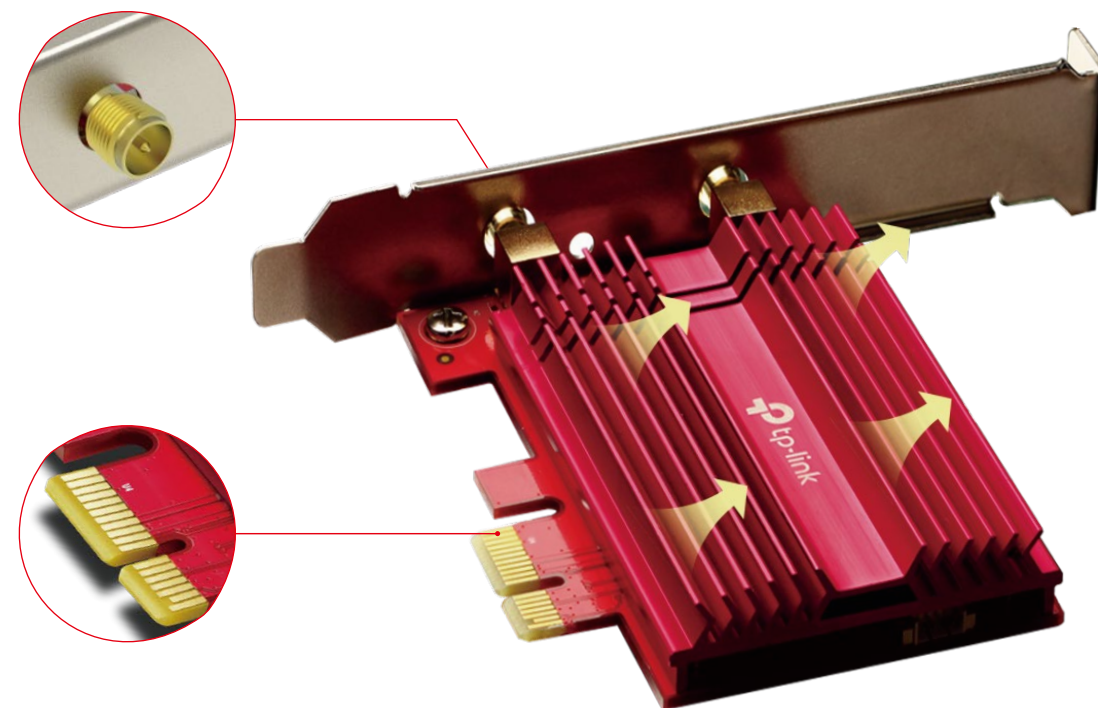

Low-Profile Bracket

In addition to the full-height bracket, a low-profile bracket is also provided for mini tower computer cases. Customized options give you the flexibility to find a bracket that will fit your board design perfectly.

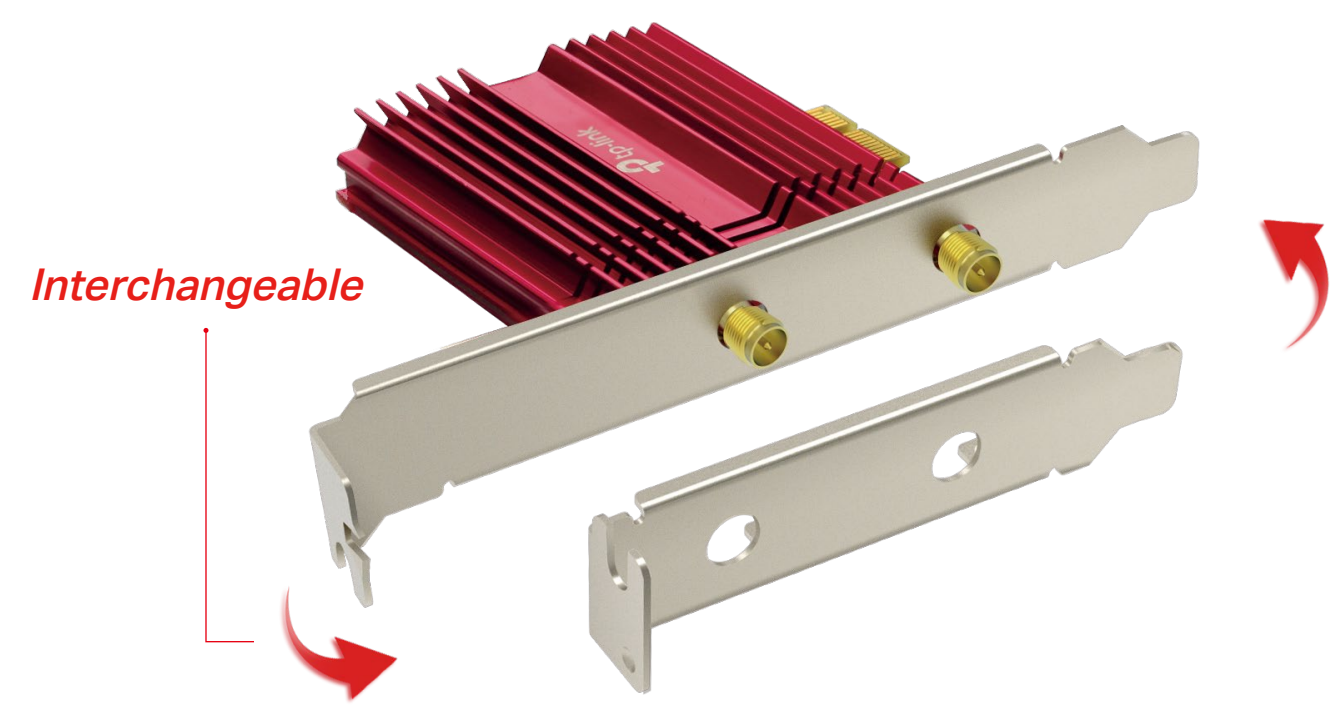

Specifications

WLAN Features

- **Wireless Standards:** IEEE 802.11ax/ac/n/a 5 GHz, IEEE 802.11ax/n/g/b 2.4 GHz
- **Signal Rate:**
 - 5 GHz
 - 11ax: Up to 2402 Mbps(dynamic)
 - 11ac: Up to 1733 Mbps(dynamic)
 - 11n: Up to 300 Mbps(dynamic)
 - 11a: Up to 54 Mbps(dynamic)
 - 2.4 GHz
 - 11ax: Up to 574 Mbps(dynamic)
 - 11n: Up to 300 Mbps(dynamic)
 - 11g: Up to 54 Mbps(dynamic)
 - 11b: Up to 11 Mbps(dynamic)
- **Reception Sensitivity:**
 - 5 GHz :
 - 11ax HE160: -56.25dBm
 - 11ax HE80: -59dBm
 - 11ax HE40: -62.25dBm
 - 11ax HE20: -65dBm
 - 11ac VHT160: -62dBm
 - 11ac VHT80: -65.5dBm
 - 11ac VHT40: -69.75dBm
 - 11ac VHT20: -73.75dBm

- 11n HT40: -74.5dBm
- 11n HT20: -77.5dBm
- 11a 54Mbps: -77.75dBm
- 11a 6Mbps: -94.5dBm
- 2.4GHz :
 - 11ax HE40: -60.75dBm
 - 11ax HE20: -63.75dBm
 - 11n HT40: -73dBm
 - 11n HT20: -76.25dBm
 - 11g 54Mbps: -76.5dBm
 - 11b 11Mbps: -89dBm
- **Transmit Power:**
 - 5 GHz: 28dBm(FCC) / 23dBm(CE) (EIRP),
 - 2.4 GHz : 24dBm(FCC) / 20dBm(CE) (EIRP)
- **WLAN Modes:** Client mode, Hotspot mode
- **Interface:** PCI Express x1
- **Wireless Security:** Support 64/128 bit WEP, WPA/WAP2/WPA3, WPA-PSK/WPA2-PSK, 802.1x
- **Modulation Technology:** DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM, 256-QAM, 1024QAM

Specifications

Bluetooth Features

- Standards and Protocols: Bluetooth 5.3/5.2/5.0/4.2/4.0
- Interface: F_USB 2.0

Hardware

- Antennas: Two High-Gain Dual Band Antennas, Magnetized Antenna Base
- Dimensions: 3.7 × 4.8 × 0.8 in (95.2 × 120.8 × 21.5 mm)

Others

- Package Contents
 - Archer TX3000E
 - Magnetized Antenna Base with 1m RF Cable
 - Two High Gain Antennas
 - Low-Profile Bracket
 - Bluetooth Header Cable
 - Quick Installation Guide
 - Resource CD
- Certification
 - FCC, CE, RoHS
- System Requirements
 - Windows 11/10 (64-bit)[§]
- Environment
 - Operating Temperature: 0°C~40°C (32°F ~104°F)
 - Storage Temperature: -40°C~70°C (-40°F ~158°F)
 - Operating Humidity: 10%~90% non-condensing
 - Storage Humidity: 5%~90% non-condensing



For more information, please visit

<https://www.tp-link.com/en/home-networking/pci-adapter/archer-tx3000e/v4/>

or scan the QR code left

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders.

[†]Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

[‡]Use of Wi-Fi 6 (802.11ax), and features including OFDMA, MU-MIMO, and 1024-QAM or HE160 require APs to also support the corresponding features.

[§]Functionality of Archer TX3000E may be restricted on some computing systems and platforms. Please try to update the device's driver for feature compatibility.

^{**}Use of WPA3 requires APs to also support the corresponding feature.

^{***}Several new features are introduced in the Bluetooth Core Specification 5.0, 5.2 and 5.3 Release, including 2× faster speed and 4× broader coverage compared with Bluetooth 4.2.

^{****}802.11ax 2x2 160 MHz enables 2402 Mbps maximum theoretical data rates, 3× faster than standard 802.11ac 2x2 80 MHz (867 Mbps) and nearly 6x faster than baseline 1x1ac (433 Mbps) Wi-Fi as documented in IEEE 802.11 wireless standard specifications, and require the use of similarly configured 802.11ax wireless network routers.

© 2024 TP-Link