



# AC1200 Wi-Fi Range Extender With Smart Plug

Works With Amazon Alexa & Google Assistant



RE370K



Expand Your Wi-Fi



Remote Control



Scheduling




Gigabit Ethernet Port

# Highlights

## Expand Wi-Fi. Eliminate dead zones.

The RE370K is a smart home range extender that works with any standard wireless router to deliver AC1200 Wi-Fi in hard-to-reach areas. It eliminates dead zones and expands the range of your existing wireless network for a stronger connection where you need it most.

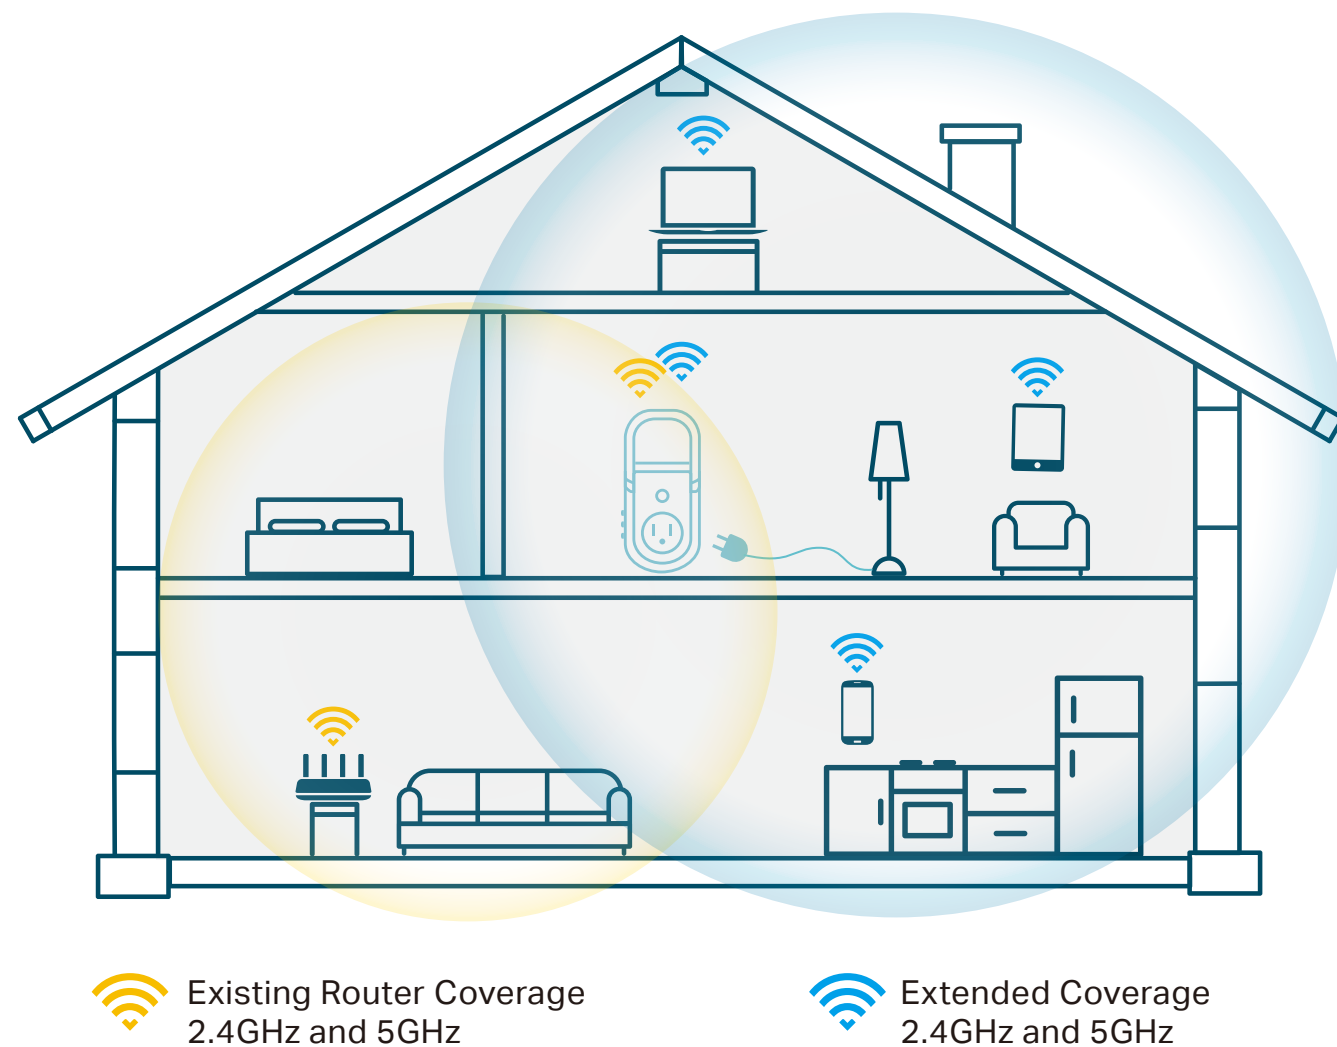

## Control Electronics and Appliances Remotely

The RE370K comes with a built-in smart plug that works using your Wi-Fi network. Control connected devices, such as lamps, fans and heaters from anywhere using your smartphone.



# Highlights

## Set Up in Minutes with Kasa


With the Kasa app, setup is easy. Just plug in the range extender and follow the steps on your screen. The RE370K also comes with an Intelligent Signal Indicator that helps you find the best spot for setup.



## Manage Devices Using Your Voice

When the RE370K is paired with Amazon Alexa & Google Assistant, you can use your voice to control electronics and appliances connected to the built-in smart plug. You can also add them to new or existing groups you have on Kasa.

\* The Amazon Alexa and Google Assistant are not available in all languages and countries.

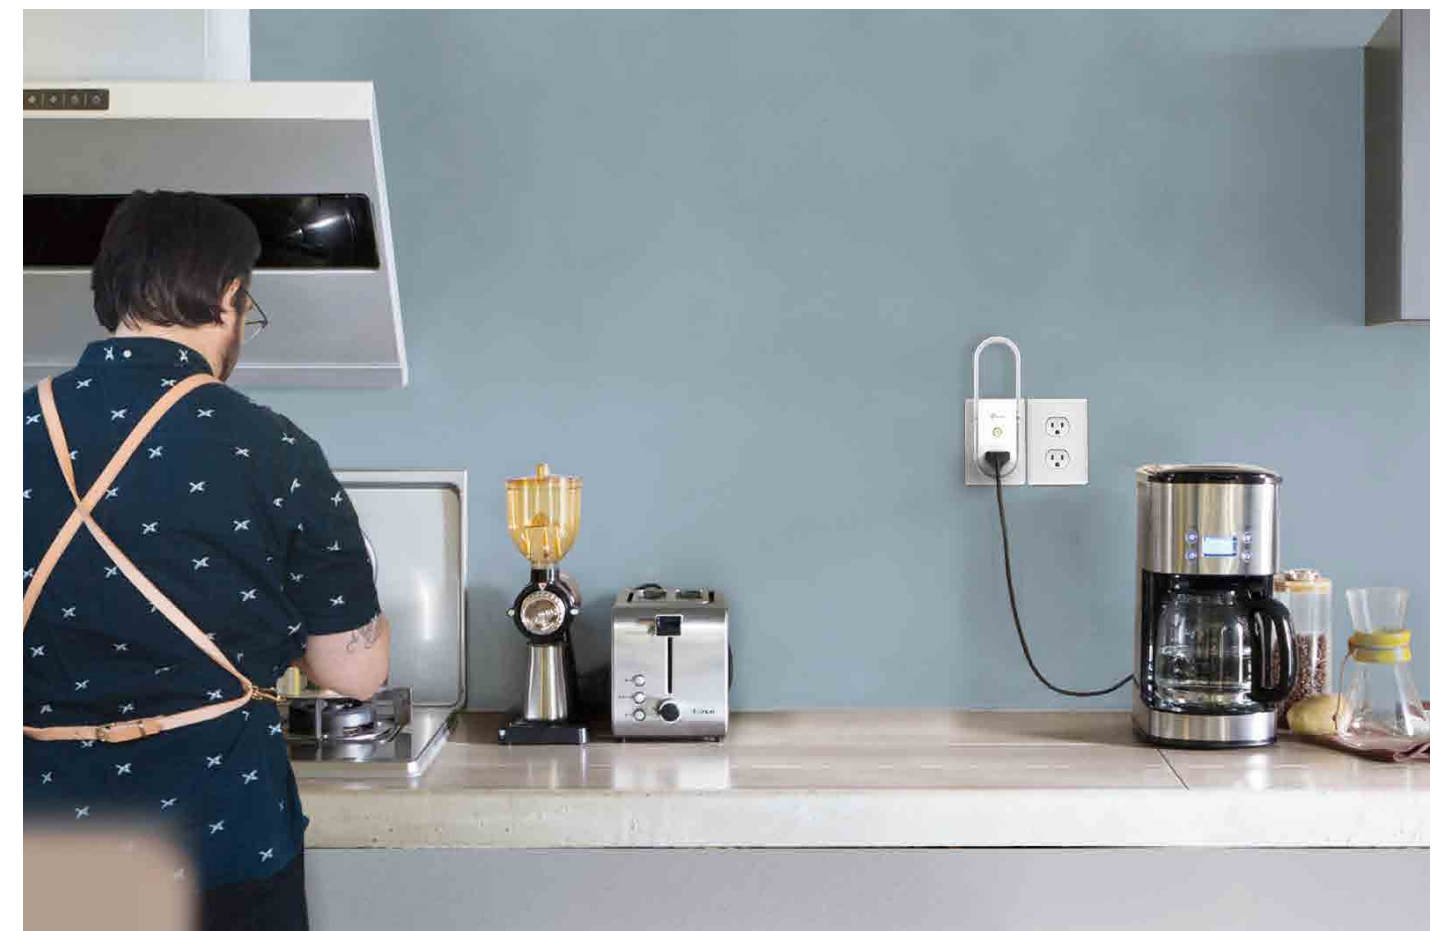


# Features



## Expand Wi-Fi Coverage

- Simultaneous Dual Band – Wireless speeds of up to 300Mbps on the 2.4GHz band and 867Mbps on the 5GHz band
- Gigabit Ethernet Port – Creates a fast, reliable wired connection
- Widespread Coverage – Expands Wi-Fi to cover dead spots
- Encryption for Secure Network – WPA-PSK/WPA2-PSK encryptions provide active protection against security threats

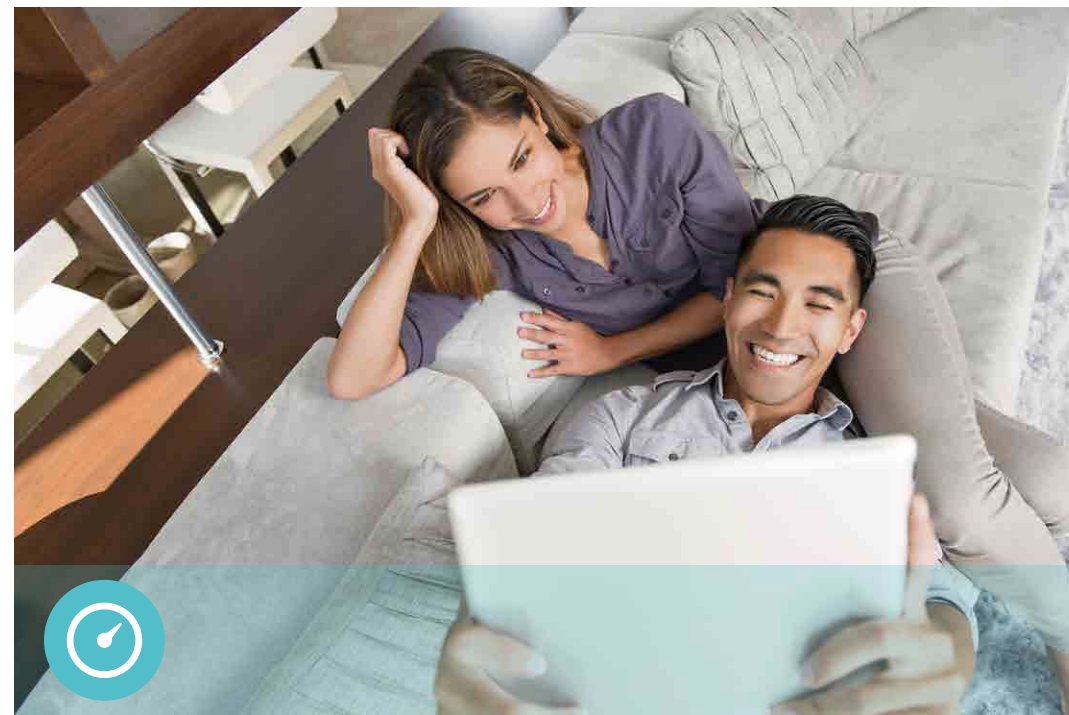

## Multi-Functional App Control

- Remote Control – Remotely control your smart devices from anywhere with Kasa app
- Network Management – Manage your network clients through Kasa app
- Scheduling – Set plugged-in devices to work around your life



## Ease of Use

- Intuitive Web UI – Ensures quick and simple installation without hassle
- Location Assistance – Kasa app will help you find the best spot to place your range extender
- Compatible with Amazon Echo & Google Assistant – Use your voice to control electronics and appliances connected to the built-in smart plug

# Specifications

## Hardware

- Ethernet Port: 1 \* Gigabit Ethernet Port (RJ45)
- Button: Reset Button, LED On/Off Button, Socket On/Off Button
- LED: Power LED, Status LED, 2.4GHz LED, 5GHz LED, Socket LED
- Input: 100-240V, 50/60Hz, AC
- Output: 16A maximum load
- Dimensions (W x D x H): 2.8 x 2.5 x 4.9 in. (70 x 64 x 125 mm)

## Wireless

- Wireless Standard: IEEE 802.11 a/n/ac 5GHz, IEEE 802.11b/g/n 2.4GHz
- Frequency: 2.4GHz and 5GHz
- Signal Rate: 300Mbps at 2.4GHz, 867Mbps at 5GHz
- Transmit Power:  $\leq 20$ dBm
- Wireless Security: Support 64/128 bit WEP, WPA-PSK/WPA2-PSK

## Others

- Certifications: CE, RoHS
- Package Contents
  - AC1200 Wi-Fi Range Extender with Smart Plug RE370K
  - Quick Start Guide
  - RJ45 Ethernet Cable
  - \*Smart Phone not included
- System Requirements
  - Mobile device running iOS 9 or higher or Android 4.1x or higher
  - Existing Wi-Fi network
- Environment
  - Operating Temperature: 0°C~40°C (32°F ~104°F)
  - Operating Humidity: 10%~90%RH, non-condensing

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2017 TP-Link Technologies Co., Ltd. All rights reserved. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.