




# Quick Installation Guide


4G LTE Mobile Wi-Fi  
M7300

## Install the SIM Card and Battery

1 Remove the back cover.

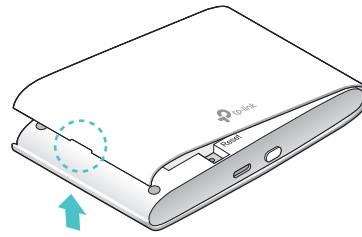


2 Insert the SIM card.

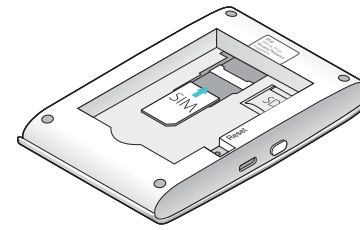


- 1 Nano SIM card must be converted using the provided SIM card tray.
- 2 The SD card slot can be used for storage and media sharing.
- 3 SIM card and SD card are not provided.


3 Install the provided battery.

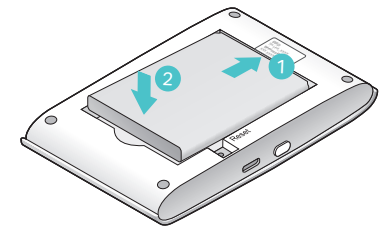

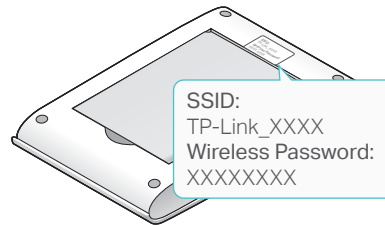

4 Note down the default SSID and Wireless Password.

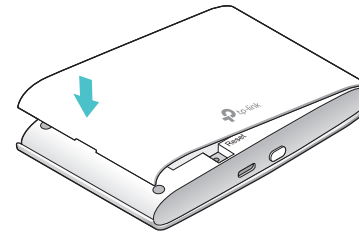


5 Replace the cover.





## Connect to the Internet

1 Press and hold the Power button  until all the LEDs are lit. Wait until the Internet LED  turns solid green. If not, please refer to FAQ > Q3.



2 On your wireless device or smart device, use the SSID and the Wireless Password you have noted down to connect to the Mobile Wi-Fi.

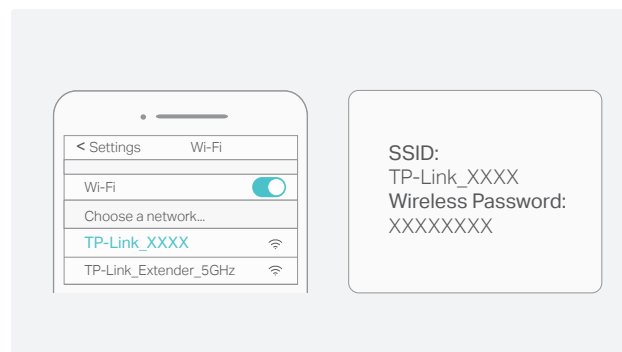

- 1 By default, Power Saving is enabled and the Mobile Wi-Fi will turn off the Wi-Fi when no wireless devices are connected to it for 10 minutes. Press the  button to resume the Wi-Fi connection.

# tpMiFi APP

## How to download tpMiFi

1. Download the tpMiFi app from the Apple App Store or Google Play Store, or simply scan the QR code.
2. Ensure your device is wirelessly connected to the Mobile Wi-Fi.
3. Launch the app and use the default admin to login.




Scan to download

## 2. Manage network access

Tap the **Wi-Fi Users** icon on Home Screen and swipe left the device to block and then tap **Block**.




Wi-Fi Users



## How to use tpMiFi

### 1. Monitor and limit your data usage.

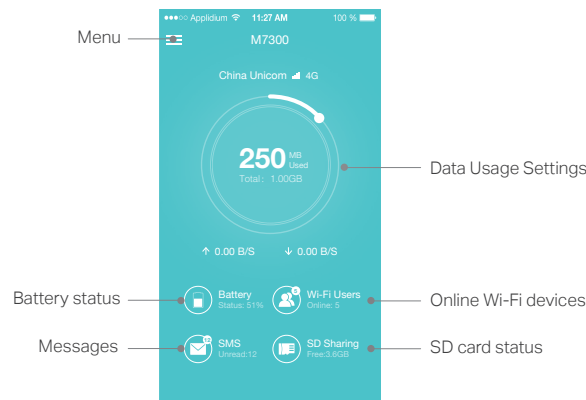


### 3. Share multimedia files

Tap the **SD Sharing** icon on Home Screen and select the sharing method: Wi-Fi Mode or USB Mode.



SD Sharing



## LED Indicators


LED	Status	Explanation
(Wi-Fi)	On	The Wi-Fi is enabled.
(Internet)	On	The Mobile Wi-Fi is connected to the internet.
(Battery)	On	The Mobile Wi-Fi is on.
	Red	The battery level is lower than 10%.
	Blinking Green	The Mobile Wi-Fi is charging.

Note: The LEDs will turn off automatically after idling for 15 seconds. To check the LED status, press the Power button to turn them on again.

## Charging Your Mobile Wi-Fi


### Method 1

Via a Wall Outlet (Recommended)



### Method 2

Via a Computer



! The Battery LED is solid green when the Mobile Wi-Fi is fully charged. The power adapter is not provided by TP-Link.

## FAQ (Frequently Asked Questions)

### Q1. Is there an alternative to manage the Mobile Wi-Fi besides the tpMiFi app?

- A. You can manage the Mobile Wi-Fi by using its web management page.
1. Connect your wireless device to the Mobile Wi-Fi.
  2. Launch a web browser and enter <http://tplinkmifi.net> or <http://192.168.0.1> in the address bar. Enter **admin** to log in.

### Q2. What should I do if I cannot log in to the web management page?

- A1. Verify that your device is connected to the Mobile Wi-Fi.  
 A2. Verify that you have entered <http://tplinkmifi.net> or <http://192.168.0.1> correctly.  
 A3. Verify that your device is set to obtain an IP address automatically.

### Q3. What should I do if the Internet LED doesn't light up (I cannot access the internet)?

- A1. Check PIN status  
 Refer to Q1 to log in to the web management page on your phone. If the current SIM card status is **PIN Locked**, you will need to unlock it using the PIN code.
- A2. Verify the mobile carrier parameters  
 1. Refer to Q1 to log in to the web management page on your phone. Go to **Dial-up** > **Device** > **View Profile Details** and verify the parameters (i.e. APN, Username,

- and Password) provided by your mobile carrier are correctly entered.
2. If the mobile carrier parameters are not correct, return to the **Dial-up** page and create a new profile with the correct information. Then choose the new created profile from the Profile List.
- A3. Check the Data Roaming settings  
 If your SIM card is operated in a roaming service area, refer to Q1 to log in to the web management page on your phone. Go to **Dial-up** and enable the **Data Roaming** option.
- A4. Check Mobile Data  
 Refer to Q1 to log in to the web management page on your phone. Go to **Dial-up** to verify that **Mobile Data** is On. If not, enable it.
- A5. Check Data Limit  
 Refer to Q1 to log in to the web management page on your phone. Go to **Device** > **Data Usage Settings** to check whether your data usage has exceeded the Total/Monthly allowance.

### Q4. What should I do if my internet speed is slow?

- A1. Refer to Q1 to log in to the web management page on your phone. Go to **Device** > **Advanced** > **Wireless Band** to switch between 2.4GHz and 5GHz band for better connectivity.
- A2. Refer to Q1 to log in to the web management page on your phone. Go to **Device** > **Network** > **Network Mode** and try a different network.

### Q5. How do I restore the Mobile Wi-Fi to its factory default settings?

- A. With the Mobile Wi-Fi powered on, remove the cover and then use a pin to press and hold the **Reset** button until all LEDs turn on momentarily.  
 Note: Resetting the device to its factory defaults will clear all previous configuration.

### Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Do not disassemble, crush, puncture, short external contacts, or dispose of the battery in fire or water.

CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

For technical support and other information, please visit <http://www.tp-link.com/support>

