
Quick Start Guide

Outdoor PoE Turret Security Camera

Images may differ from actual products.

©2025 TP-Link 7106511588 REV1.0.0


Appearance

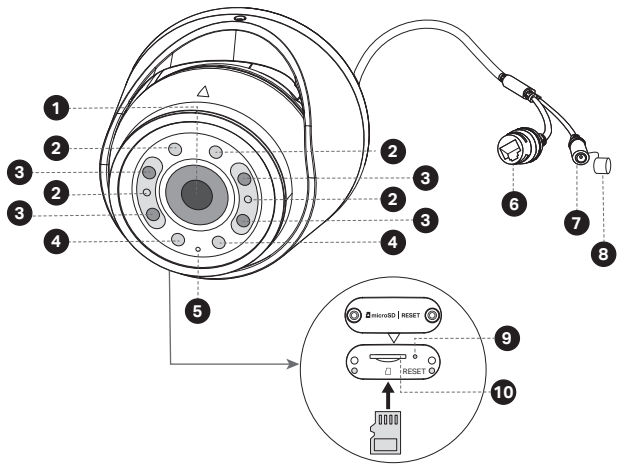

1. Lens
2. Infrared LEDs
3. White LEDs
4. Red-Blue Flashing Lights
5. Microphone
6. Ethernet/PoE Port
7. DC Power Connector
8. Waterproof Cap
9. Reset Button
   Remove the cover and use a pin to press and hold for 5s to reset the camera.
10. microSD Card Slot
    Remove the cover and insert a microSD card (not provided) for local storage.

Use Your Camera with an NVR

The camera works with a network video recorder (NVR) for easier batch access and management. Here we use a Tapo NVR as an example. If you use the camera with other NVR brands, please refer to their User Manual.

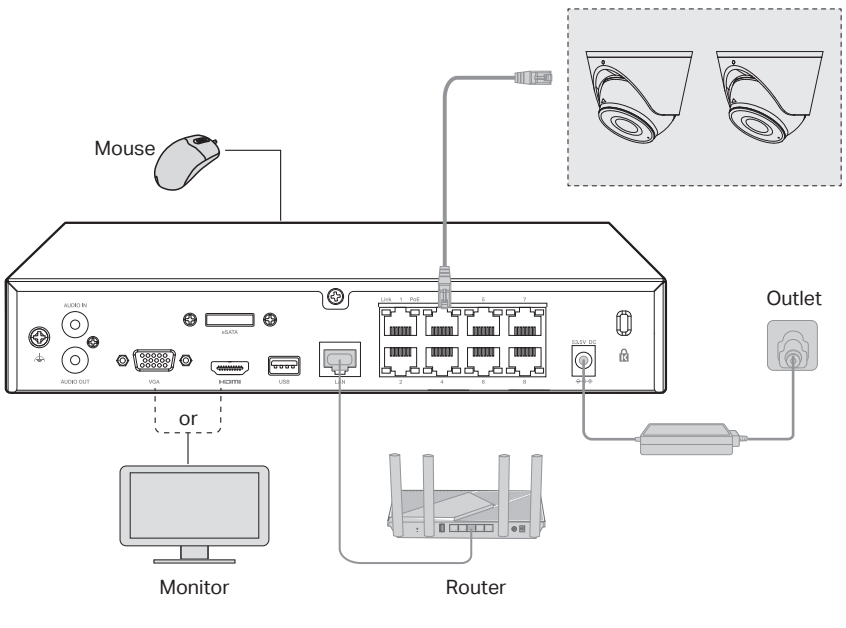

Step 1

Connect your camera to the PoE port of the NVR (not included) with the provided PoE Ethernet cable.

* If your camera is connected with a non-PoE Ethernet cable, use a power adapter to power it on. Ensure that your power supply matches your camera's requirements. The camera's standard power supply is 12V DC or PoE (802.3af/at). The power source should comply with Power Source Class 2 (PS2) or Limited Power Source (LPS) as defined in IEC 62368-1.

Step 2

Connect the NVR as shown in the diagram, and open the monitor.

Step 3

Make sure your NVR is working properly, and add your camera using the following methods.

A. If **Plug and Play** is enabled on your NVR, you can just stay on the Live View screen for the NVR to automatically add your camera.

B. If **Plug and Play** is disabled on your NVR, right click on the Live View screen and click **Add Camera**.

Manage Your Camera

You can also access and manage your cameras via any of the methods below.

App Management

Remotely view live video, manage cameras, and get instant alerts.

Step 1 Download App


Download the **Tapo** app from the App Store or Google Play, and log in.



Step 2 Power Up

Make sure your camera is powered on. You can use the power adapter or connect it with the provided PoE Ethernet cable.


*When using a power adapter, you'll still need an Ethernet cable for network connection.



power adapter PoE Ethernet cable

Step 3 Set Up


Tap the ⊕ button > **Add Device** in the app and select your model. Follow the app instructions to set up and manage your camera.



Web Management

View live video and modify camera settings via a web browser.

1. Find the camera's IP address on your router's client page.
2. On your local computer, open a web browser and enter **https://camera's IP address** (e.g., https://111.111.1.111).
3. Follow the instructions to manage your devices.

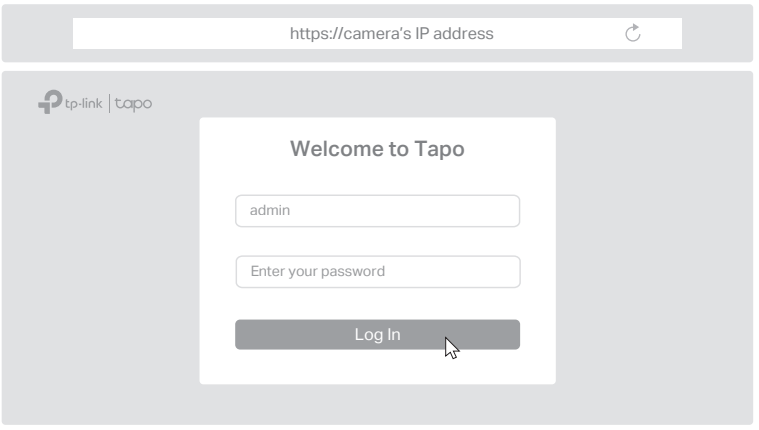


*The image above is for reference only.

Mount Your Camera


1. Open the Camera Base

Use the L-shaped hex metal screwdriver to loosen the hex screw, and use a screwdriver (not provided) to gently pry open the camera base.

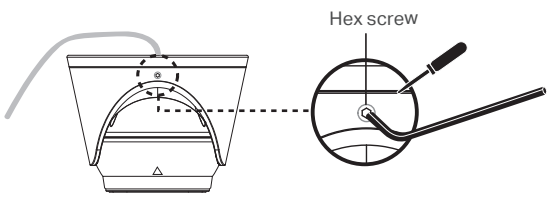


2. Choose How to Route the Cable

You can route the camera's cable through the wall/ceiling or through the side outlet.



cable through the wall/ceiling




cable through the side outlet


3. Secure the Camera

Option 1: Route the cable through the wall/ceiling

(1) Stick the mounting template to the desired mounting place. Drill 4 screw holes and 1 cable hole according to the template.

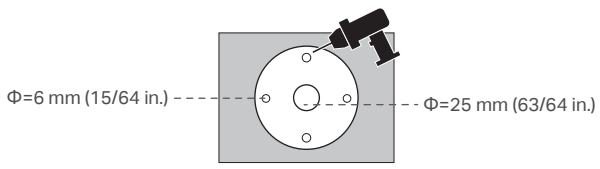


(2) Insert anchors into the holes and use screws to affix the camera base. Align the base's rim with the camera's groove to ensure a proper fit. Then, rotate the camera onto the base to secure it.

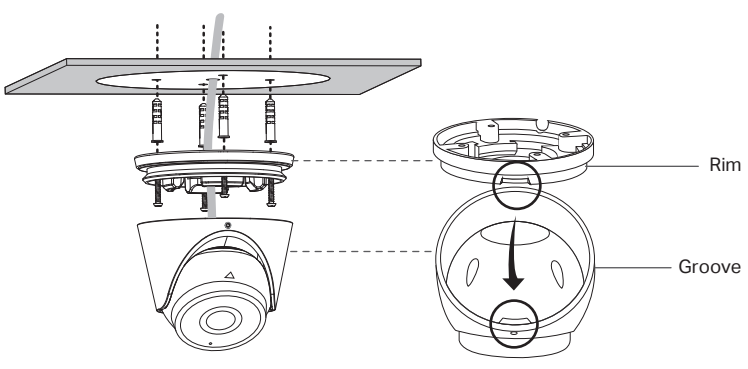


OR

Option 2: Route the cable through the side outlet

(1) Stick the mounting template to the desired mounting place. Drill 4 screw holes according to the template.

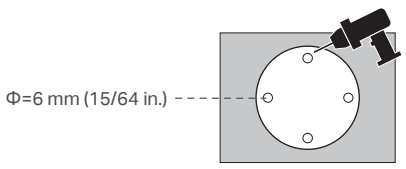


(2) Insert anchors into the holes and use screws to affix the camera base. Align the base's rim with the camera's groove to ensure a proper fit. Then, rotate the camera onto the base to secure it.

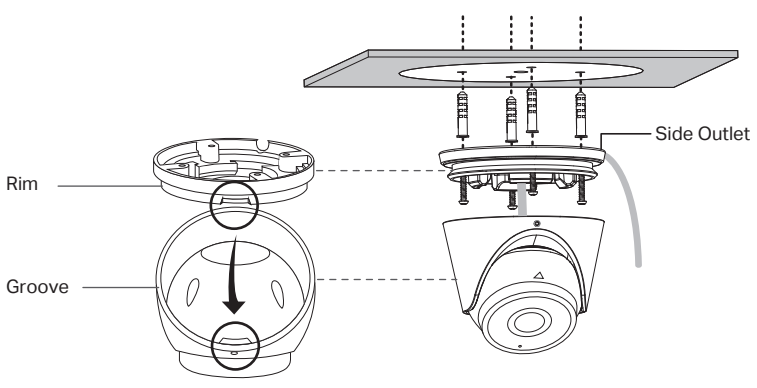


4. Adjust the Surveillance Angle

Adjust the surveillance angle as you need and the △ symbol should point up.

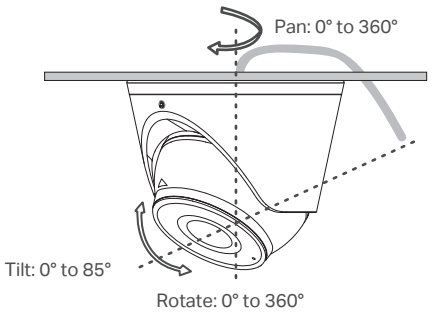

5. Tighten the Hex Screw


Tighten the hex screw to secure the camera to the camera base.

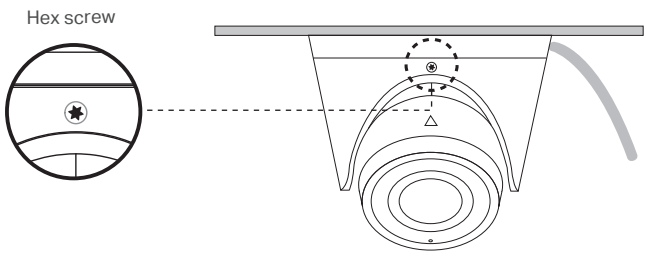

Install Waterproof Accessories

1. Install Waterproof Cable Attachments

Install the waterproof cable attachments for the network interface. Make sure each part is securely attached and the waterproof rings are flush to keep out water.

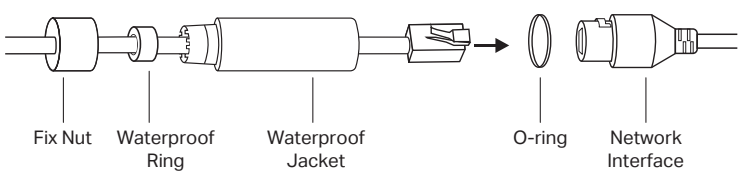

1) Route the network cable through the following components in order: fix nut, waterproof ring, and then the waterproof jacket.
2) Insert the waterproof ring into the waterproof jacket.
3) Fix the O-ring to the network interface of the camera and connect the network cables.
4) Attach the network interface with the waterproof jacket, then twist to lock. Rotate the fix nut to secure it to the waterproof jacket.

2. Install Waterproof Seal/Cap for Power Connectors


➢ Powered by PoE

Use the waterproof cap to cover the power adapter.



➢ Powered by the adapter

Install the waterproof seal for the power connectors when using a power adapter to power the camera.

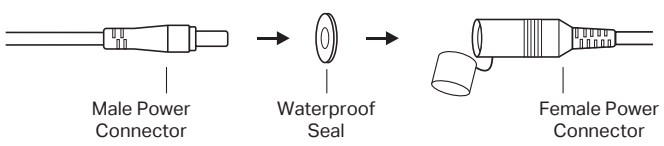

Safety Information

- The supplied Ethernet cable cannot be used outdoors.
- Do not use any other chargers than those recommended.
- Do not use damaged charger or USB cable to charge the device.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Keep the device away from fire or hot environments. DO NOT immerse in water or any other liquid.
- Adapter should be used indoors where the ambient temperature is lower than or equal to 40°C/104°F.

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2009/125/EC, 2014/35/EU, 2011/65/EU and (EU)2015/863.
The original EU Declaration of Conformity may be found at https://www.tapo.com/support/ce/.

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Electromagnetic Compatibility Regulations 2016 and Electrical Equipment (Safety) Regulations 2016.
The original UK Declaration of Conformity may be found at https://www.tapo.com/support/ukca/.

CE EAC UKCA

?

Need some help?

Visit https://www.tapo.com/support/
for technical support, user guides, FAQs, warranty & more