



Quick Start Guide

Smart Wi-Fi Outdoor Plug

©2025 TP-Link 7100000292 REV1.0.0

Get Started with the Tapo App

1. Get the **Tapo** app from the App Store or Google Play, and log in.



OR



2. Tap the **+** button in the app. Select **Plugs** and then your model. Follow the step-by-step app instructions to set up your plug.

Power Button

- Press once: Turn on or off the smart plug.
- Press & hold for 5s: Reset Wi-Fi while preserving other existing settings.
- Press & hold for 10s: Reset to factory default settings.

LED Status

Blinking green and red	Ready for setup; Resetting
Blinking green	Connecting to Wi-Fi; Updating firmware
Solid green	Setup complete and connected to the cloud
Solid red	Setup complete but disconnected from the cloud
Blinking red	Disconnected from Wi-Fi


Use Your Plug with Third-party Apps

- **Via Tapo**
Go to **Me > Third-Party Services** to link Tapo to third-party services.
- **Via Matter**
Use any smart home app that supports Matter to integrate the plug. You can use the Matter setup code on your device or in its packaging for setup.


Rating

200-250V~, 50/60Hz, 16A

Waterproof Your Plug

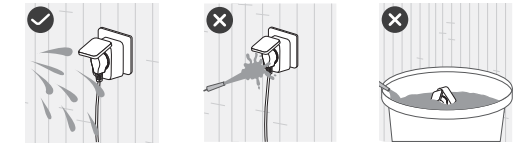

Tips: It is recommended to use waterproof sockets and splashproof plugs.

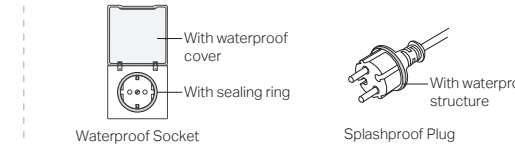

Supported Load Types

Load Type	Max Current	Max Power (at 230V~)
Steam Iron	16 A	3200 W
Kettle	16 A	3000 W
Heater	16 A	2500 W
Toaster	16 A	2500 W
Coffee Maker	16 A	2000 W
Desk Lamp	0.75 A	80 W
TV	2 A	350 W
PC	3.5 A	600 W
Fan	1 A	200 W
Water Pump	3.5 A	735 W (1HP)
Power Adapter / USB Charger	1.2 A	200 W

Note:

1. Avoid plugging your appliances with a motor/compressor higher than 1HP, such as an air conditioner. Frequent on/off switching may damage the compressor. You can check the motor/compressor value listed on your appliances or consult their Support.
2. EV charging is not supported as it demands higher power and a charging current that surpasses the plug's rated capacity.

Safety Information

- Please keep this instruction manual.
- Keep the device away from heat sources and enclosed spaces with poor ventilation.
- Electronic switch integrated in this product is only intended for functional purpose. Unplug the appliance before servicing
- Keep the device away from fire or hot environments. DO NOT immerse in water or any other liquid.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- For passthrough devices, plug the power strips into the integrated electrical sockets of the devices, but devices of the same or another type not be stacked in normal use. Do not plug in a row.



- Do not plug in one after the other.
- Only de-energize when the plug is pulled out.
- Do not operate covered.
- Plug the product into a grounded wall outlet.

- Install residual current protective devices with a rated residual operating current of no more than 30mA in building installations.
- Do not plug in any plug-in devices.



Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

TP-Link hereby declares that the smart wi-fi outdoor plug is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011 /65/EU and (EU) 2015/863.

The original EU declaration of conformity may be found at <https://www.tapo.com/support/ce/>

TP-Link hereby declares that the smart wi-fi outdoor plug is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK declaration of conformity may be found at <https://www.tapo.com/support/ukca/>



Need some help?
Visit <https://www.tapo.com/support/> for technical support, the user guide, warranty, and more

