




Smart Wi-Fi Dimmer Switch

3-Way Kit

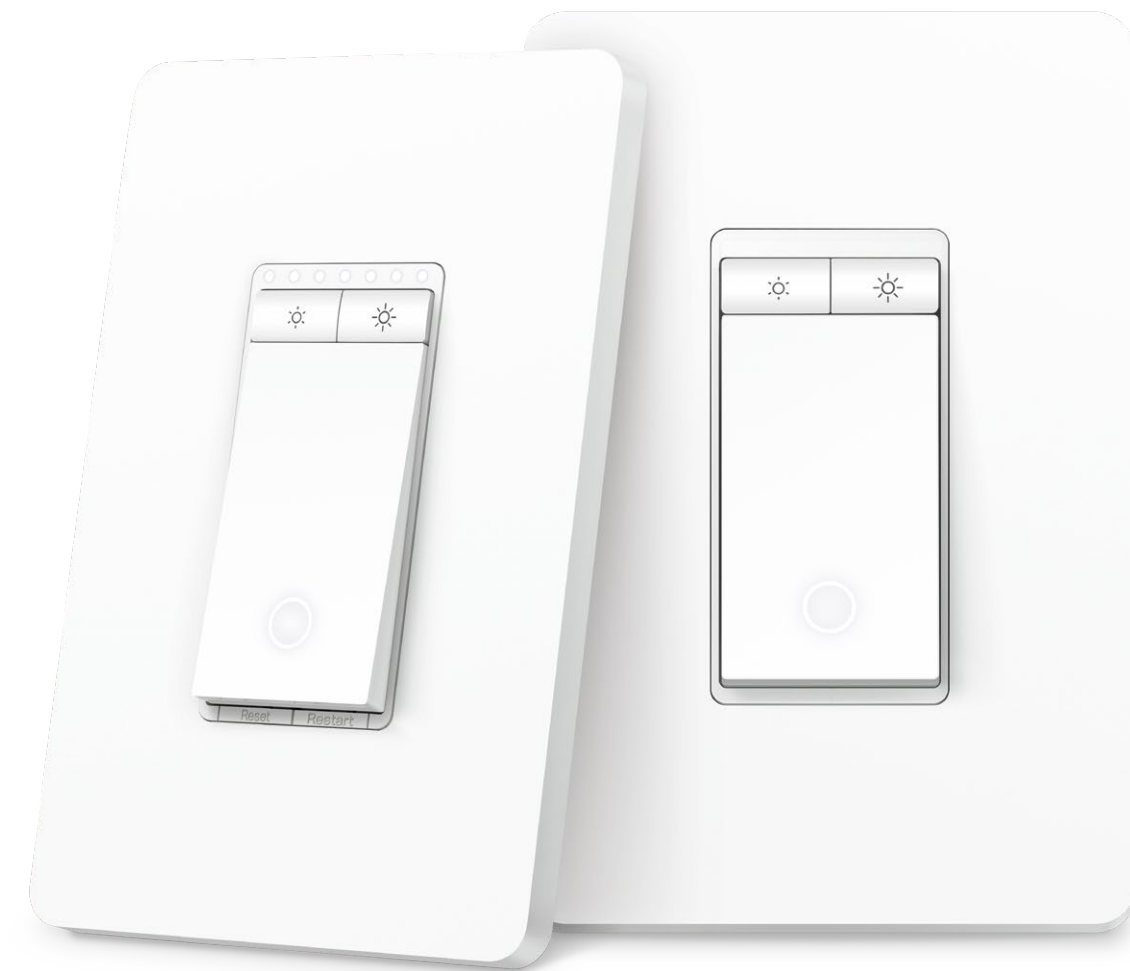

KS230Kit



Full Range
Brightness



Three-Way
Control



Voice
Commands



Fade On/Off

Highlights

Smart Dimming from Anywhere


Set the perfect ambiance for any activity by dimming your light from 100% to 1% via your phone or simple voice commands. Just replace your traditional 3-way switches that control the same light—whether in your living room, hallway, or stairway.



Notes: The app screen depicted is for visual reference only and does not necessarily represent actual product operation or app appearance.

Smart 3-Way Control

Replace traditional 3-way switches commonly found in living rooms, stairways, and hallways with something smarter from Kasa Smart. Manually control your lights from two separate locations. Remotely turn your lights on and off, set schedules and times all from your smartphone.

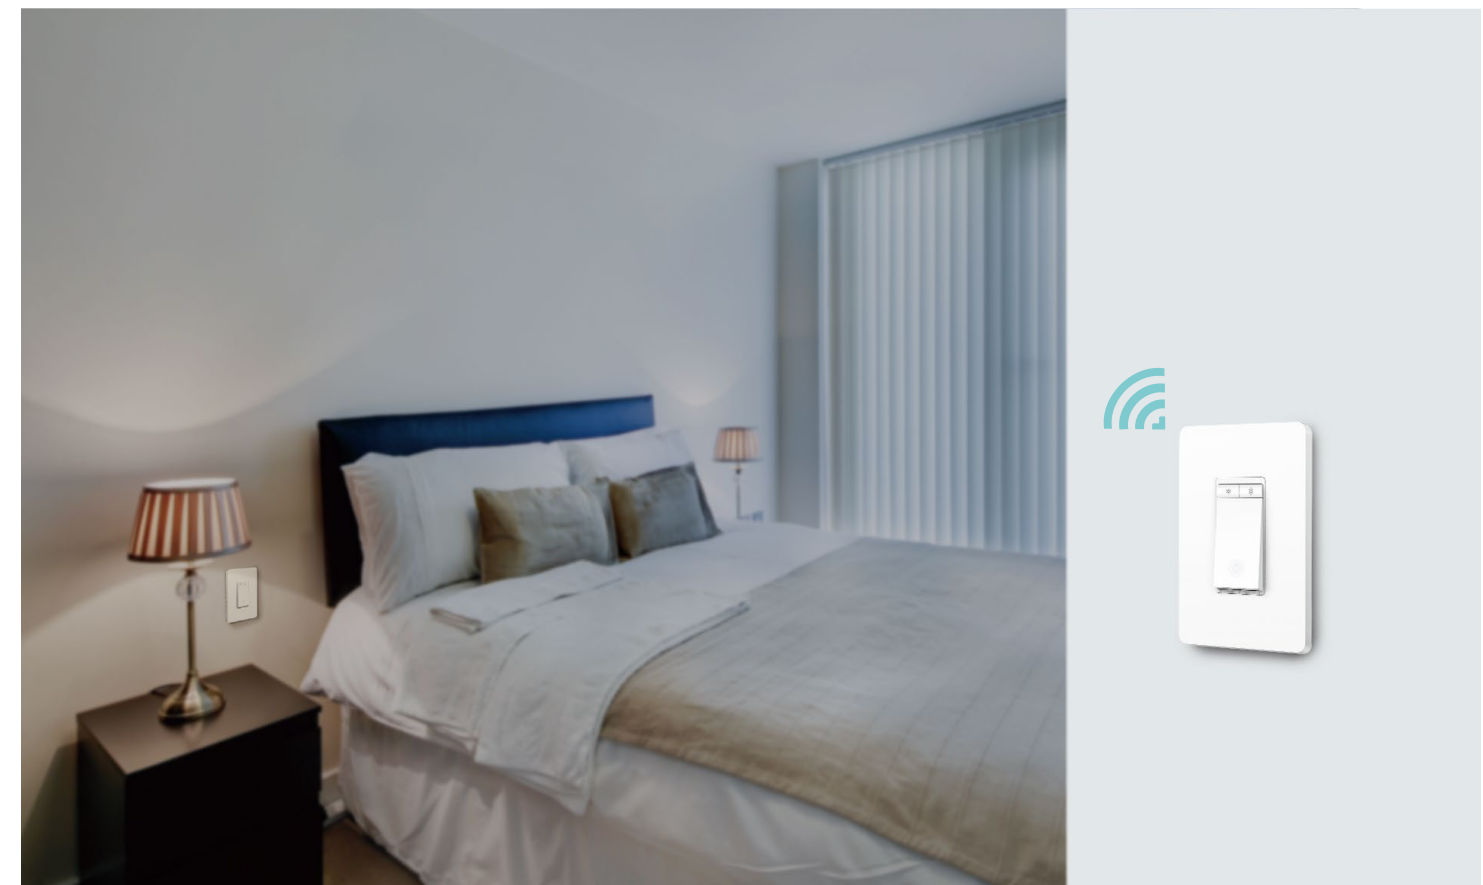


Hands-free Voice Control

Connect your Smart 3-Way Dimmer Switch with Amazon Alexa, Google Home, or Samsung SmartThings, and adjust lighting levels hands-free using only your voice.



Your Home. One App.

The Smart Wi-Fi Dimmer is part of the Kasa smart home family of devices including plugs, cameras, switches and more. With Kasa, your home is never more than a few taps away.

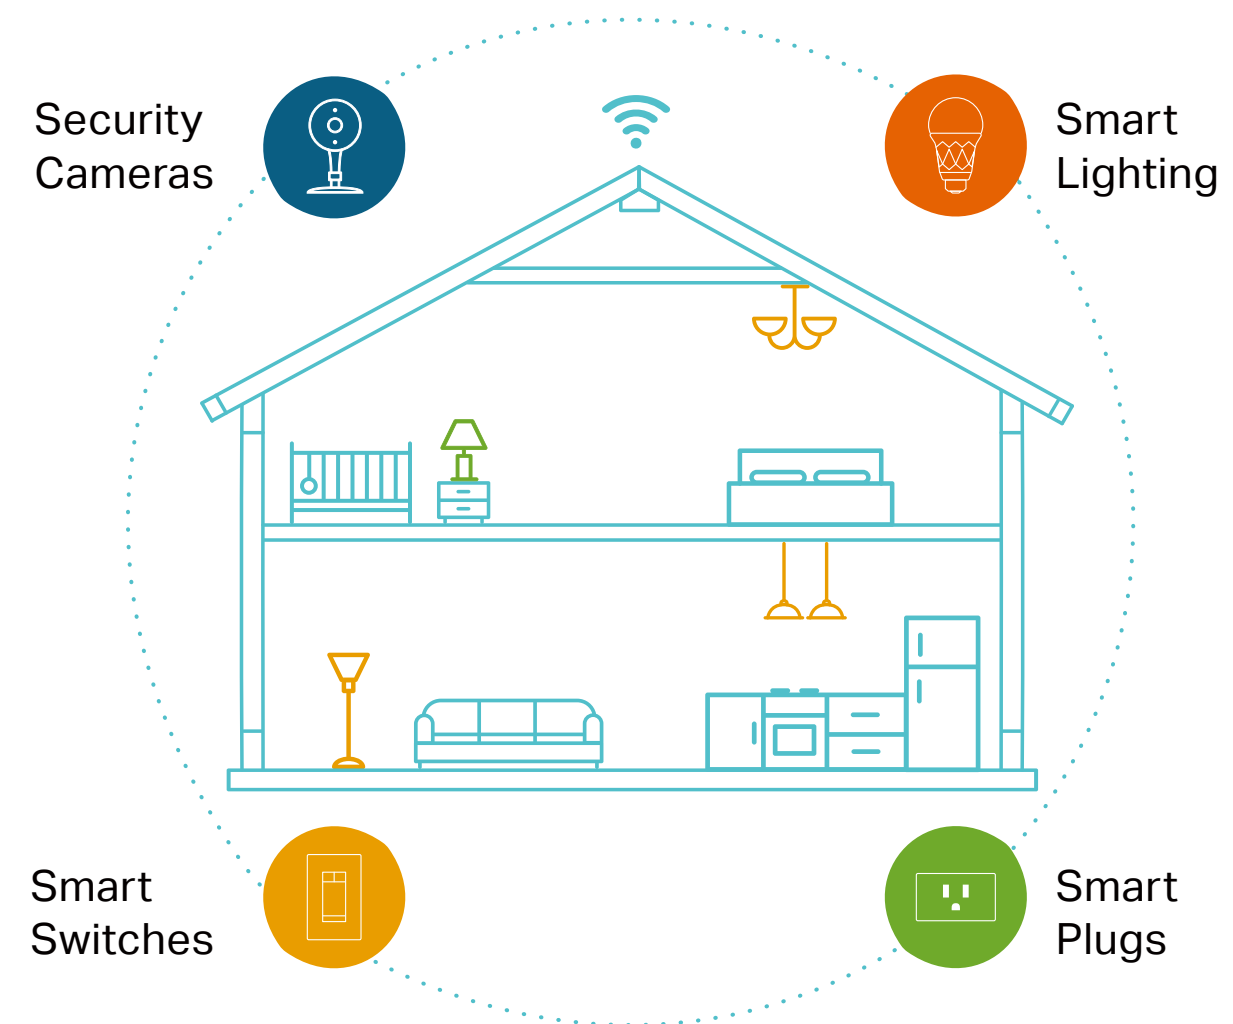

Features



Ease to Use

- No Hub Required – Easily connect directly to your secured home Wi-Fi network.
- Upgrade your Light Switch – Designed to easily replace traditional light switches (single-pole only).
- Three-Way Control – Manually control your lights from two separate locations.
- Anywhere and Anytime – Set up your dimmer and control it from anywhere with the free Kasa Smart app.
- Scheduling – Set your dimmer to turn on and off automatically while you're home or away.



Plays well with Others

- Hands-Free Voice Control – Set lighting levels using the leading voice assistants such as Amazon Alexa and Google Assistant.
- Works with SmartThings – Control and manage your Kasa devices with SmartThings.



Smart Features

- Full-Range Brightness – Adjust the brightness to set the perfect ambiance for any activity.
- Fade On/Off – Turn the lights on and off gradually, reduce the strain on your eyes.
- Smart Actions – Seamlessly control every Kasa device in a room with one touch of the smart switch.

Specifications

Electrical

- Input Voltage: 120VAC 60Hz
- Output Voltage: Dimmed (120VAC Max)
- Supported Bulb Types:
 - Dimmable LED (MLV) - 150W Max
 - Incandescent - 300W Max
- Dimming Type: Leading Edge Dimming / TRIAC Phase Cut
- * It's also suggested to contact the bulb's Support to check the supported dimming type of the bulb.
- Power Consumption & Standby Power Consumption: 1.5W
- Neutral wire connection required
- Standard lighting wall box (at least 2 inches deep)

Communication

- Secured home Wi-Fi connection required
- Wi-Fi Protocol: IEEE 802.11b/g/n
- Wi-Fi Frequency: 2.4 GHz Wi-Fi only

General

- Dimensions:
 - Main: 5.06 x 3.33 x 1.77 in. (128.65 x 84.65 x 44.9 mm)
 - Satellite: 5.06 x 3.33 x 1.42 in. (128.65 x 84.65 x 36.05mm)
- Indoor Use Only
- Buttons:
 - Main: On/Off Switch, Brightness Up/Down, Reset, Restart
 - Satellite: On/Off Switch, Brightness Up/Down
- Operating Temperature: 0 °C ~ 40 °C (32°F ~ 104°F)
- Operating Humidity: 10%~90%RH, Non-condensing
- Certifications: FCC, IC, ETL, RoHS

Package Contents

- 1× Smart Wi-Fi Dimmer Switch
- 1× Satellite Dimmer Switch
- 2× Wall Plates
- 3× Wire Nuts
- 4× Screws
- Wire Labels
- Quick Start Guide

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. The Works with SmartThings words and logo are trademarks of Samsung Electronics Co. Ltd.
©2021 TP-Link

www.tp-link.com