



Datasheet

Highlights

Fine-Tuned Lighting with a Tap

• Easy Dimming

Set the brightness with the dimming range from 1% to 100%.

• Set Your Time

Schedule your lights to regularly turn on/off with the brightness you set.

• Sunrise and Sunset Modes

Automatically activate your light according to your time zone.

• Energy Saving

Reduces energy use by up to 85% without losing brightness compared to 60 W incandescent bulbs. Track real-time consumption via the Tapo app.

Fill Your Day with Pleasant Brightness



* Note: The app screen depicted is for visual reference only and does not necessarily represent actual product operation or app appearance.






Highlights

Free Up Your Hands with Voice Control


You can use Amazon Alexa or Google Assistant to control your devices with voice commands like "Alexa, turn on the light please".



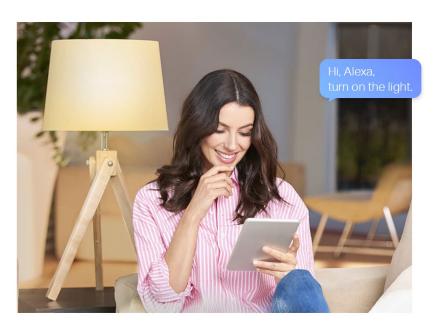

A Deterrent for Your Home

Away Mode, a feature that intelligently simulates someone being home by turning the light on and off, makes it appear that someone is home when you're on long trips to keep away people with ill intent.

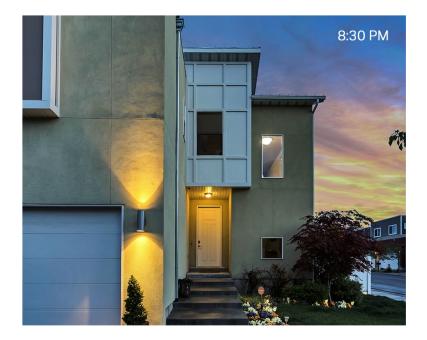

Features

- Remote Control Instantly turn the light on/off wherever you are through the Tapo app
- **Schedule** Preset a schedule to automatically manage devices
- **Timer** Create countdown timer for your smart bulb
- Voice Control Manage your smart bulb with voice commands via Amazon Alexa or the Google Assistant
- Group Control Group your smart lights for seamless control and simultaneously turn your lights and other devices on and off
- **Away Mode** Automatically turns bulb on and off at different times to give the appearance that someone is home

- **Easy Setup and Use** No hub required, set up quickly and manage easily through the free app
- **Device Sharing** Easily share management permissions with each member of your family
- **Energy Monitoring** Track the real-time energy consumption with the Tapo app
- **Energy Saving** Reduce energy use up to 85% without losing brightness or quality

Specifications

- **Technical Specifications**
- · Form Factor: A60, B22
- · Light Beam Angle: 220 °
- · Voltage: 220 -240 V, 50/60 Hz
- Switching Cycles: 15,000
- Equivalent Incandescent Lamp Power: 60 W
- · Color Temperature: 2,700 K
- · Color Rendering Index: ≥ 80
- · Warm-Up Time Up to 95%: ≤1 s
- · Dimmable: Yes (via app and voice only)
- · Brightness: 806 lumens
- · Weighted Energy Consumption: 9 kWh/1000 h
- $\cdot\,$ Power Consumption: 8.3 W
- · Wattage: 8.3 W
- · SDCM: ≤ 6
- · Lifetime: 25,000 Hrs
- · Energy Class: F
- Standby Power: 0.4 W

*Voice Control is only supported with certain voice assistants.

Please do not use in damp environments or outdoors. For more information, please visit https://www.tapo.com/

All brands and product names are trademarks or registered trademarks of their respective holders. Specifications are subject to change without notice. ©2023 TP-Link

General

- · Package Contents:
 - Tapo Smart Light Bulb
- Quick Start Guide
- · Lamp Base: B22 fitting
- · Weight:
 - 60 g (for 1-pack)
 - 120 g (for 2-pack)
- 240 g (for 4-pack)
- Dimensions: 115 x 60 mm
- · Certifications: CE, ERP, RoHS, SAA, RCM
- Operating Temperature: -15 °C~40 °C
- · Operating Humidity: 10%~90%RH, Non-condensing

Network

- · Wi-Fi Protocol: IEEE 802.11b/g/n
- · Wi-Fi Frequency: 2.4 GHz