

# Kasa Smart Wi-Fi Light Switch, Dimmer











# Highlights

# **Smart Dimming**

Adjust your home's brightness freely using the Kasa Smart app, built-in dimmer buttons, and voice commands via Alexa or Google Assistant. With the Fade On/Off feature, smoothly adjust lighting levels without sudden eye-irritating brightness or darkness.



# Highlights


# **Brightness Control**

Control the brightness of your lights to set the perfect ambiance for any activity.



# **Voice Control**

Use simple voice commands to control your smart dimmer switch with Alexa or Google Assistant.

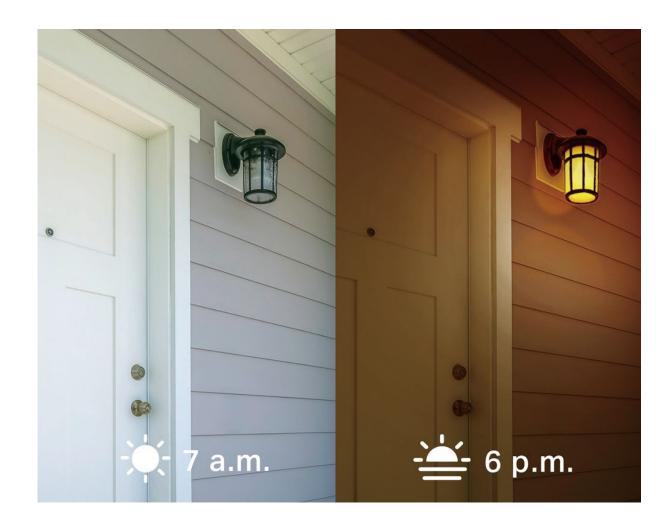

# **Features**

#### · Schedule

Set your dimmer to automatically turn on and off while you're home or away.

#### · Remote Control

Control your connected lights from anywhere, anytime via the free Kasa Smart app.

#### · Away Mode

Set your smart light switch to turn connected fixtures on and off at random intervals to give the appearance you're home even while you're away.

#### · Fade On/Off

Smart dimmer switch smoothly adjusts lighting levels without sudden eye-irritating brightness or darkness. Fade off the lights in your children's bedrooms as they drift off to sleep.

#### · UL Certified

Housed with V-0 (UL94) flame-retardant material, the smart dimmer switch is UL listed for safety use.

#### · Group & Secene

Group your smart switch with other smart devices to control them all at once. Set custom scenes to match any occasion like waking up.

#### · No Hub Required

Easily connect directly to your secured 2.4GHz home Wi-Fi network.

#### · Led Indicator

With an illuminating LED indicator, you'll always be able to find your smart dimmer switch even when it's dark.



# **Specifications**

#### Electrical

- Rating: 100-120V~ 50/60Hz
- · Max Load: 15 A General Use, 600 W Incandescent, 120 W Ceiling Fan, 1/6 HP Motor
- In-Wall Depth: 1.35 in (34.2 mm)
- · Dimming Type\*: Leading Edge Dimming / TRIAC Phase Cut
- \*We recommend contacting your bulb's customer support to verify its compatible dimming options.
- · Neutral wire required
- · Standard wall box (at least 2 inches deep)
- · Single pole switch. Not compatible with 3-way (multi-location) wiring.

### Set Up

- · Black and Light Almond: Bluetooth setup (Select Smart Switch (BLE) in the Kasa Smart app)
- · White: Wi-Fi setup (Select Smart Switch (Wi-Fi) in the Kasa Smart app)

### Requirements

- · IEEE 802.11b/g/n, 2.4 GHz Wi-Fi, Bluetooth for setup only (for black and light almond switches)
- · Kasa Smart app and account

Please do not use in damp environments or outdoors.

#### www.tp-link.com

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. ©2024 TP-Link

#### General

- · Indoor Use Only
- · Buttons: Switch Button, Restart Button, Reset Button, Brightness Up/Down Buttons
- · Operating Temperature: 0 °C ~ 40 °C (32°F ~ 104°F)
- · Operating Humidity: 10%~90%RH, Non-condensing
- · Certifications: FCC, IC, UL, RoHS

### Package Contents

- · 1× Smart Wi-Fi Light Switch
- · 1× Wall Plate
- · 2× Screws
- · 4× Wire Nuts
- · Wire Labels
- · Quick Start Guide

