



Deco App Guide

Simple. Easy. Yet Powerful.

Contents

Get Started 1

About This Guide 2

Introduction to Deco App 3

Set Up 5

Set Up Your Deco Network 6

Network 10

Create a New Network 11

Switch Between Deco Networks 13

Add More Decos 15

Replace Main Deco 16

Manage Deco Network 17

Manage Deco Units 18

Manage Network Clients 19

Deco Smart Home 22

Add Smart Devices 23

Quickly Do Tasks with Shortcut 24

Automate Your Smart Devices 26

Parental Controls 28

Create Profiles 29

Manage Your Kids' Activities 30

View Online Usage Data 36

Set Up Family Time 37

Grant Rewards 40

Network Protections 42

Enable Security+ Protection 43

Device Isolation 47

Camera Security 48

More Features 51

Test Features at the Deco Lab 52

Check Network Reports 58

Block/Unblock Specific Devices 59

QoS 60

Change Wi-Fi Settings 61

Create a Guest Network 63

Create a IoT Network 65

WPS	66
Change Internet Settings	67
Network Optimization	68
Create Static Routes	69
Set Up VPN Server/Client	71
Advanced Features	90
Configure Connection Alerts	94
Control the Light on Decos	95
Upgrade Your Deco	96
Reboot Your Deco	97
Reboot Schedule	98
Control Your Deco with Alexa	99
Enable App Notifications	100
Change App Appearance	101
Change Account Information	102
Add Managers	103
Upgrade Your HomeShield	104
Subscribe to HomeShield Service	105

Get Started

About This Guide

This guide provides a brief introduction to the Deco app.

Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Deco experience.

Conventions

In this guide, the following conventions are used:

Convention	Description
<u>Underline</u>	Hyperlinks are in teal and underlined. You can click to redirect to a website or a specific section.
Teal	Key information appears in teal, including management page text such as menus, items, buttons and so on.
■ Note:	Ignoring this type of note might result in a malfunction or damage to the device.
🔗 Tips:	Indicates important information that helps you make better use of your device.

IoT Compatibility Disclaimer

IoT compatibility refers only to smart devices that can be controlled via the Deco app. Other wireless devices can still connect to Deco for normal Wi-Fi use.

Seamless Roaming Disclaimer

Clients need to support 802.11k/v/r and may require additional set up. Performance may vary depending on the client device.

HomeShield Disclaimer


HomeShield includes the Free Basic Plan. Fees apply for the Pro Plan. Visit <https://www.tp-link.com/homeshield/> for more information.

Introduction to Deco App

TP-Link Deco app is the perfect way to set up your Deco mesh Wi-Fi in minutes and control your whole-home network. You can monitor your home Wi-Fi from anywhere, and make changes right from the palm of your hand.


Your network at-a-glance

Easily access what you use most in the reorganized dashboard. View the network topology and status, manage clients, and more.

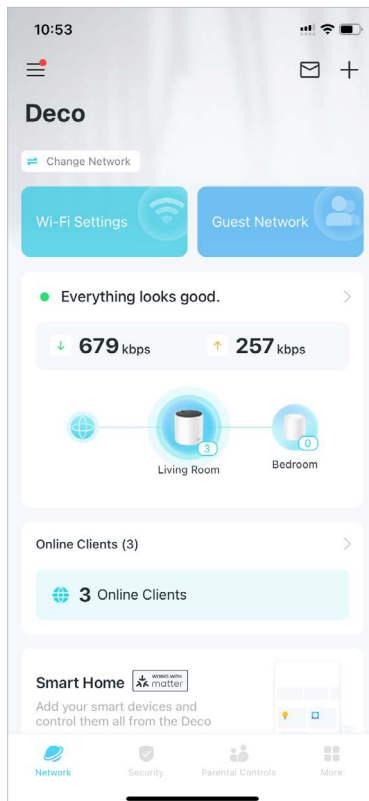


Safeguard your network

Power up your protection against intrusions and attacks, stay updated on security details, and get network recommendations.

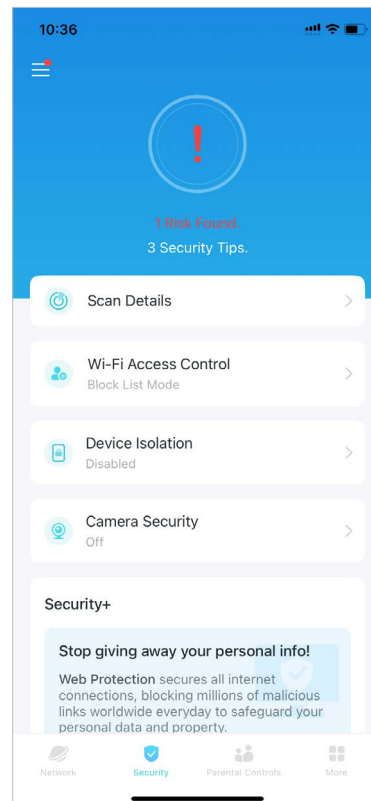


Maintain healthy digital habits

Easily control your kids' online time and content. Receive intuitive charts and detailed statistics concerning your kids' online usage.

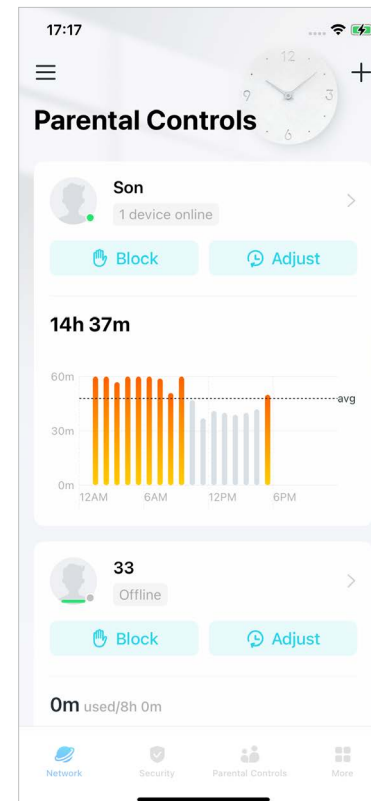

More features within reach


Test the in-development features at the Deco Lab, receive intuitive network reports, set up networks for dedicated needs, and more.

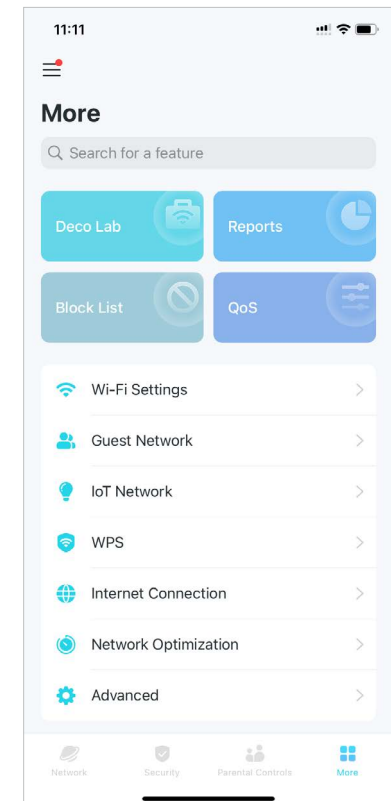

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


Link for more flexibility

Link your Deco with different accounts for more flexible management.

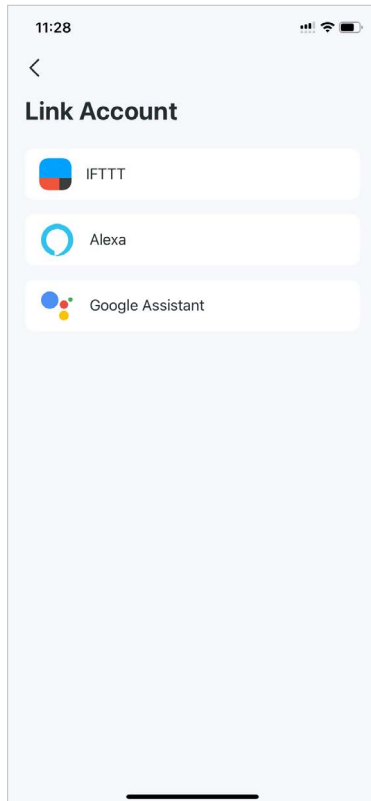


Customize app settings

Get app versions and configure basic app settings such as notifications and appearance.

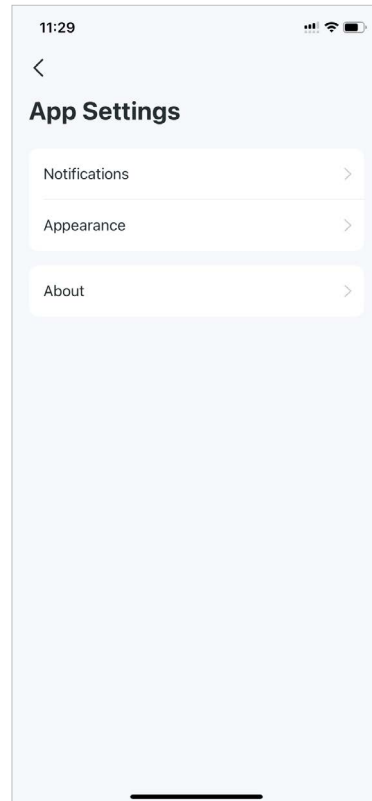

Get help instantly

Find all ways in Support Center to solve the problems you encountered.

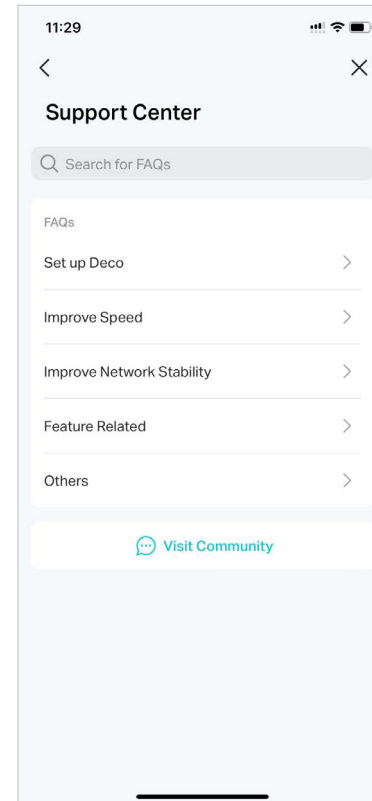

Set Up

Before using your Deco devices, you need to set it up first. Follow the quick setup process on the Deco app to set up your Deco and unlock various features.

Set Up Your Deco Network


First let's start by setting up the Deco network. Get the TP-Link Deco app for iOS or Android, then follow the app to walk through the setup.

1. Get the Deco app

Scan the QR code below or go to Google Play or the App Store to download the Deco app. Install the app on your Android or iOS smartphone or tablet.




or



2. Log in with TP-Link ID


Open the app and log in with your TP-Link ID. If you don't have a TP-Link ID, create one first.

[Tip:](#) If you forgot your login password, tap [Forgot Password](#). The app will help you reset your password.

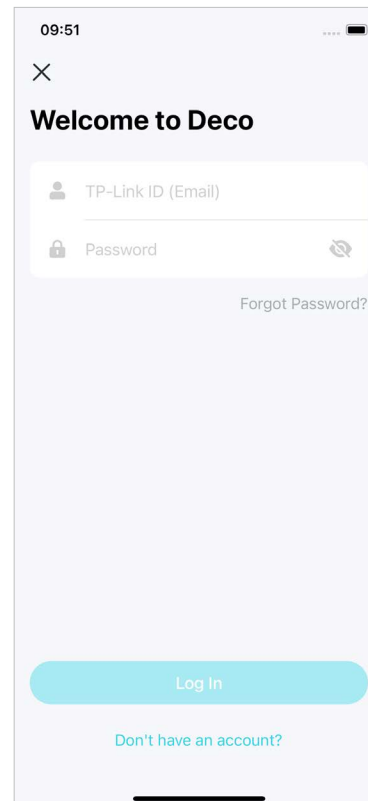

3. Select your Deco model

Search for and select your Deco model. If you have more than one Deco model, tap the question below the search box to check how to maximize the overall network.

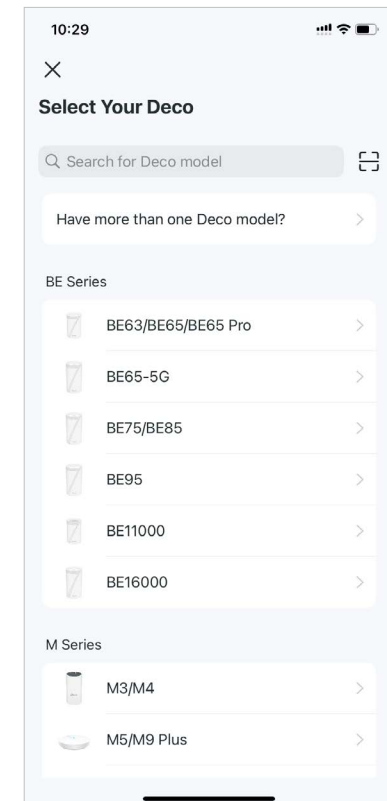


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

4. Plug in your devices


Power off your modem, connect your Deco to the modem and power them both on.

If you don't have a modem, connect your Deco directly to the Ethernet outlet.

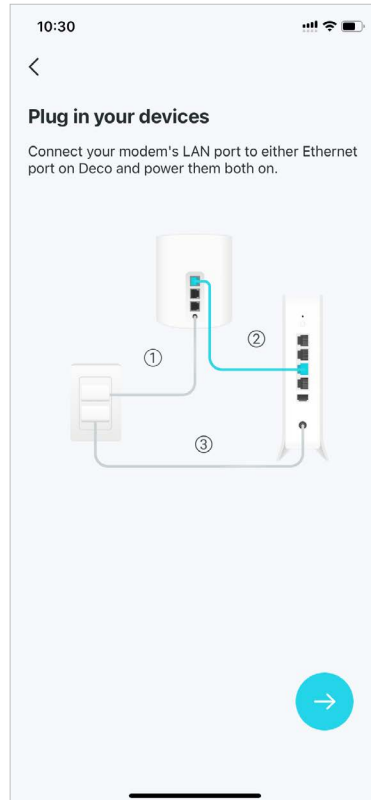


5. Wait until your Deco is ready for setup

Wait until your Deco's LED pulses blue, indicating that your Deco is ready for setup. Connect your phone/tablet to the Deco's default Wi-Fi.

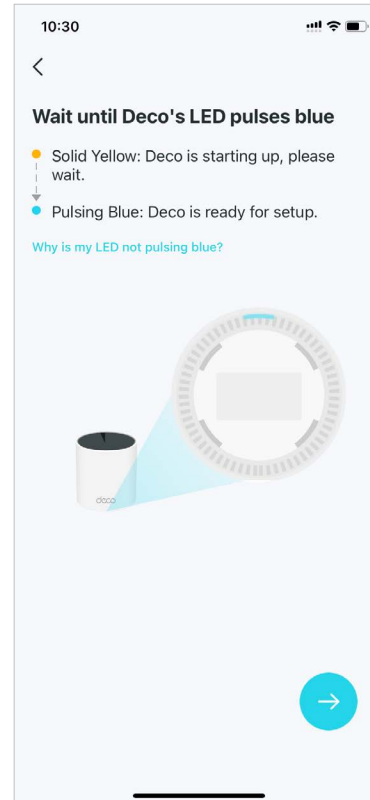

6. Specify your Deco's location

Select or custom a location for your Deco. The location will be used as the name of your Deco.

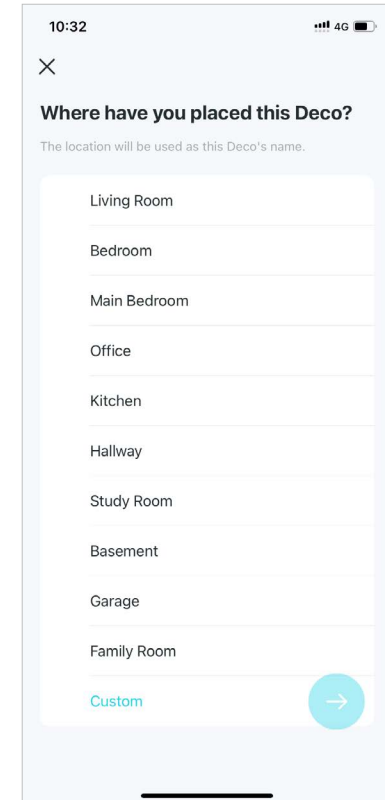

7. Connect your Deco to the internet

Select the internet connection type and enter the information. If you are not sure, contact your internet service provider.

10:33 4G

×

Connect your Deco to the internet

Enter the information provided by your ISP (internet service provider). If you are unsure, contact your ISP.

Internet Connection Type
Dynamic IP

IPTV/VLAN Settings Off

[Need to change MAC address?](#)

Next

8. Create your Wi-Fi network

Set a network name and a password. These will be the name and password you use to connect your devices to Wi-Fi.

10:33

×

Create your Wi-Fi Network

This will be the name and password you'll use to access your network. Your password must be at least 8 characters.

Network Name (SSID)

At least 8 characters

It is recommended to set a password using a combination of letters, numbers, and symbols.

Next

9. Keep your Deco up-to-date (Optional)

Set auto update time. This allows your Deco to automatically update to the latest firmware which provides better network experience.

10:34

×

Skip

Keep your Deco up-to-date.

Auto update allows your Deco to automatically update to the latest firmware which provides better network performance.

Update Schedule 3:00 AM - 5:00 AM

1:00 AM - 3:00 AM

2:00 AM - 4:00 AM

3:00 AM - 5:00 AM

4:00 AM - 6:00 AM


5:00 AM - 7:00 AM

If the Deco detects anyone is using the internet at the time, the update will be rescheduled for the next day.

→

10. Connect to your Wi-Fi network

Connect your phone/tablet to the Deco's Wi-Fi.

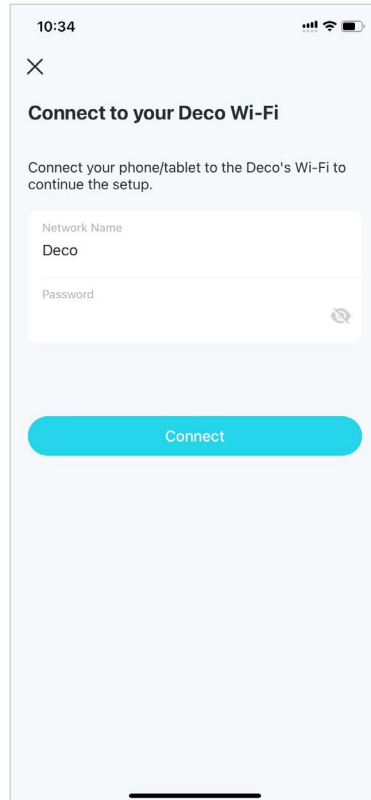

11. Setup complete

Your Deco network is now up. You can connect your devices to the Deco network. Plug in the other included Decos, and they will automatically join the network within 2 minutes.



Network



After setting up your Deco network, you can easily access what you use most in the dashboard. Create a new network, switch between networks, view the network topology and status, manage clients, and more.

Create a New Network

In the Deco app, you can create different Deco networks with your TP-Link ID and manage them conveniently from the Deco app with one account. Two methods are provided as below to create a new network.

Method 1. Via Home Page


1. On the home page, tap **+** and select **Create a Network**.
2. Search for and select your Deco model. Then follow app instructions to create the network.

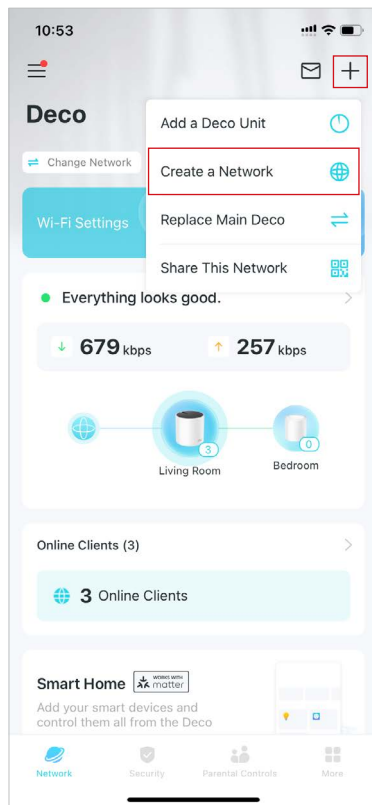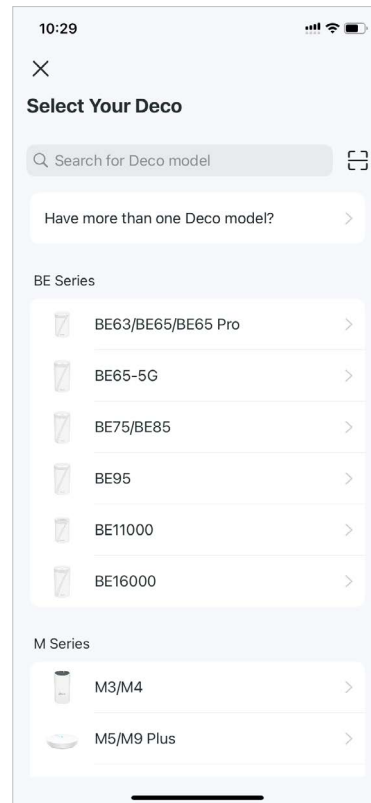


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Method 2. Via Side Menu


1. Tap  to open the side menu.

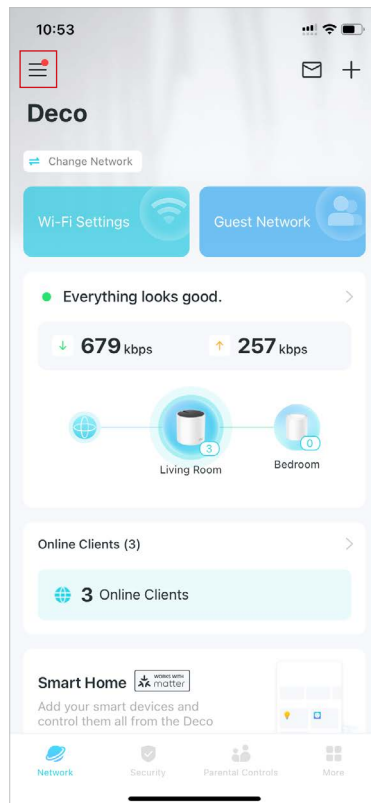


2. Tap .

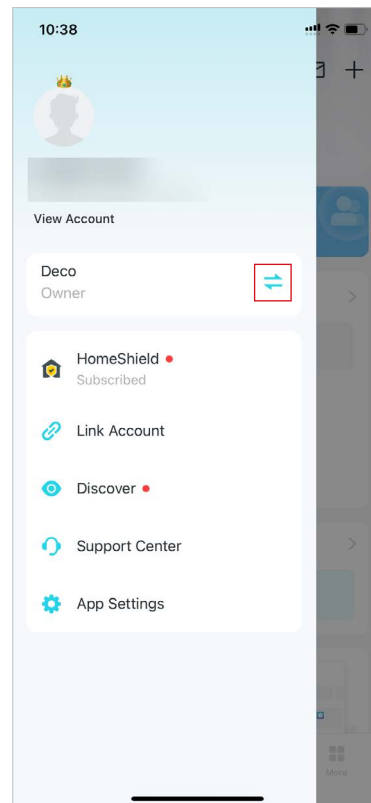

3. Tap [Create New Network](#).

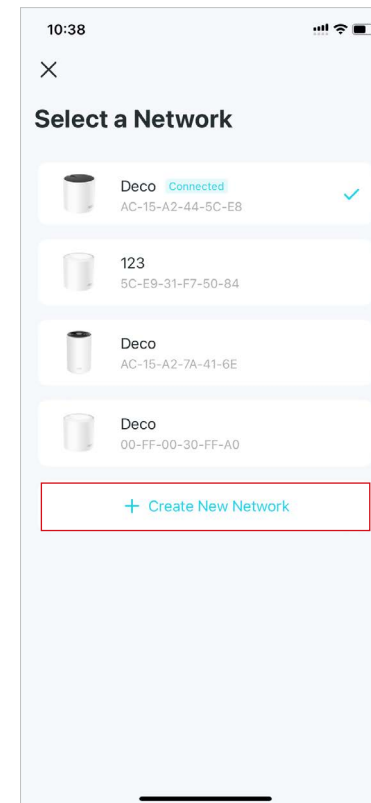

4. Search for and select your Deco model. Follow app instructions to create the network.


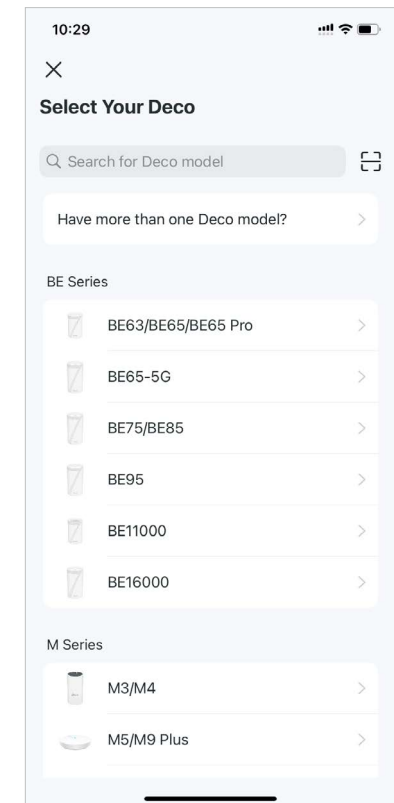


Switch Between Deco Networks

If you have created multiple Deco networks with your TP-Link ID, you can switch between them conveniently on the Deco app.

Method 1. Via Home Page

1. On the home page, tap [Change Network](#).
2. Select a network to switch to.

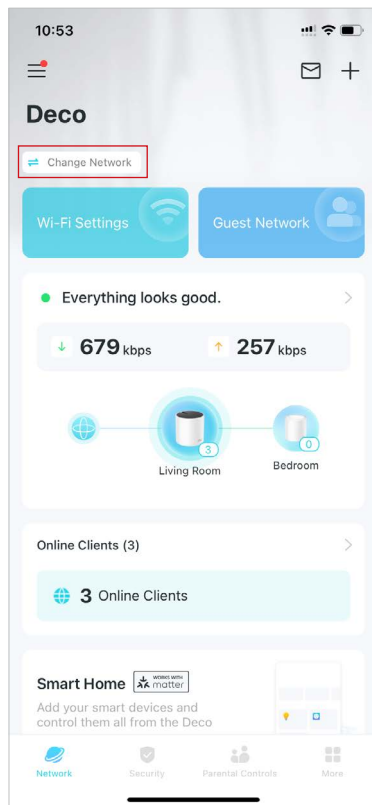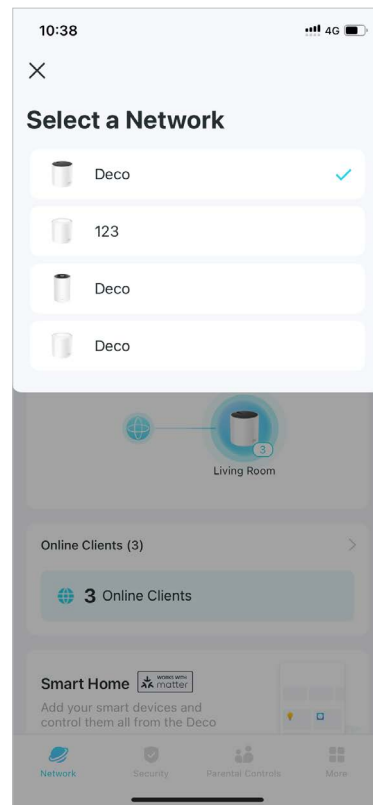




* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Method 2. Via Side Menu

1. Tap  to open the side menu.

2. Tap .


3. Select a network to switch to.

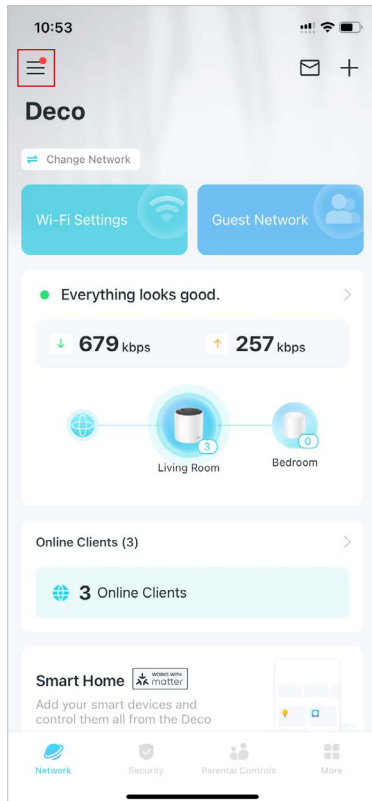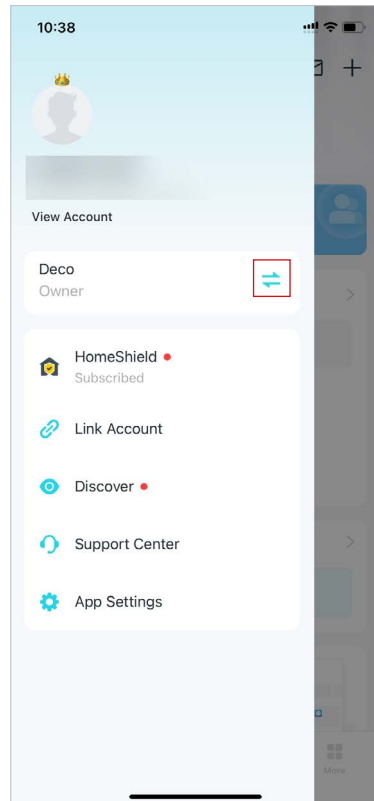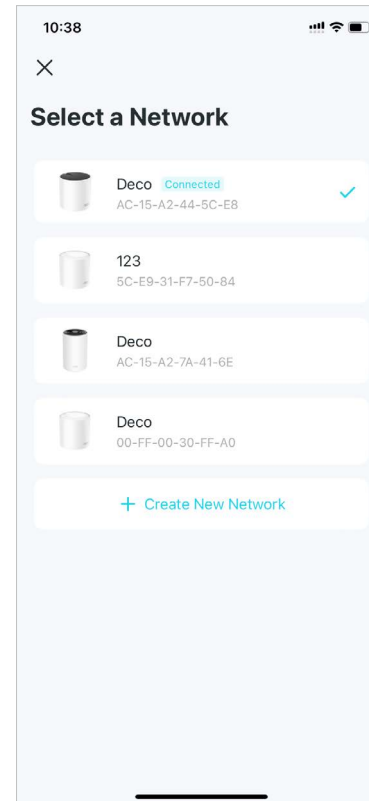



Add More Decos

After creating a Deco network, you can add more Decos to the network to expand the Wi-Fi coverage and manage them easily on your Deco app.

1. On the home page, tap **+** and select **Add a Deco Unit**.

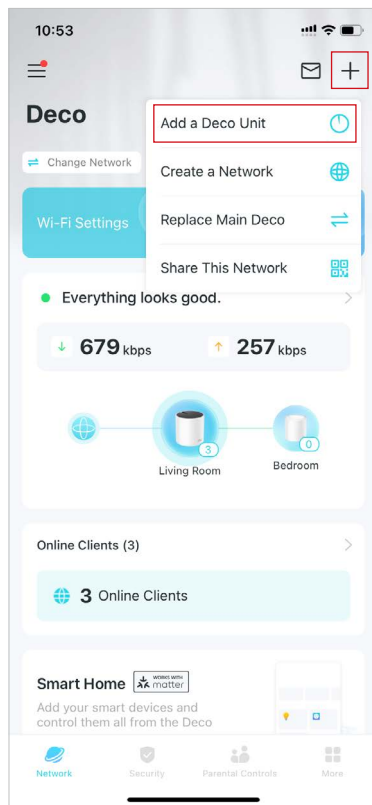

2. Search for and select your Deco model. Then follow app instructions to add the Deco.

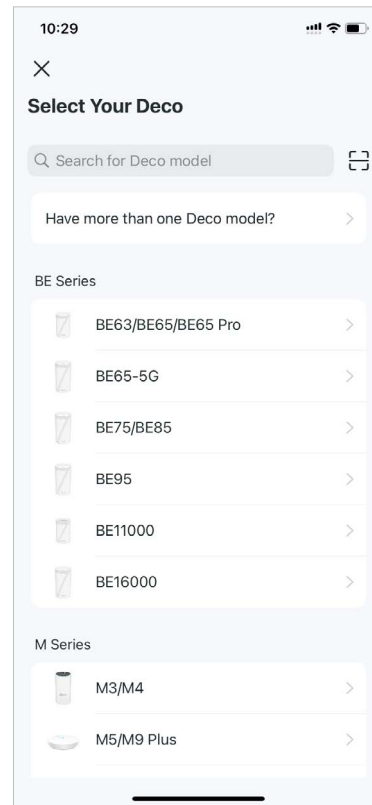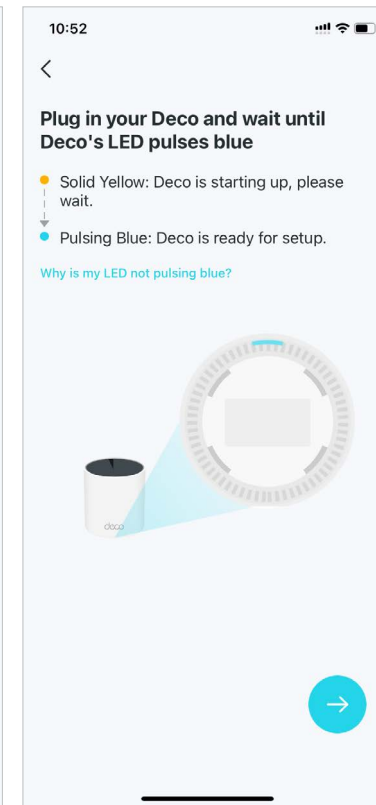

Replace Main Deco




You can replace the current main Deco with a new Deco, and your internet configuration and Wi-Fi settings will remain unchanged.

■ Note: Make sure that the new Deco supports the operation mode of the current main Deco. Otherwise, the network may be unavailable.

1. On the home page, tap **+** and select **Replace Main Deco**.

2. Follow instructions to complete the settings.


■ Note: When replacing your Deco, your network will be temporarily unavailable.

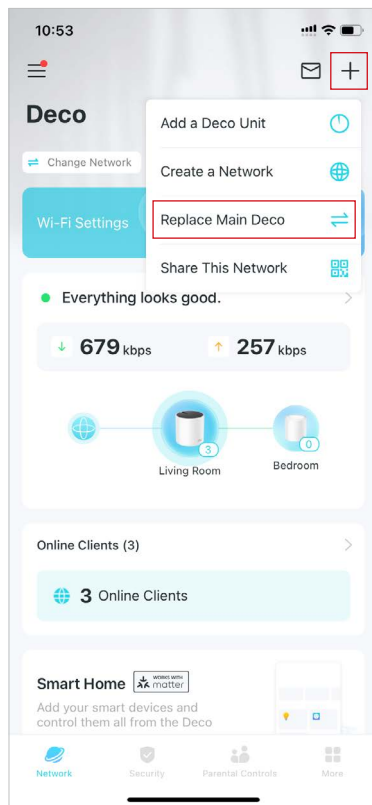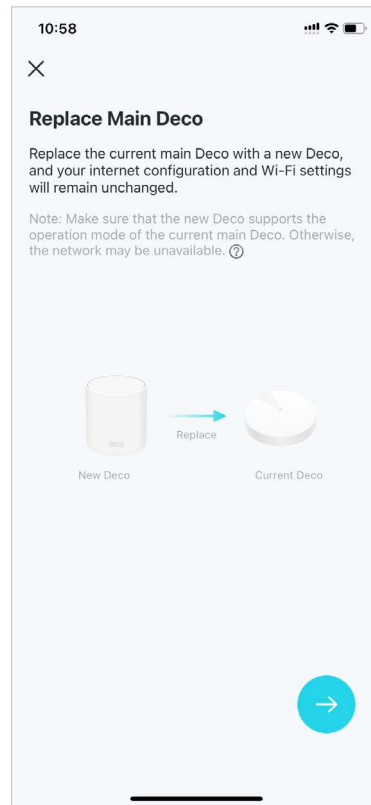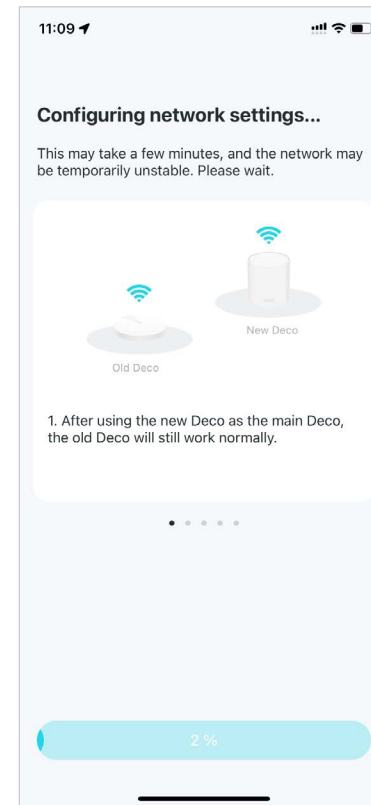

Manage Deco Network




After setting up your Deco network, you can easily manage your whole-home network. Check the network status and speeds, reboot network, change the network owner and main Deco, delete the network, and more.

1. On the home page, tap the Network module.

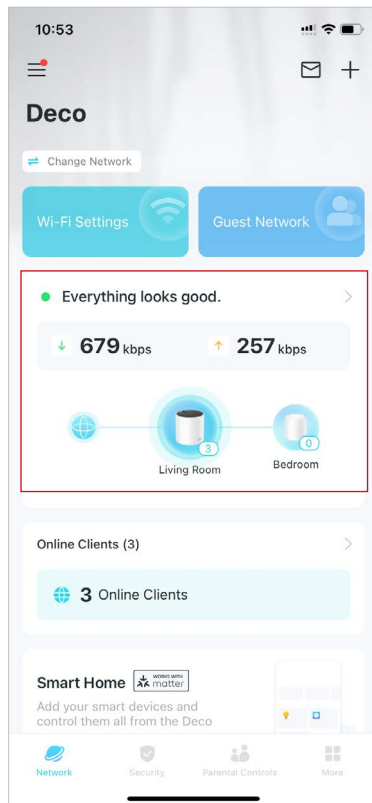

2. Check the network status, speeds, and connected devices.


Tap  to manage the network,

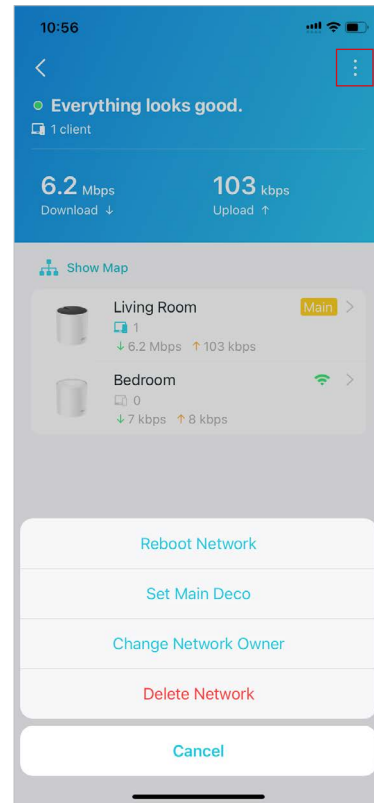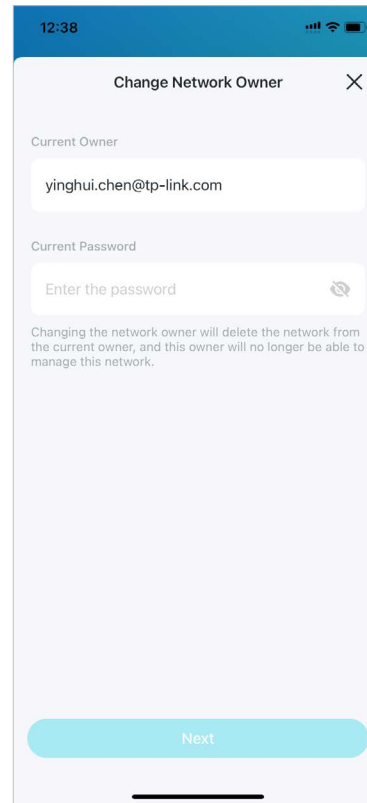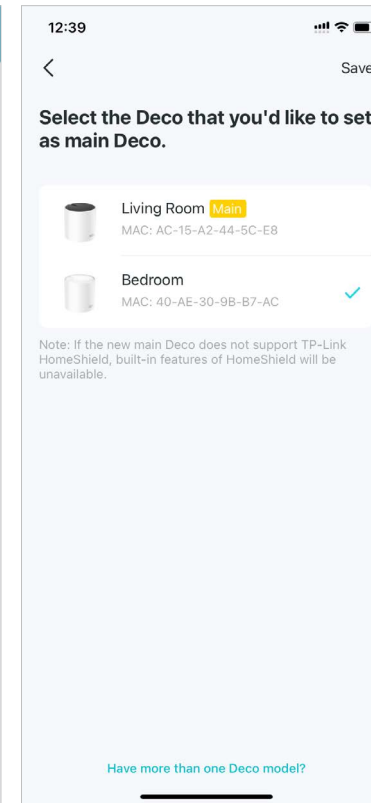


Manage Deco Units

You can easily manage the Deco units in your network. View Deco connections, check the clients of each Deco, edit the Deco's name, and reboot or remove a Deco.


1. On the home page, tap the Network module.

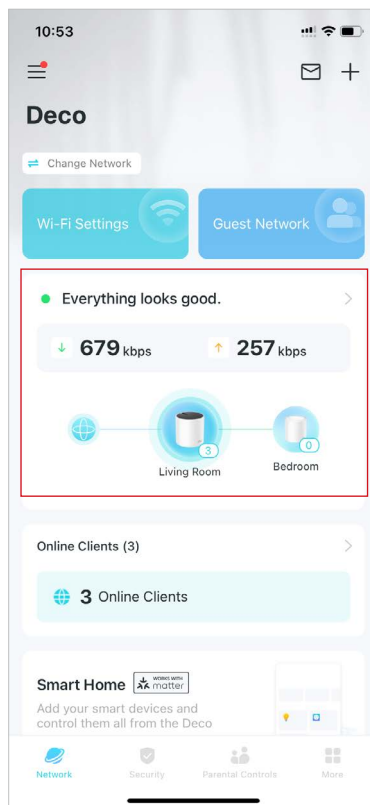

2. Tap a Deco to view device details.

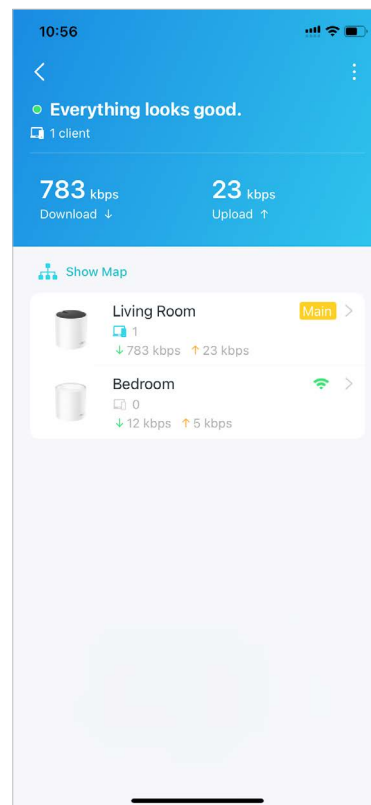


3. Tap  to configure the Deco settings, like rebooting or removing the Deco.

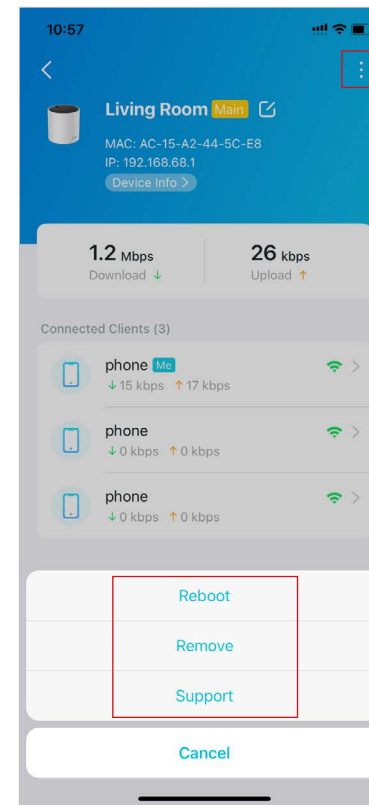


Manage Network Clients

You can manage each network client easily. Change the device name, check its connection status, add it to the profile of a family member, enable high priority and Mesh Technology for it, and block the device.


1. On the home page, tap the Clients module.

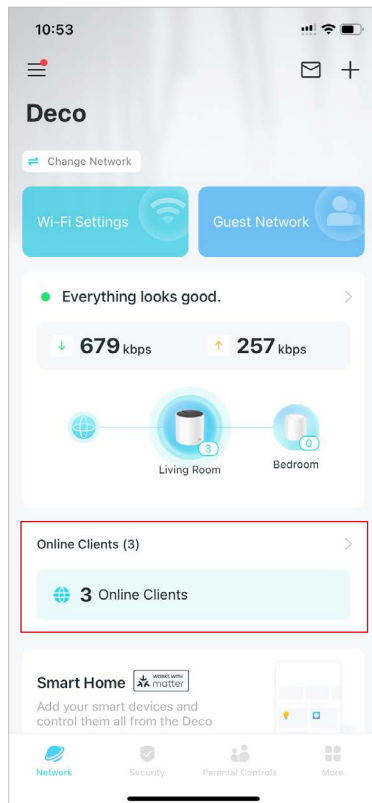


2. Tap a client to view the details.

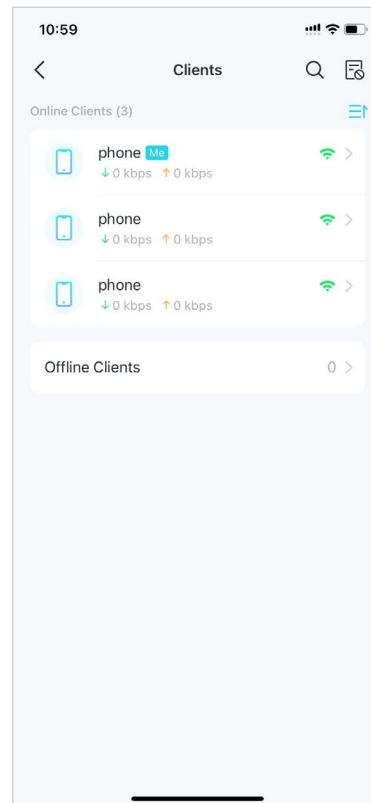


3. Tap the device icon to configure the device type and name.

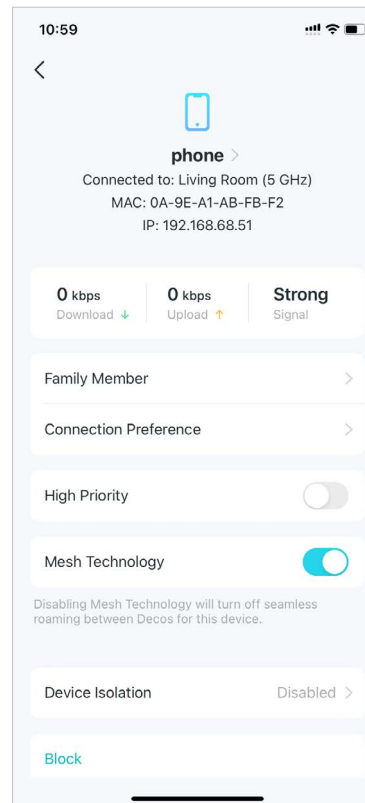


4. Tap **Family Member** to check the profile it belongs to.

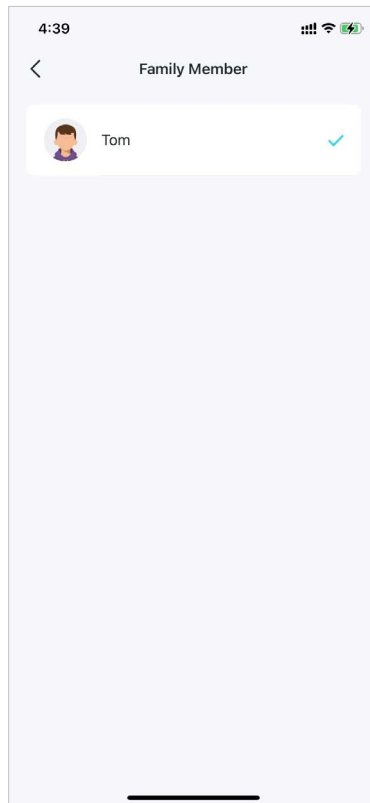


5. Tap **Connection Preference** to configure the preferred Deco and Wi-Fi band for this client.

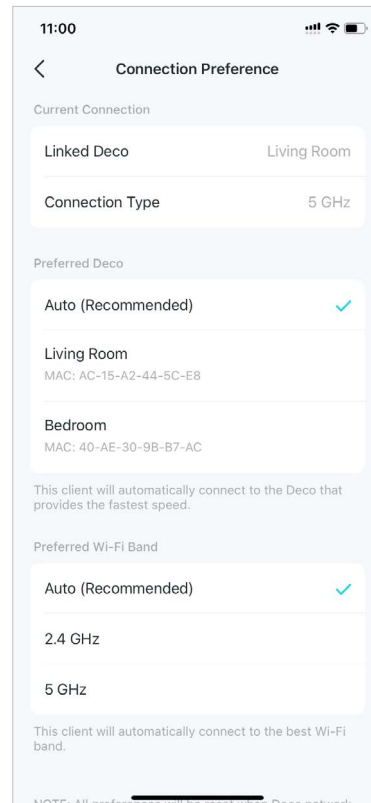


6. Enable **High Priority** for this client.

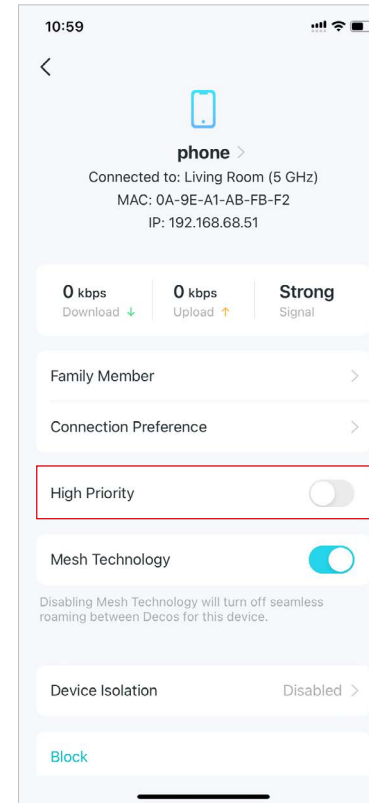


7. Enable **Mesh Technology** for this client to turn on seamless roaming between Decos for this device.

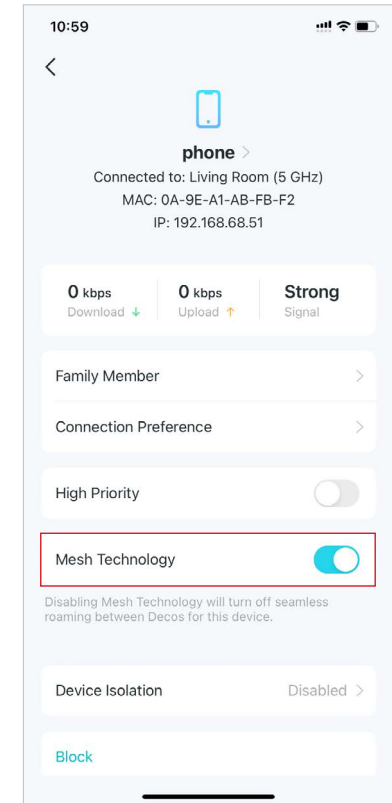

8. Enable [Device Isolation](#) to block this device from communicating with other devices on the network to ensure the network security. Refer to [Device Isolation](#) for more details.

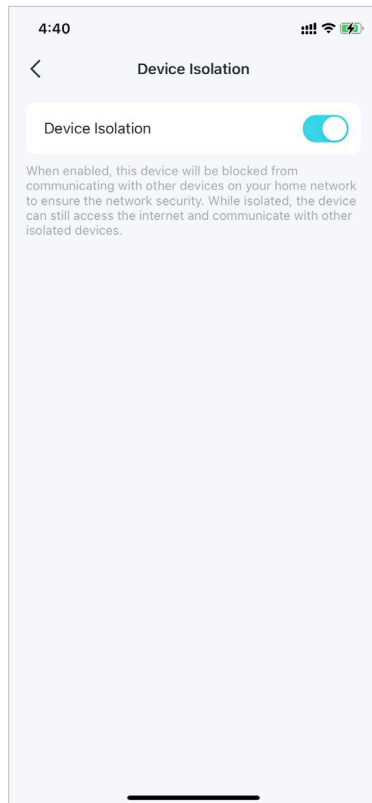

9. Tap [Block](#) to prevent this device from accessing to the network.

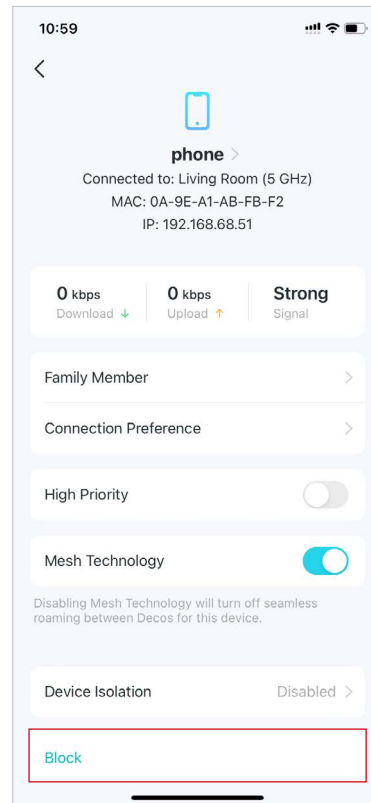


Deco Smart Home

Deco works as a central controller to manage your smart devices such as smart bulbs, plugs, and switches. It allows you to access the devices in your local area network (LAN) through the Deco app even when your home goes offline.


Add Smart Devices

After creating a Deco network, you can add your smart home devices to the network and manage them conveniently on your Deco app.


1. On the home page, swipe up and tap the Smart Home module.

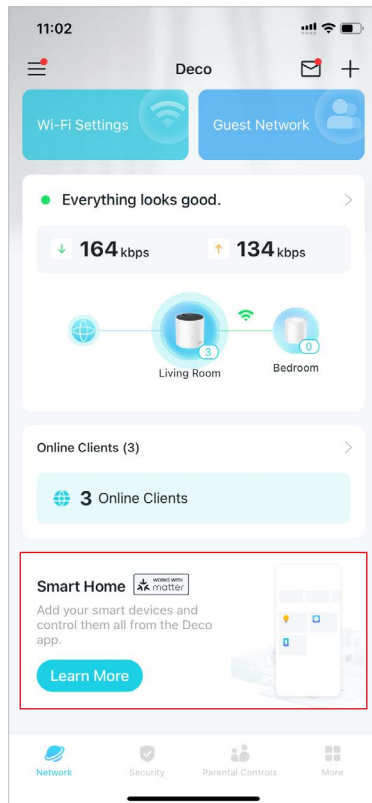


2. Tap [Get Started](#).

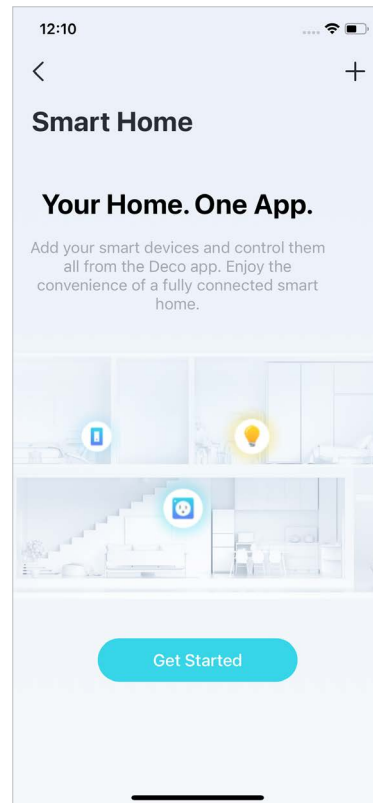

3. Select the brand of your device and follow the instructions to add it to your Smart Home.

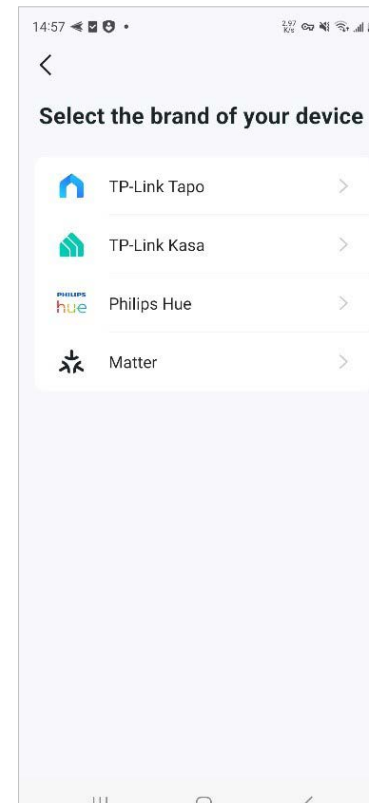

4. When finished setup, you can manage your smart devices on Deco Smart Home.

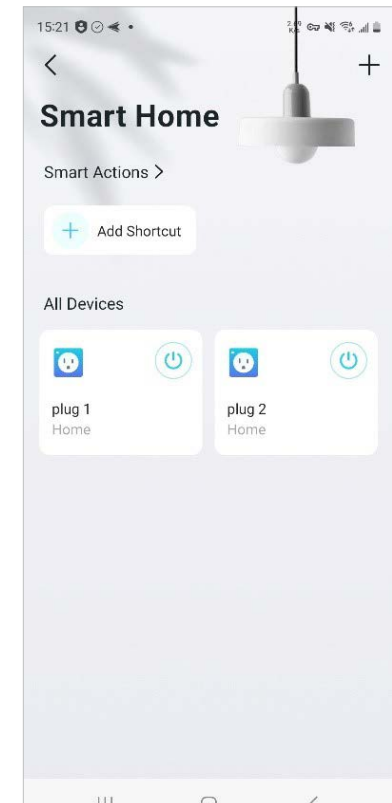


Quickly Do Tasks with Shortcut


Shortcut lets you execute an action with a simple tap. For example, if you want to power off your living room light at one tap, follow the steps below.

📌 Note: If you want to create shortcuts for your smart devices, refer to [Add Smart Devices](#) to add the them to your Deco network first.


1. On the home page, swipe up and tap the Smart module.

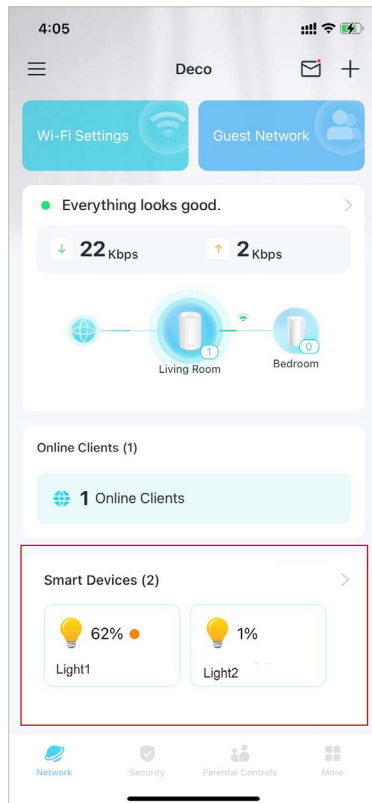


2. Tap + and select [Add Shortcut](#).

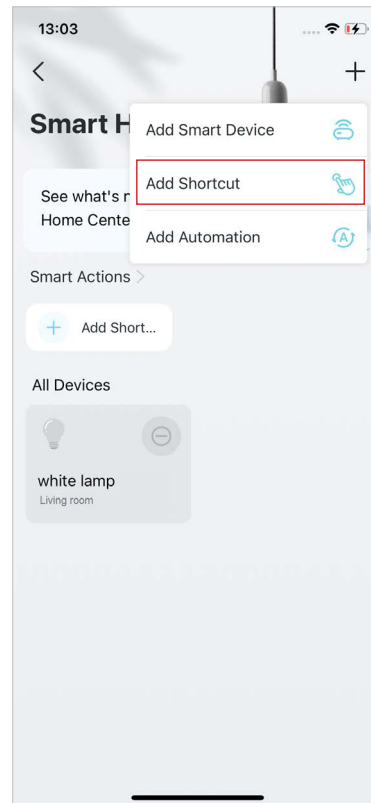


3. Tap [Add Action](#).

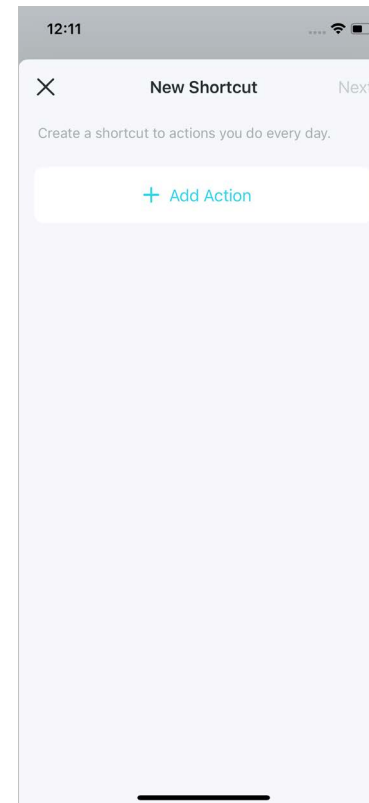


4. Choose the devices you'd like to control.

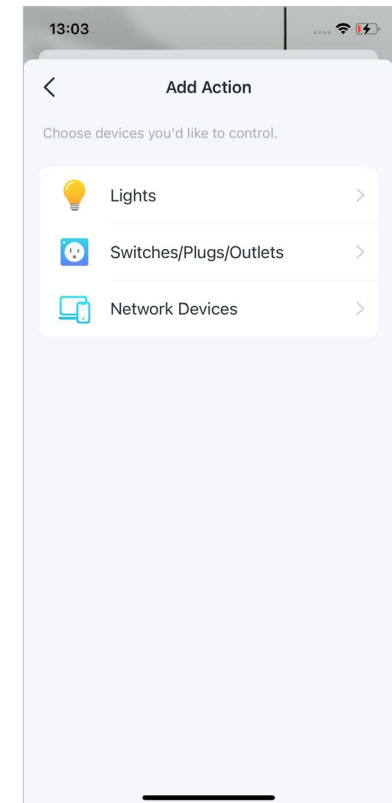


5. Add an action to be executed with a simple tap.

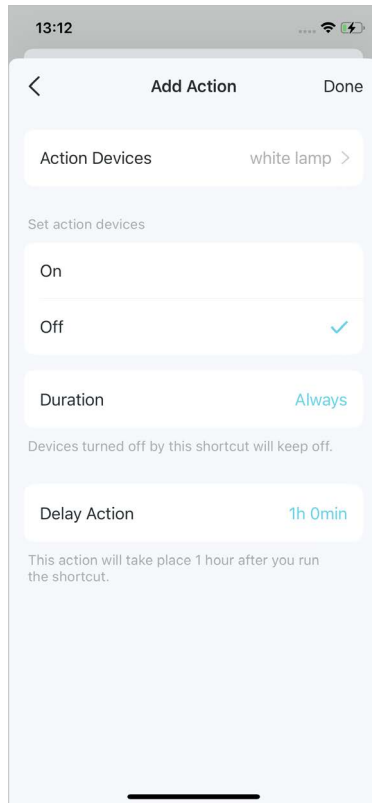

6. Name the shortcut and choose an icon for easy identification.

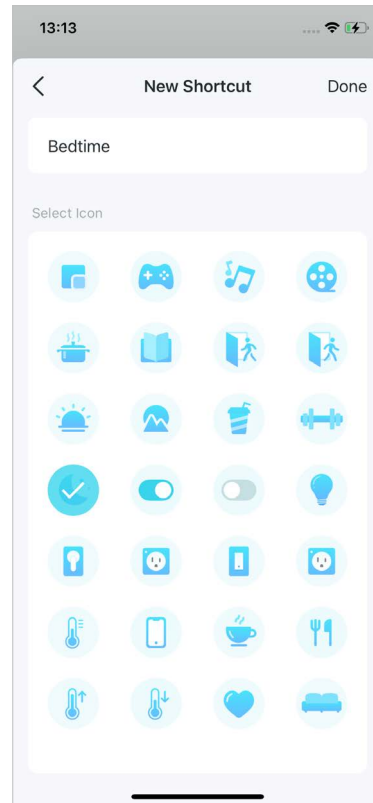

Now you can tap to execute the action anytime you like.

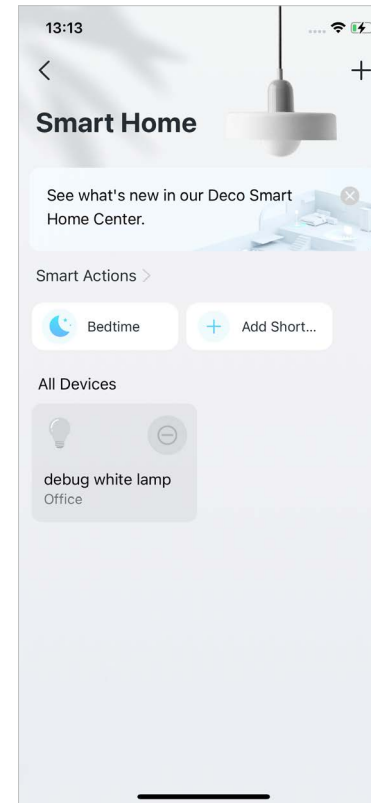


Automate Your Smart Devices


Automation allows you to set interactions between your devices by adding triggers and actions. For example, when you arrive home or when your smartphone is connected to the Deco network (which is a trigger), the living room plug automatically turns on (which is an action). Then the kettle plugged into the living room plug will start to boil water.

■ Note: If you want to create shortcuts for your smart devices, refer to [Add Smart Devices](#) to add the them to your Deco network first.


1. On the home page, swipe up and tap the Smart module.

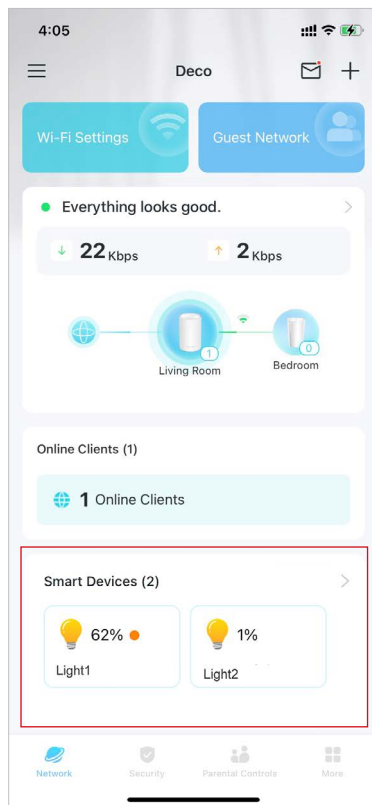


2. Tap + and select [Add Automation](#).

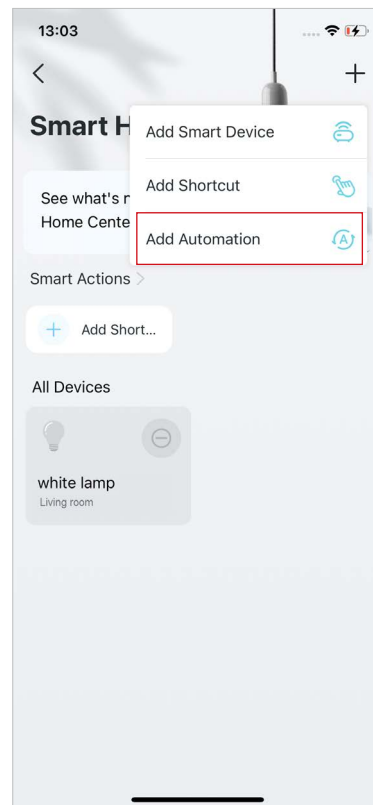

3. Tap [Add Trigger](#).

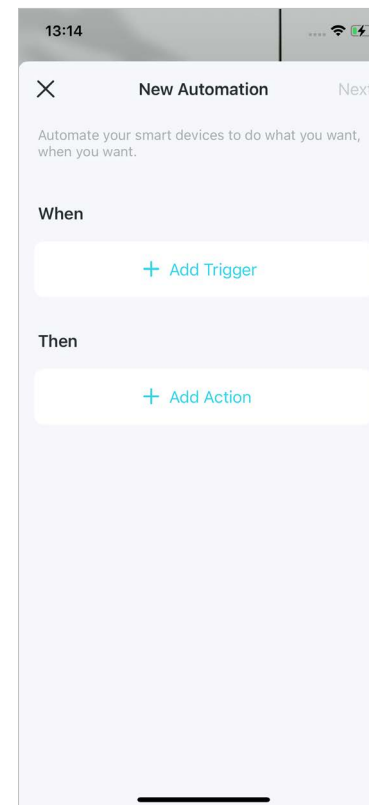


4. Set a time or device trigger to activate this automation.

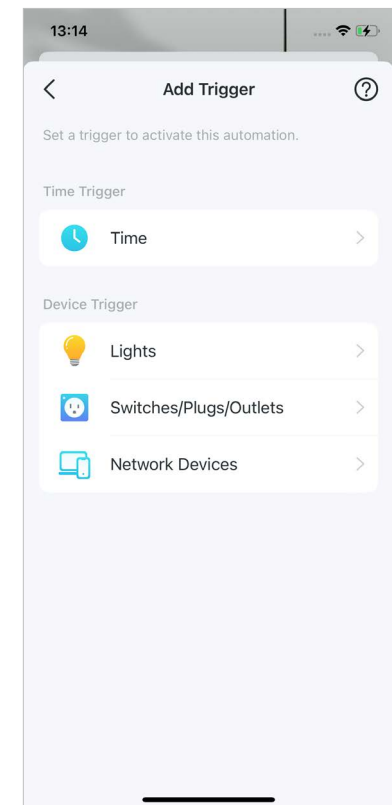


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


5. Add an action to be executed when triggered.

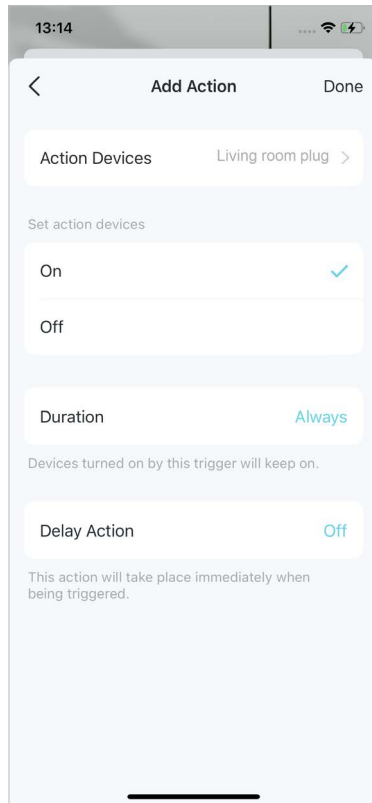

6. Name the automation.

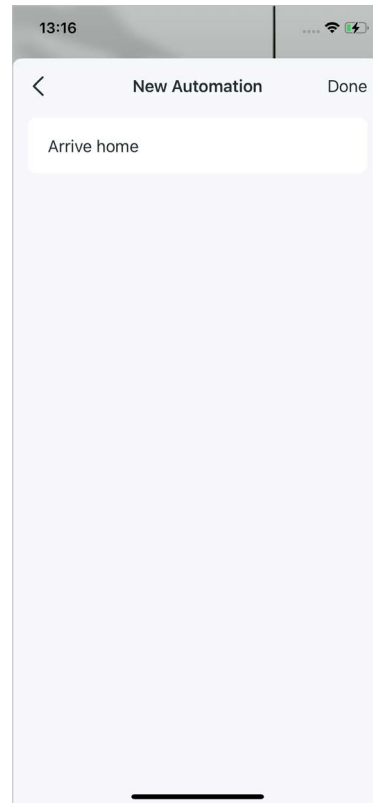

Now the action will be executed when triggered.

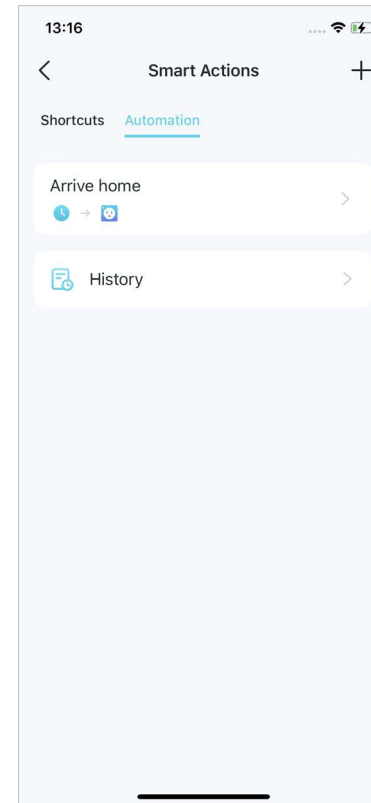

Parental Controls


Parental Controls helps your kids maintain healthy digital habits.

Easily control your kids' online time and content. Receive intuitive charts and detailed statistics concerning your kids' internet usage.


Create Profiles

To use Parental Controls, let's start by creating profiles for your kids.


1. On the home page, tap **Parental Controls** and tap **Get Started**.

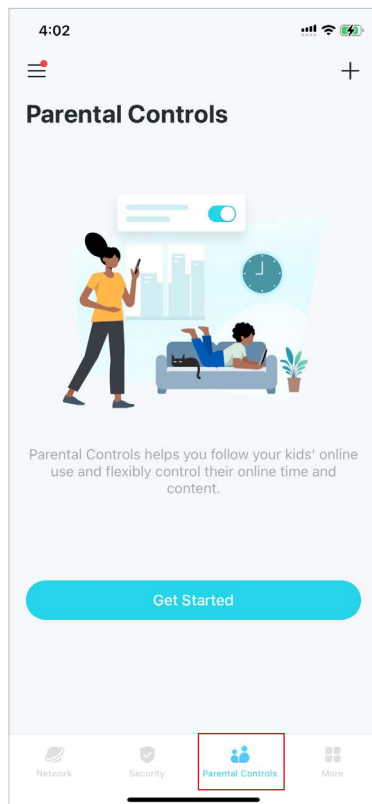

2. Create a profile for your kid.

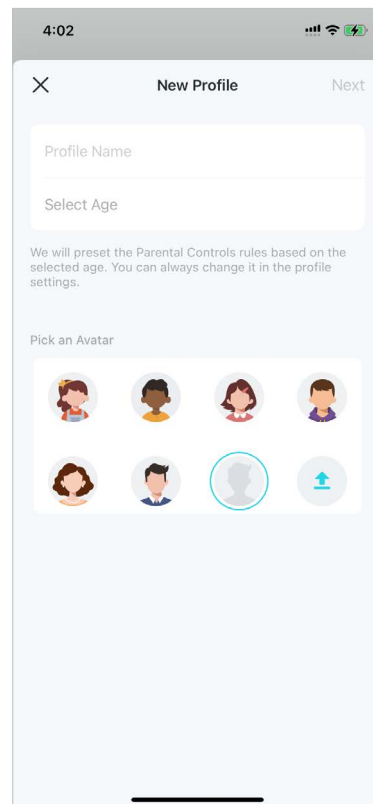


3. Select the devices belong to your kid.

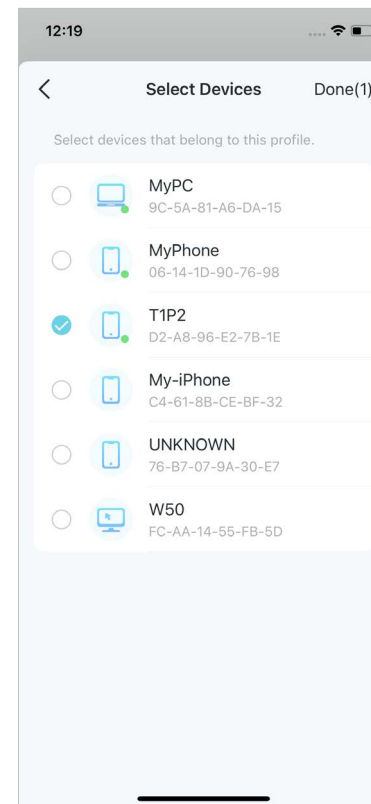

4. Follow the instructions to complete the settings, then a profile will be created.

Note: Features with  is for Advanced Parental Controls users only.

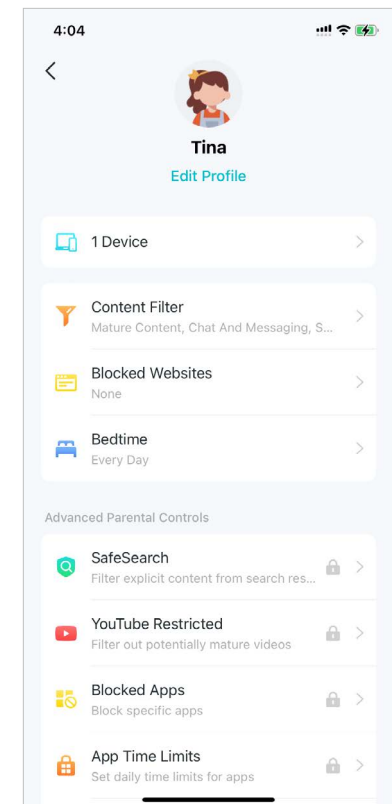


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


Manage Your Kids' Activities

You can use Parental Controls features to manage your kids online activities such as online time and content. Some features are for HomeShield Subscription Service users only. You need to upgrade to Advanced Parental Controls to use these features. Other features are free for use.

1. On the home page, tap **Parental Controls** and select your kid's profile.


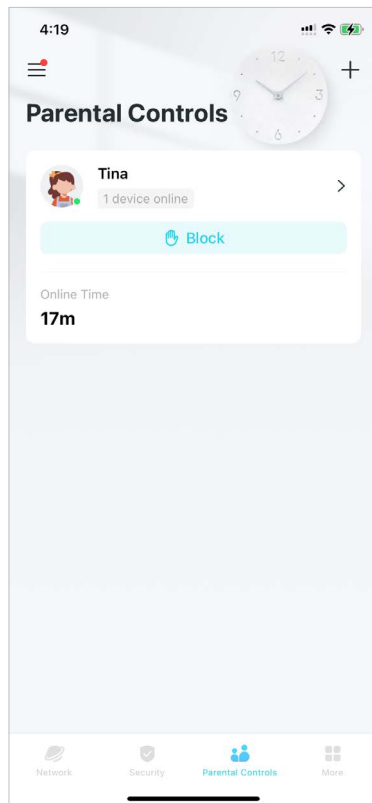


2. Tap the icon .

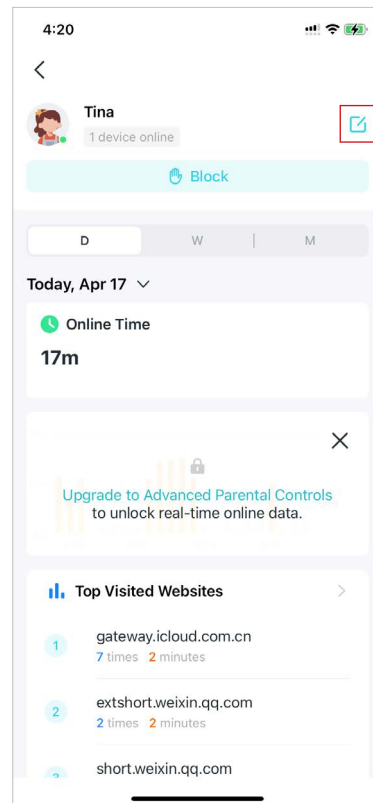

3. Manage the online activities for your kids.

Note: Features with  is for HomeShield Subscription Service users only. Please upgrade to Advanced Parental Controls to unlock more flexible settings.

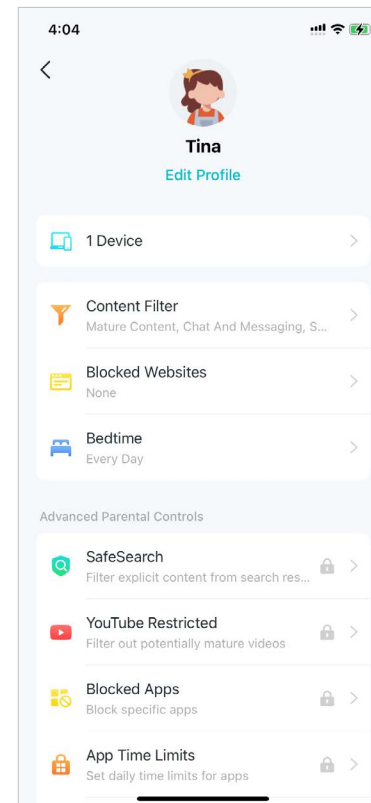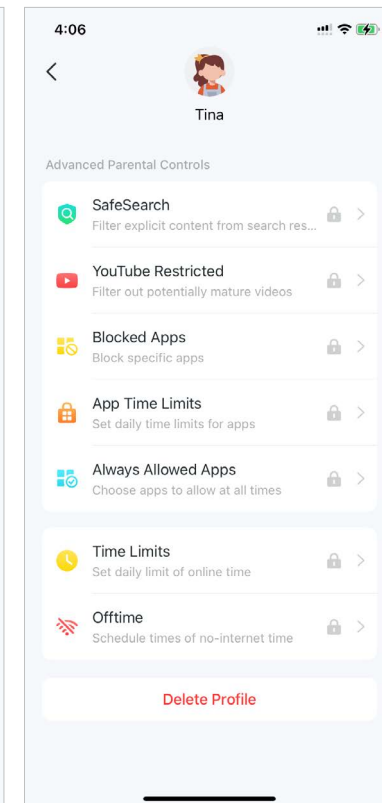


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Features for all:

- Filter inappropriate content


Tap [Content Filter](#). The categories selected here will be blocked from accessing.

You can add accessible exception sites in [Manage Allowed Websites](#).

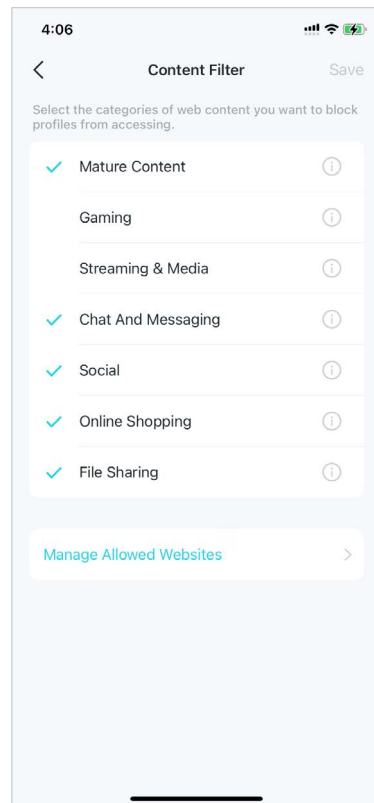

- Block specific websites

Tap [Block Websites](#) and enter the websites you want to prevent the profile from accessing.

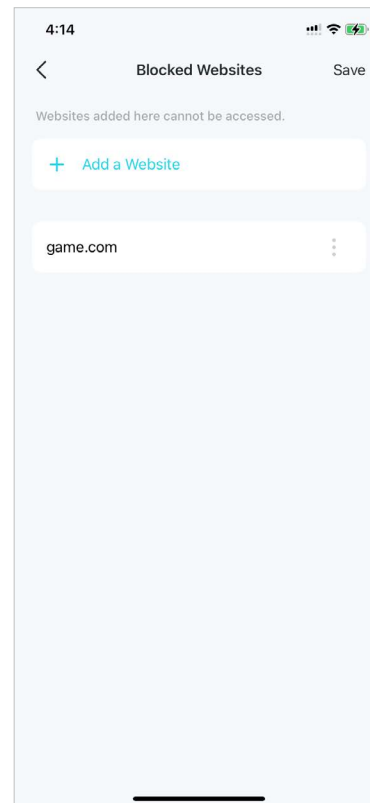


- Set "no internet" bedtime

Tap [Bedtime](#) and set a bedtime to prevent the profile from accessing the internet.

To set a more flexible bedtime, upgrade to Advanced Parental Controls.

Note: Features with  is for Advanced Parental Controls users only.

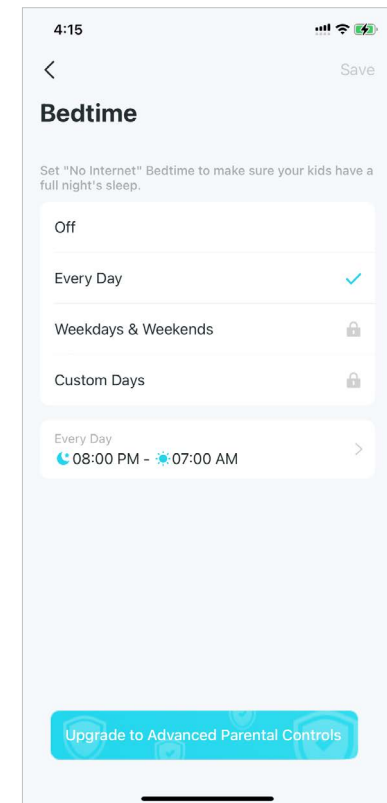


More Flexible Settings for Advanced Parental Controls users only:

- Block specific apps

Tap **Blocked Apps** and select the categories or apps to prevent the profile from accessing.


📌 Note:

1. If you block an app category, new applications in that category after a firmware upgrade will also be blocked.
2. Only apps displayed in the list can be blocked. Apps not on the list will be allowed to access.
3. If you block apps that have been previously added to App Time Limits, the rules you set in App Time Limits will be ignored and these apps will be blocked.

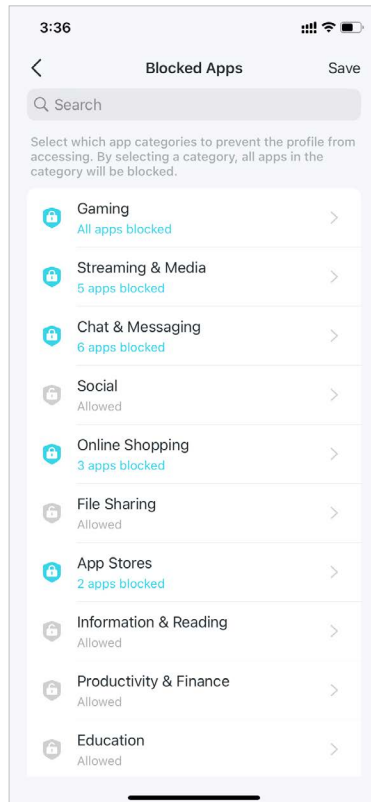


- Youtube Restricted

Youtube Restricted Mode filters out potentially mature videos while leaving most videos available.

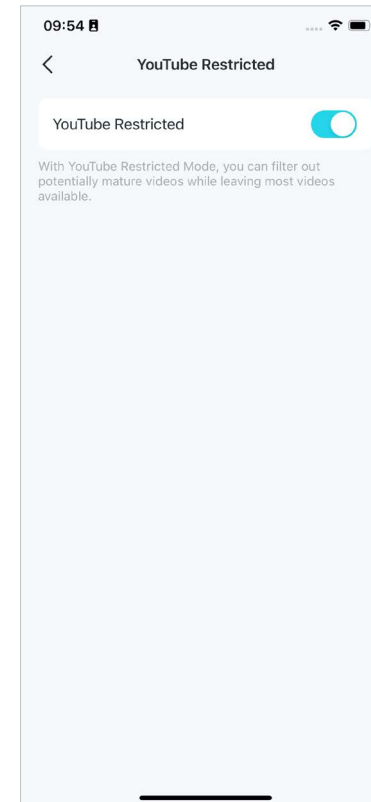


- Safesearch

Safesearch helps you filter explicit content from your results.


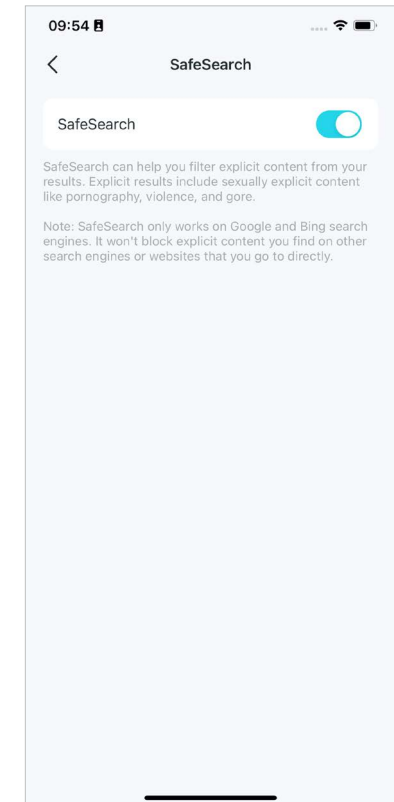


- Always Allowed Apps

1. Tap [Add Apps](#).

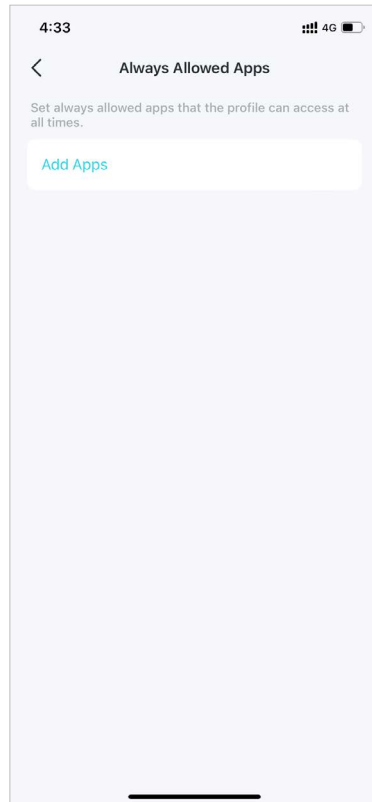


2. Select app categories or specific apps that the profile can access at all times, regardless of whether they were previously added to Blocked Apps or App Time Limits.

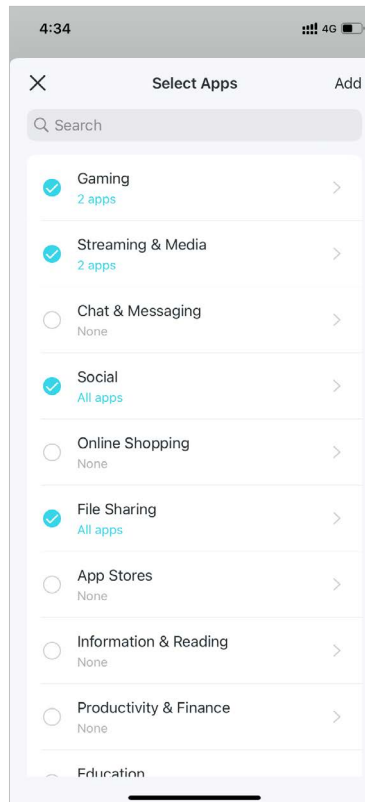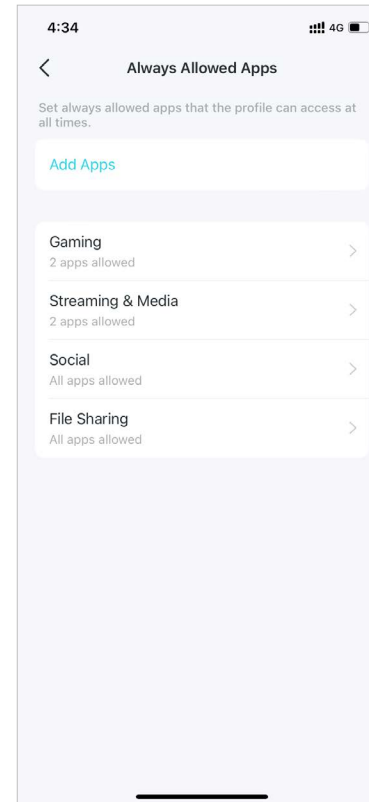


- App Time Limits

1. Tap [Add Limits](#).

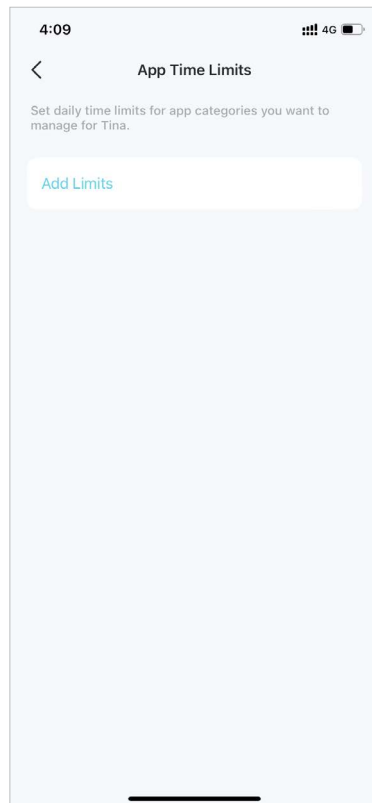

2. Select app categories or specific apps.

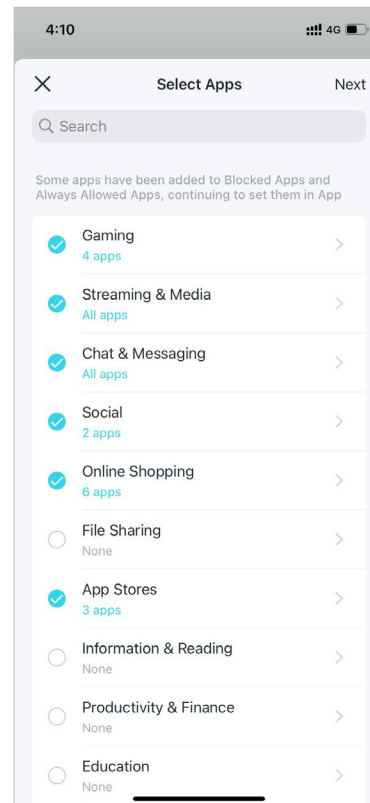


3. Set time limits for the selected apps and tap [Add](#) to save the settings.

Note:


1. If you set time limits for apps that have been previously added to Blocked Apps, these apps will be unblocked and follow the rules you set in App Time Limits.

2. Time limits here refer to the time the device uses internet traffic. Activities that don't use traffic, such as single-player gaming and video buffering, are not included.

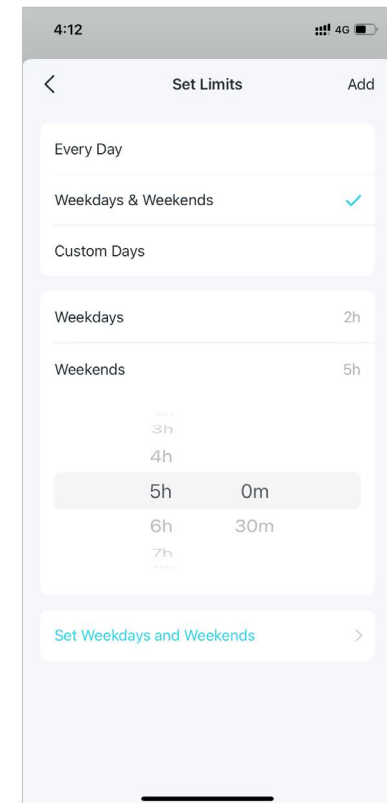


- Time Limits


1. Tap [Add Limits](#).

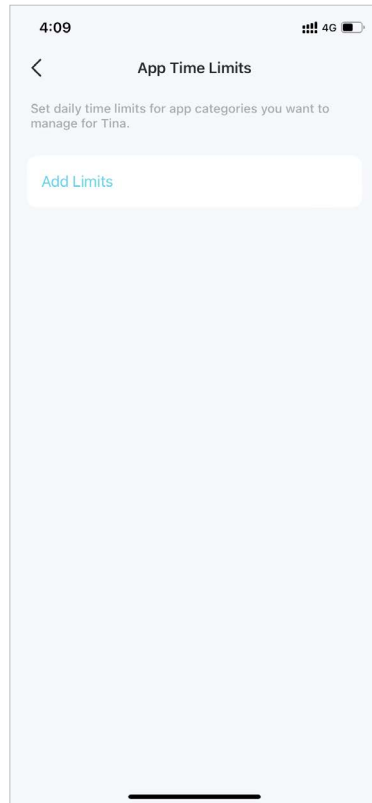

2. Select apps you want to manage for the profile.

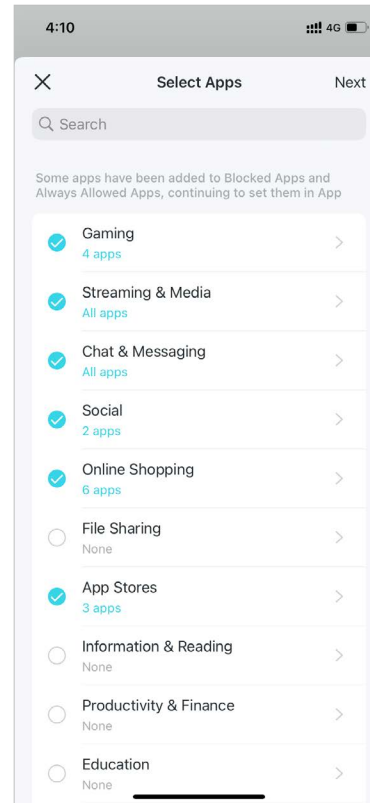

3. Set time limits for the selected apps and tap [Add](#) to save the settings.




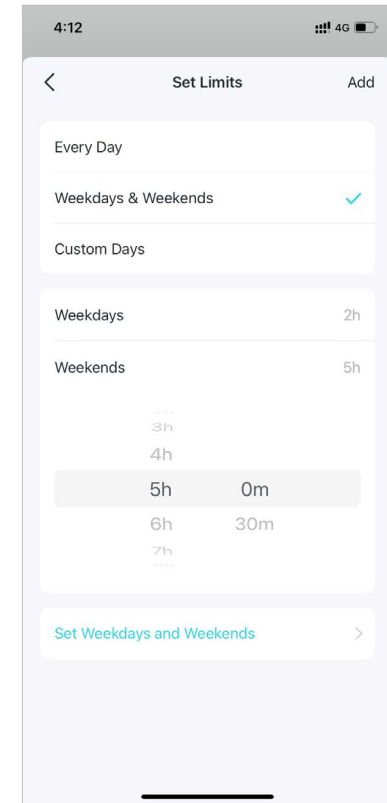


View Online Usage Data

With the created profiles, you can view intuitive charts and real-time detailed statistics concerning your kids' online usage.

 Note: App usage data is for HomeShield Subscription Service users only. Upgrade to Advanced Parental Controls to see what apps your kids use and how much time they spend.

- 1. On the home page, tap [Parental Controls](#).
- 2. Tap a profile to check the online usage data such as most visited websites and most used apps, block history, and more.

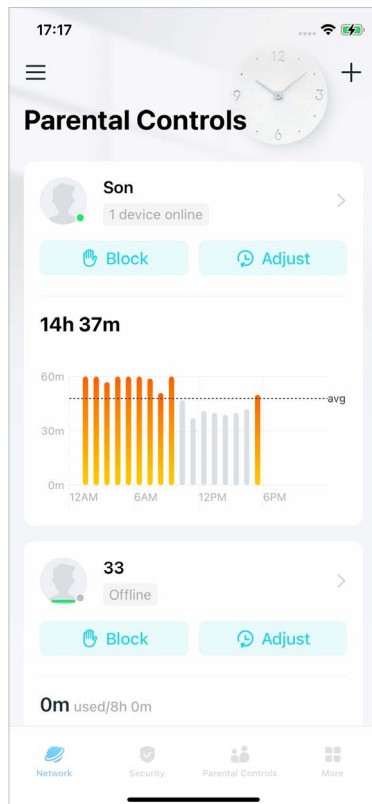
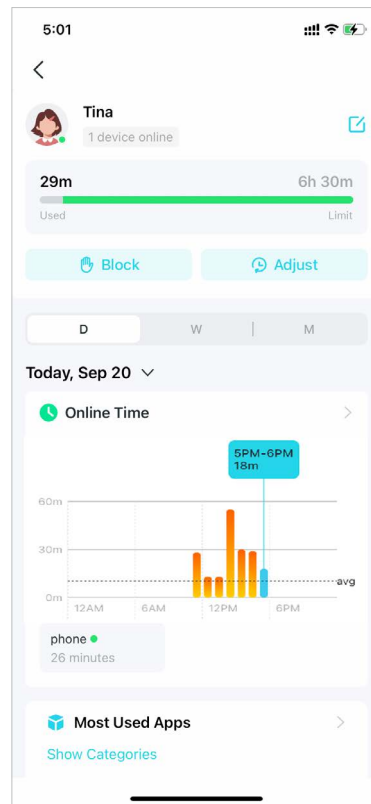
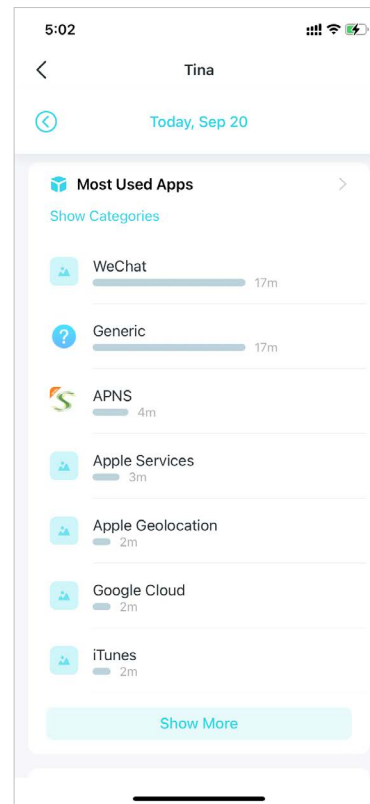
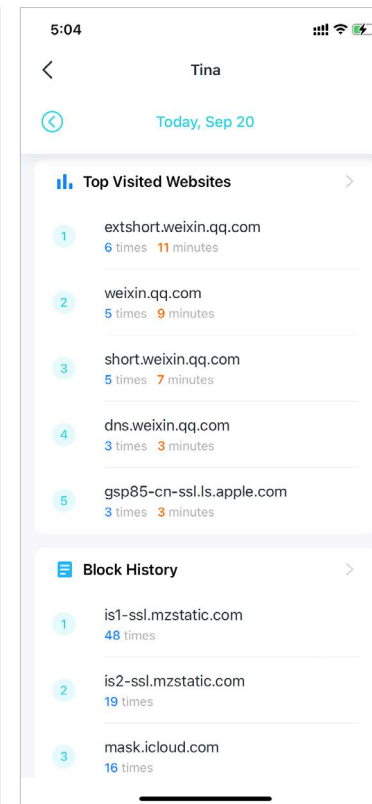


Set Up Family Time

Family time lets you enjoy a nice dinner, or share a fun movie with your family together by pausing the internet with one tap. Family Time is for HomeShield Subscription Service users only.


1. On the home page, swipe right to open the menu and select [HomeShield](#).

2. Select a desired network to apply Advanced Parental Controls.

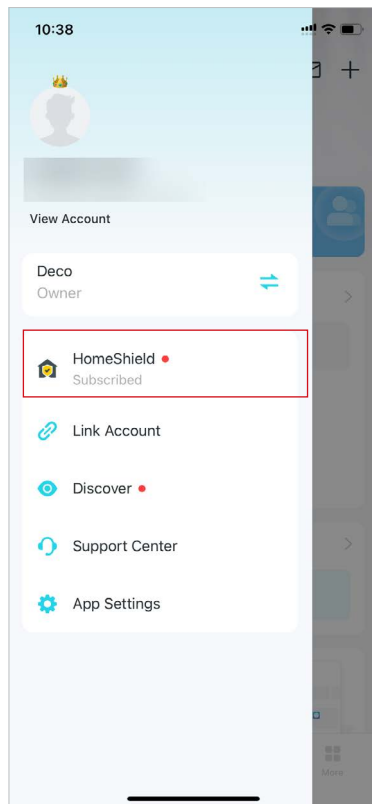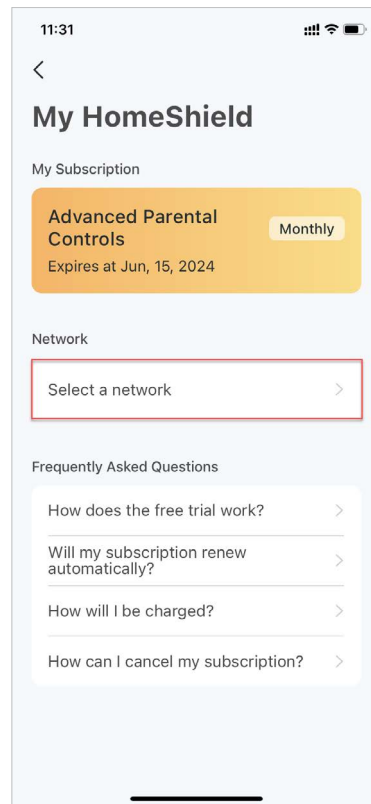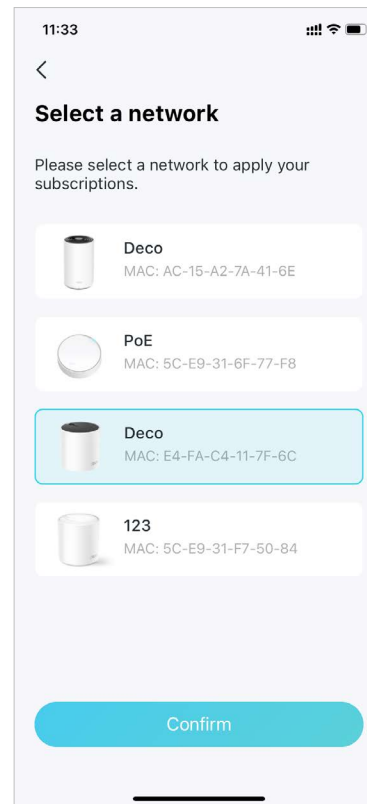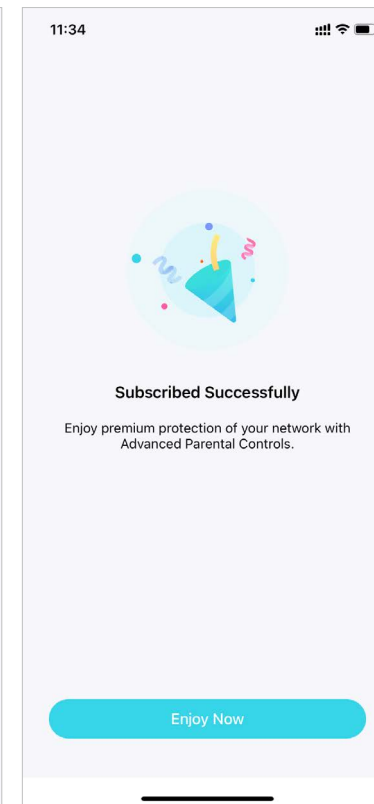


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


3. Open Deco app. Go to the **Parental Controls** tab and tap + > **Set up Family Time**. Then tap **Set Up Now**.

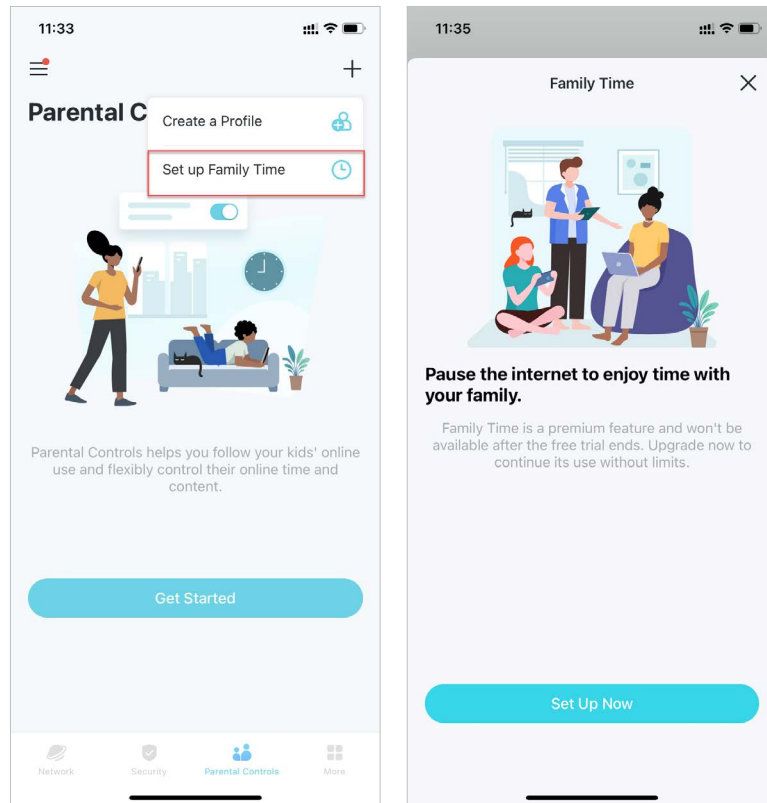

4. Add devices of the family member who you want to cut the internet and then set the time duration you want to have your family together without internet distractions.

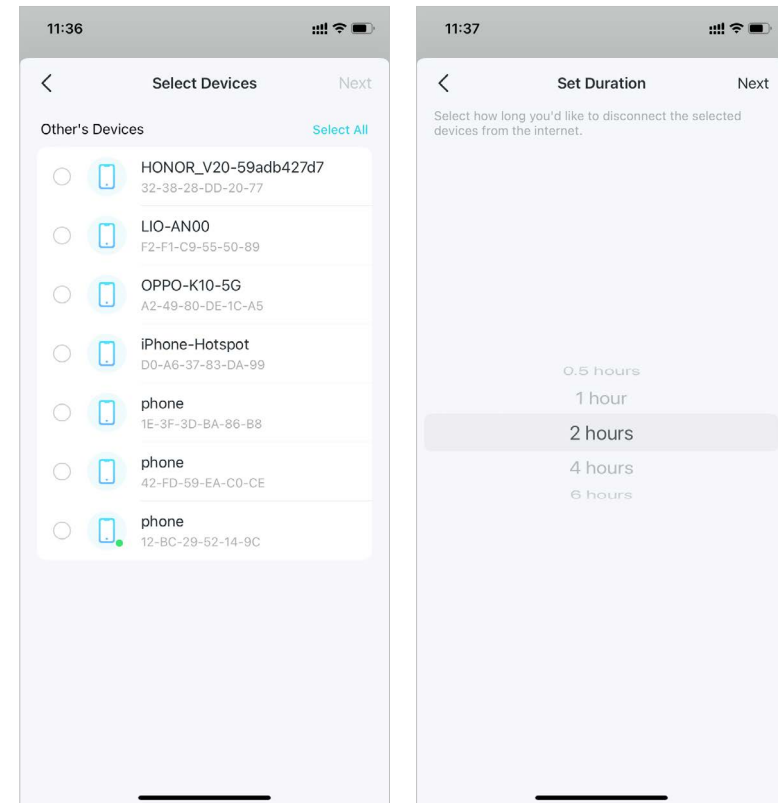

5. Tap **Start** anytime you want to activate the family time. Tap **Stop** anytime when finished.




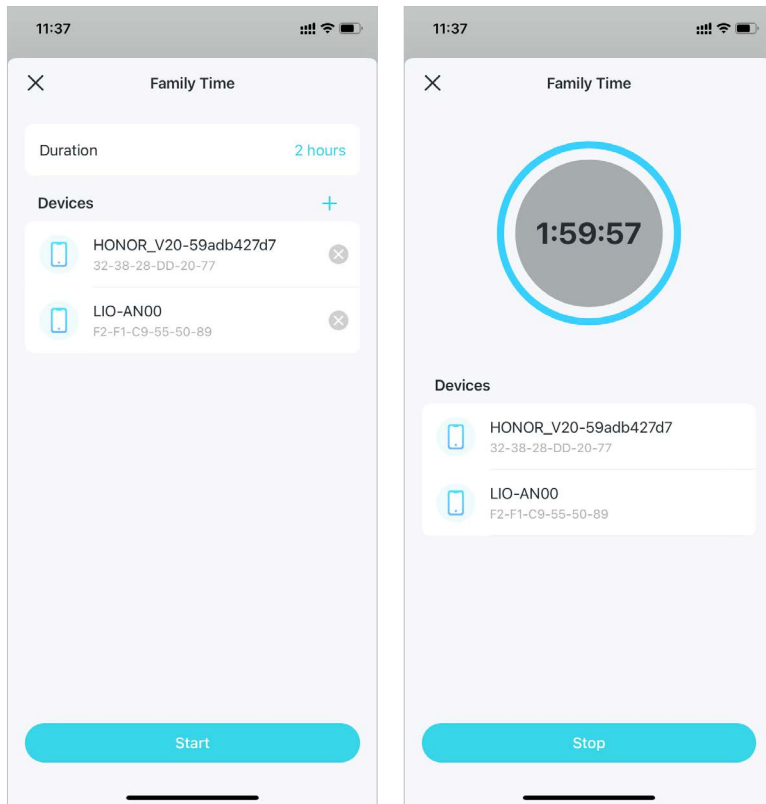


Grant Rewards


You can add extra online time as a reward for you kid' s good behavior. This feature is for HomeShield Subscription Service users only.

1. On the home page, swipe right to open the menu and select [HomeShield](#).


2. Select a desired network to apply Advanced Parental Controls.

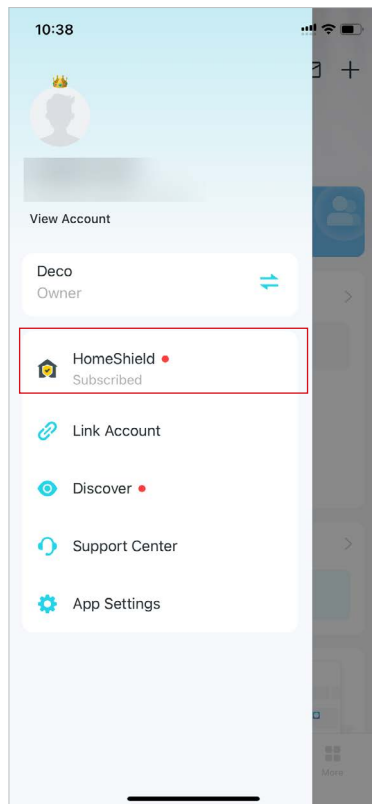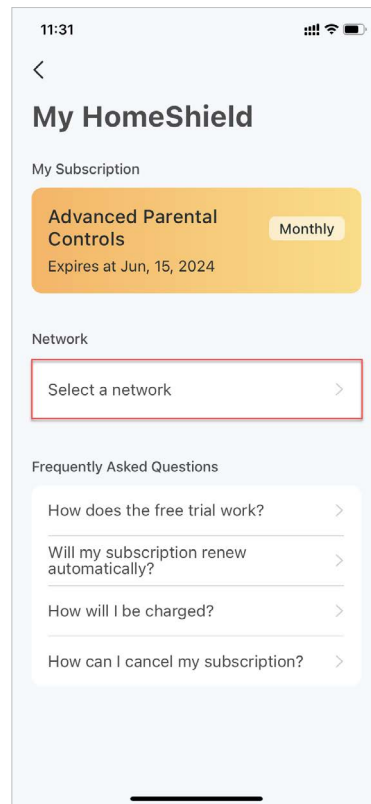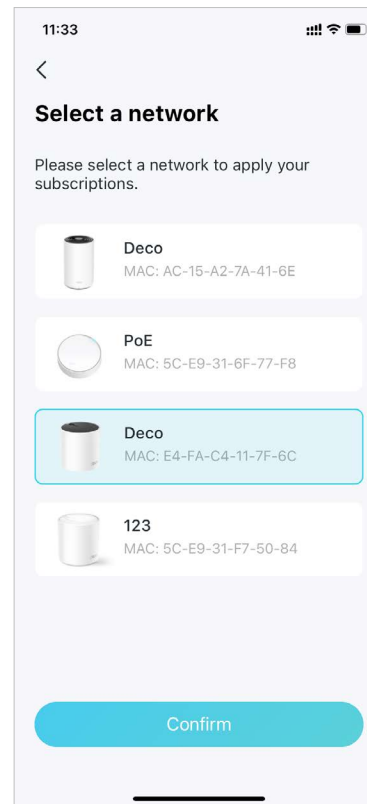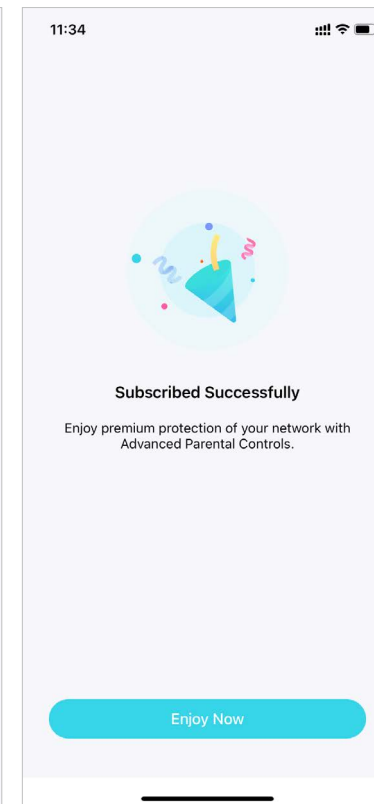

3. Go to the Parental Controls tab and select a profile.

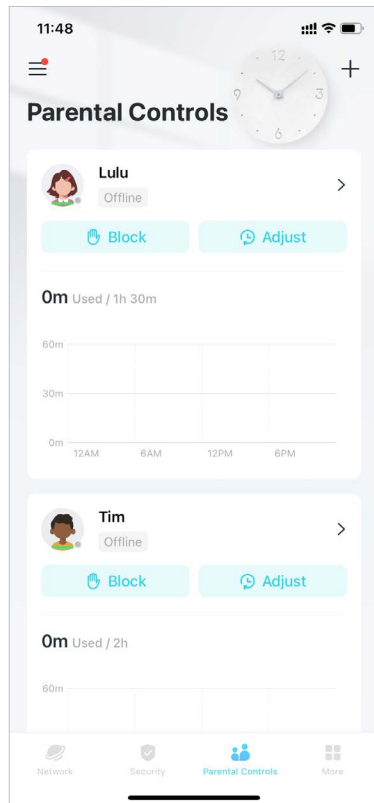

4. Tap **Adjust** and select the allowed time you want to add for today.

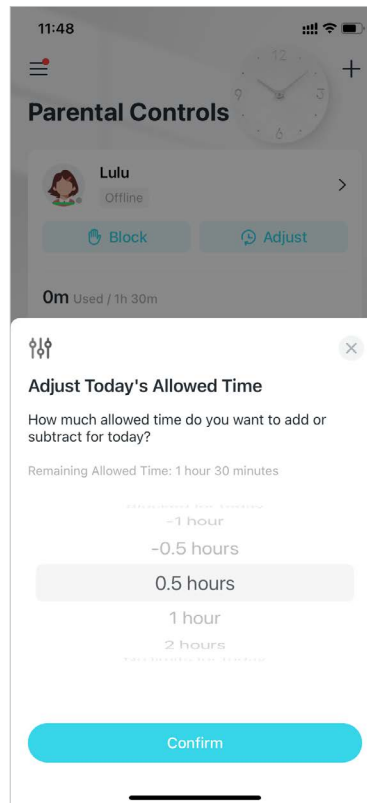


Network Protections

Real-Time Protection is for HomeShield Security+ users only. After subscribing to HomeShield Security+, you can protect your network safe from attacks by blocking malicious websites, identify potential threats, and blocking hackers from access your devices.




Enable Security+ Protection

Real-Time Protection is for HomeShield Security+ users only. Before using this, refer to [Subscribe to HomeShield Service](#) to update to HomeShield Security+ Service.


1. In the homepage, swipe right to open the menu and select [HomeShield](#).

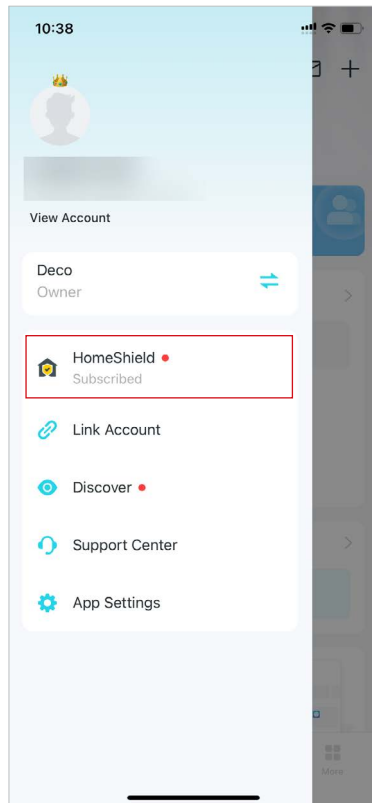


2. Select a desired network to apply Security+.

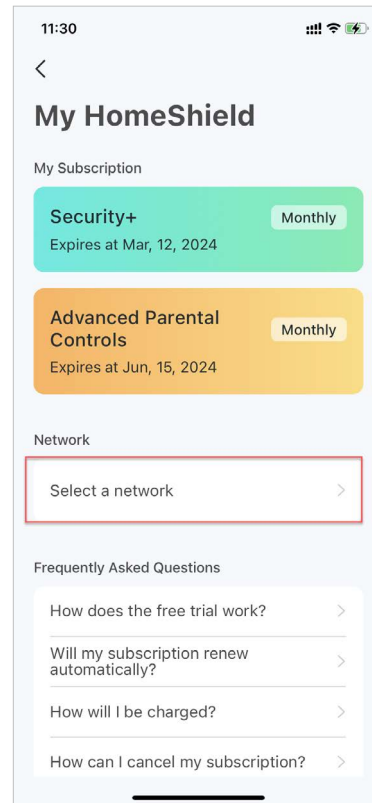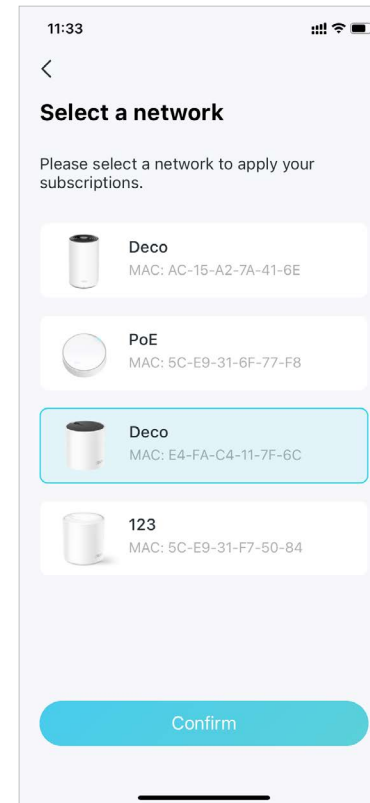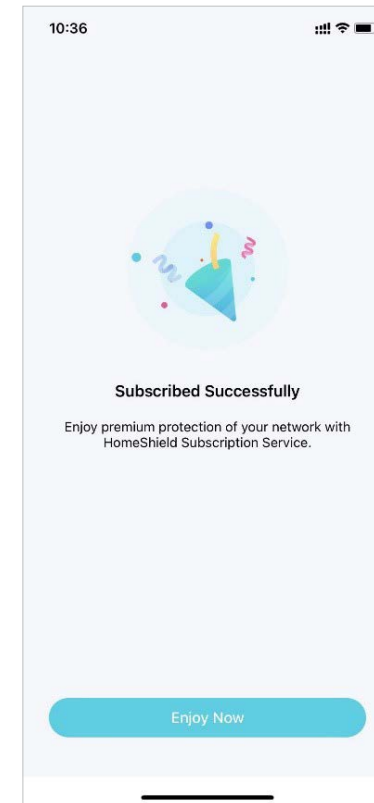

3. Go to the **Security** tab. Your Deco will scan automatically. You can tap **Scan Details** to check the security details such as wireless security or blocked threats and optimize the settings.

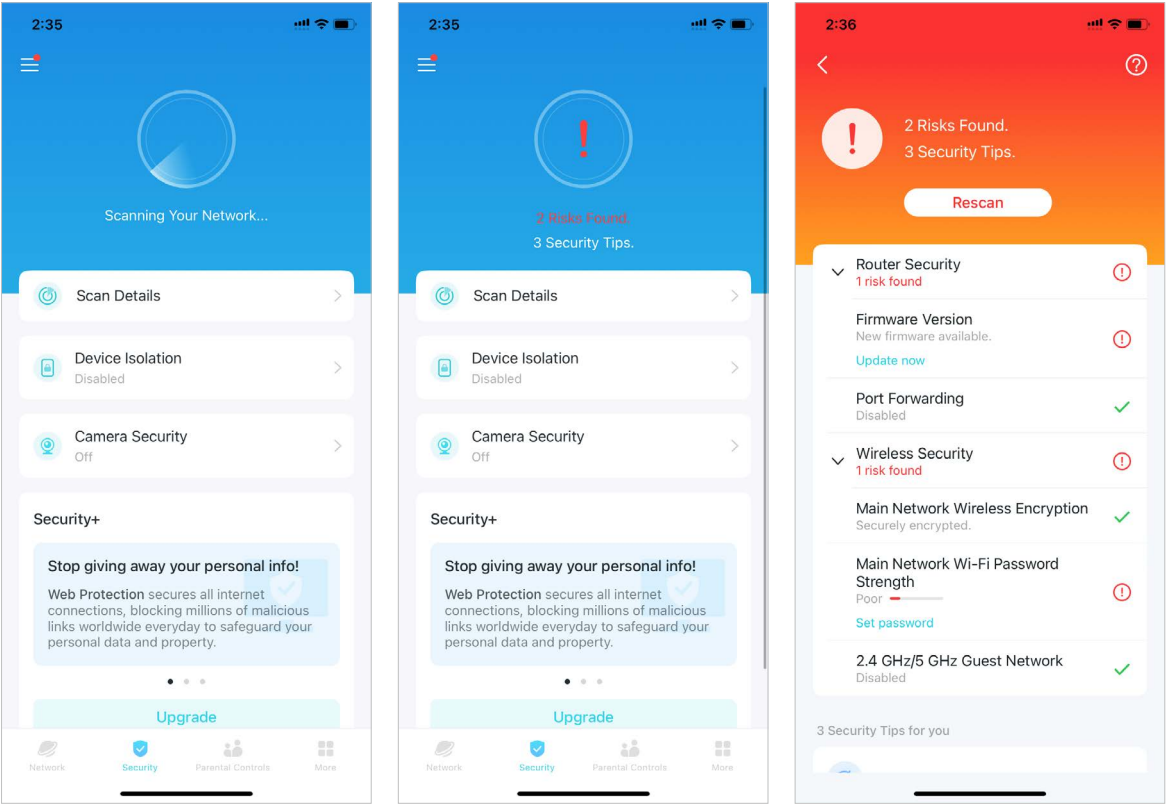

4. Upgrade to Security+ for more protections as below.

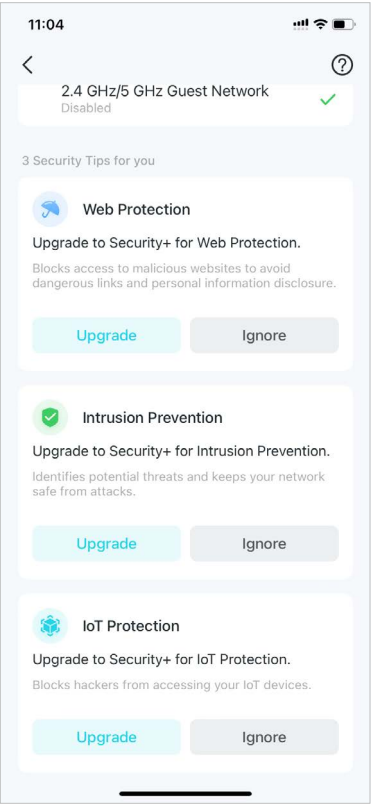


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

- **Web Protection**

Turn on Web Protection to block access to malicious websites to avoid dangerous links and personal information disclosure.


You can add clients to Exceptions to opt out of the protection.

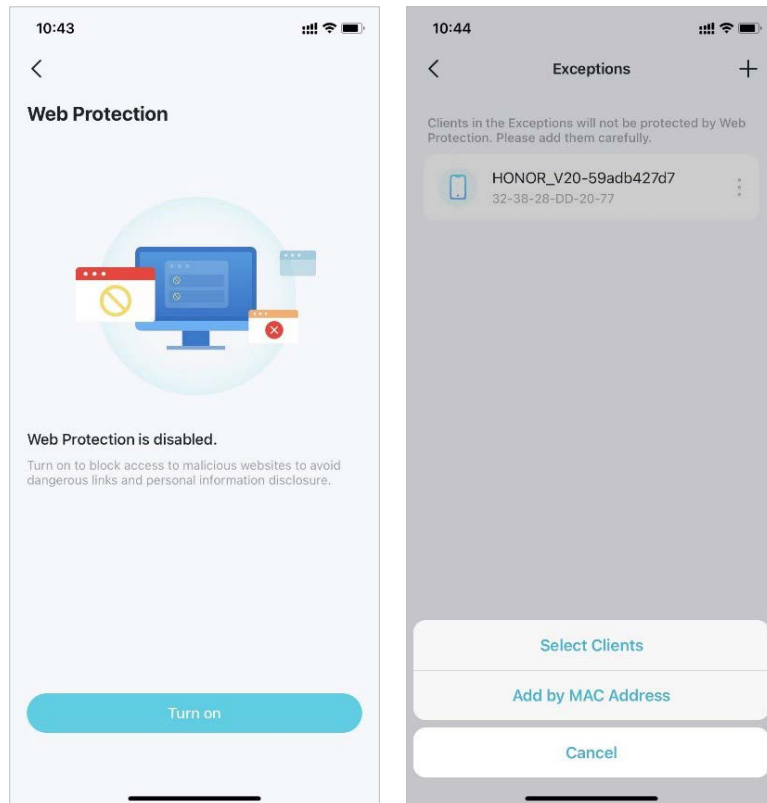

- **Intrusion Prevention**

Turn on Intrusion Prevention to identify potential threats and keep your network safe from attacks.


You can add clients to Exceptions to opt out of the protection.

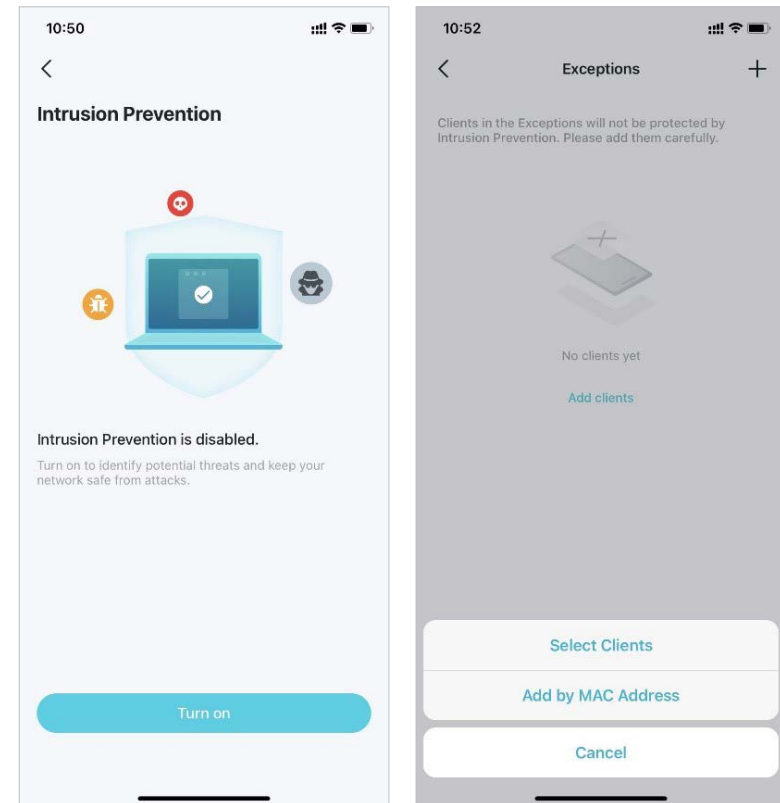

- **IoT Protection**

Turn on IoT Protection to block hackers from accessing your IoT devices.


You can add clients to Exceptions to opt out of the protection.

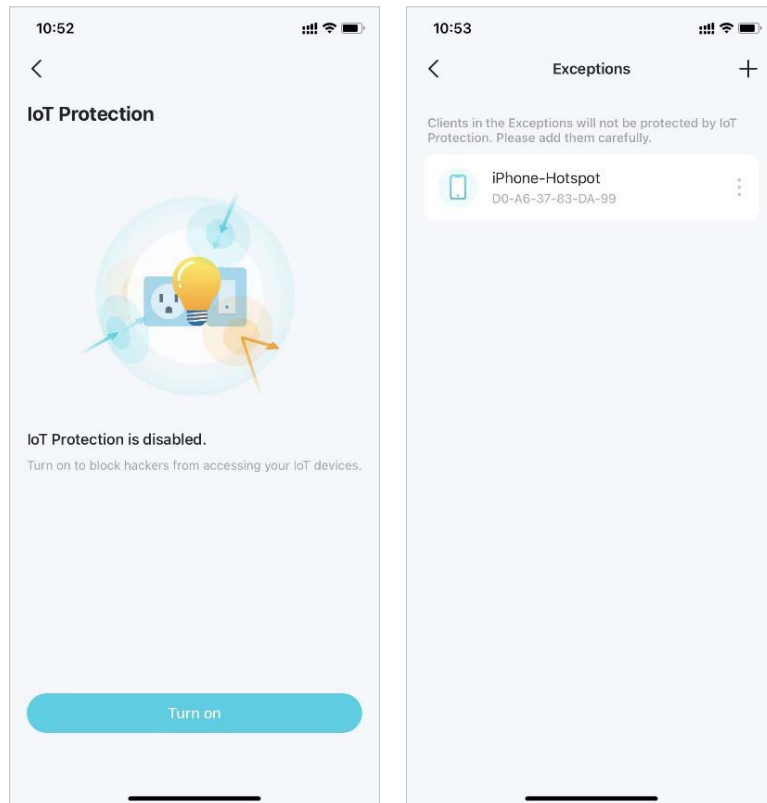

Device Isolation




Isolating Your Devices will minimize the potential for potential third parties to gain access to data or devices on your network and will limit the impact of a breach or malware to only some devices. Also, some IoT devices may often consume large portions of your network's bandwidth. Isolating these devices will prevent them from affecting the overall performance of the devices connected to your home network and will allow your router to better allocate and manage bandwidths for the connections.

1. In the homepage, go to the [Security](#) tab and tap [Device Isolation](#).

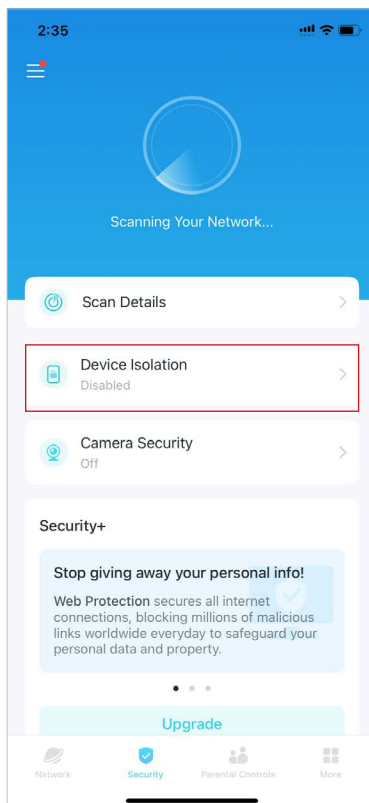

2. Enable [Device Isolation](#). Then tap [+](#) to add the devices that you would like to be isolated from your main network.

Then the device will appear in the Isolated Devices list. While isolated, the devices can still access the internet and are able to communicate with other isolated devices. However, isolated devices cannot transfer data with devices on your home network, including managing gateway devices, accessing USB devices, etc.

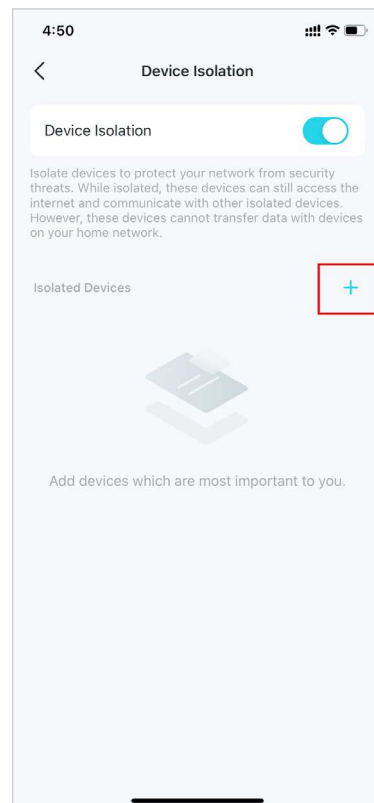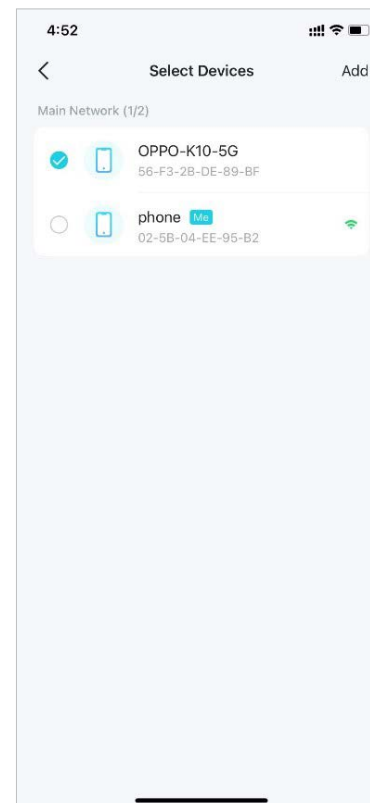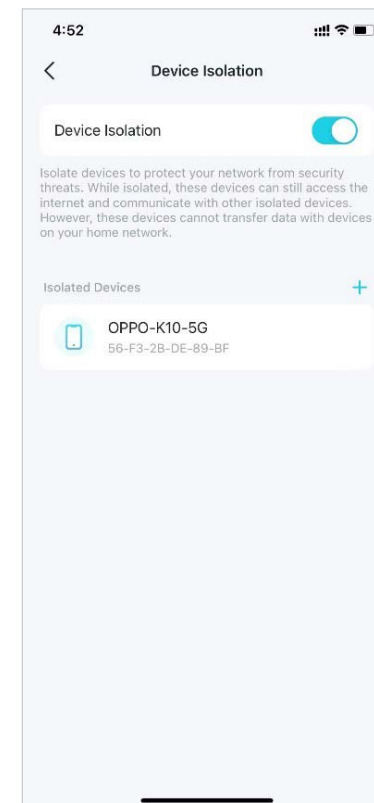


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.



Camera Security

Camera Security ensures your privacy at home by blocking your camera from accessing the internet at certain times or all the time.

1. In the homepage, go to the [Security](#) tab and tap [Camera Security](#).

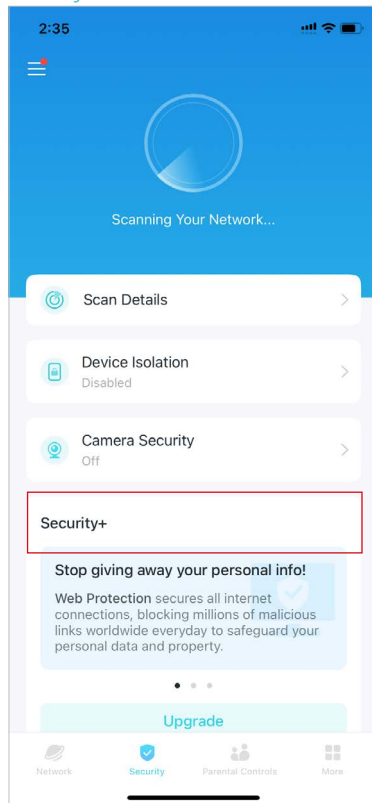

2. Choose a mode and add cameras to apply the mode.

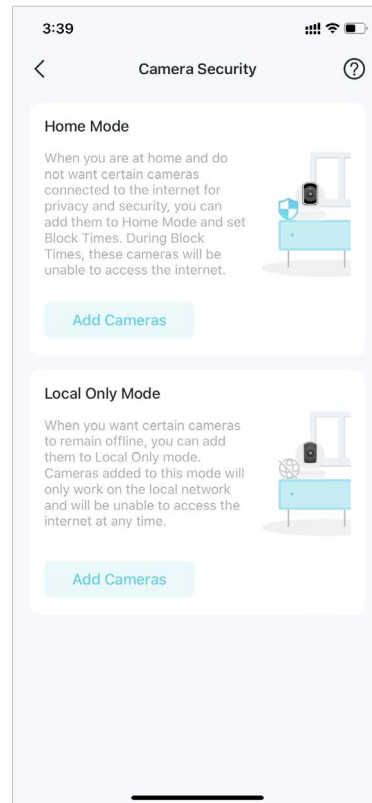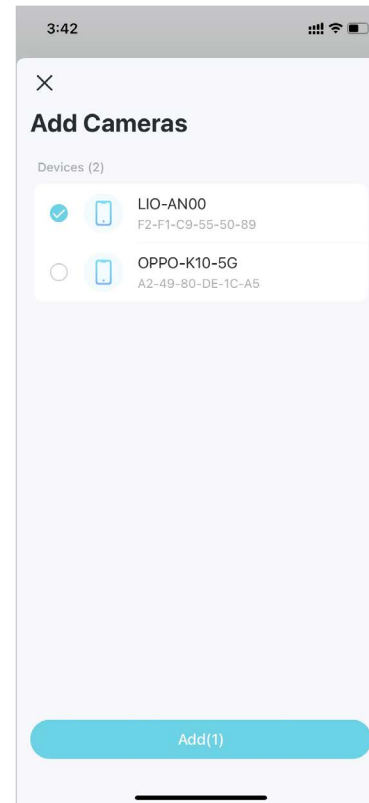


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Home Mode


Cameras in Home Mode cannot access the internet during block times. You can set block times in the following two ways:

- **Set a Block Schedule:** Set times when the cameras will be blocked from the internet.
- **Block Upon Arrival:** Set mobile phones that once connected to Deco's Wi-Fi, the cameras will be blocked from accessing the internet.

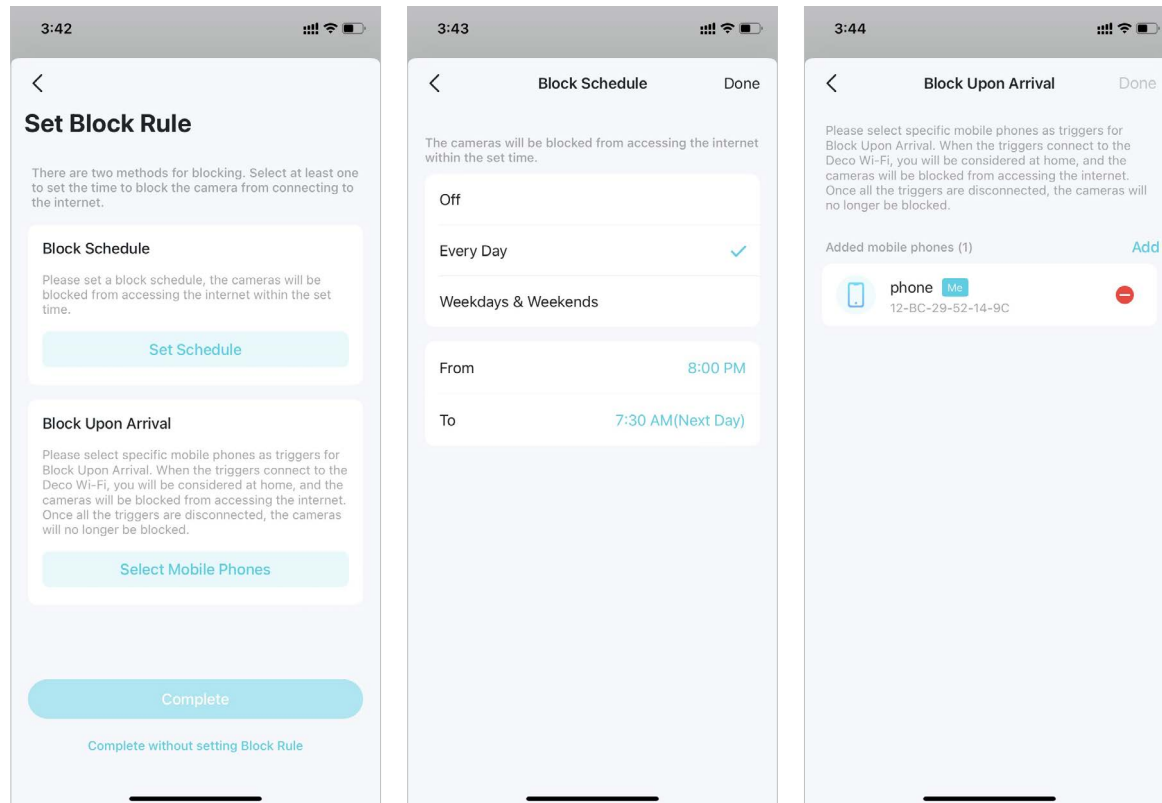

Local Only Mode

Cameras in Local Only mode will only work on the local network and cannot access the internet all the time. You can turn it off at any time to let the camera connect to the internet again.

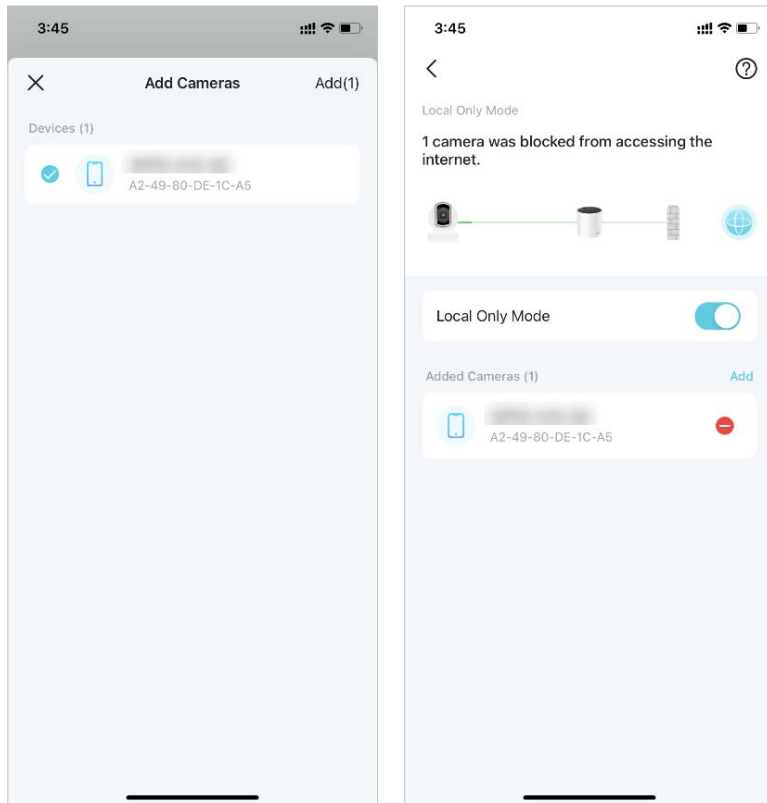

More Features


More features are within reach. Test the in-development features at the Deco Lab, receive intuitive network reports, configure network and account settings for dedicated needs, and more.

 **Tip:** You can use the search box on the [More](#) page to quickly find the features you need.




Test Features at the Deco Lab

Deco app includes a built-in Deco Lab, which is committed to trying experimental features. It keeps updating the lab according to the actual performance to provide even better experiences.

1. Go to [More > Deco Lab](#).

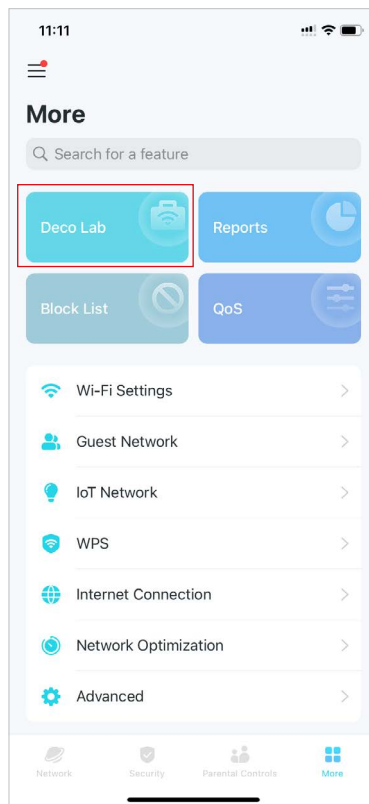

2. Check and test the in-development features. Now Wi-Fi Assistant and VPN Client are available for use.


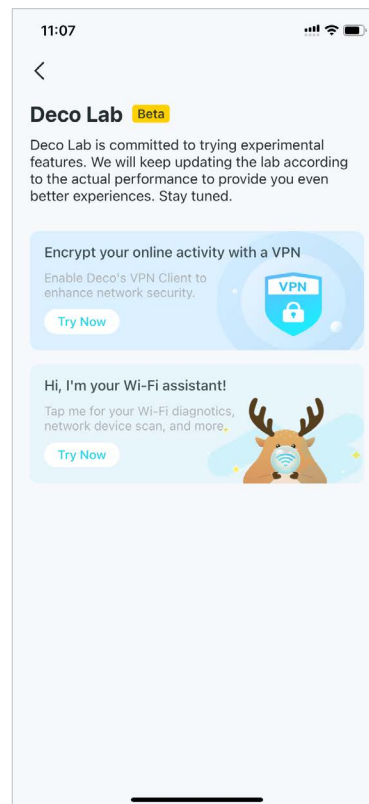
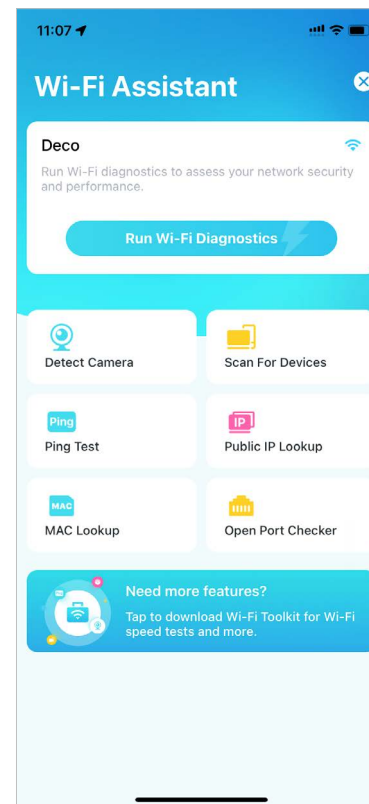
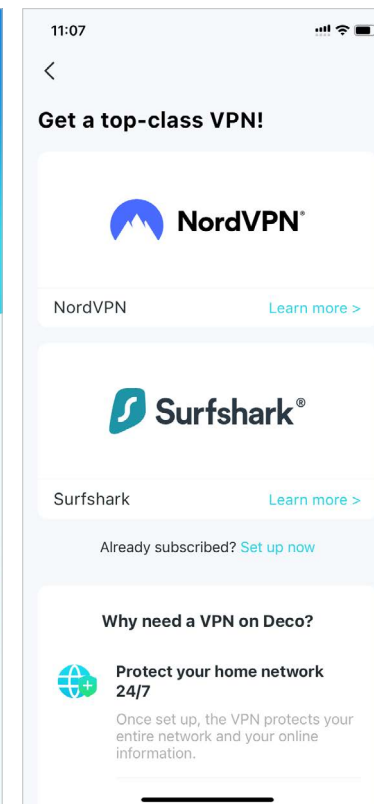


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


Wi-Fi Assistant

Use Wi-Fi Assistant for your Wi-Fi diagnostics and network device scan. You can also check how other Wi-Fi networks are impacting your Wi-Fi, the surrounding cameras, the vendor information for a known MAC address, and ISP information for a known IP address.


- **Wi-Fi Diagnostics:** Run Wi-Fi Diagnostics to access your network security and performance. The Deco app will automatically check your network's signal strength, security, Ping result, wireless interference, etc.
- **Detect Camera:** The Deco app can automatically scan all the cameras in your network. You can also follow app instructions to detect camera manually to check if there are any cameras in your house.

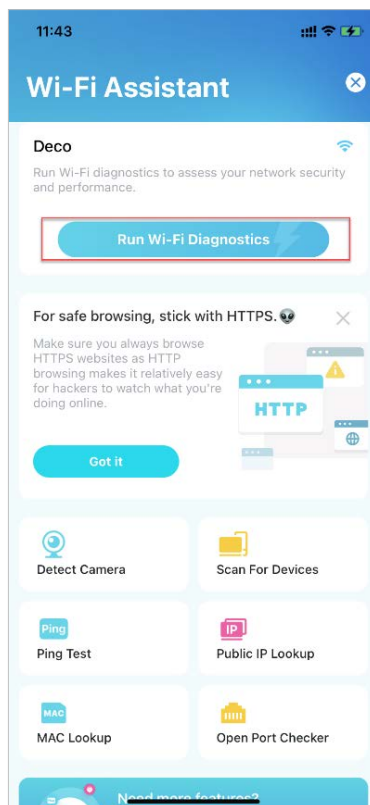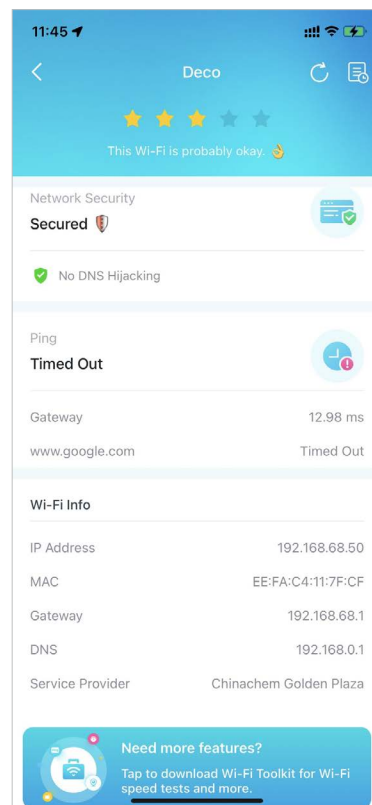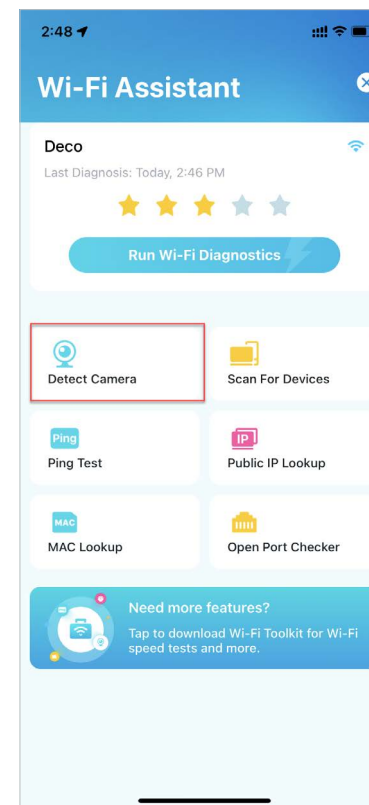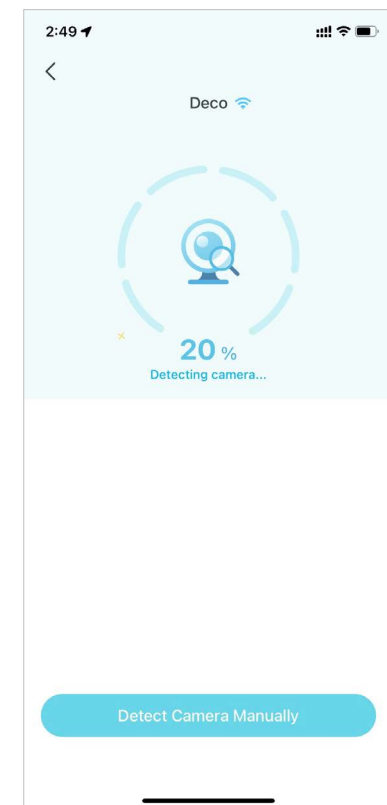


- **Scan for Devices:** Let Deco app scan all the connected devices in your network.

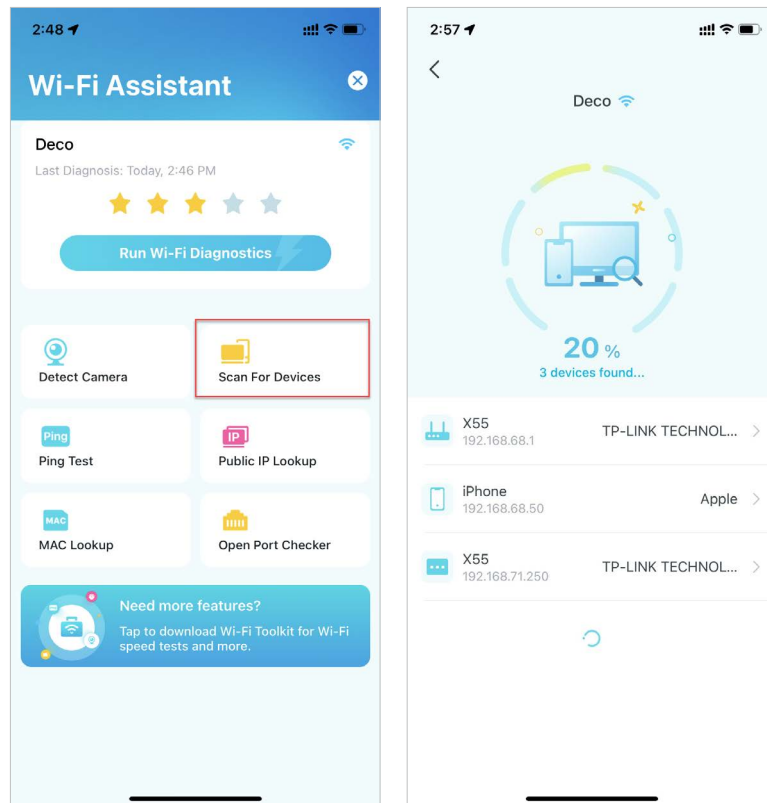

- **Public IP Lookup:** Query tool to query the network information of the current network or the network information of a specific IP address. You can type in a specific IP address to check the location and the ISP information or click Lookup Current IP to check the information of your network if the Internet address of your network is a public address. In the upper right corner of this page, you can view the history.

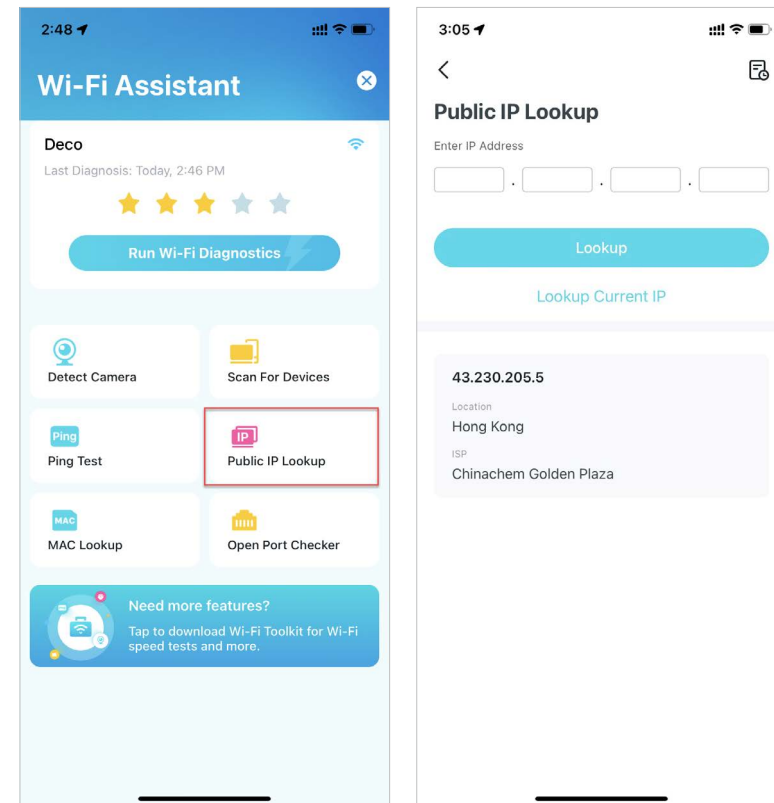


- **Ping Test:** Ping test on the specified server to view real-time packet loss and latency data. In the upper right corner of this page, you can set the send interval and packet size or view the history.

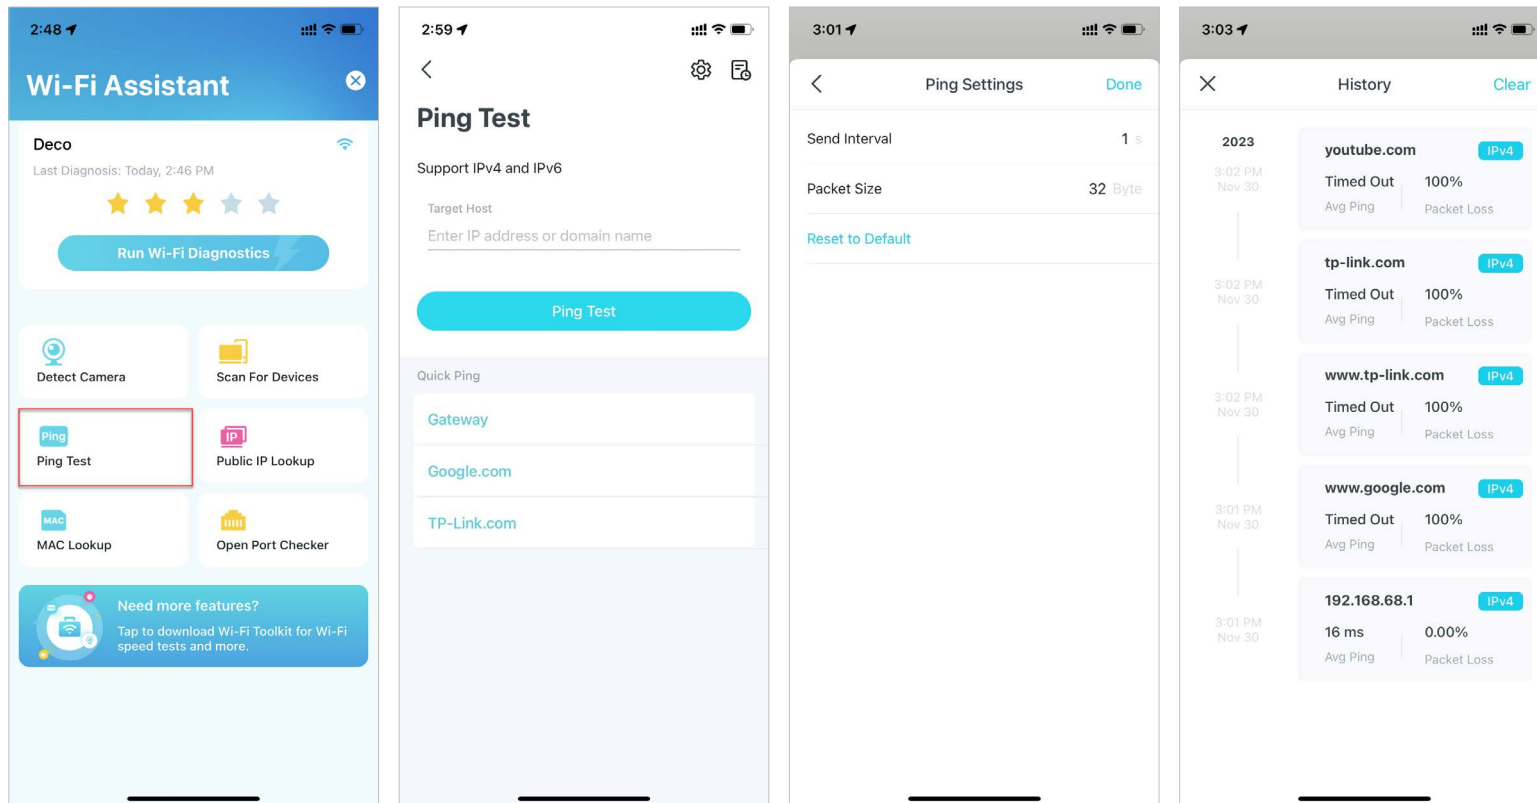


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

- **MAC Lookup:** Query tool for relevant vendor information based on MAC address. You can type in a specific MAC address (first six letters) to check the vendor information of the device.

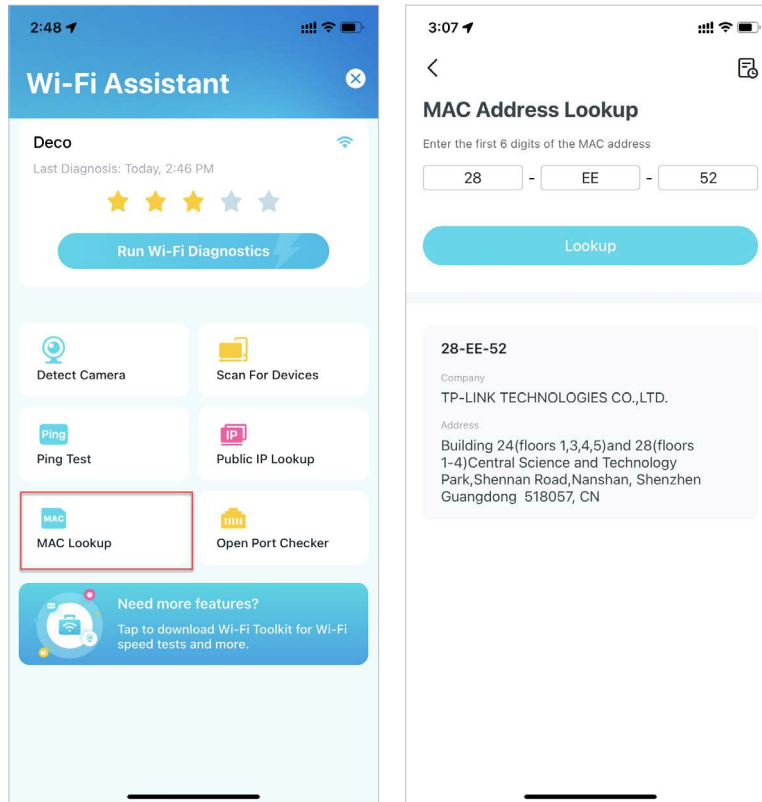

- **Open Port Checker:** You can type in a specific IP address to check the opened ports of this server or click [Scan Current Device](#) to check the opened ports of your router.

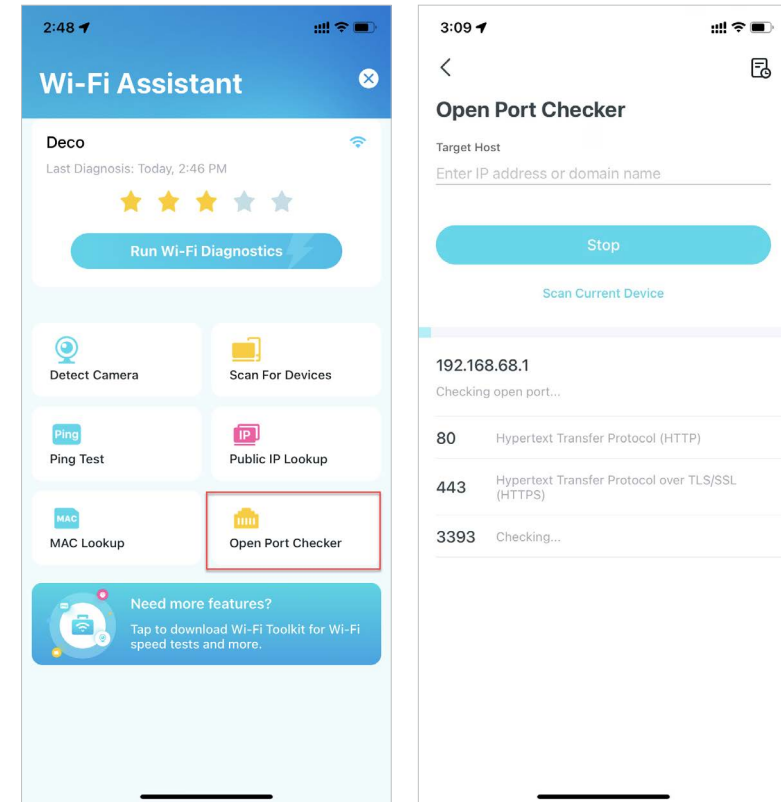


VPN Client

Get a top-class VPN and encrypt Deco's VPN Client to enhance your network security.

Choose any of the VPN service provider and subscribe the services provided. You can also tap Set up now if you already have one. Customize your own VPN service is also available. Refer to [Set Up VPN Server/Client](#) for more setup details.

 Note: TP-Link does not provide any guarantee for the services of any third party.

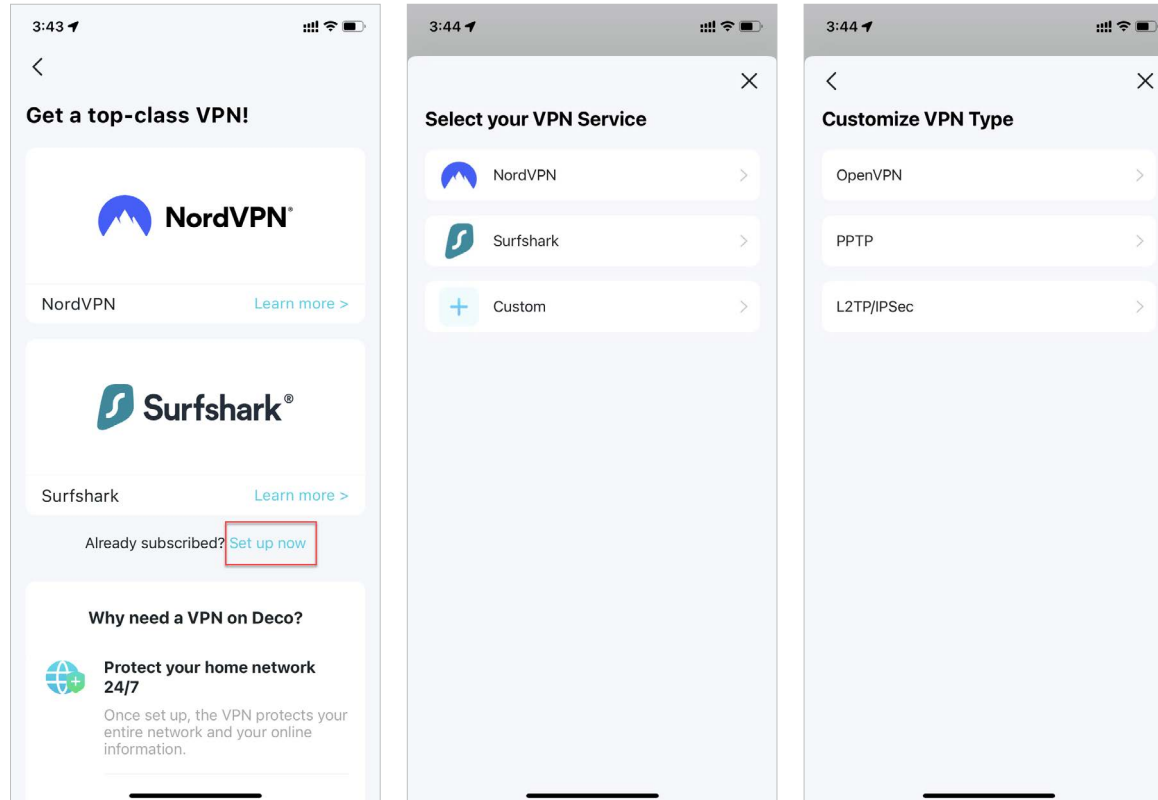





* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Check Network Reports

The Deco app provides intuitive charts and detailed statistics to help you know your home network better.

1. Go to [More > Reports](#).

2. Check the weekly and monthly reports of your network.

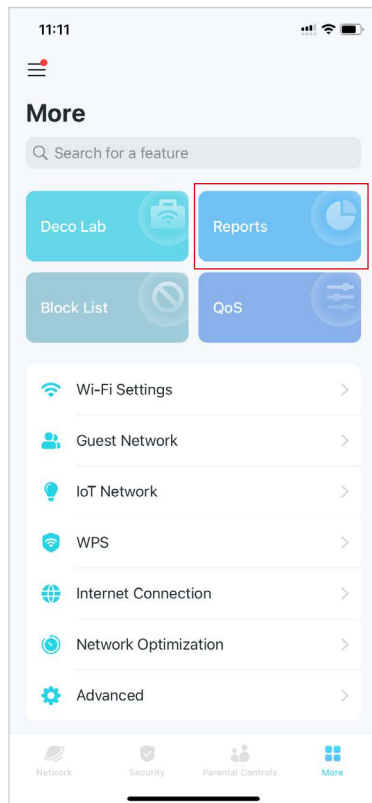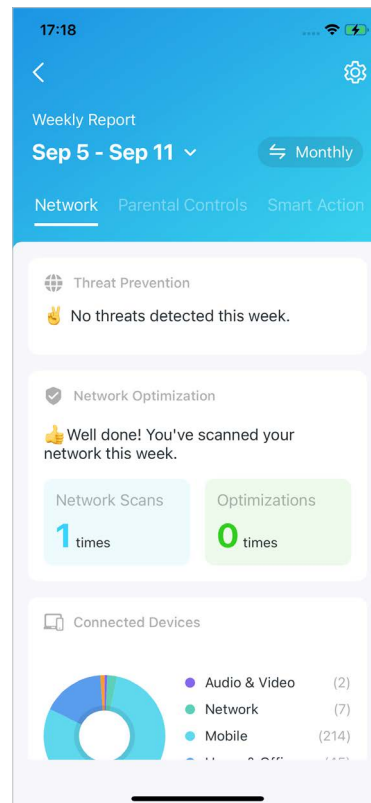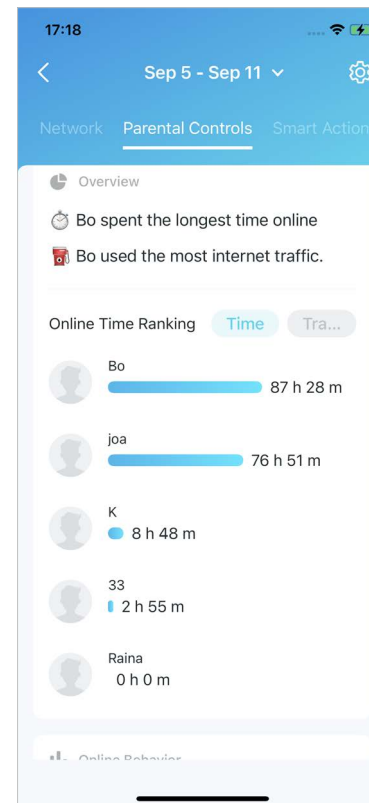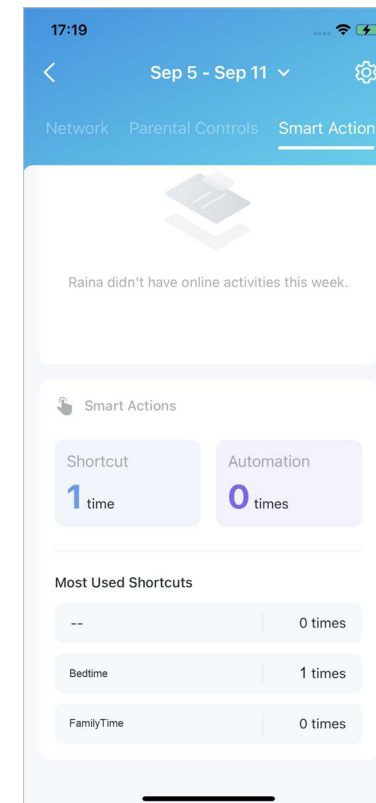


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Block/Unblock Specific Devices

You can block undesired devices to prevent them from accessing your network or unblock specific devices.

1. Go to [More](#) > [Block List](#).
2. Tap [+](#) and choose a method to block devices.

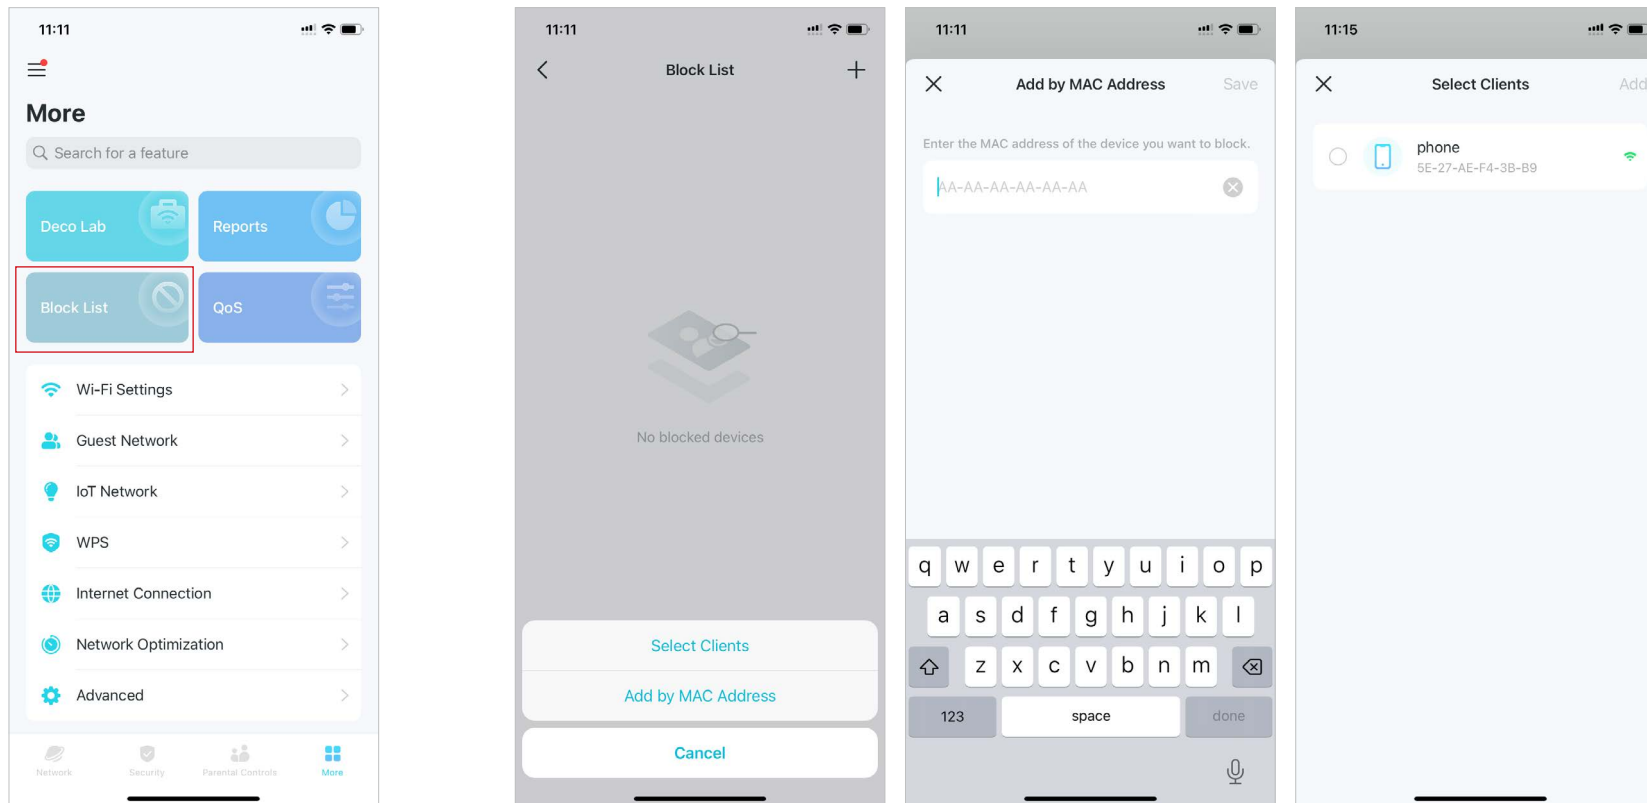


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


QoS

QoS (Quality of Service) allows you to prioritize specific devices. Devices set as high priority will run smoothly even when the network is crowded.


1. Go to [More](#) > [QoS](#).

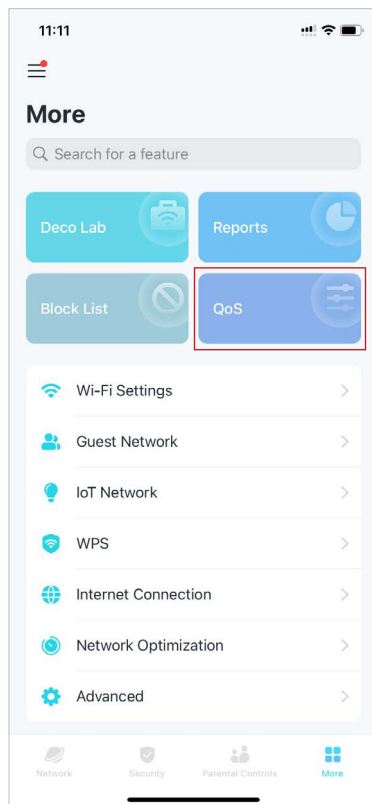


2. Enable [QoS](#).

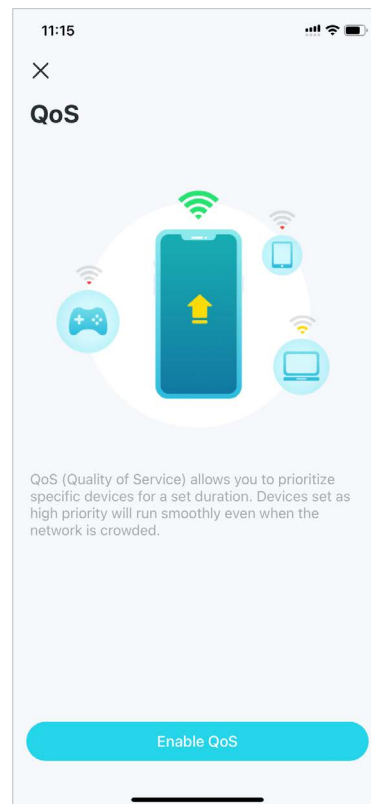

3. Set the total bandwidth provided by your ISP.

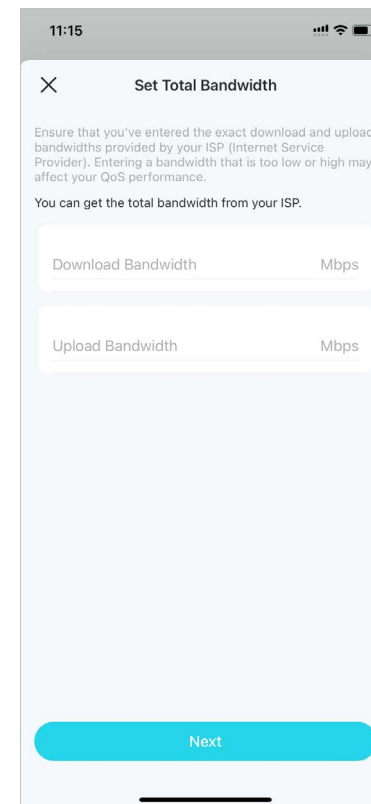





4. Tap [+](#) and add high priority devices.

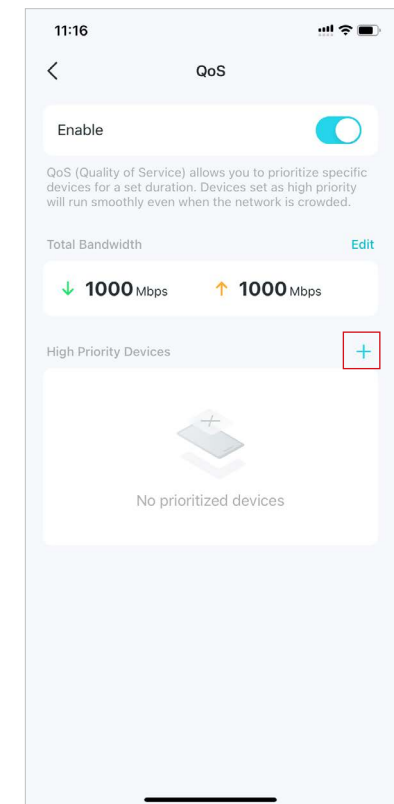

Change Wi-Fi Settings


You can change the network name and password of your main network at any time and share the network easily with family and friends.

1. Go to [More > Wi-Fi Settings](#).
2. Select the Wi-Fi network and you can change the Wi-Fi network name, password and security.

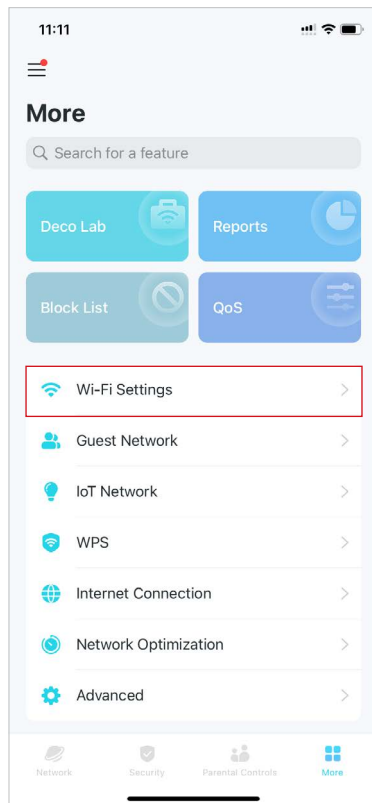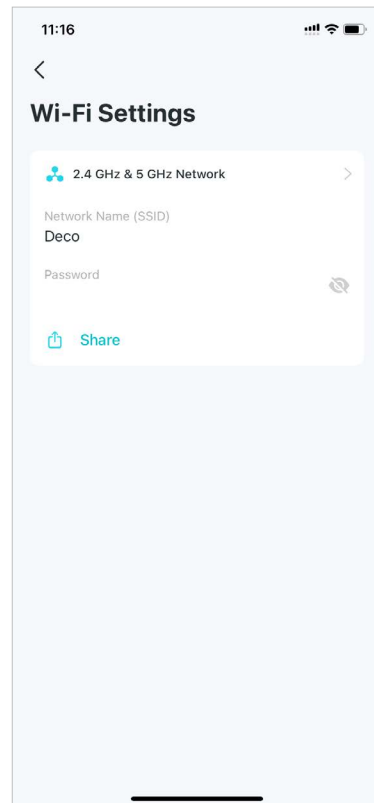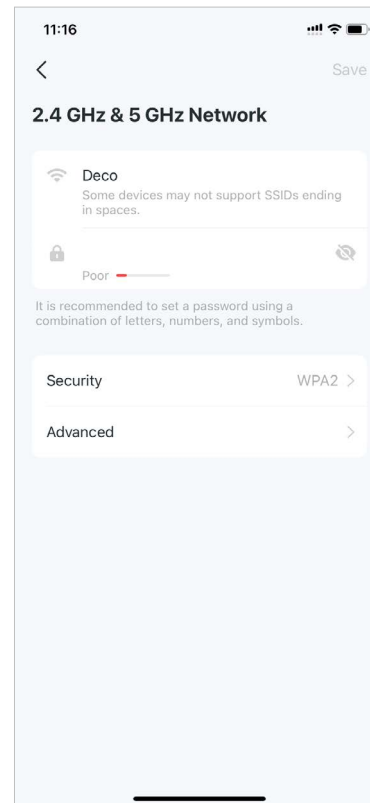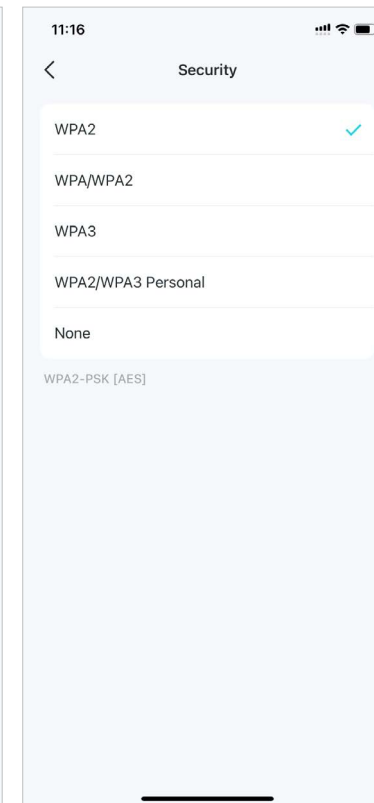


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


3. Tap **Advanced** for more Wi-Fi settings as follow.

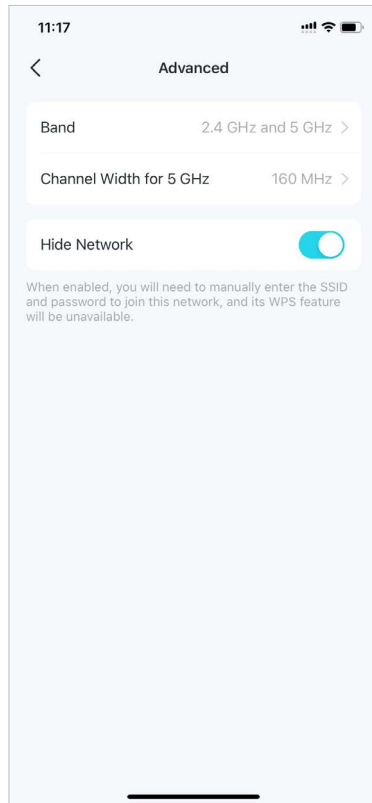


4. Select a preferred band to be enabled in this network.

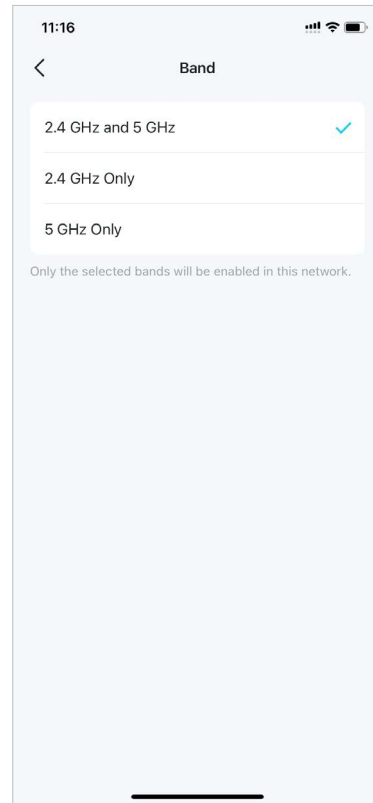

5. Select a preferred channel width for 5 GHz network.

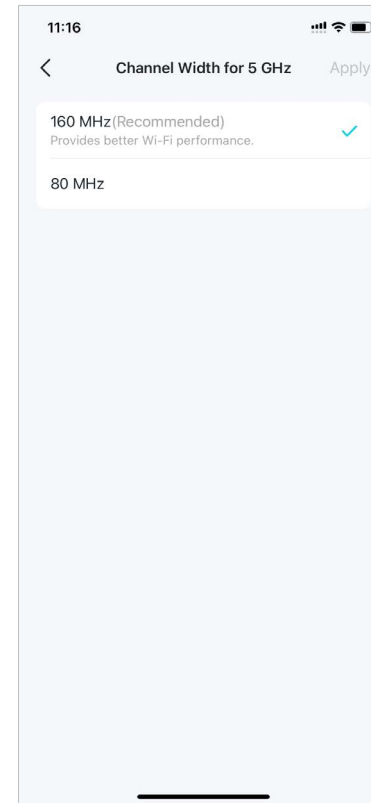


6. Enable **Hide Network** to hide this network from Wi-Fi list.

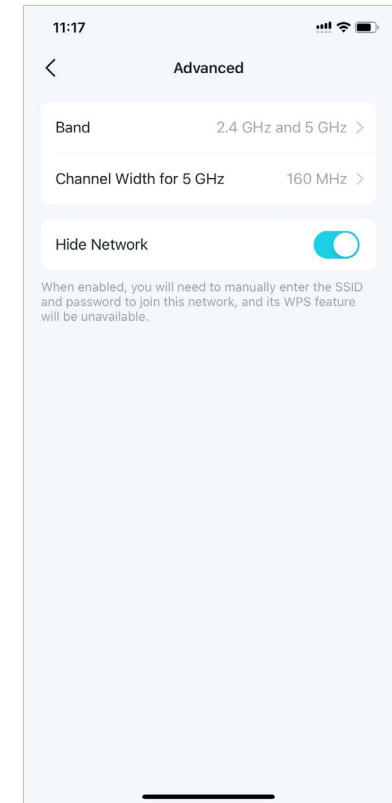


Create a Guest Network

You can create and share a separate network for guests to guarantee the security and privacy of your main network.


1. Go to [More](#) > [Guest Network](#).

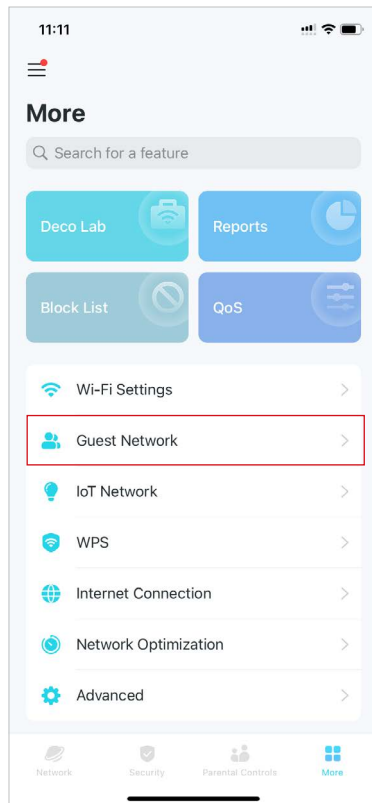


2. Turn on [Guest Network](#) and set a Wi-Fi network name and password for it.

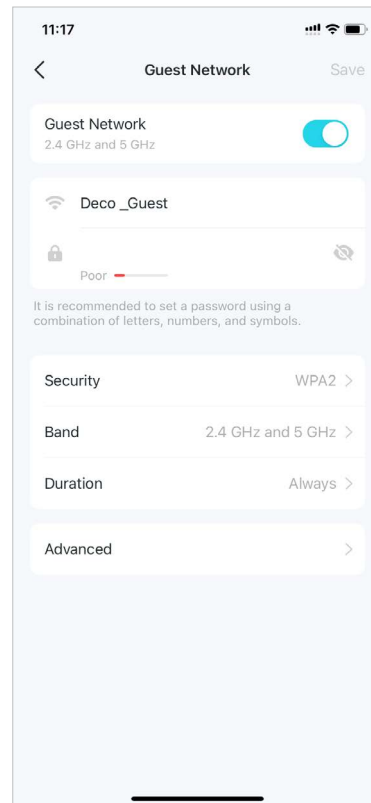

3. Select a Wi-Fi security protocol for this network.

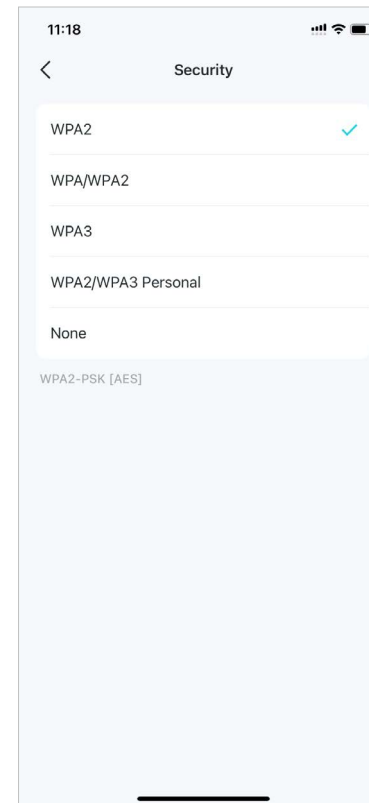


4. Select a preferred band to be enabled in this network.

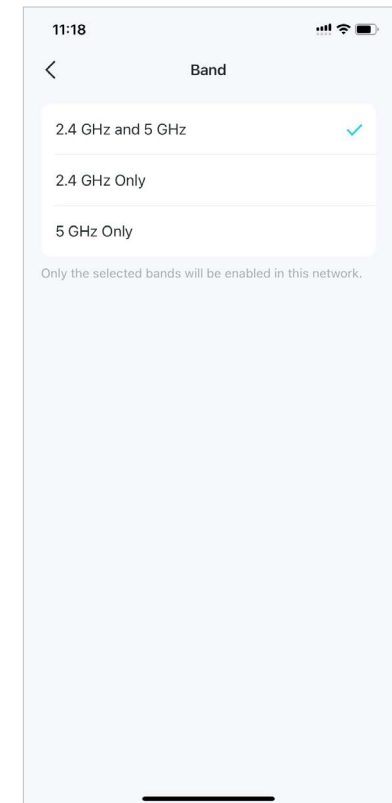


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


5. Tap **Duration** to set how long the Guest Network works before it automatically turns off.

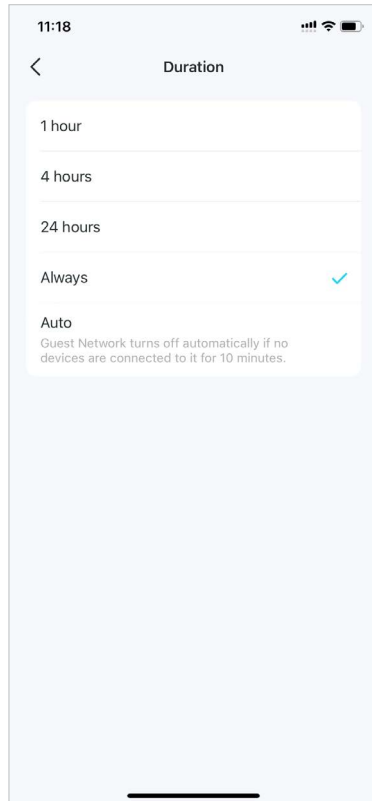


6. Tap **Advanced** to set more settings as follow.

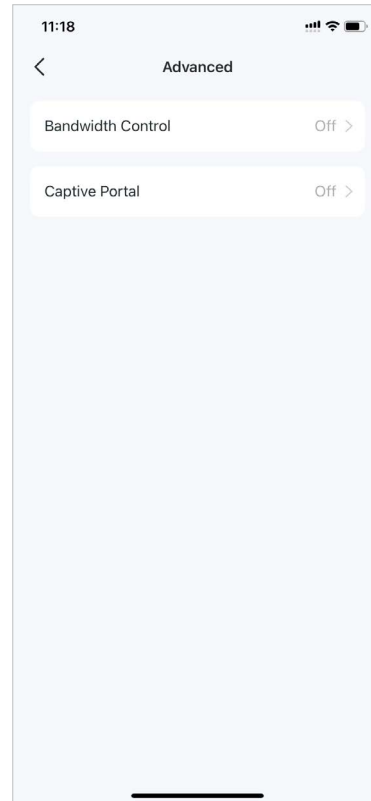

7. Enable **Bandwidth Control** and set a download and upload bandwidth for your network.

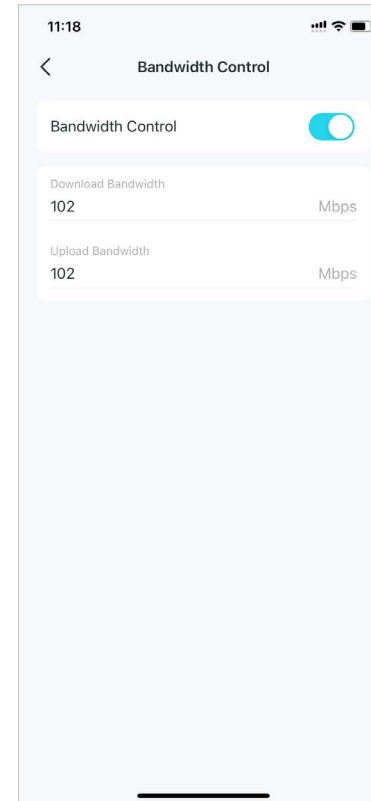





8. Enable **Captive Portal** to customize a professional captive portal within minutes.

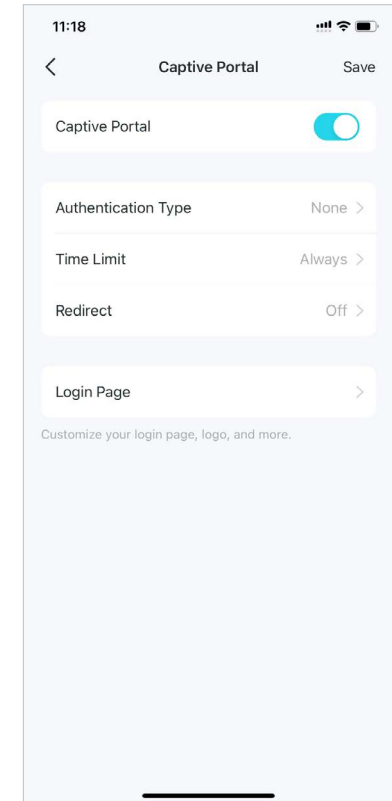

Create a IoT Network

Create a dedicated and wireless network to manage all your IoT devices, such as smart lights and cameras.

1. Go to [More > IoT Network](#).
2. Turn on [IoT Network](#). Set a Wi-Fi network name and password for this network.
3. Select a Wi-Fi security protocol for this network.
4. Select a preferred band to be enabled in this network.

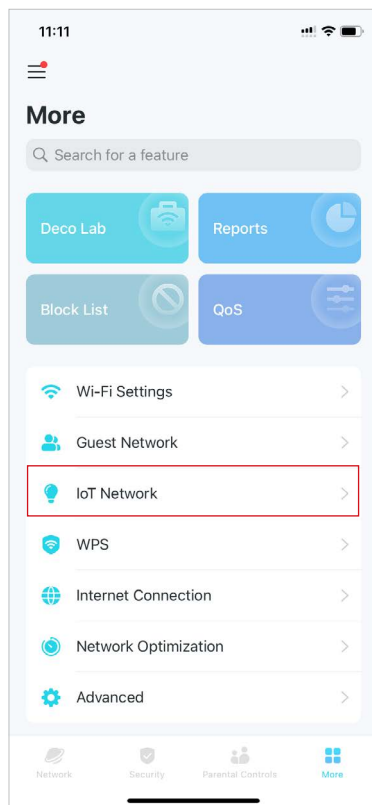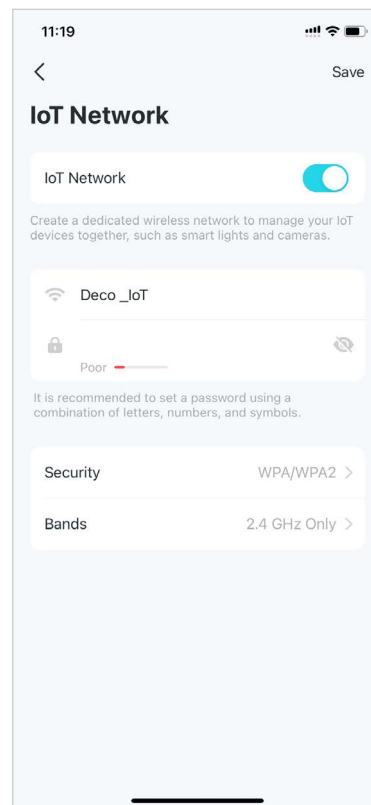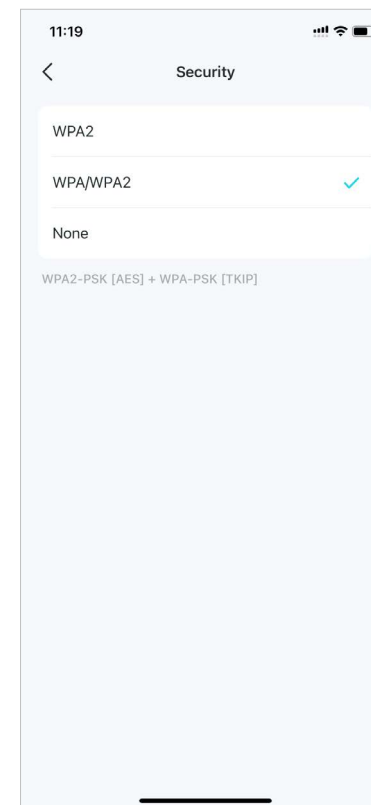
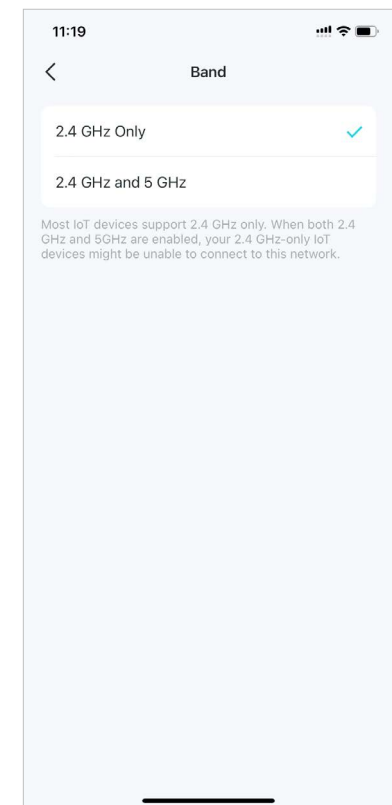


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

WPS

WPS (Wi-Fi Protected Setup) helps you to quickly and securely connect a client to the network with a tap without entering any password.

1. Go to [More](#) > [WPS](#).
2. Tap the [WPS](#) icon on Deco app and then on your client.

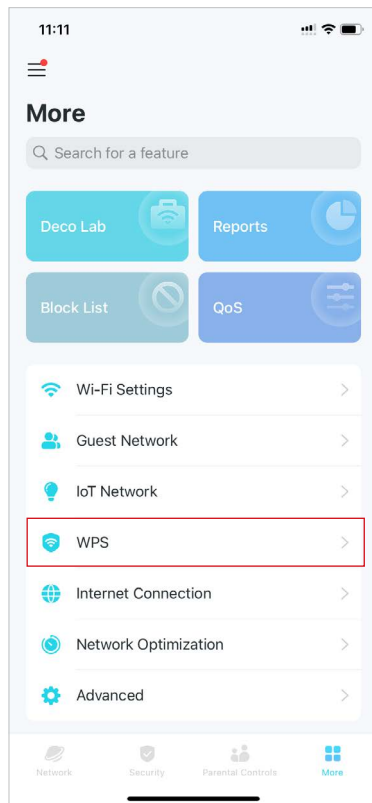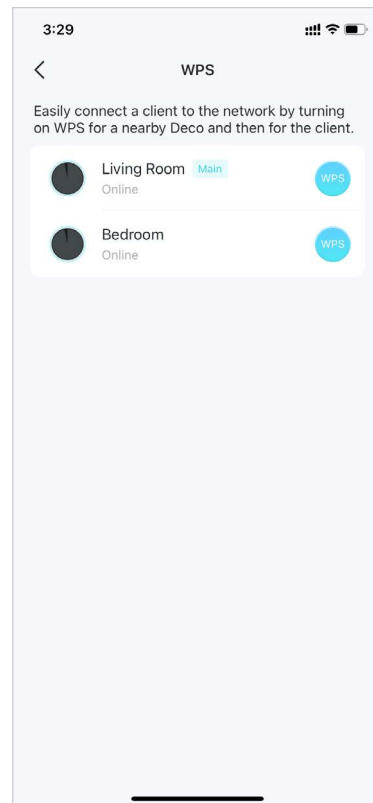

Change Internet Settings





You can change internet settings if needed.

1. Go to [More](#) > [Internet Connection](#).

2. Tap [IPv4](#) for IPv4 settings.

3. Tap [IPv6](#) and enable it for IPv6 settings.

4. Tap [Firewall Rules](#) to add rules if you want to allow specific devices to access specific services.

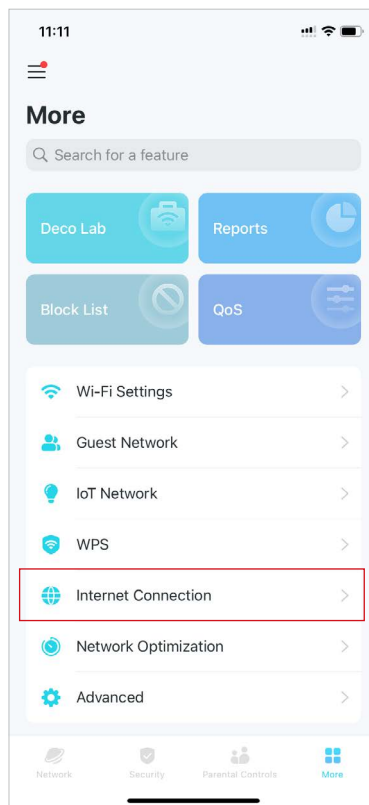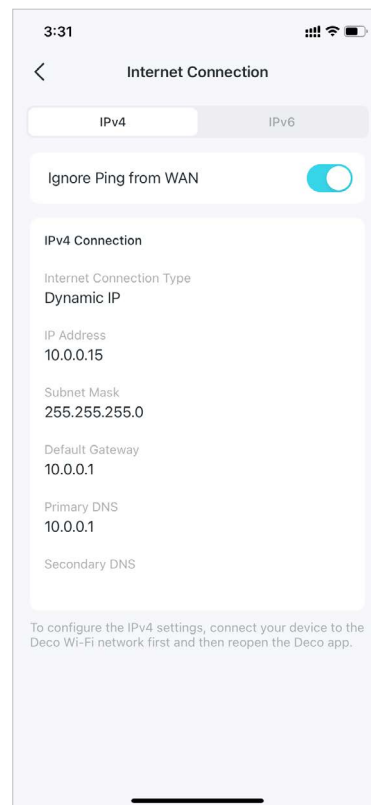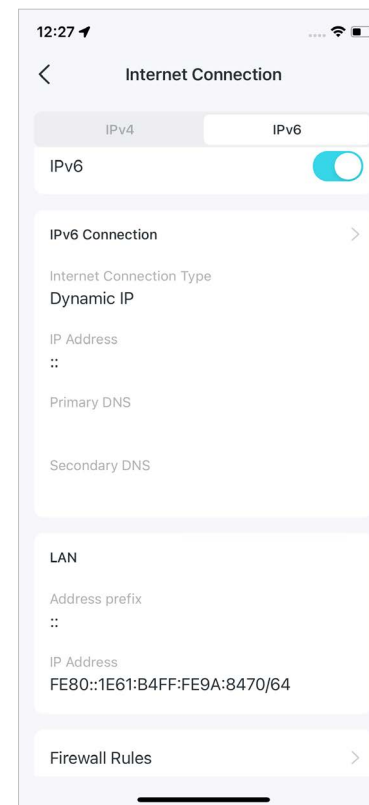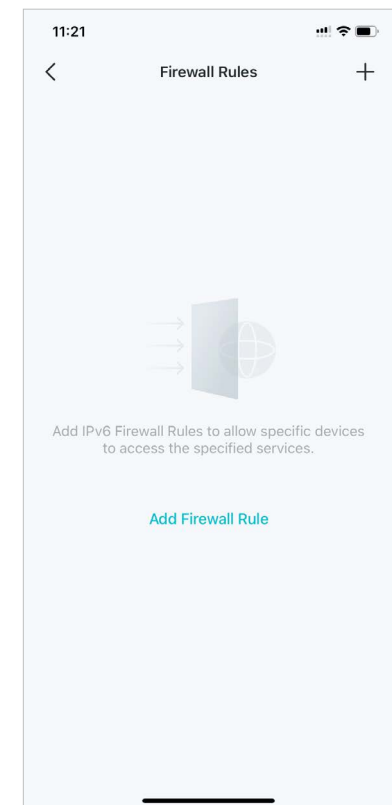





Network Optimization

Network Optimization analyzes the quality of the Deco wireless network by scanning the interference signals in the environment and improves your wireless experience by optimizing the Deco network's channel.

1. Go to [More > Network Optimization](#).

2. Tap [Scan](#) to detect network security and performance.

3. Optimize the network if needed.

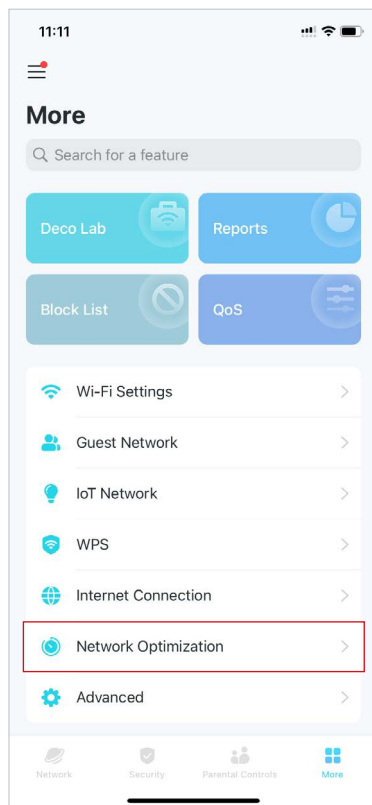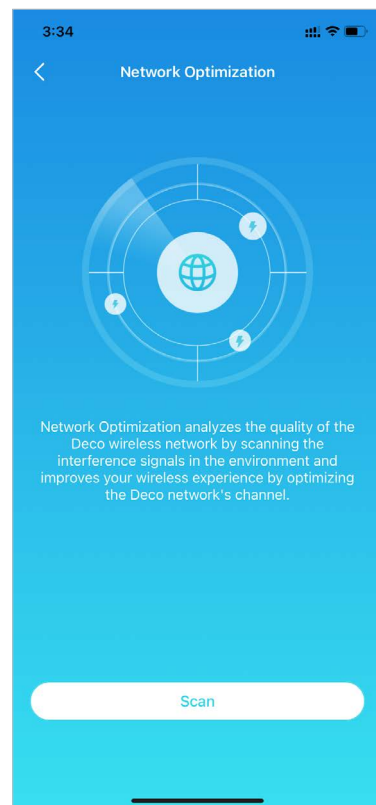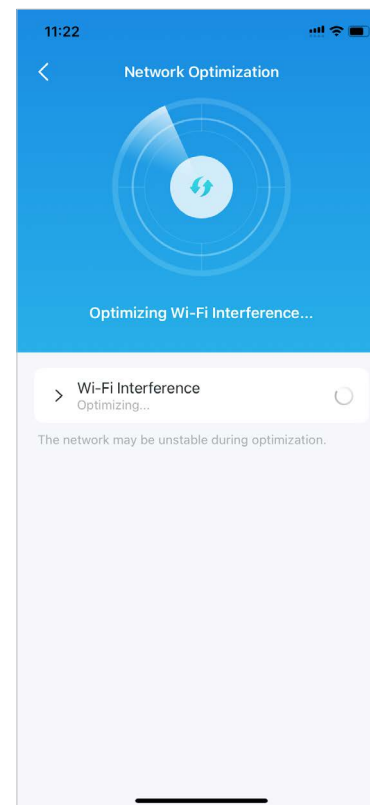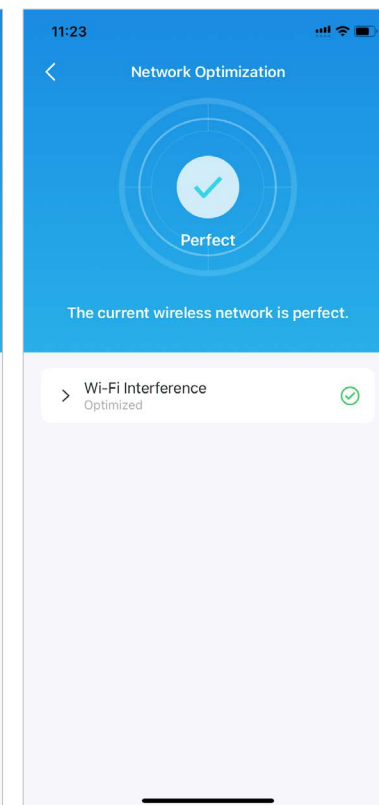


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Create Static Routes

Static routing is a form of routing that is configured manually by a network administrator or a user by adding entries into a routing table. The manually-configured routing information guides the router in forwarding data packets to the specific destination.

1. Go to [More](#) > [Advanced](#) > [Static Routing](#), and tap [Add Static Route](#).

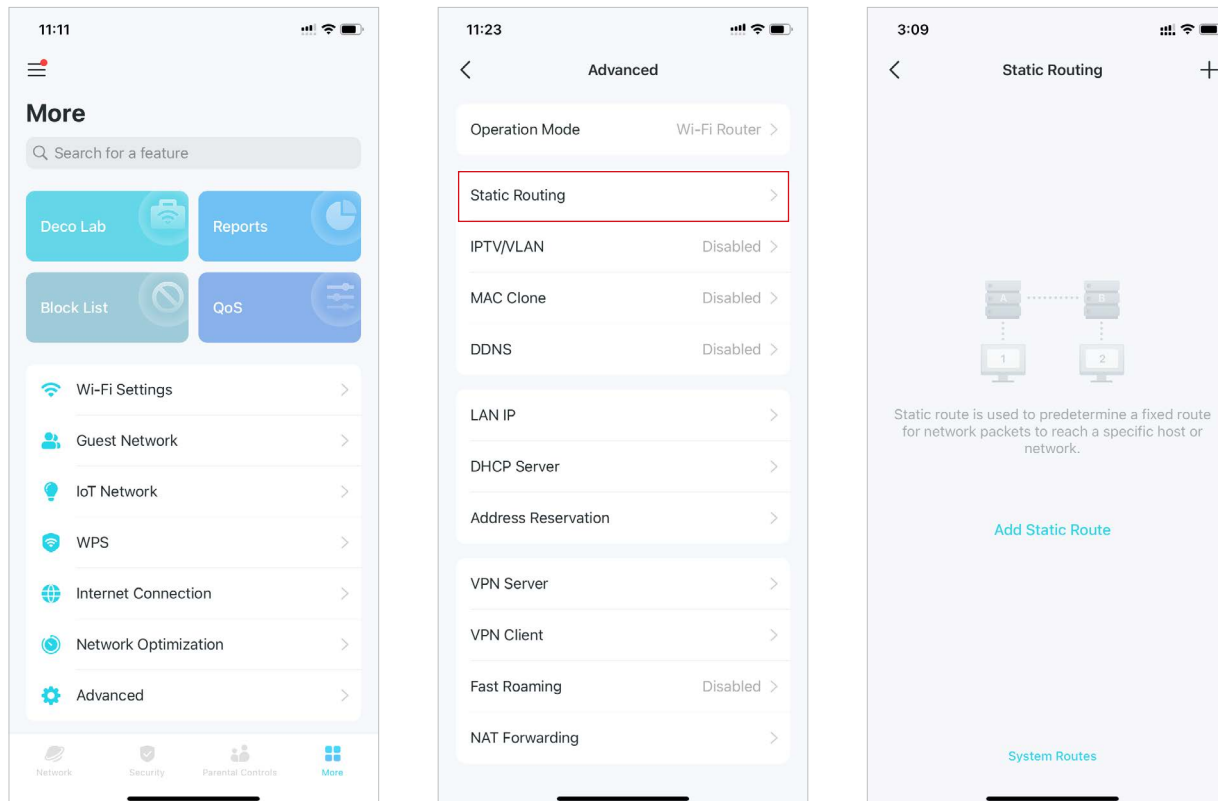

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

2. Fill in the necessary information.

- **Description:** Specify a description for the routing entry.
- **Network Destination:** The network destination is the address of the network of host that you want to assign to a static route.
- **Subnet Mask:** The Subnet Mask divides the network portion and the host portion of an IP address.
- **Default Gateway:** This is the IP address of the default gateway device that allowing for the contact between the router and the network or host.
- **Interface:** Select the interface to specify the type of the network destination.

3:09

✕ Add Static Route Save

Description
Static Route 1

Routing Settings ⓘ

Network Destination

Subnet Mask

Default Gateway

Interface WAN >

3:09

< Interface

WAN ✓

LAN

3. After you save the settings, if the entry you have set appear on the screen, the static routing is set successfully.

3:10

< Static Routing +

Static Route 1 >

Network Destination 172.31.53.0

Subnet Mask 255.255.255.0

Default Gateway 192.168.0.1

Interface WAN

System Routes

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Set Up VPN Server/Client

Use Open VPN, PPTP VPN, or L2TP/IPSec VPN to access your home network, and use VPN Client to access a remote VPN server.





Use OpenVPN to Access Your Home Network

OpenVPN Server is used to create an OpenVPN connection for remote devices to access your home network.

To use the VPN feature, you need to enable OpenVPN Server on your Deco router, and install and run VPN client software on remote devices. Please follow the steps below to set up an OpenVPN connection.

1. Go to [More](#) > [Advanced](#) > [VPN Server](#).


2. Tap [Add VPN Server](#) and select [OpenVPN](#).

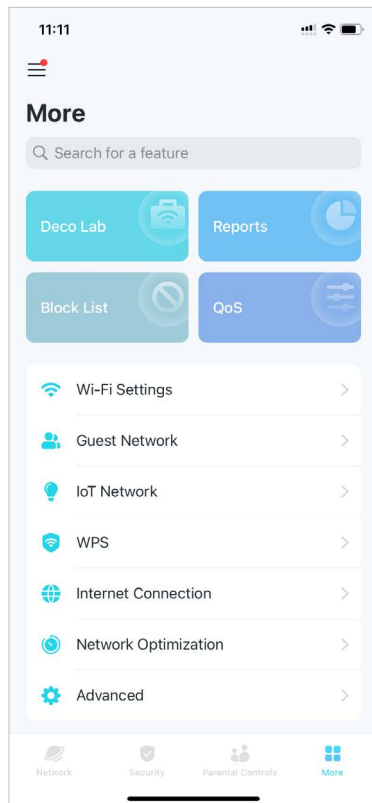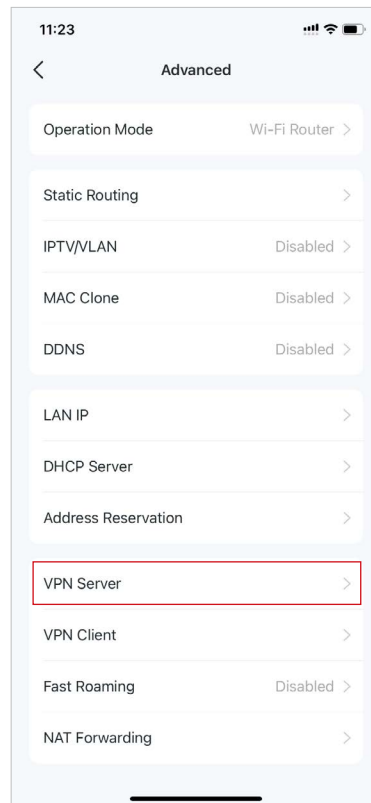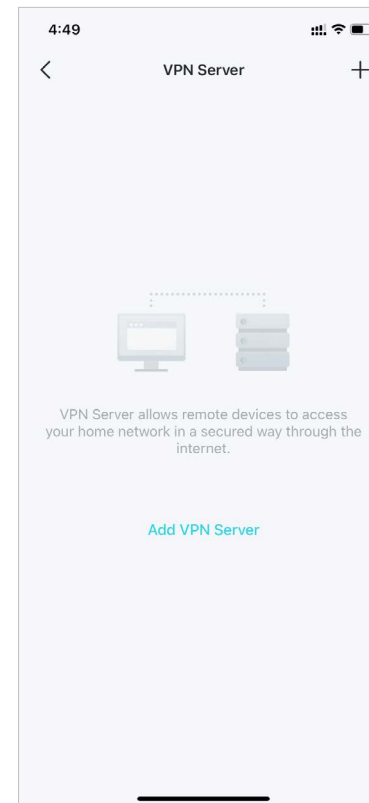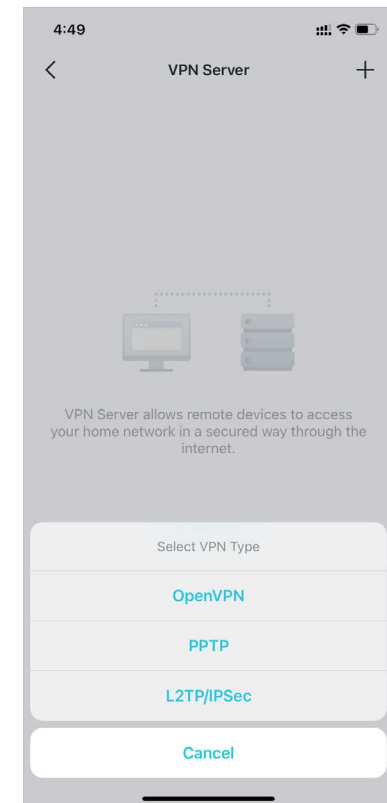

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


3. Enter the necessary information and save the settings.

- **Description:** Enter a name for this OpenVPN.
- **Service Type:** Select the service type ([UDP/TCP](#)) for OpenVPN.
- **VPN Port:** Enter a VPN service port to which a VPN device connect, and the port number should be between 1024 and 65535.
- **VPN Subnet/Netmask:** Enter the range of IP addresses that can be leased to the device by the OpenVPN server.
- **Client Access:** Select your client access type. Select [Home Network Only](#) if you only want the remote device to access your home network. Select [Internet and Home Network](#) if you also want the remote device to access internet through the VPN server.

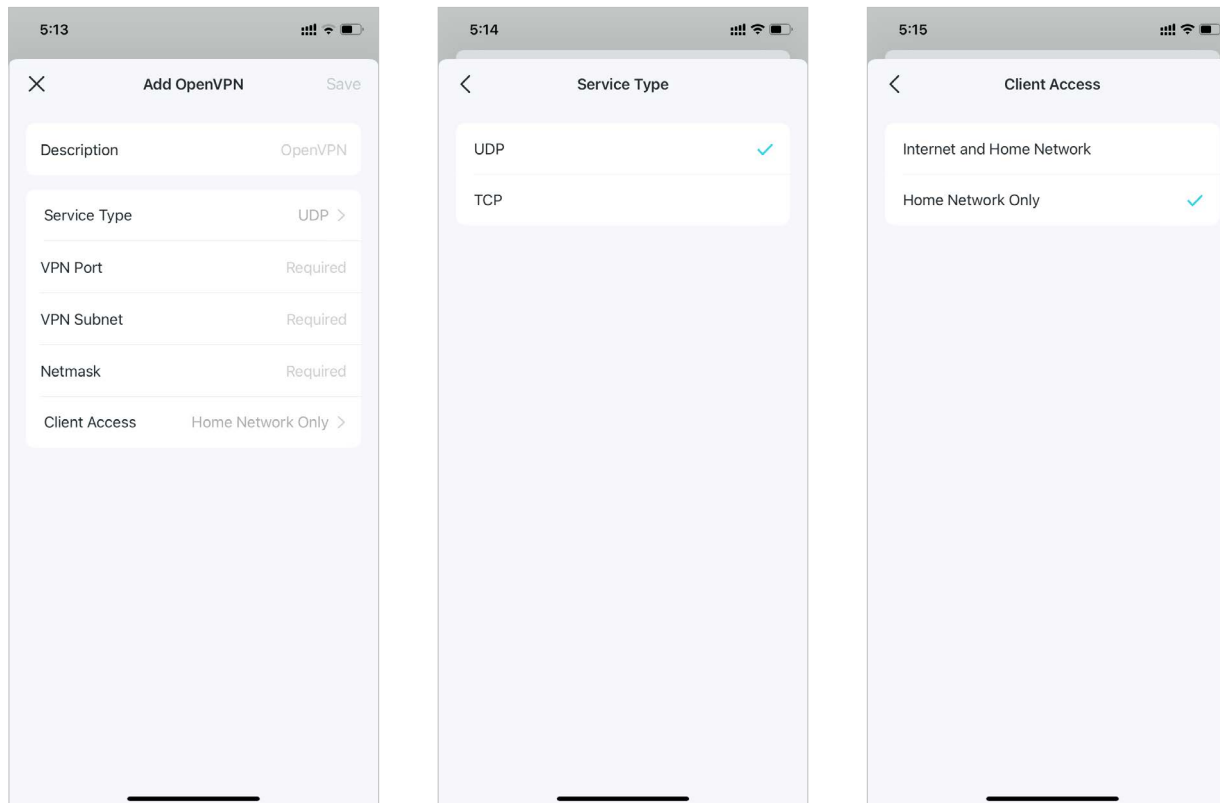

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

4. Tap the VPN you have saved and tap [Export Config File](#) to save the OpenVPN configuration file which will be used by the remote device to access your router.

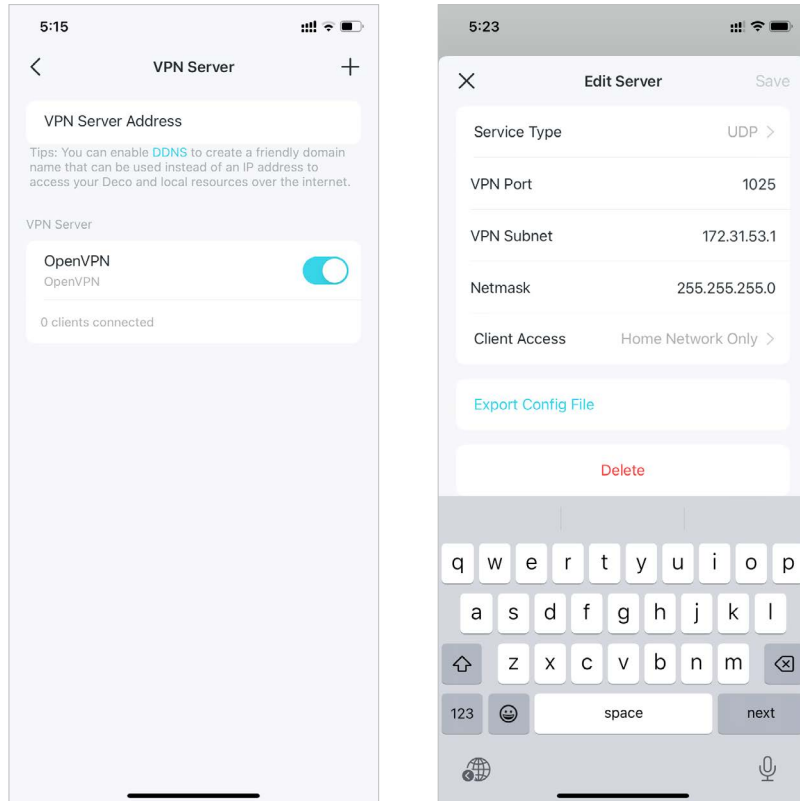

5. Now you need to configure OpenVPN connection on your remote device.

(1) Visit <https://openvpn.net/community-downloads/> to download the OpenVPN software, and install it on your device where you want to run the OpenVPN client utility.

■ Note: You need to install the OpenVPN client utility on each device that you plan to apply the VPN function to access your Deco router. Mobile devices should download a third-party app from Google Play or Apple App Store.

(2) After the installation, copy the file exported from your router to the OpenVPN client utility's "config" folder (for example, [C:\Program Files\OpenVPN\config](#) on Windows). The path depends on where the OpenVPN client utility is installed.

(3) Run the OpenVPN client utility and connect it to OpenVPN Server.

Use PPTP VPN to Access Your Home Network





PPTP VPN Server is used to create a PPTP VPN connection for remote devices to access your home network.

To use the VPN feature, you need to set up PPTP VPN Server on your Deco router, and configure the PPTP connection on remote devices.

Please follow the steps below to set up a PPTP VPN connection.

1. Go to [More](#) > [Advanced](#) > [VPN Server](#).


2. Tap [Add VPN Server](#) and select [PPTP](#).

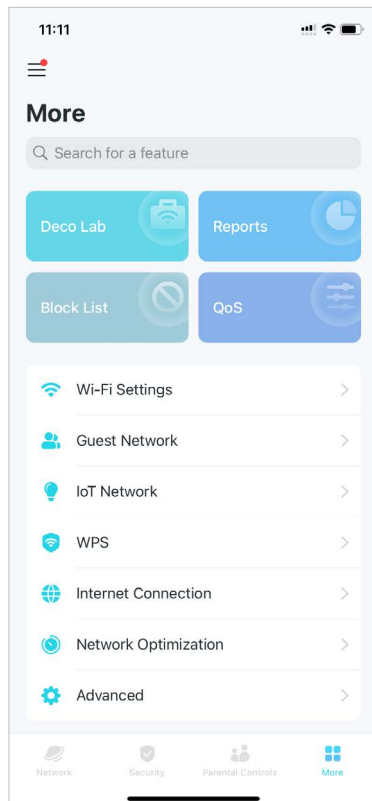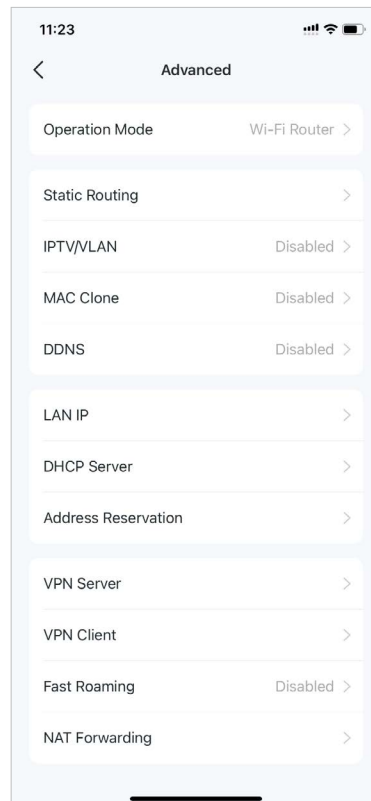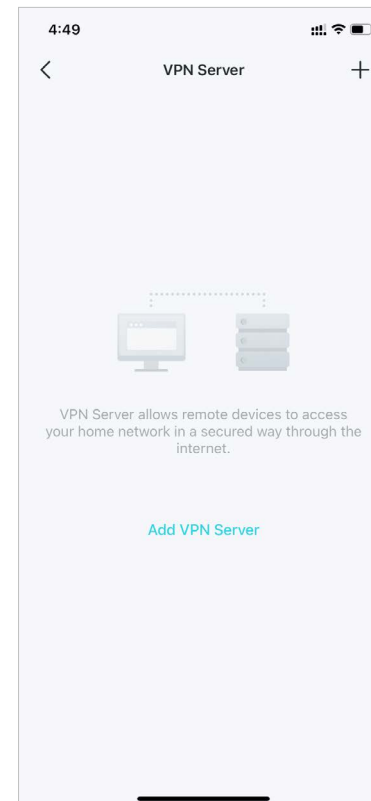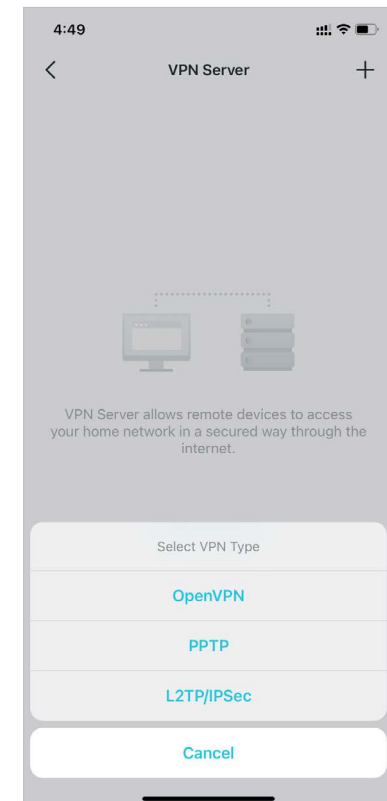

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

3. Enter the necessary information and save the settings.


- **Description:** Enter a name for this VPN.
- **Client IP Address:** Enter the range of IP addresses (up to 10) that can be leased to the devices by the PPTP VPN server.
- **Allow NetBIOS passthrough:** Enable it to allow your VPN device to access your Samba server using NetBIOS name.
- **Allow unencrypted connections:** Enable it to allow unencrypted connections to your VPN server.
- **Account List:** Add the PPTP VPN connection account (user name and password) for the remote device. You can create up to 16 accounts.

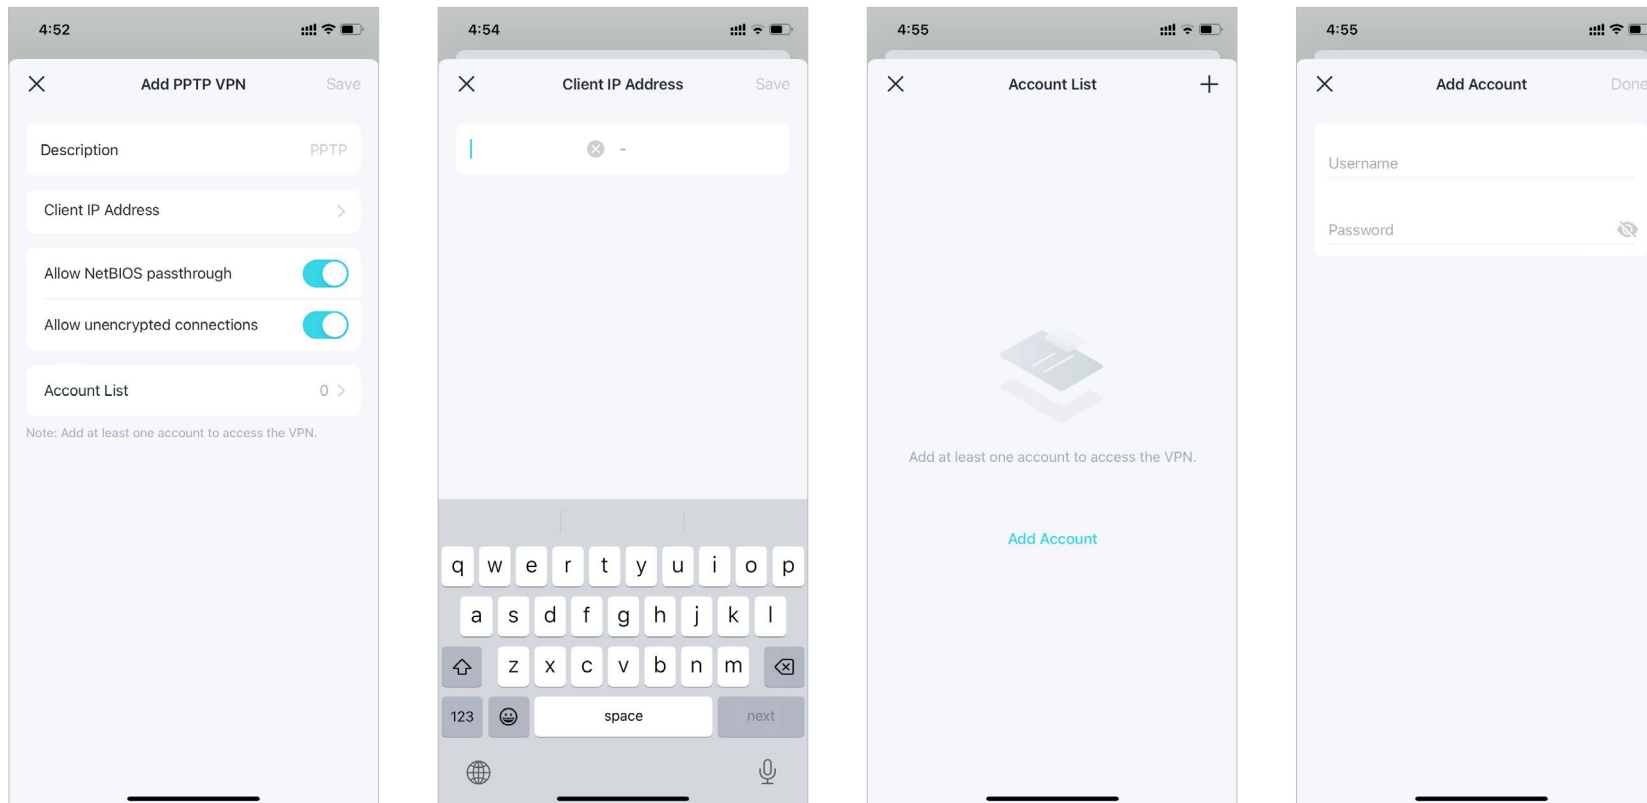


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

4. Now you need to configure PPTP VPN on your remote device. The remote device can use the Windows built-in PPTP software or a third-party PPTP software to connect to PPTP Server. Here we use the Windows built-in PPTP software as an example.


(1) Go to [Start > Control Panel > Network and Internet > Network and Sharing Center](#) and select [Set up a new connection or network](#).

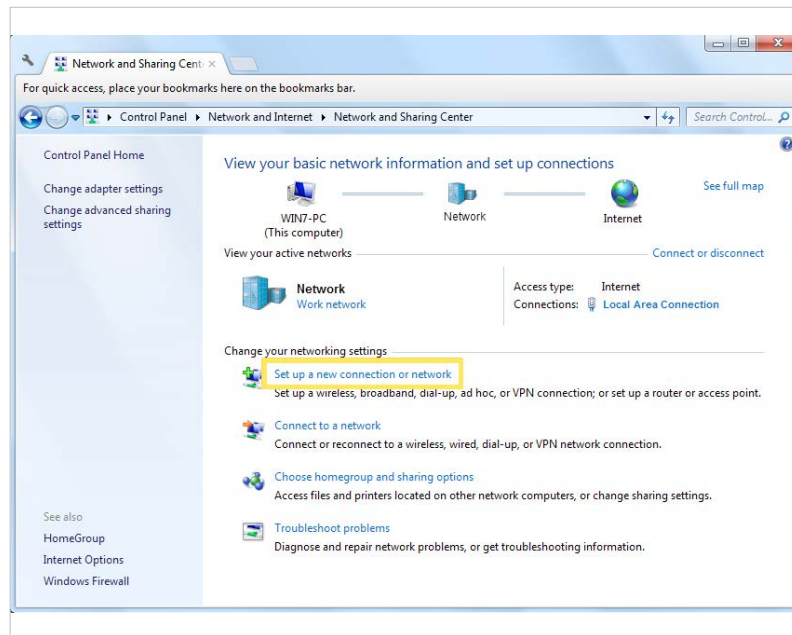


(2) Select [Connect to a workplace](#) and click [Next](#).

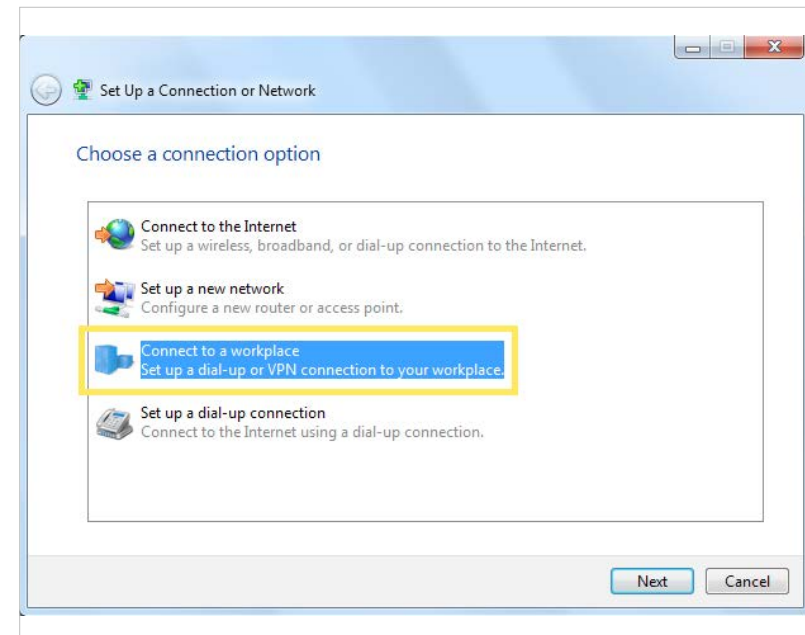


(3) Select [Use my Internet connection \(VPN\)](#).

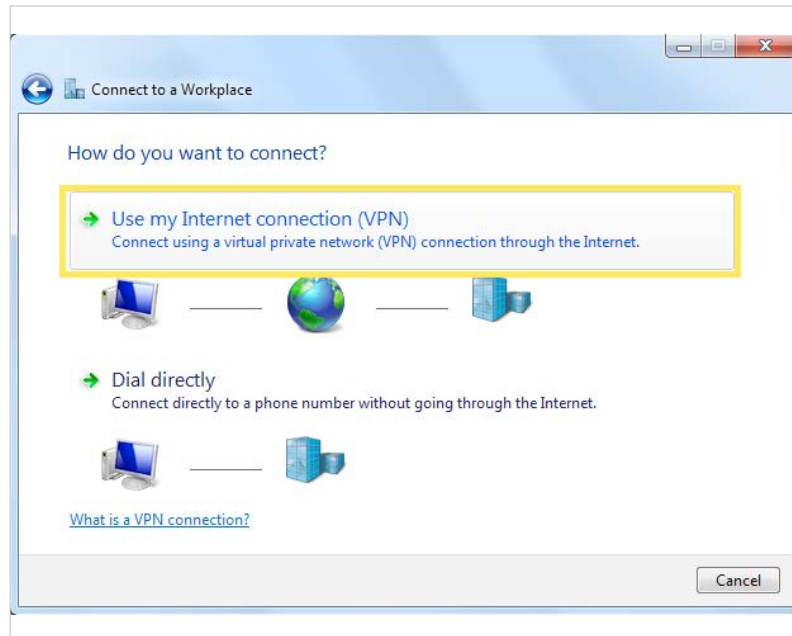


(4) Enter the internet IP address of the router in the [Internet address](#) field. Click [Next](#).

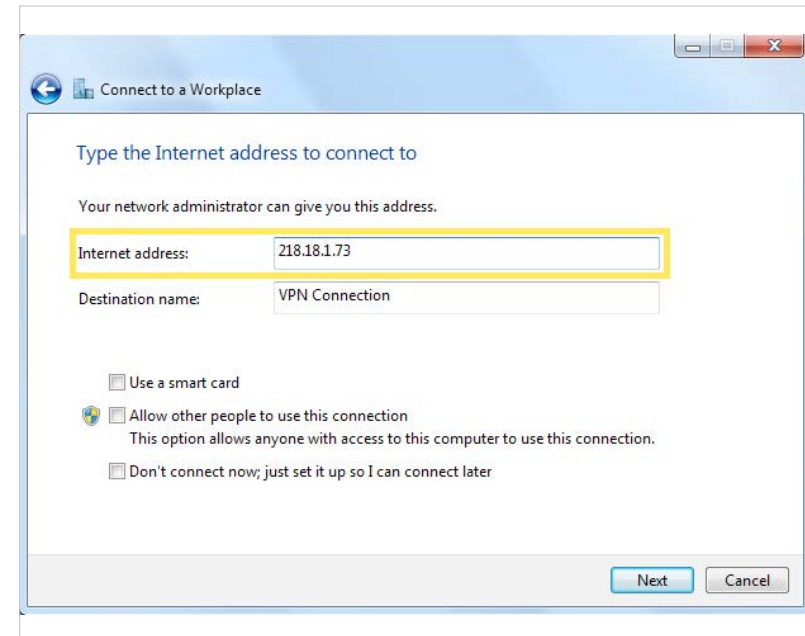

(5) Enter the [User name](#) and [Password](#) you have set for the PPTP VPN server on your router, and click [Connect](#).

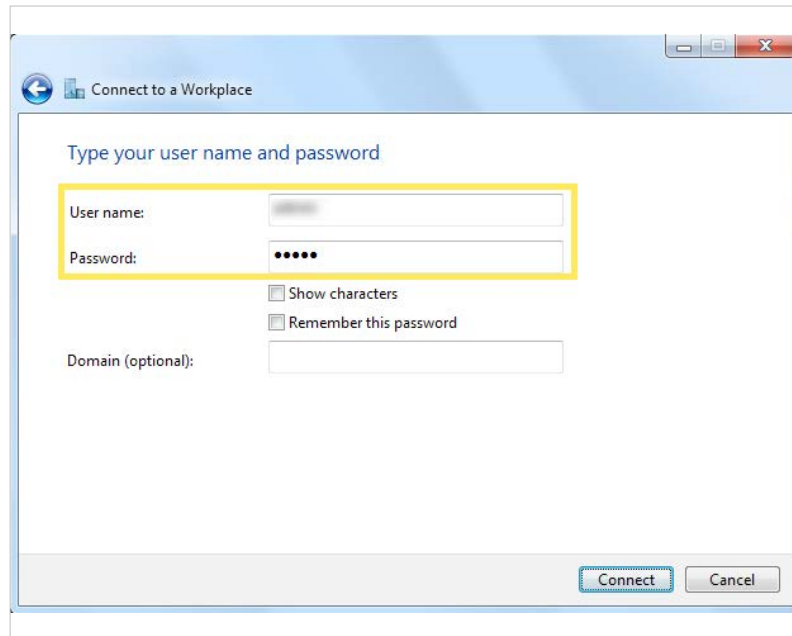

(6) Click [Connect Now](#) when the VPN connection is ready to use.

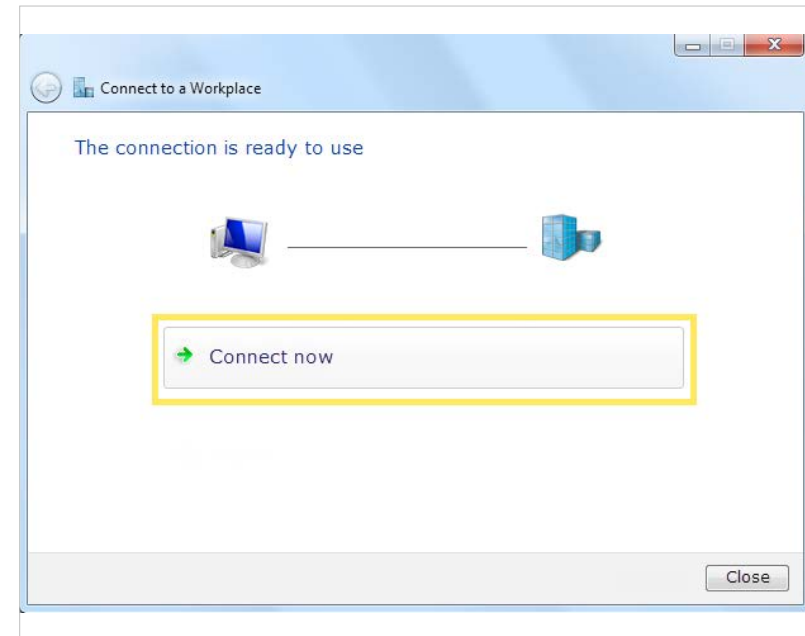

Use L2TP/IPSec VPN to Access Your Home Network





L2TP/IPSec VPN Server is used to create a L2TP/IPSec VPN connection for remote devices to access your home network.

To use the VPN feature, you need to set up L2TP/IPSec VPN Server on your Deco router, and configure the L2TP/IPSec connection on remote devices.

Please follow the steps below to set up the L2TP/IPSec VPN connection.

1. Go to [More](#) > [Advanced](#) > [VPN Server](#).


2. Tap [Add VPN Server](#) and select [L2TP/IPSec](#).

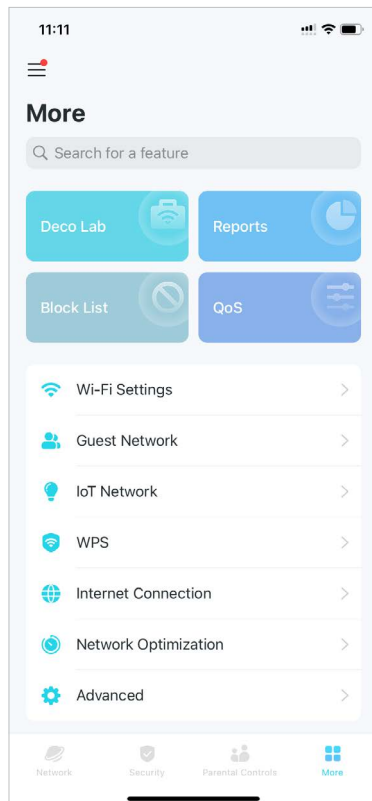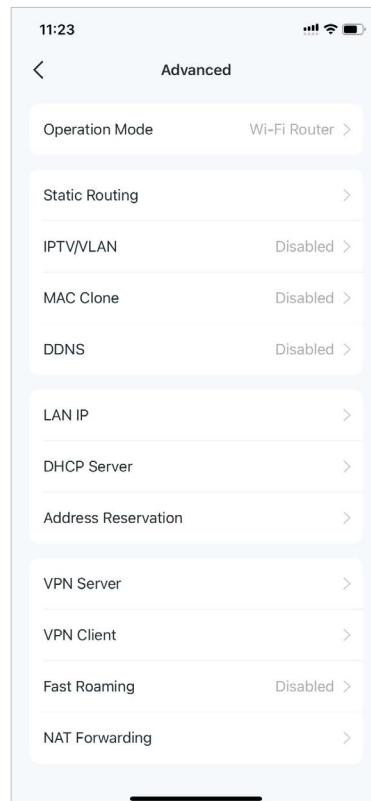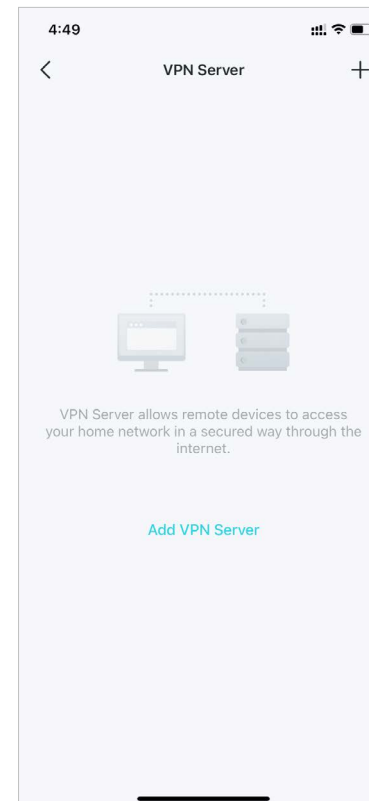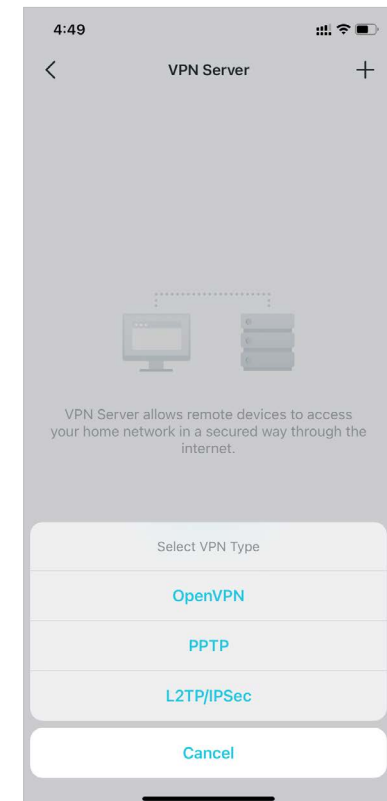

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

3. Enter the necessary information and save the settings.


- **Description:** Enter a name for this VPN.
- **Client IP Address:** Enter the range of IP addresses (up to 10) that can be leased to the devices by the L2TP/IPSec VPN server.
- **IPSec Encryption/ IPSec Pre-Shared Key:** Keep IPSec Encryption as Encrypted and create an IPSec Pre-Shared Key.
- **Account List:** Add the L2TP/IPSec VPN connection account (user name and password) for the remote device. You can create up to 16 accounts.

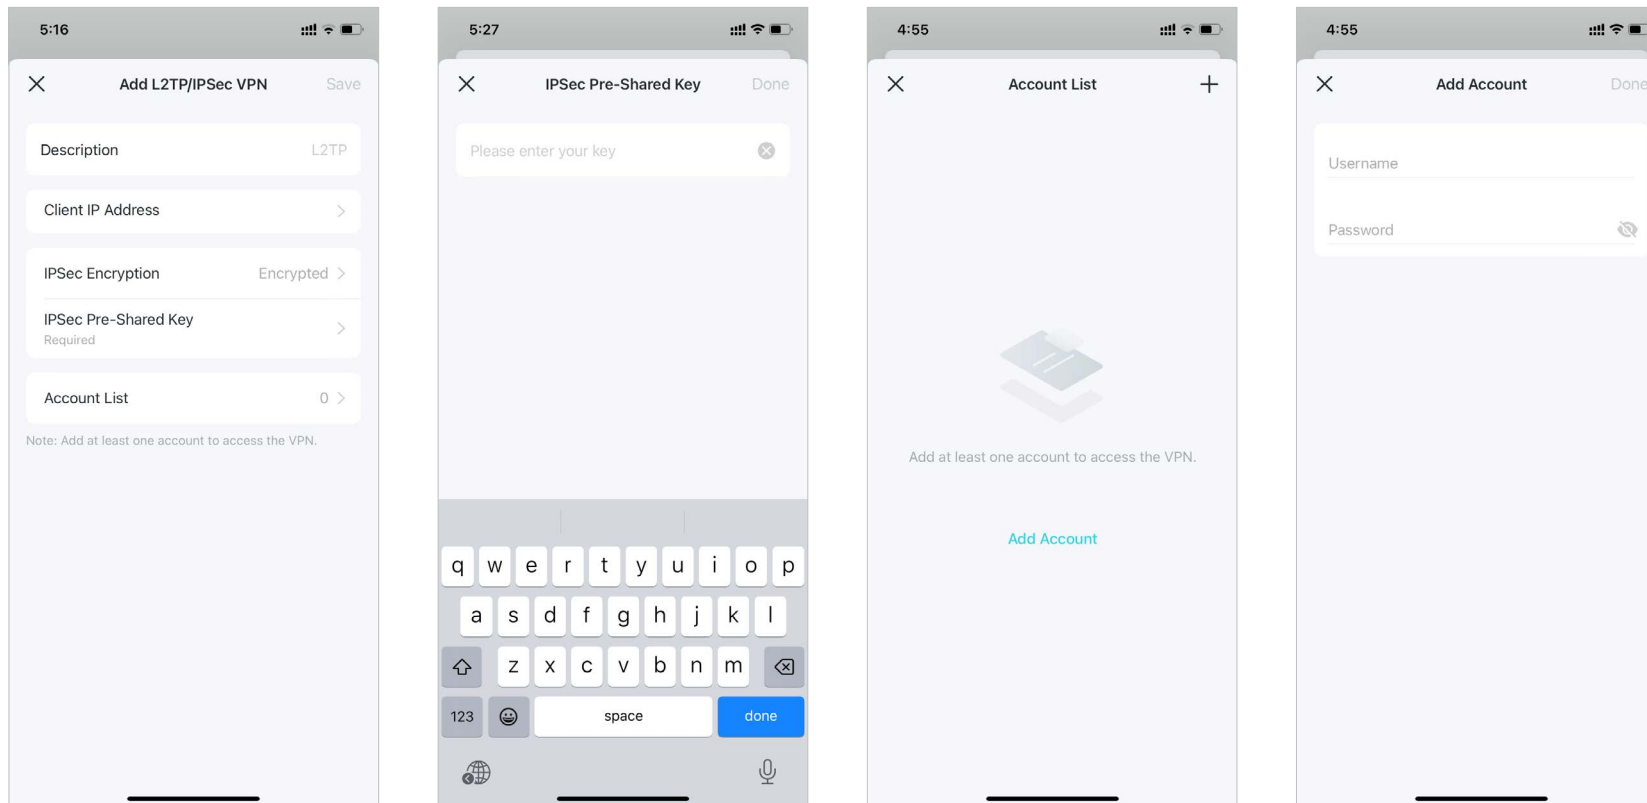


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

4. Now you need to configure L2TP/IPSec on your remote device. The remote device can use the Windows or Mac OS built-in L2TP/IPSec software or a third-party L2TP/IPSec software to connect to L2TP/IPSec Server. Here we use the Windows built-in L2TP/IPSec software as an example.


(1) Go to [Start > Control Panel > Network and Internet > Network and Sharing Center](#) and select [Set up a new connection or network](#).

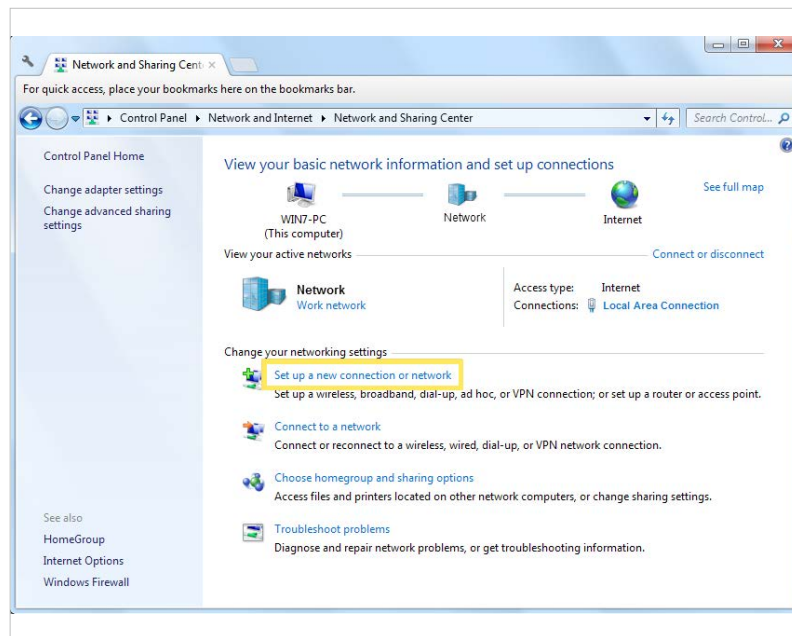


(2) Select [Connect to a workplace](#) and click [Next](#).

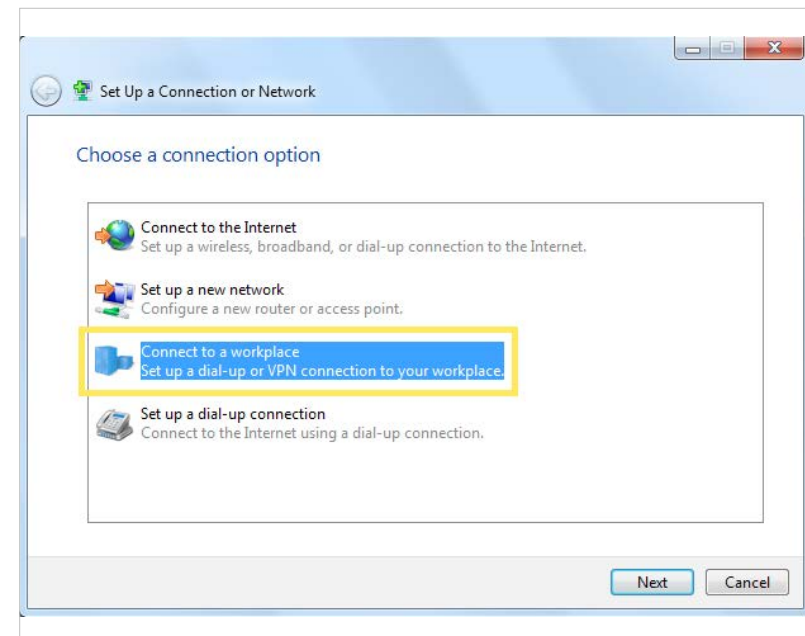


(3) Select **Use my Internet connection (VPN)**.

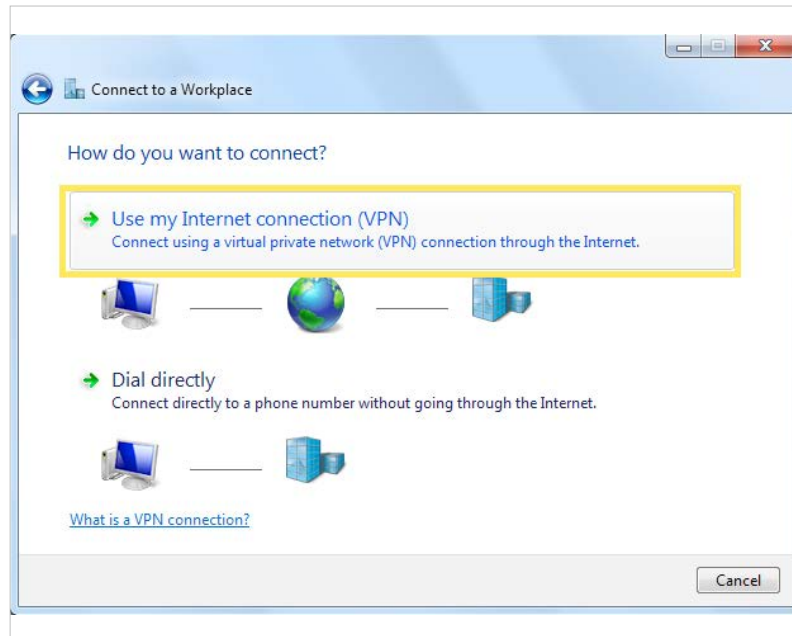


(4) Enter the internet IP address of the router in the **Internet address** field. Select **Don't connect now; just set it up so I can connect later**. Then click **Next**.

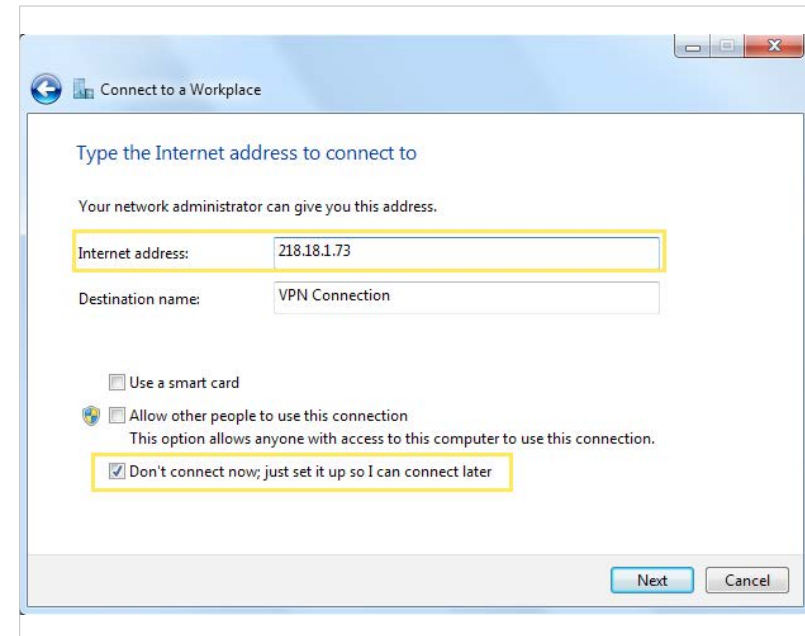


(5) Enter the User name and Password you have set for the L2TP/IPSec VPN server on your router, and click Connect.

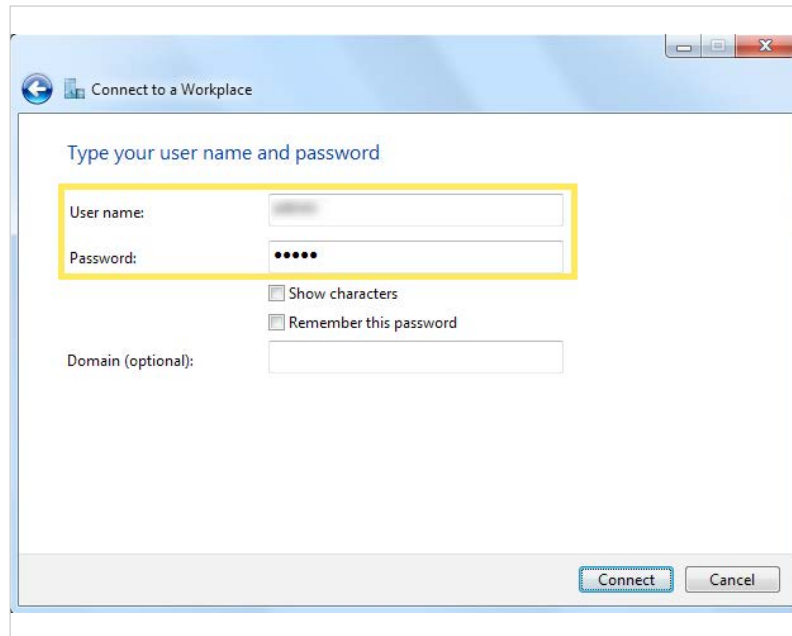


(6) Click Close when the VPN connection is ready to use.

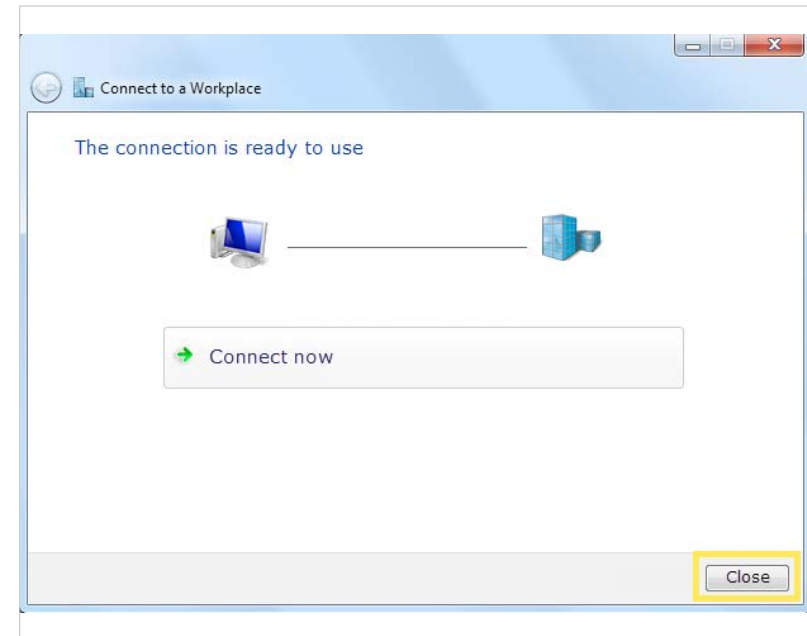

(7) Go to Network and Sharing Center and click Change Adapter Settings.

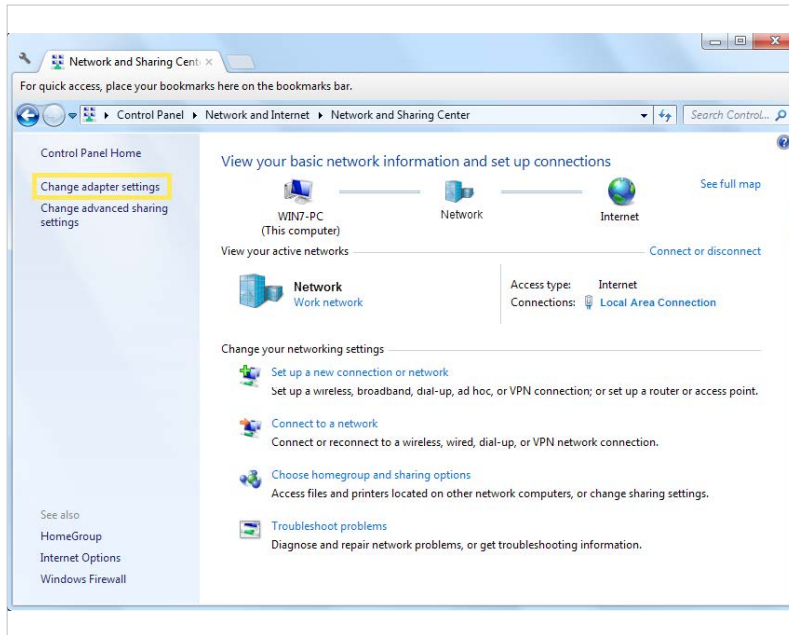


(8) Find the VPN connection you created, then double-click it.

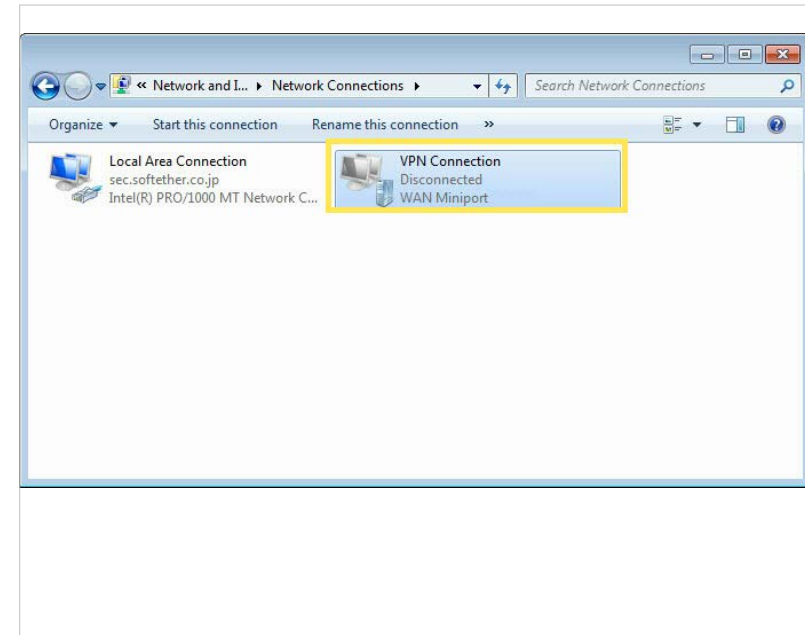


(9) Enter the Username and Password you have set for the L2TP/IPSec VPN server on your router, and click Properties.




(10) Switch to the Security tab, select Layer 2 Tunneling Protocol with IPsec (L2TP/IPSec) and click Advanced settings.

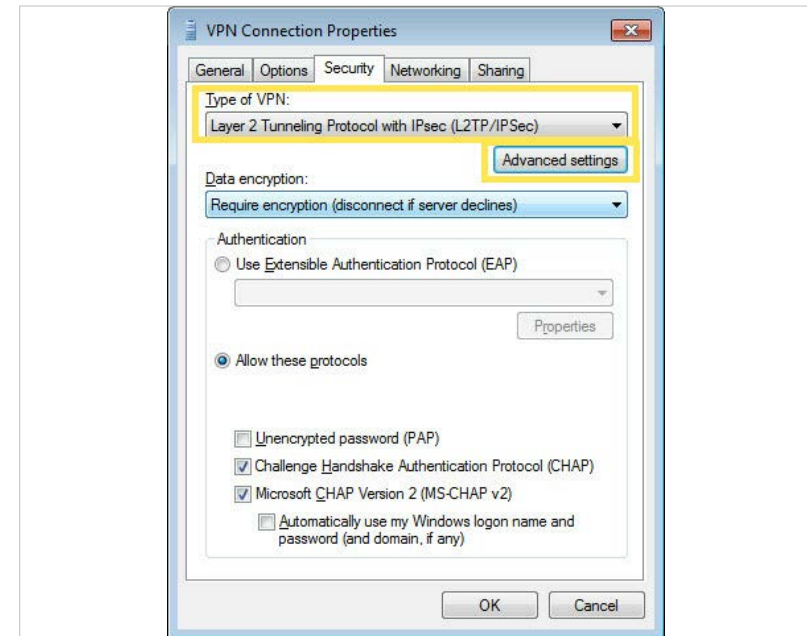

(11) Select Use preshared key for authentication and enter the IPsec Pre-Shared Key you have set for the L2TP/IPsec VPN server on your router. Then click OK.

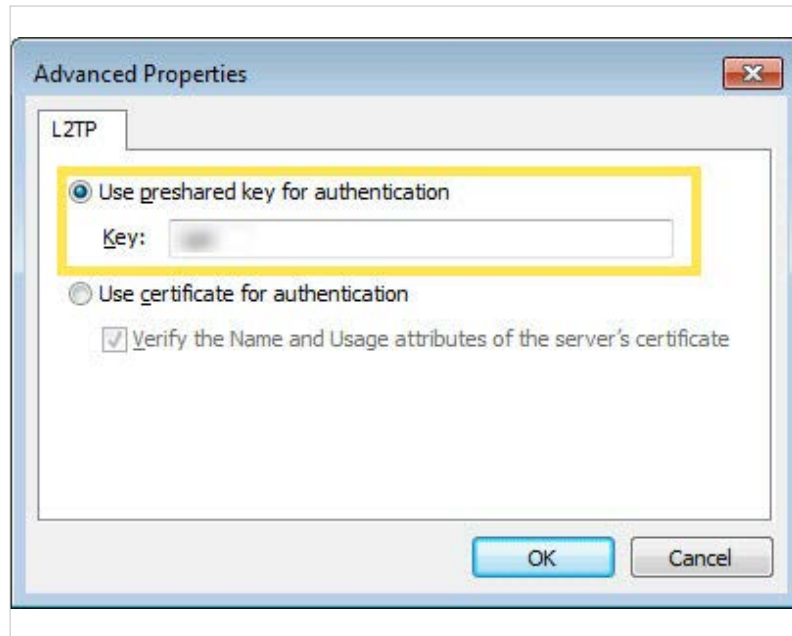

(12) Switch to the Security tab, select Layer 2 Tunneling Protocol with IPsec (L2TP/IPsec) and click Advanced settings.

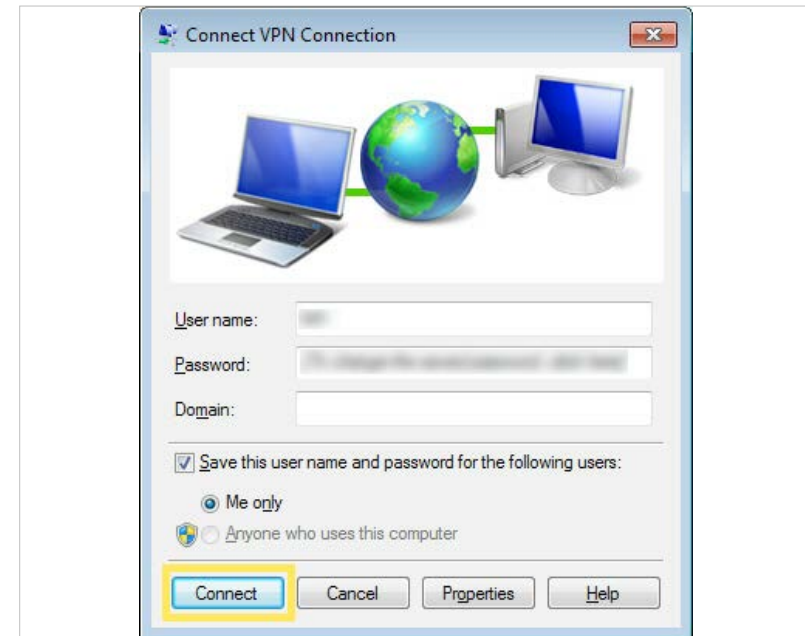

Done! Click [Connect](#) to start VPN connection.

Use VPN Client to Access a Remote VPN Server





VPN Client is used to create VPN connections for devices in your home network to access a remote VPN server.

To use the VPN feature, simply configure a VPN connection and choose your desired devices on your Deco router, then these devices can access the remote VPN server. Please follow the steps below:

1. Go to [More](#) > [Advanced](#) > [VPN Client](#).

2. Tap [Add VPN Server](#).


3. Select your VPN service and follow instructions to complete the settings.

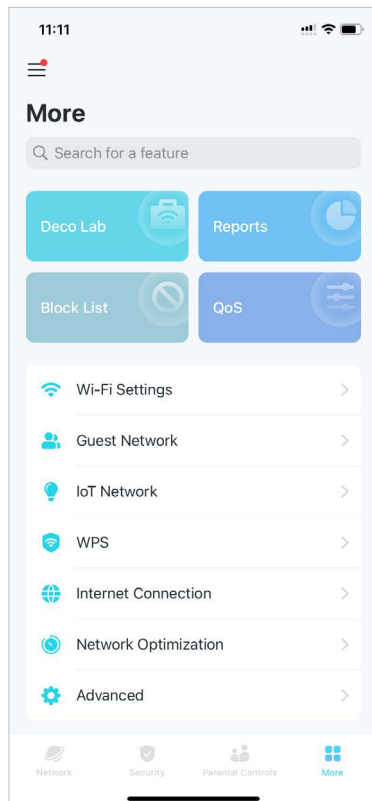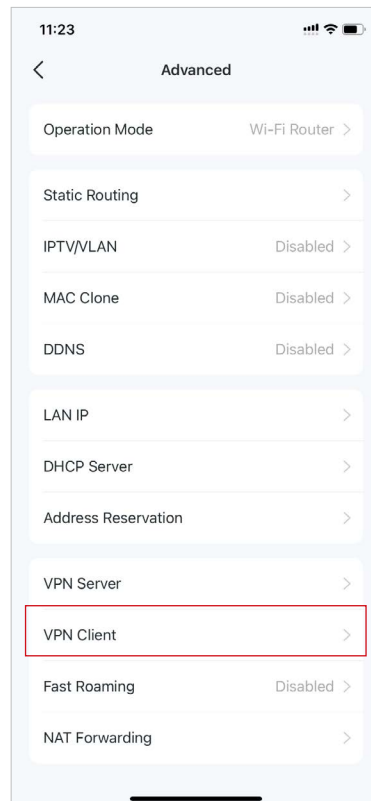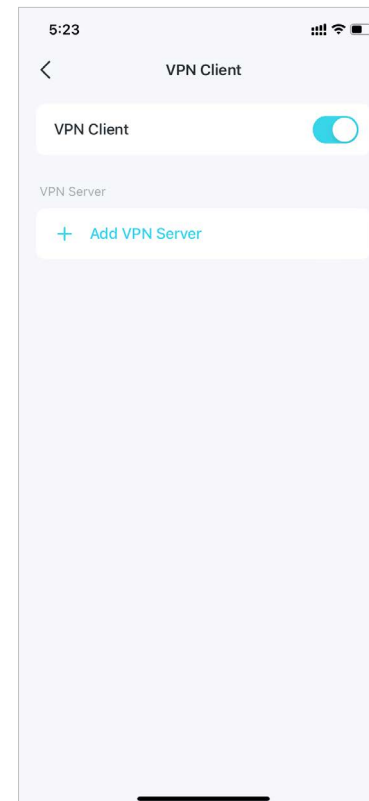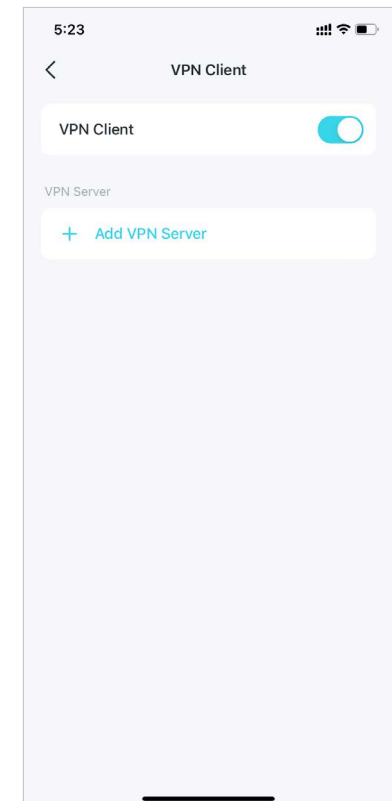

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


3. Tap **Custom** and customize the VPN type. Then enter the VPN information provided by your VPN provider and save the settings.

- **OpenVPN:** Enter the VPN username and password if required by your VPN provider, otherwise simply leave them empty. Then import the configuration file provided by your VPN provider.
- **PPTP:** Enter the VPN server address and the VPN username and password provided by your VPN provider.
- **L2TP/IPSec:** Enter the VPN server address, VPN username and password, and IPSec pre-shared key provided by your VPN provider.

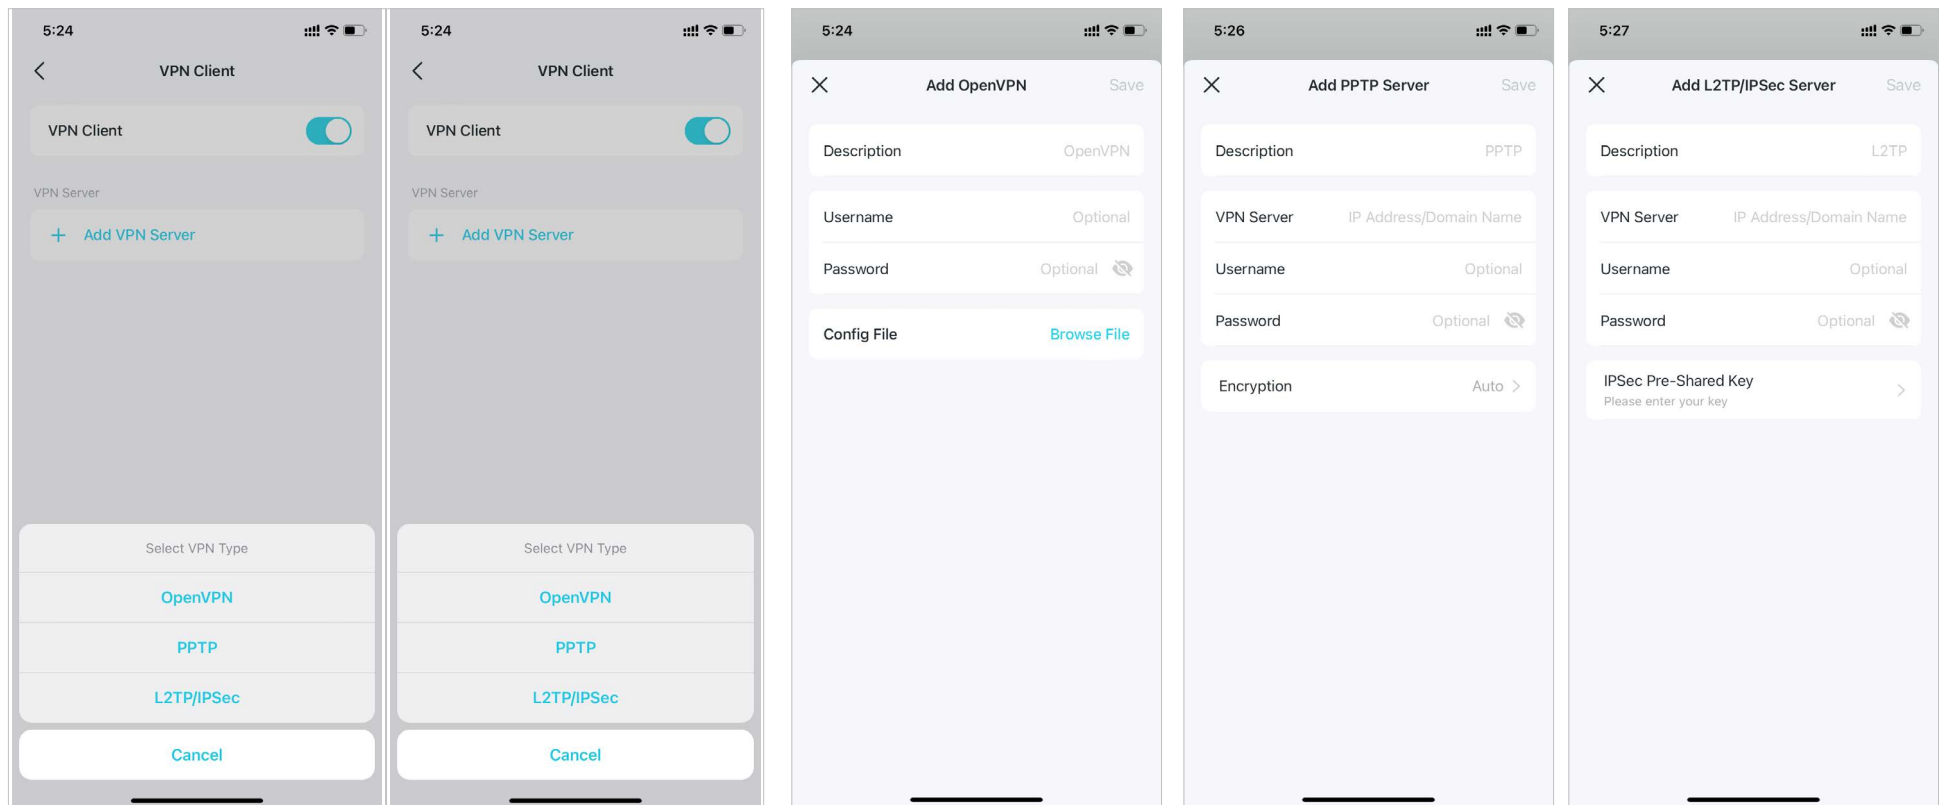

4. Tap **Client List** and **+** to add devices that will use the VPN function

5. Tap **Access Permission** to allow all devices connected to your Deco to use the VPN function or only allow devices on the Client List to use VPN function.

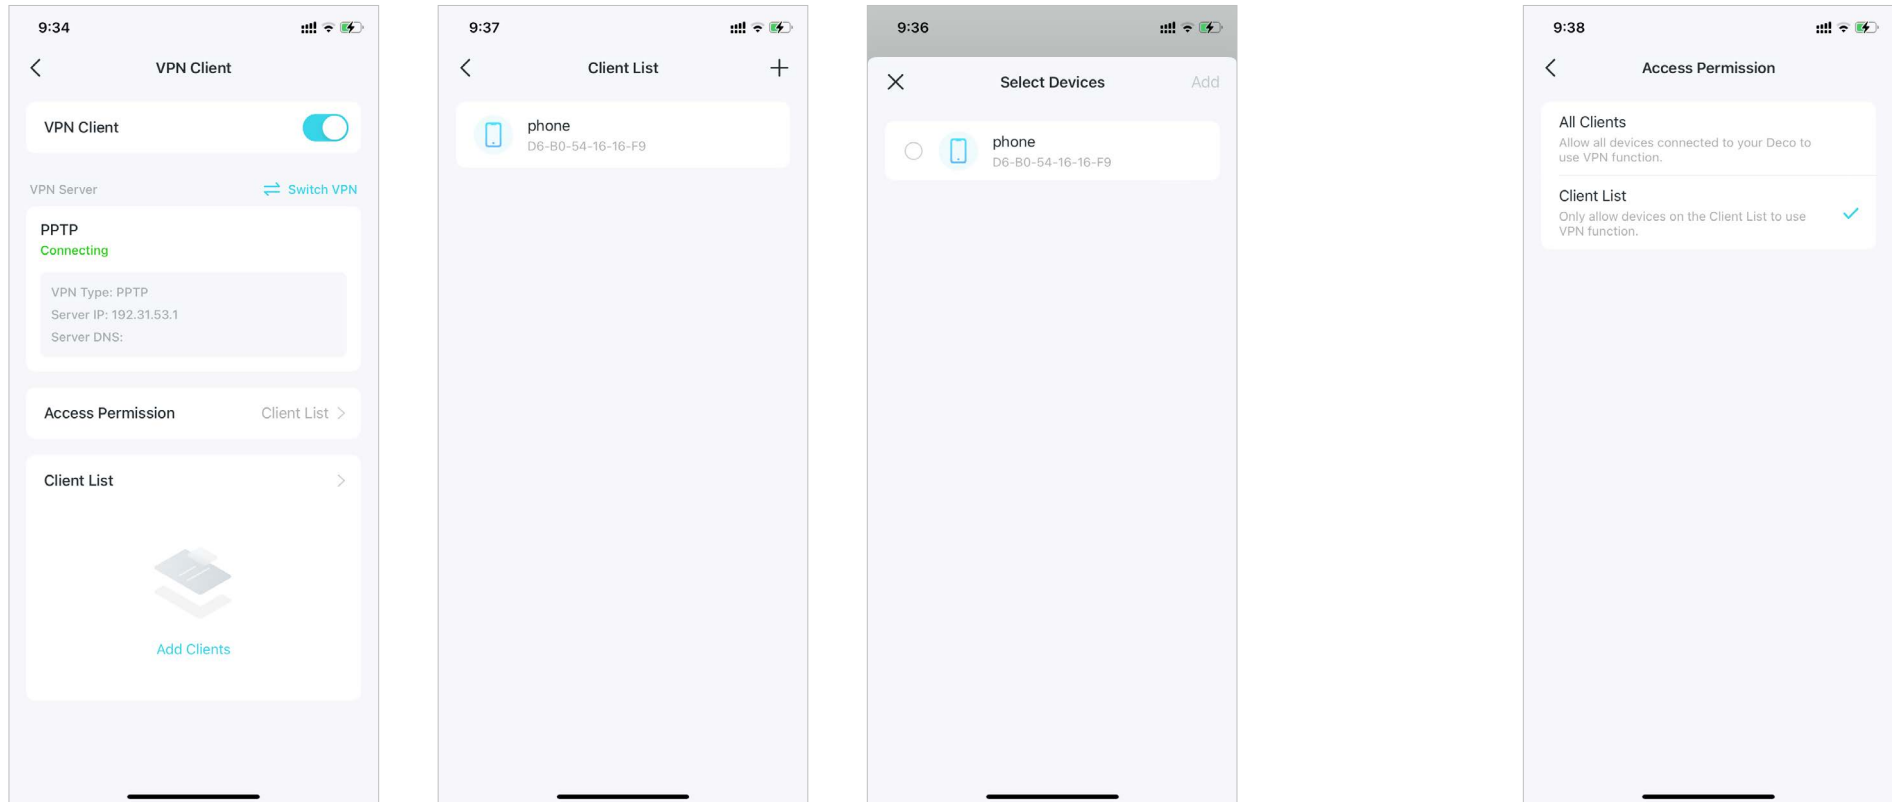

Done! Now the devices you specified can access the VPN server you enabled.



Advanced Features

The Deco app offers a list of advanced features to fulfill diverse network needs.


 **Tip:** You can use the search box on the [More](#) page to quickly find the features you need.

Tap [More](#) > [Advanced](#) to access advanced features.


 **Note:** Features available on this page are based on the current operation mode of the network.

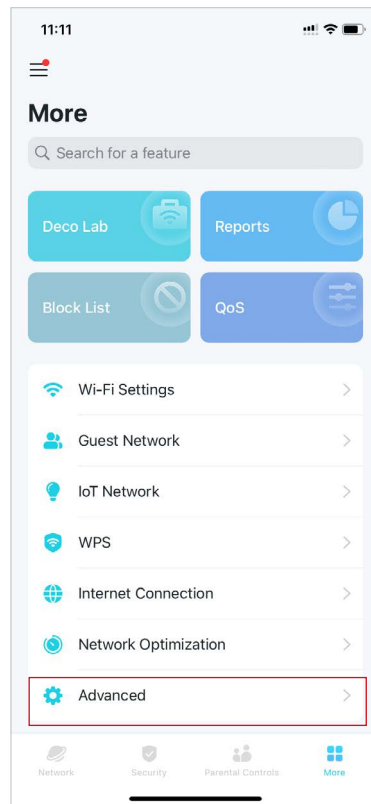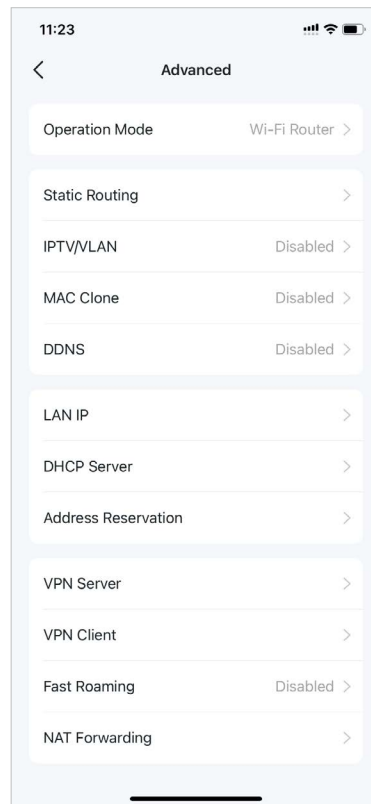

Change the operation mode.

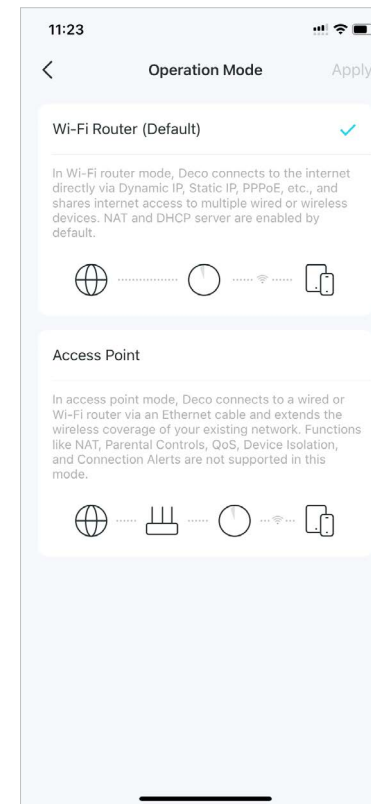

[Create Static Routes](#) to visit multiple networks and servers at the same time.

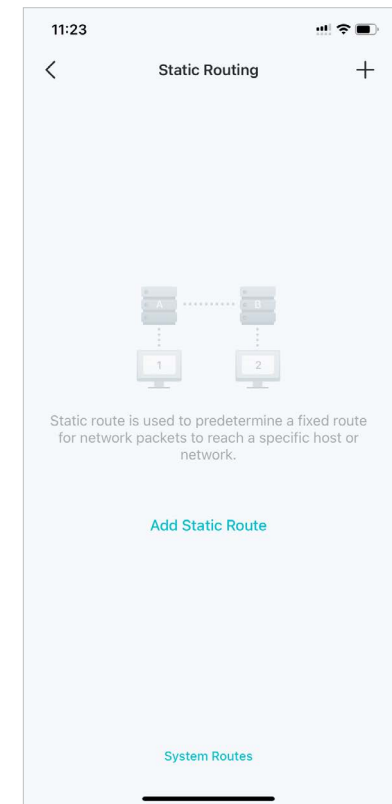


 **Tip:** You can use the search box on the [More](#) page to quickly find the features you need.


Enable IPTV/VLAN mode to support IPTV services.




Enable MAC Clone if your ISP only allows specific MAC addresses.

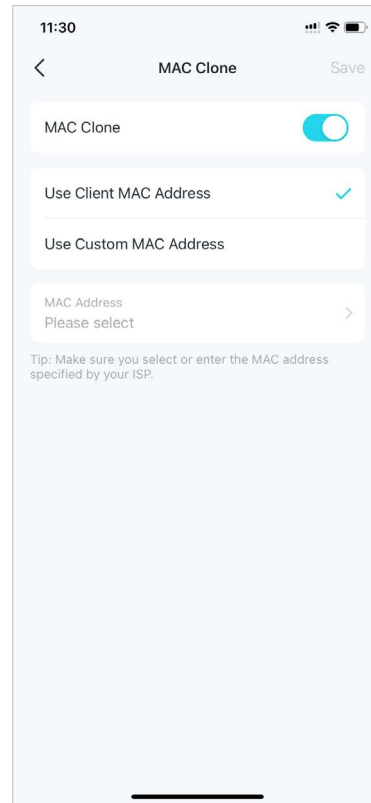

Register a TP-Link DDNS domain name to access your Decos and local resources over the internet.

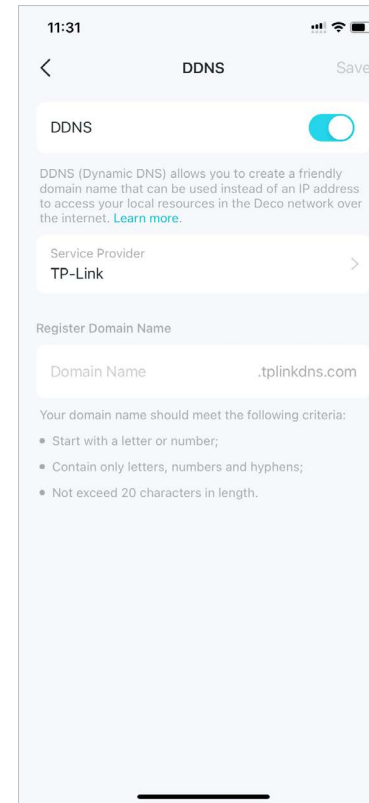


Modify LAN IP to avoid IP address conflict.

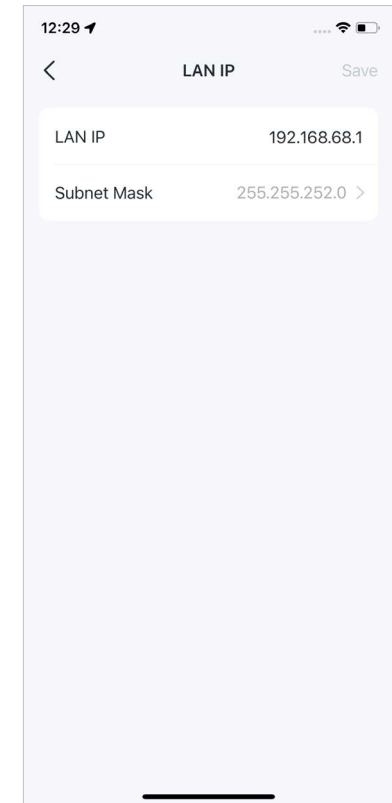


 **Tip:** You can use the search box on the [More](#) page to quickly find the features you need.



Change DHCP Server settings.

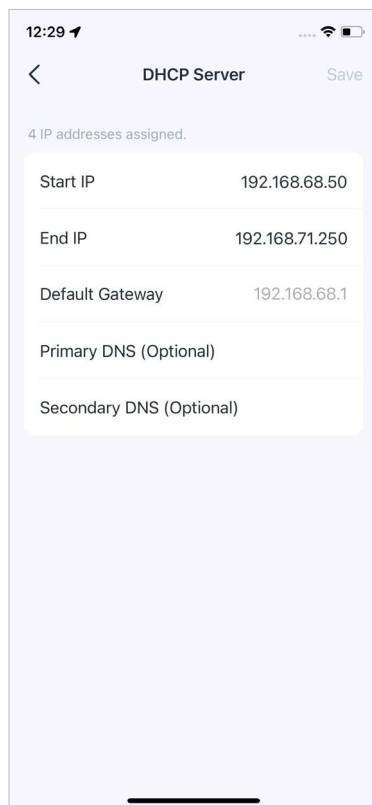

Reserve IP addresses for specific devices to recognize and manage them more easily.

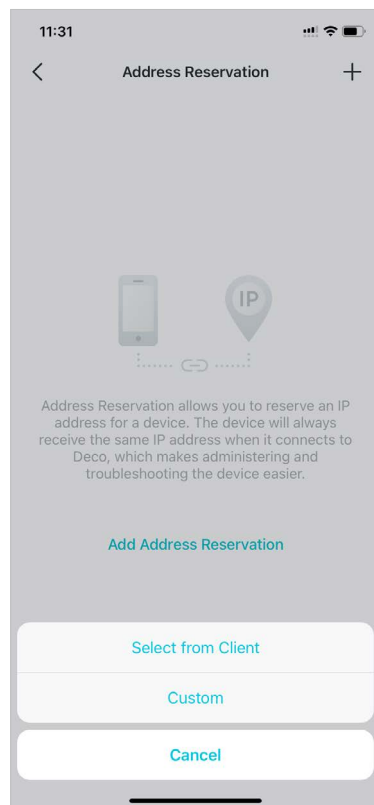


[Set Up VPN Server/Client](#) to allow remote access to your home network in a secured way and share the VPN service in your network.

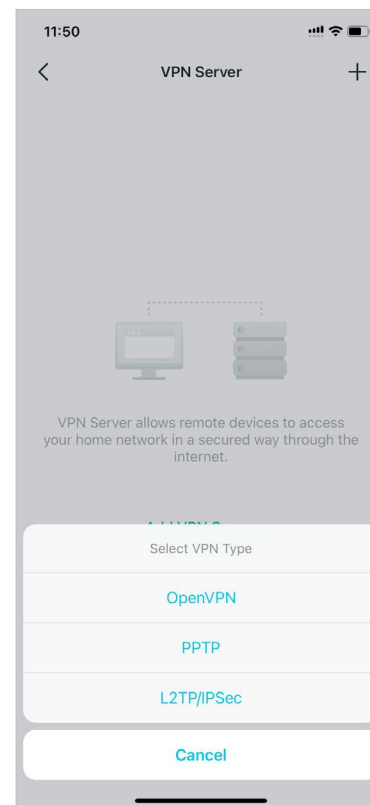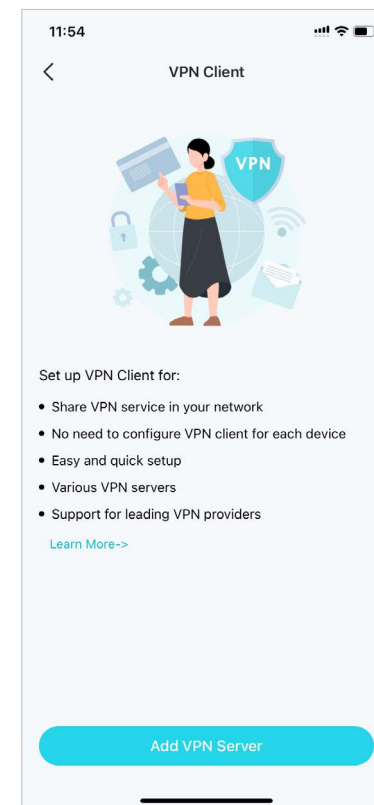


 **Tip:** You can use the search box on the [More](#) page to quickly find the features you need.


Enable Fast Roaming to further reduce roaming delays for your wireless devices.

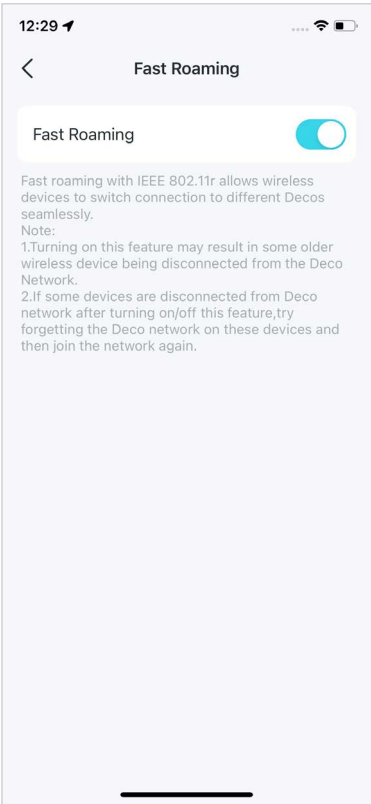


Set up port forwarding rules to enable devices in your network accessible over the internet with safety.

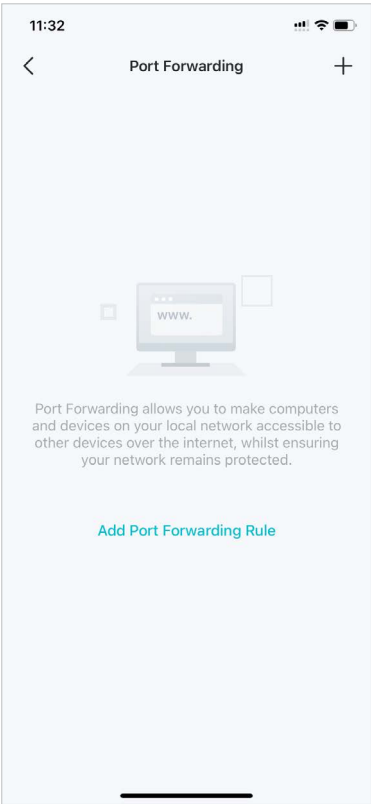

Enable SIP ALG to communicate with SIP (Session Initiation Protocol) servers via NAT.

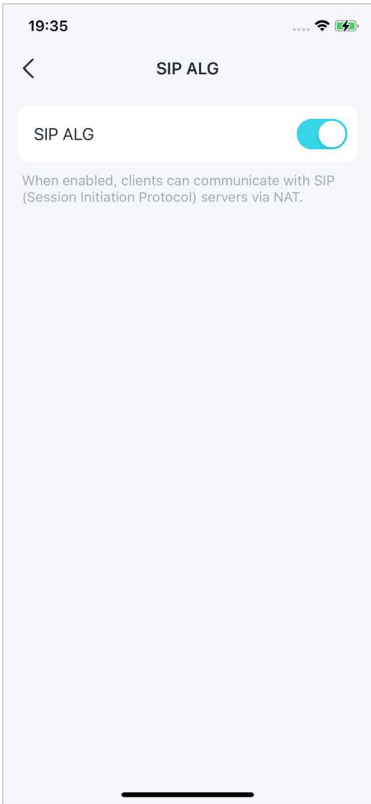

Enable UPNP to allow your local network to dynamically open ports for applications like gaming.

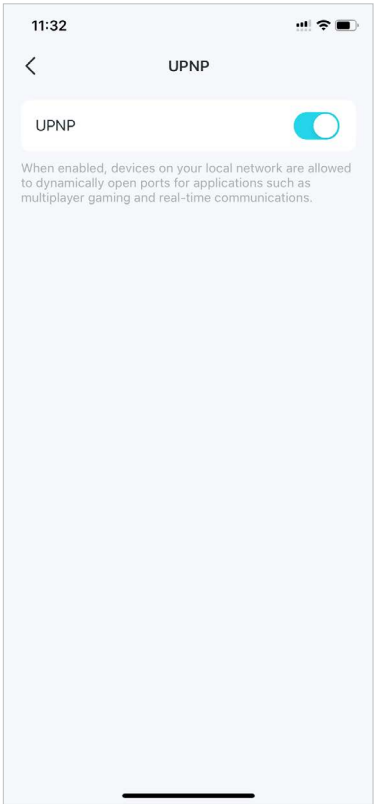


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Configure Connection Alerts

You can configure Connection Alerts so you can get alerts when new devices connect to your network or when the devices you care about go online or offline.

Go to [More > Connection Alerts](#) to enable notifications of new or known clients.

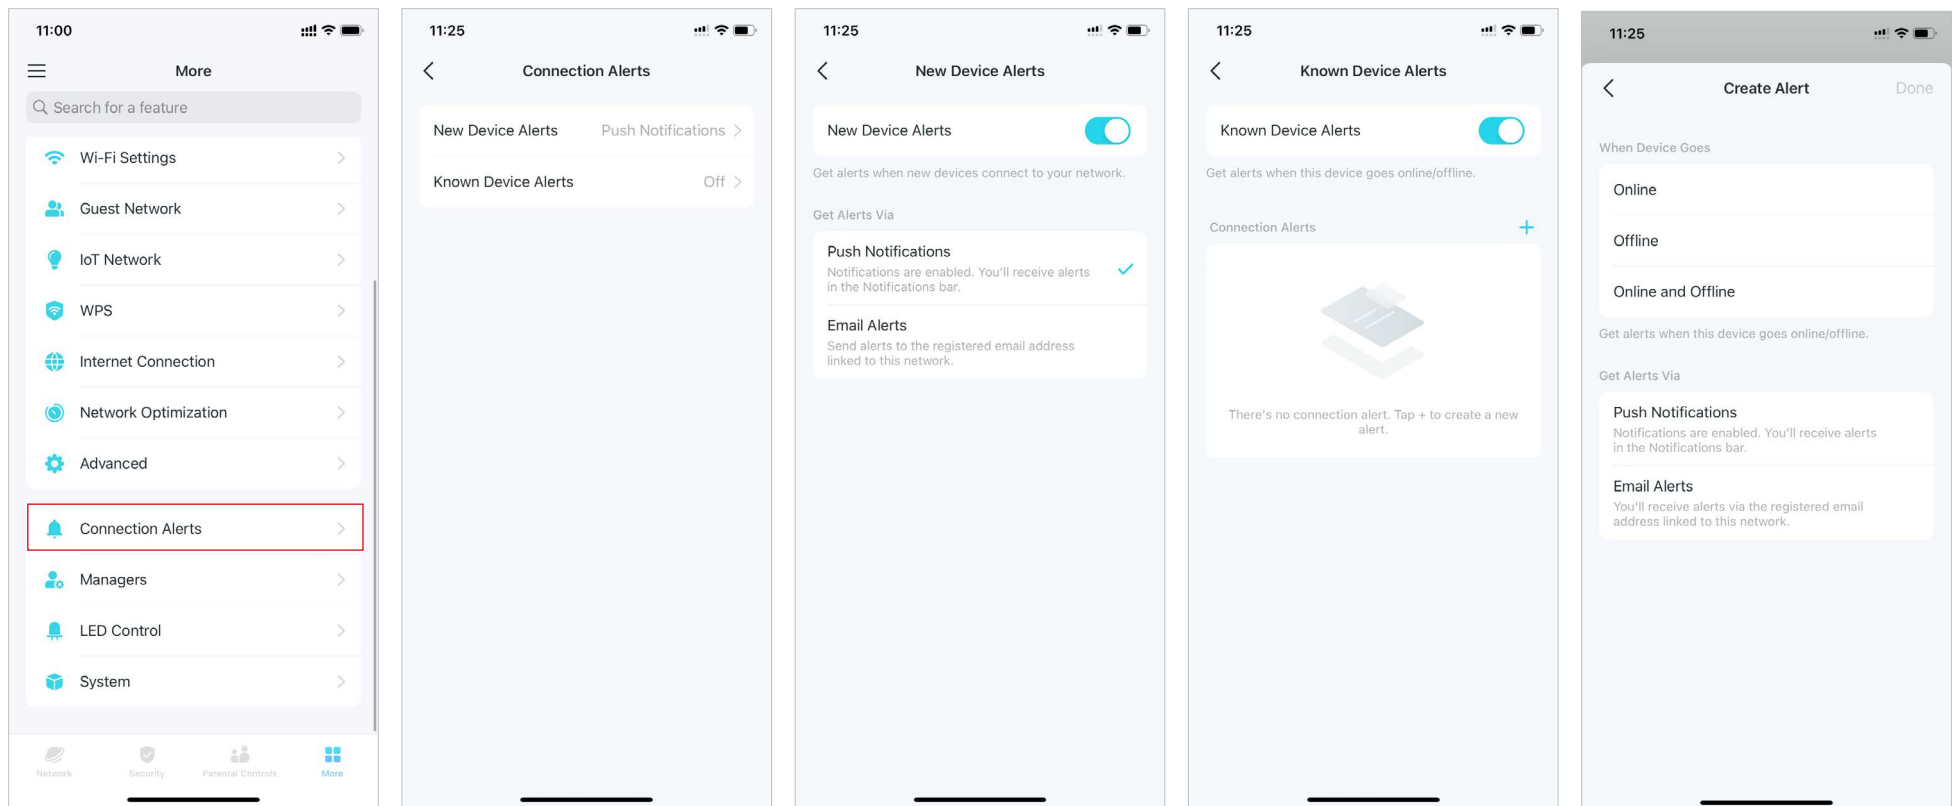


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Control the Light on Decos

You can turn on or off the light on your Decos immediately or at specific period.

Go to [More > LED Control](#) to turn on or off the light on your Decos or specify a period during which the light will go off.

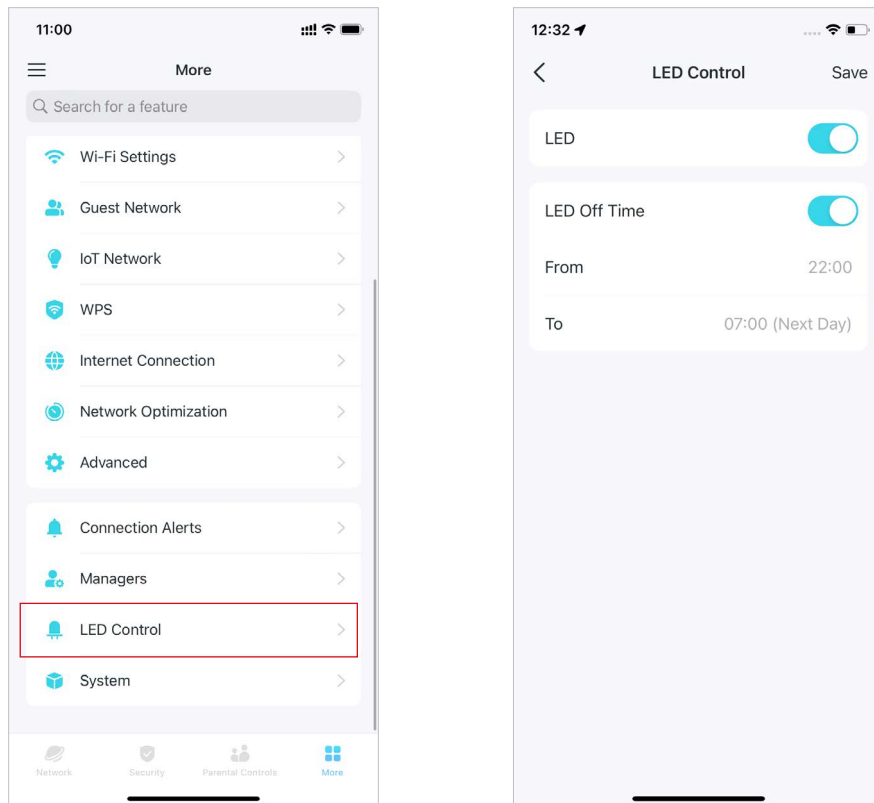


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.


Upgrade Your Deco

TP-Link is dedicated to improving product features and providing a better customer experience. An up-to-date firmware provides better and more stable network performance. Always update your Deco to the latest firmware version when prompted in the Deco app.


1. Go to [More](#) > [System](#) > [Update Deco](#).

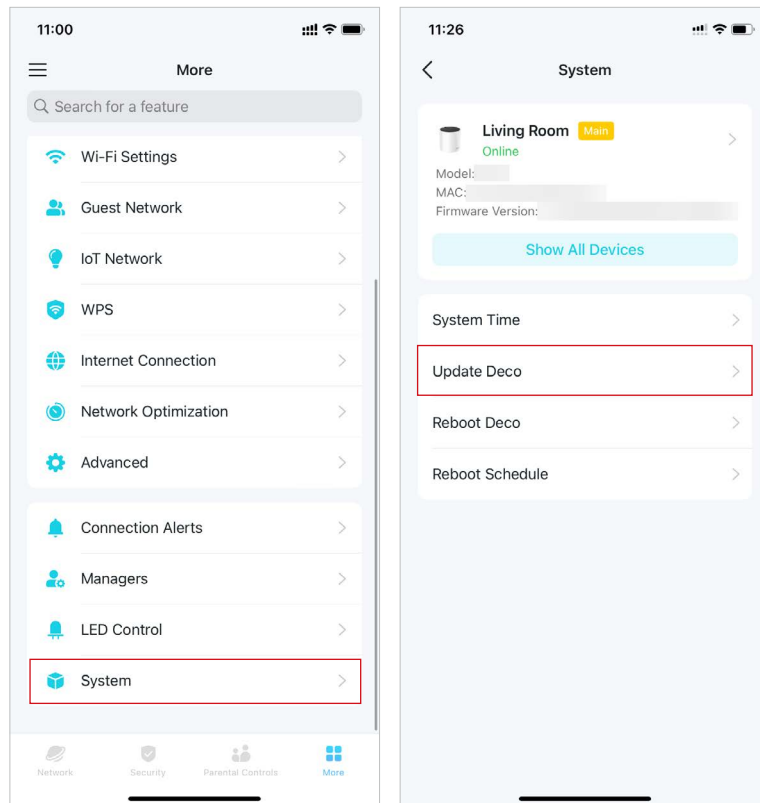

2. Download and install the latest firmware (if any).

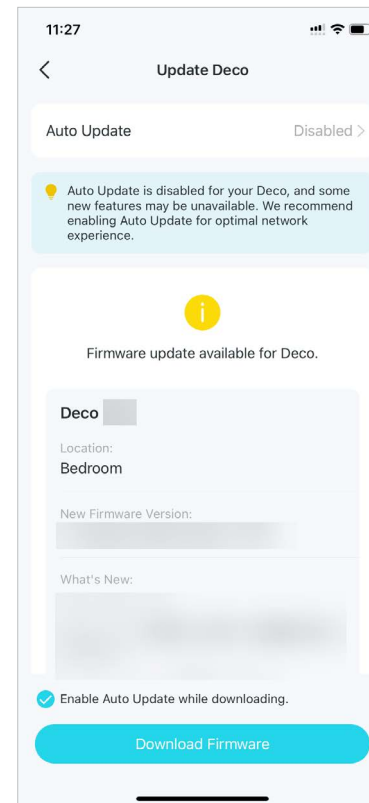

3. All Decos in your network will be updated.



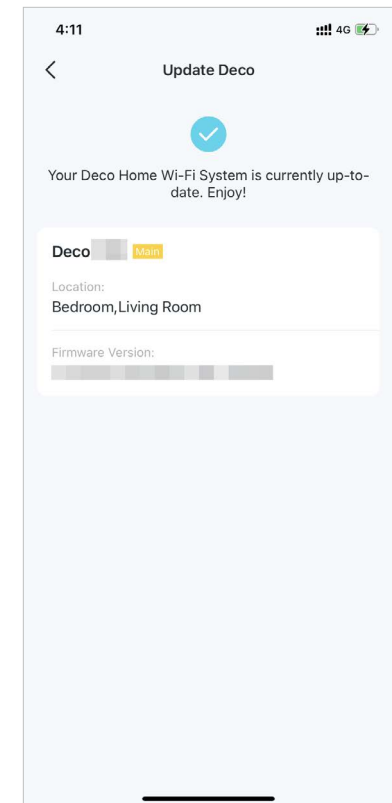


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Reboot Your Deco

Reboot your Deco at any time when needed.

1. Go to [More](#) > [System](#) > [Reboot Deco](#).
2. Select the Deco you need to reboot and tap [Reboot](#). You will lose your internet connection temporarily during the reboot.

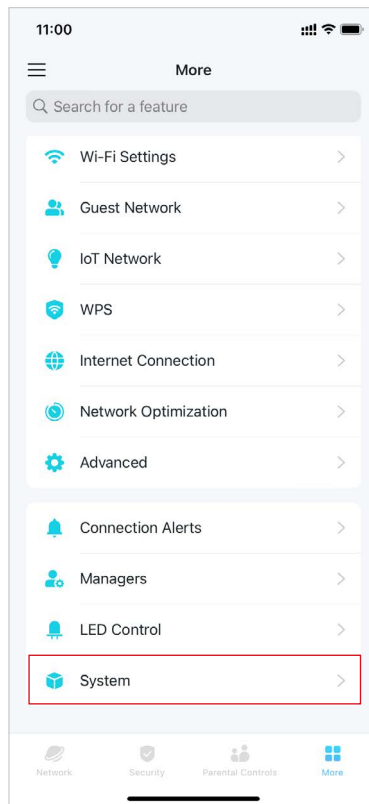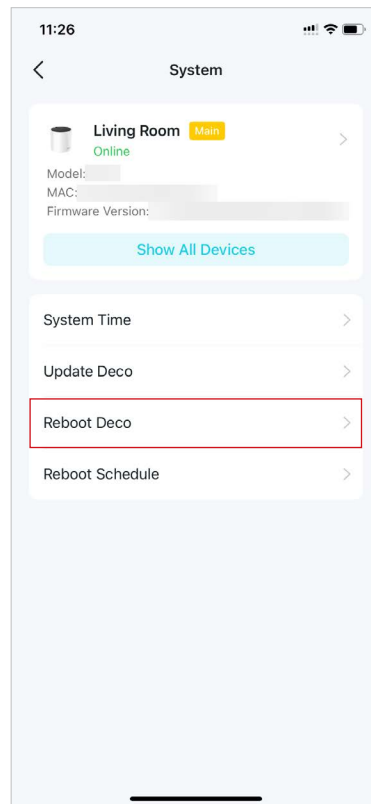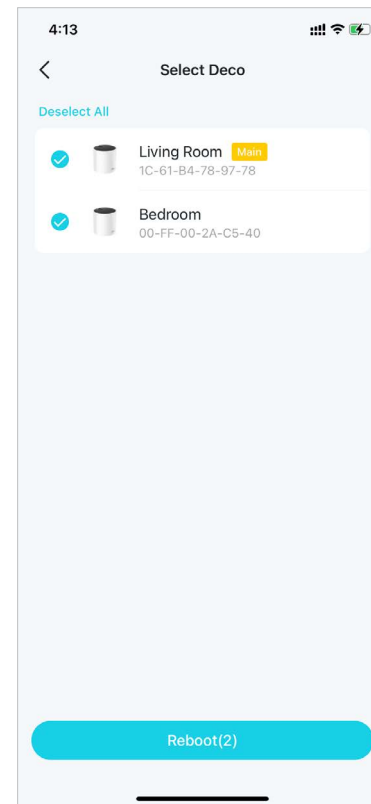





* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Reboot Schedule

With Reboot Schedule, you can set when and how often the Deco reboots regularly, which may improve the network stability.

1. Go to [More](#) > [System](#) > [Reboot Schedule](#).

2. Enable [Reboot Schedule](#) and set when and how often to reboot the Deco regularly.

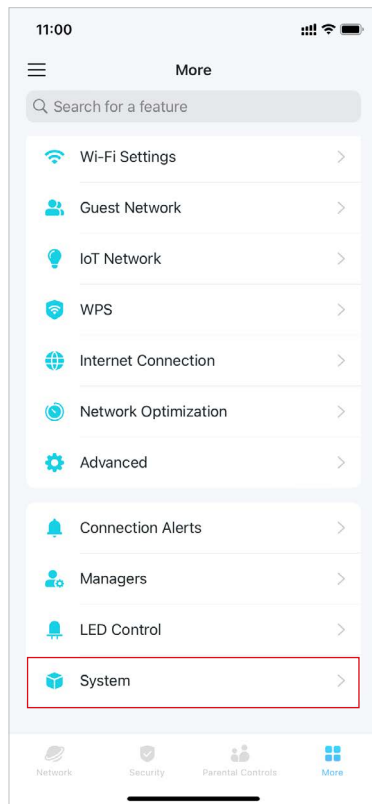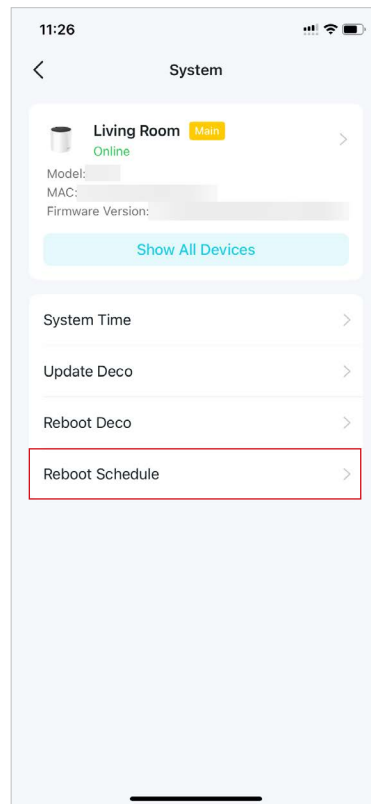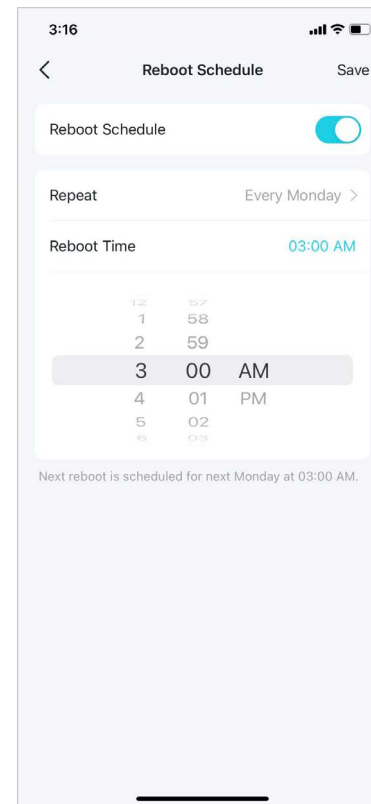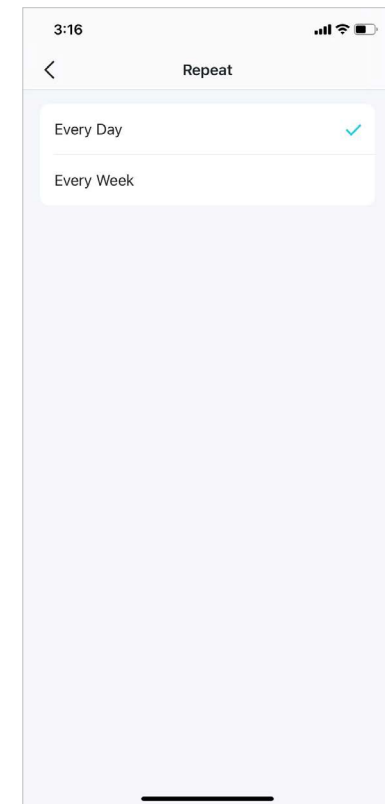


Control Your Deco with Alexa

Alexa Integration allows you to control your Deco using Amazon's Alexa voice service. You can control and customize your home network by giving simple voice commands to Alexa, such as enabling the Guest Network, turning off your Deco LEDs, and more.

Follow the steps below to use Alexa voice commands to control your Deco network.

■ Note: This feature is currently available in English (US), English (UK), German and Japanese.

On the homepage, swipe right to open the side menu and tap [Link Account](#) > [Alexa](#) > [TP-Link Router Skill](#), then follow the app instructions to complete the setup.

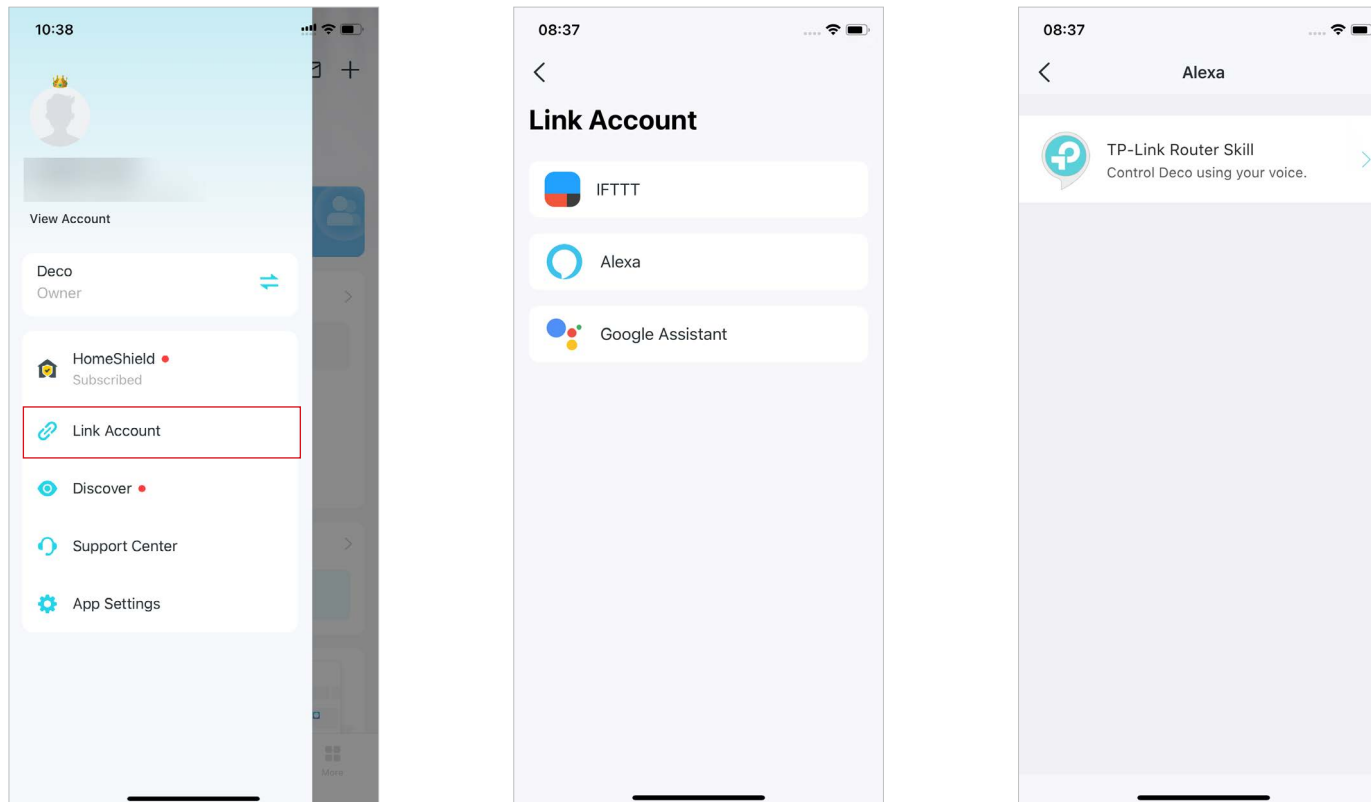


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Enable App Notifications

You can enable notifications of what you care most.

On the homepage, swipe right to open the side menu and tap [App Settings > Notifications](#) to enable notifications.

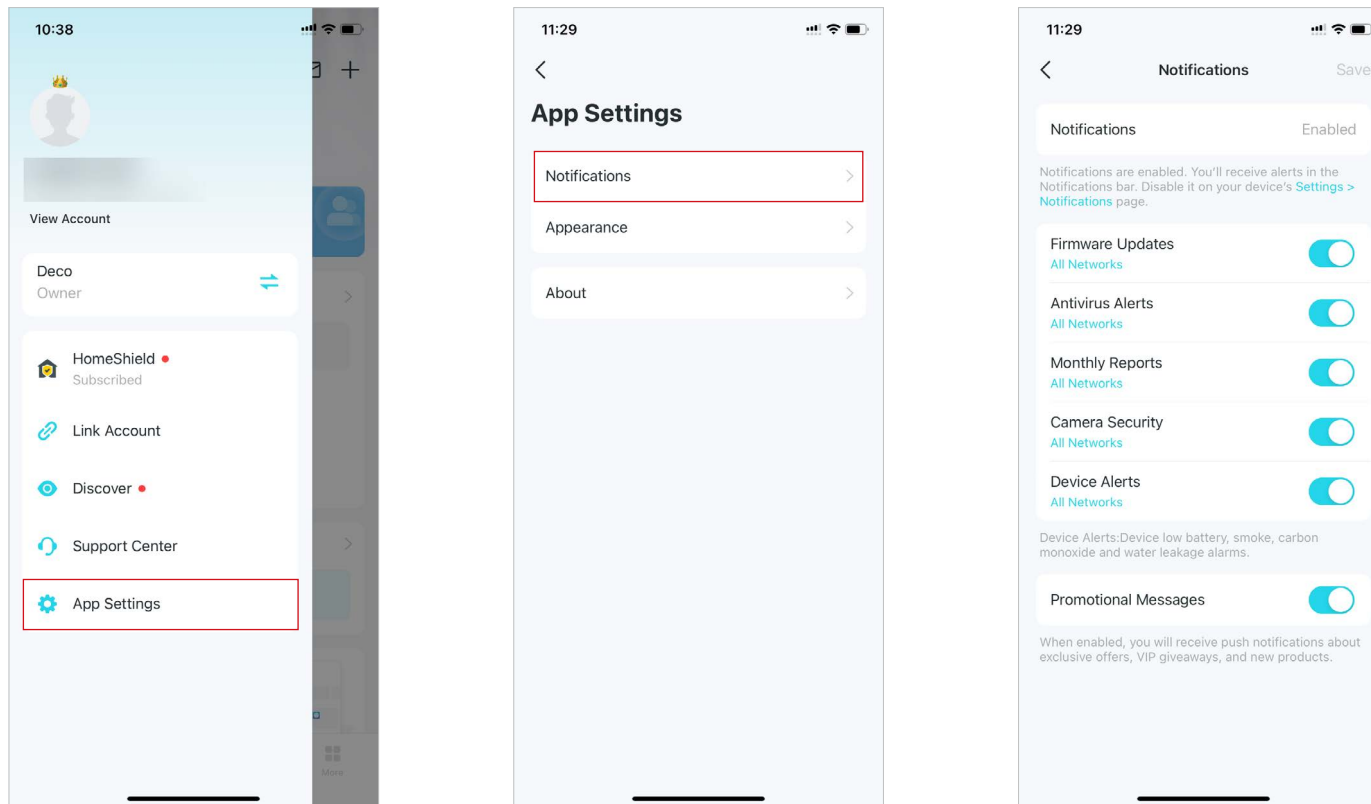


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Change App Appearance

Deco app now support Dark Mode. You can easily change the appearance preference on the app.

On the homepage, swipe right to open the side menu and tap [App Settings > Appearance](#). Select the preferred appearance for your app.

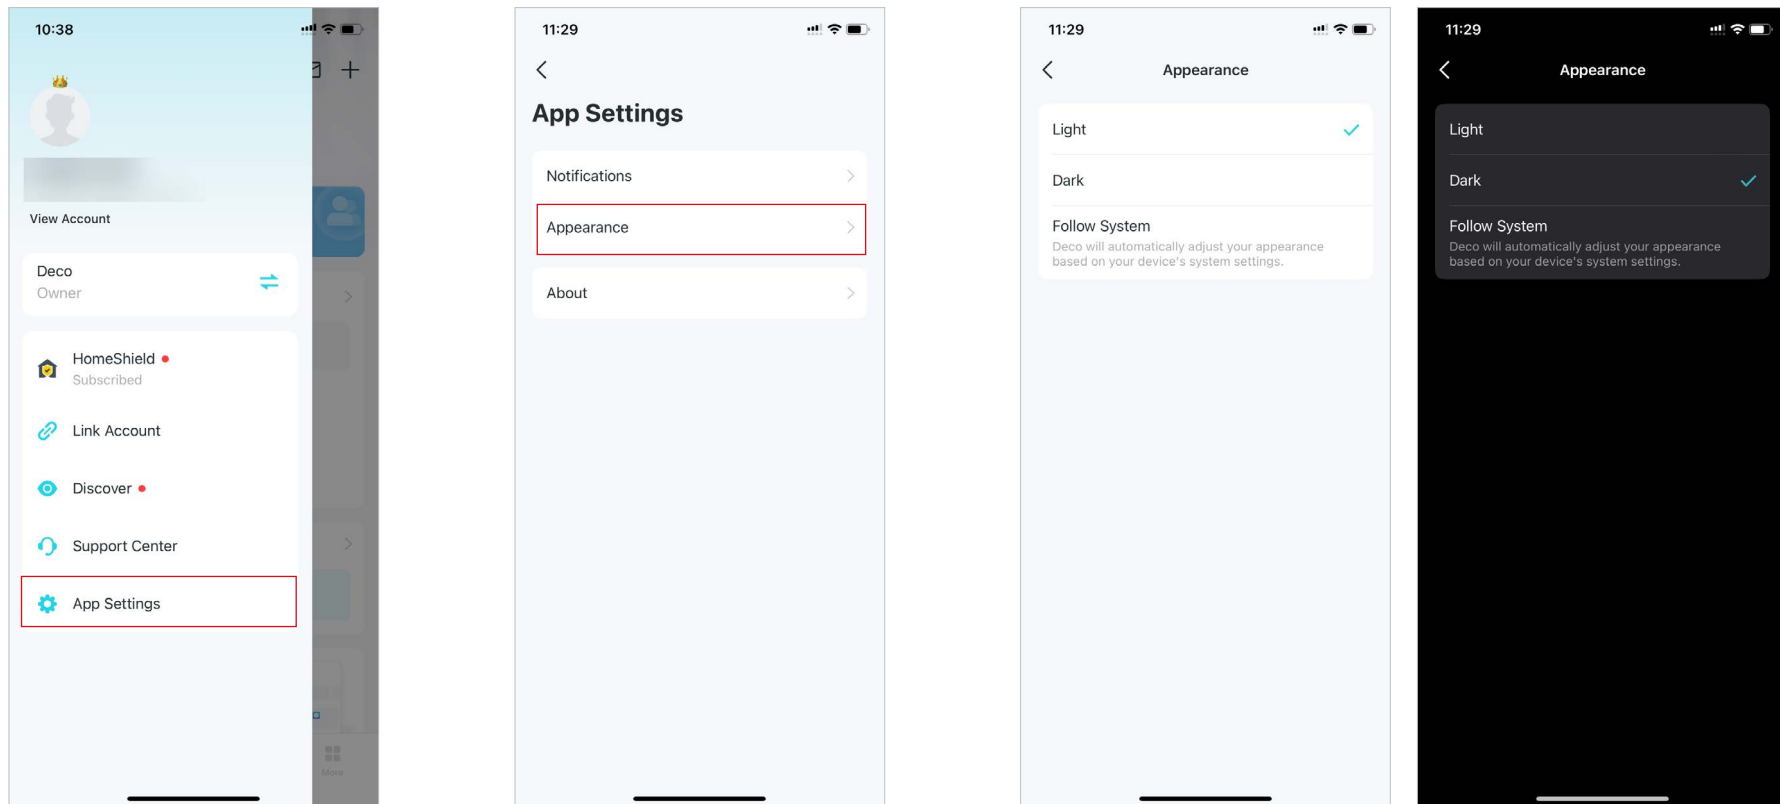


* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Change Account Information

More security methods such as Two-Step Verification and FACE ID are now supported on the Deco app. You can change your account information easily on the app.

On the homepage, swipe right to open the side menu and tap [View Account](#). Then you can check and edit your account settings.

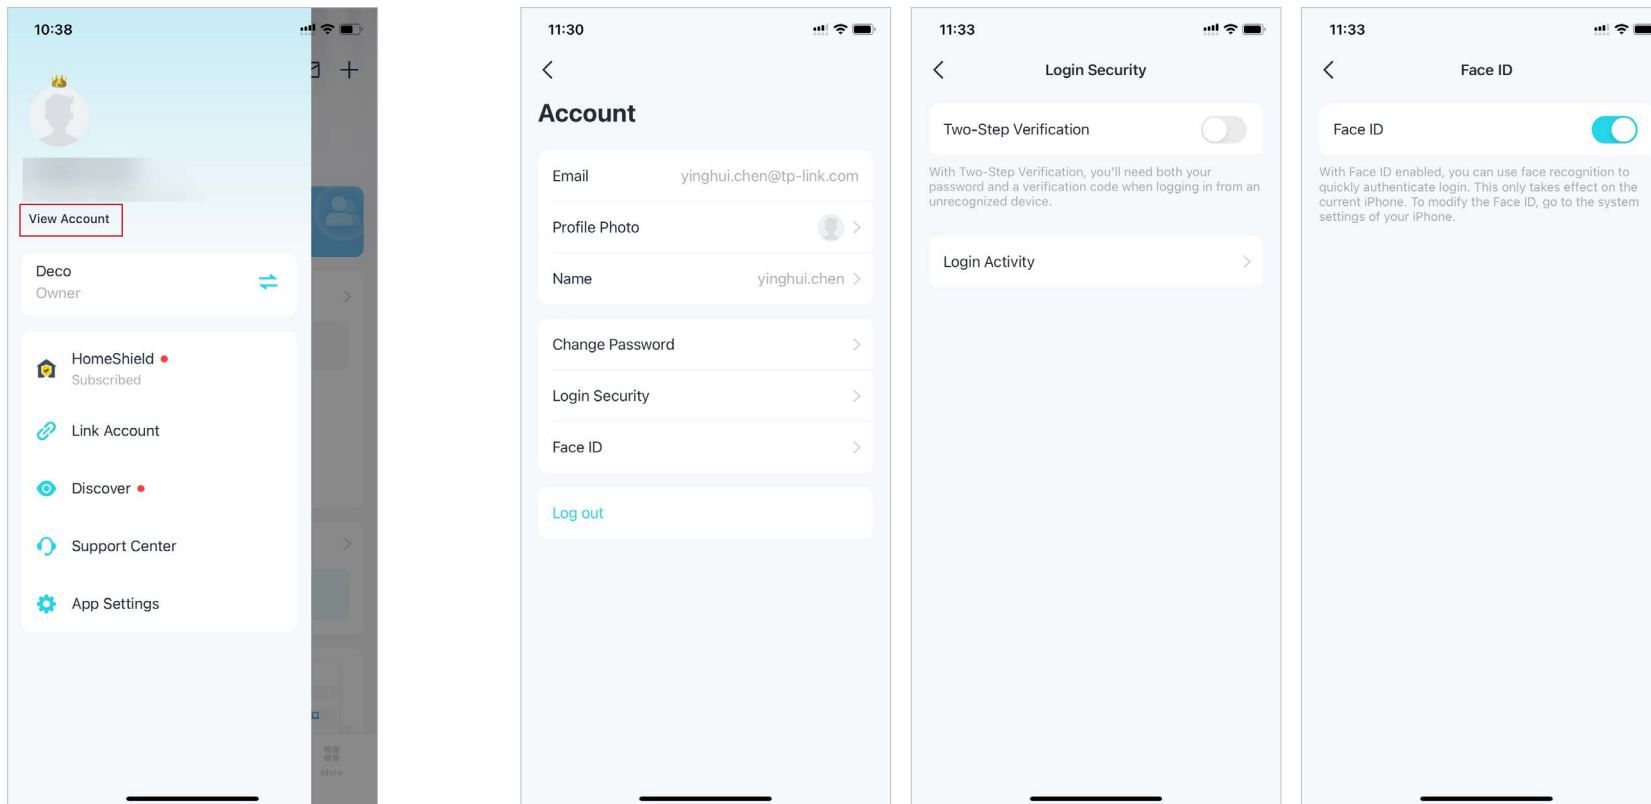

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Add Managers

The Owner creates the Deco network and has full authority to manage the network. The Owner can add one or multiple Managers to help manage the network as permitted.





Add friends and family members to help manage your network. Each manager should have their own TP-Link ID.

■ Note: Managers cannot modify the Owner account, add other accounts, or set manager privileges.

1. Go to [More > Managers](#).

2. Tap [Add a Manager](#) to add another TP-Link ID account as Manager.

3. Tap  to set manager privileges.

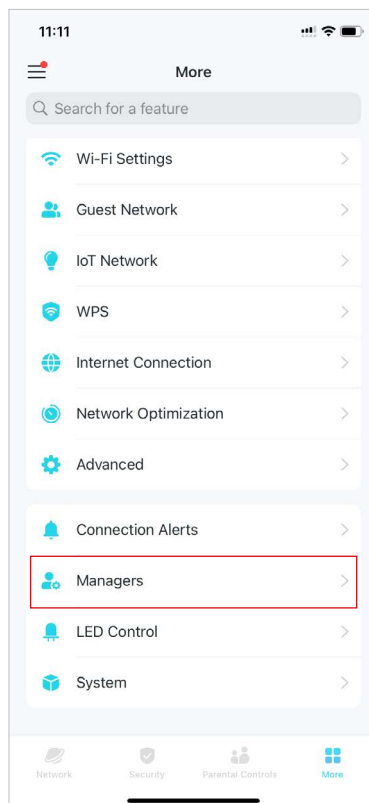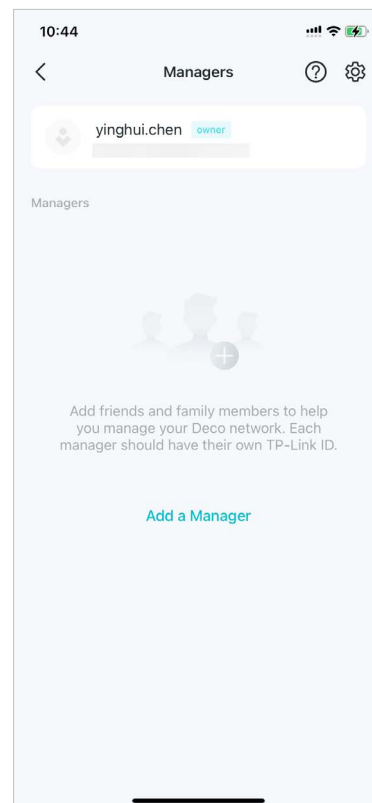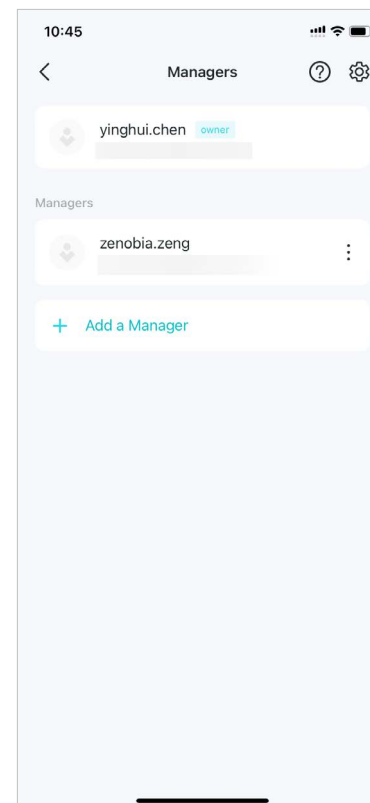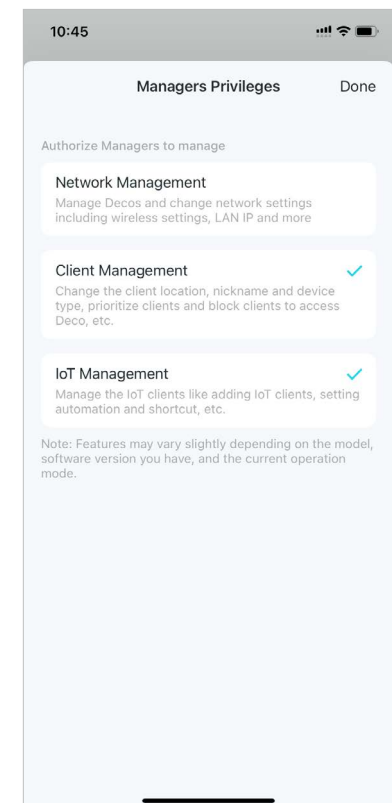

* Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP.

Upgrade Your HomeShield


HomeShield is a home networking protection kit that covers all security scenarios with its network security, parental controls, QoS, and comprehensive reports. It provides two subscription options, Advanced Parental Controls and Security+.

- Advanced Parental Controls helps you manage your kids' online time and bedtime and regulate the content and apps they have access to, letting them develop healthy digital habits.
- Security+ provides you with comprehensive and professional network security protection to protect your Wi-Fi network and all connected devices from virus attacks.

Subscribe to HomeShield Service

HomeShield provides two subscription options, Advanced Parental Controls and Security+. Subscribe to TP-Link HomeShield for more advanced features.

1. In the homepage, swipe right to open the menu and select [HomeShield](#).

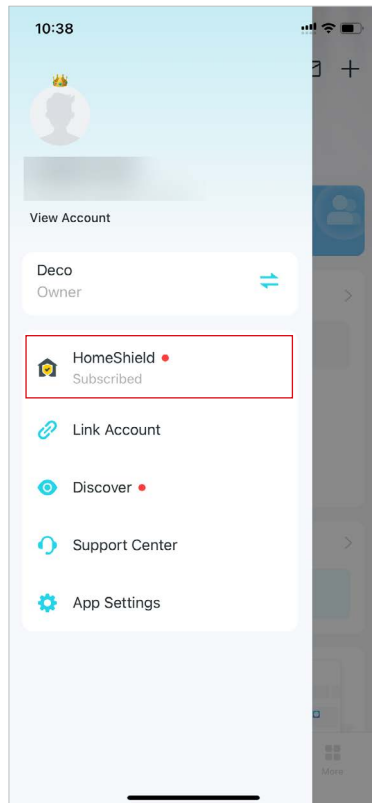

2. In HomeShield Center, select the subscription service as needed and then follow app instructions to subscribe to the service.

