


Convertisseurs de médias & Châssis

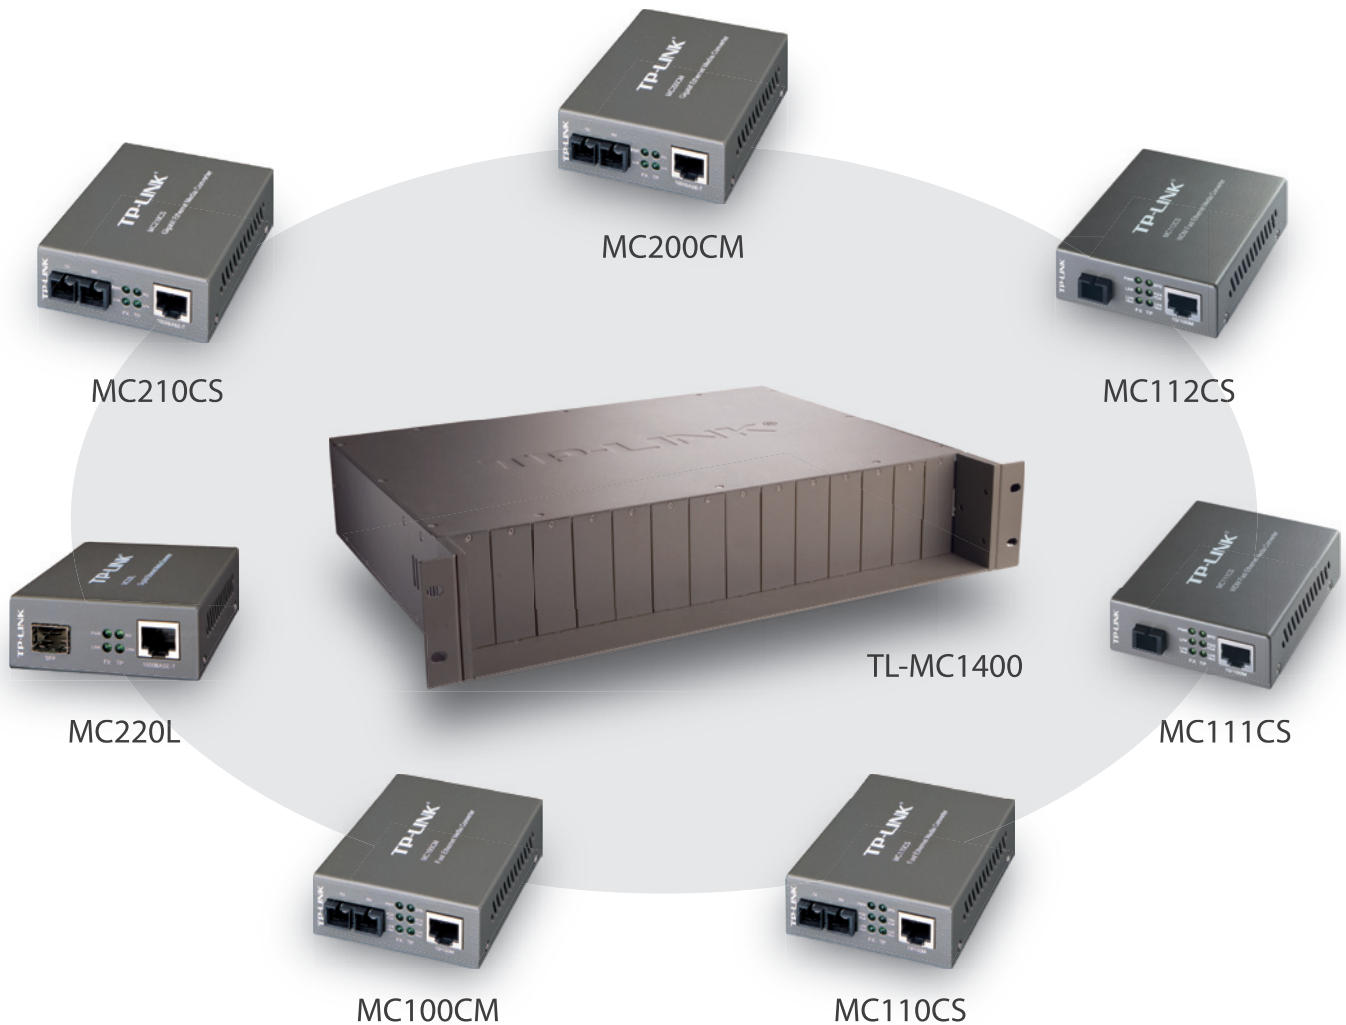

Aperçu de la gamme

Les convertisseurs de médias rackable incluent des convertisseurs de médias et un châssis capable d'alimenter 14 de ces convertisseurs. Vous pouvez débiter avec des convertisseurs de médias pourvus d'un boîtier et d'une alimentation. Puis si vous avez besoin de place, vous pouvez installer un châssis dans votre baie réseau et installer vos convertisseurs dans le châssis, il suffit de les insérer dans les emplacements du châssis.

Châssis rackable 14 emplacements - TL-MC1400

Le châssis 14 emplacements TL-MC1400 est spécifiquement conçu pour accueillir les convertisseurs de médias rackable TP-LINK. C'est un boîtier rackable 19" de 2U compatible avec les baies réseaux d'au moins 400 mm de profondeur.

Le châssis vous permet d'installer les convertisseurs de médias dans un boîtier 19" afin de les placer à proximité des autres équipements réseaux. Cela permet un gain de place, et un câblage propre. Le châssis est équipé d'une alimentation ca/cc et pour une disponibilité optimale, une alimentation redondante optionnelle est intégrable au châssis.

Fonctionnalités:

- 14 emplacements pour 14 convertisseurs de médias*
- Encombrement au standard 19' sur 2U
- Fonctionnement 24/24 et indisponibilité minimale
- Insertion et extraction à chaud des convertisseurs
- Alimentation redondante optionnelle extractible à chaud
- Ventilateurs en face arrière (intégrées aux alimentations)
- Alimentation ca/cc optionnelle pour répartition de la charge
- Isolement électrique de chaque emplacement
- Protections contre les surtensions et les surintensités

Spécifications:

Alimentation CA/CC	Entrée: 100-240V~50/60Hz 3.0A(Max) Sortie: +9.5VDC, 9.5A(Max.) V ripple: ≤50mv Bruit: ≤100mv
Température de fonctionnement	0°C~40°C
Température de stockage Humidité	-40°C~70°C
Humidité relative en fonctionnement	10 à 90% sans condensation
Humidité relative de stockage	5 à 90% sans condensation
Dimensions (L x P x H)	482 x 358 x 86 mm (19' sur 2U)
Poids	8Kg

* TL-MC1400 n'est prévu que pour les V2 des modules TL-MCXXX

MC200CM

The MC200CM media converter converts 1000BASE-SX fiber to 1000Base-T copper media or vice versa. It is designed for use with 850nm multi-mode fiber cable utilizing the SC-Type connector, transmitting data up to 0.55 kilometers away. What's more, MC200CM can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis.

Features:

- Works at 1000Mbps in Full-Duplex mode for both TX port and FX port
- Supports Auto MDI/MDIX for TX port
- Provides switch configuration of Force /Auto transfer mode for FX port
- Extends fiber distance up to 0.55km
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x
Basic Function	Full Duplex Flow Control (IEEE 802.3x) Extends fiber distance up to 0.55km using 50/125um fiber, 0.22km using 62.5/125um fiber
Wave Length	850nm
Interface	1 1000Mbps SC port 1 1000Mbps RJ45 port (Auto MDI/MDIX)
Network Media	1000BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 1000BASE-FX: Multi-mode Fiber
LED Indicators	PWR, LINK, RX
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

MC210CS

The MC210CS media converter converts 1000BASE-LX/LH fiber to 1000Base-T copper media or vice versa. It is designed for use with 1310nm single-mode fiber cable utilizing the SC-Type connector, transmitting data up to 15 kilometers. What's more, MC210CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis.

Features:

- Works at 1000Mbps in Full-Duplex mode for both TX port and FX port
- Supports Auto MDI/MDIX for TX port
- Provides switch configuration of Force /Auto transfer mode for FX port
- Extends fiber distance up to 15km
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x
Basic Function	Full Duplex Flow Control (IEEE 802.3x) Extends fiber distance up to 15km
Wave Length	1310nm
Interface	1 1000Mbps SC port 1 1000Mbps RJ45 port (Auto MDI/MDIX)
Network Media	1000BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 1000BASE-FX: Multi-mode Fiber
LED Indicators	PWR, LINK, RX
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

MC220L

The MC220L converts 1000BASE-SX/LX/LH fiber to 1000Base-T copper media or vice versa. It is designed for use with 850nm multi-mode/1310nm single-mode/WDM fiber cable utilizing the LC-Type connector, transmitting data up to 0.55 kilometers or 10 kilometers. What's more, MC220L can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis.

Features:

- Works at 1000Mbps in Full-Duplex mode for both TX port and FX port
- Supports Auto MDI/MDIX for TX port
- Provides switch configuration of Force /Auto transfer mode for FX port
- FX port support hot-swappable
- Extends fiber distance up to 0.55 km for multi-mode fiber and 10 km for single-mode fiber
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x
Basic Function	Full Duplex Flow Control (IEEE 802.3x) Extends fiber distance up to 10km
Wave Length	Depend on the used SFP module
Interface	1 SFP port 1 1000Mbps RJ45 port (Auto MDI/MDIX)
Network Media	1000BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 1000BASE-FX: Multi-mode Fiber
LED Indicators	PWR, LINK, RX
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

MC100CM

The MC100CM media converter converts 100BASE-FX fiber to 100Base-TX copper media or vice versa. It is designed for use with 1310nm multi-mode fiber cable utilizing the SC-Type connector, transmitting data up to 2 kilometers. What's more, MC100CM can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

Features:

- Auto-negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Extend fiber distance up to 2km
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3u, IEEE 802.3x
Basic Function	Half/Full-Duplex transfer mode for TX port Full Duplex Flow Control (IEEE 802.3x) Half Duplex Flow Control (Backpressure) Extends fiber distance up to 2km Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
Interface	1 100Mbps SC port 1 100Mbps RJ45 port (Auto MDI/MDIX)
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-FX: Multi-mode Fiber
LED Indicators	PWR, SPD, LFP, FDX/Col, Link/Act
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

MC110CS

The MC110CS is a media converter designed to convert 100BASE-FX fiber to 100Base-TX copper media or vice versa. It's designed for use with single-mode fiber cable utilizing the SC-Type connector, transmitting data up to 20 kilometers. What's more, MC110CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

Features:

- Auto negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Extend fiber distance up to 20km
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3u, IEEE 802.3x
Basic Function	Half/Full-Duplex transfer mode for TX port Full Duplex Flow Control (IEEE 802.3x) Half Duplex Flow Control (Backpressure) Extends fiber distance up to 20km Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
Interface	1 100Mbps SC port 1 100Mbps RJ45 port (Auto MDI/MDIX)
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-FX: Single-mode Fiber
LED Indicators	PWR, SPD, LFP, FDX/Col, Link/Act
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

MC111CS

The MC111CS is a media converter designed to convert 100BASE-FX fiber to 100Base-TX copper media or vice versa. It's designed for use with single-mode fiber cable utilizing the SC-Type connector. Adopting WDM technology, MC111CS takes only one fiber to transmit and receive data, which saves you half of the cabling cost. On this fiber, it works at 1550nm on transferring data and at 1310nm on receiving data. So the other end device cooperating with the MC111CS will work at 1310nm on transferring data and at 1550nm on receiving data. Another of TP-LINK's media converters, the MC112CS is just one example of potential devices with which to cooperate with the MC111CS. Moreover, MC111CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

Features:

- Auto negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Adopts WDM technology, transmitting and receiving data on one single fiber
- Extend fiber distance up to 20km
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3u, IEEE 802.3x
Basic Function	Half/Full-Duplex transfer mode for TX port Full Duplex Flow Control (IEEE 802.3x) Half Duplex Flow Control (Backpressure) Extends fiber distance up to 20km Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
Interface	1 100Mbps SC port 1 100Mbps RJ45 port (Auto MDI/MDIX)
Wave Length	TX: 1550nm RX: 1310nm
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-FX: Single-mode Fiber
LED Indicators	PWR, SPD, LFP, FDX/Col, Link/Act
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

MC112CS

The MC112CS is a media converter designed to convert 100BASE-FX fiber to 100Base-TX copper media or vice versa. It's designed for use with single-mode fiber cable utilizing the SC-Type connector. Adopting WDM technology, MC112CS takes only one fiber to transmit and receive data, which saves you half of the cabling cost. On this fiber, it works at 1310nm on transferring data and at 1550nm on receiving data. So the other end device cooperating with the MC112CS will work at 1550nm on transferring data and at 1310nm on receiving data. Another of TP-LINK's media converters, the MC111CS is just one example of potential devices with which to cooperate with the MC111CS. Moreover, MC112CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

Features:

- Auto negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Adopts WDM technology, transmitting and receiving data on one single fiber
- Extend fiber distance up to 20km
- Easy-to-view LED indicators provide status to monitor network activity easily

Specifications:

Standards	IEEE 802.3u, IEEE 802.3x
Basic Function	Half/Full-Duplex transfer mode for TX port Full Duplex Flow Control (IEEE 802.3x) Half Duplex Flow Control (Backpressure) Extends fiber distance up to 20km Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
Interface	1 100Mbps SC port 1 100Mbps RJ45 port (Auto MDI/MDIX)
Wave Length	TX: 1310nm RX: 1550nm
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-T: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-FX: Single-mode Fiber
LED Indicators	PWR, SPD, LFP, FDX/Col, Link/Act
Certifications	FCC, CE
Dimensions (W x D x H)	3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Power Supply	External Power Adapter, 9V/0.6A or 5V/1A

More information of the 100Mbps series Media Converter

Type	Connector	Transmission Distance	Transmission Media	Wave Length
MC100CM	RJ45--SC	2km	Multi-mode Fiber,TP	1310nm
MC110CS	RJ45--SC	20km	Single-mode Fiber,TP	1310nm
MC111CS	RJ45--SC	20km	Single-mode Fiber,TP	1550nmTX/1310nmRX
MC112CS	RJ45--SC	20km	Single-mode Fiber,TP	1310nmTX/1550nmRX

More information of the 1000Mbps series Media Converter

Model NO.	Interface	Transmission Distance	Transmission Media	Wave Length
MC200CM	RJ45--SC	0.55km(50/125um), 0.22km(62.5/125um)	Multi-mode Fiber,TP	850nm
MC210CS	RJ45--SC	15km	Single-mode Fiber,TP	1310nm
MC220L	RJ45--SFP	0.55km /10km	Multi/Single-mode Fiber, TP	Depend on used SFP module