


AC1350 High Power Wireless Dual Band Router

Higher Power, Greater Coverage, Faster Streaming










Highlights


Superior Coverage

An array of high-powered features provides wireless coverage for areas of up to 10,000 square feet.

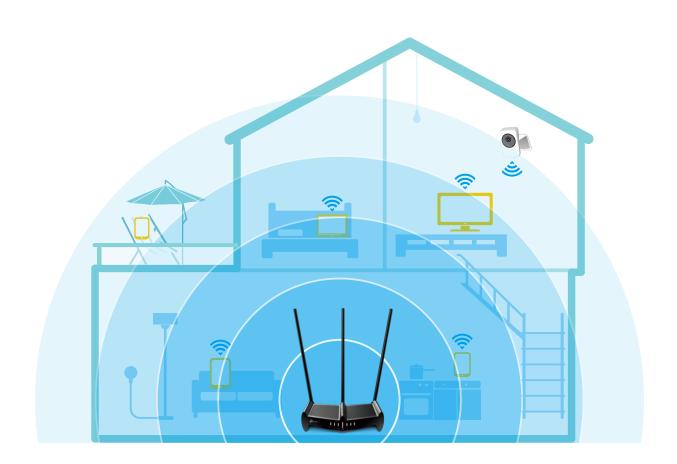

Wall-Breaking Wi-Fi


The supercharged wireless signal cuts through walls and other physical barriers, eliminating dead zones for a worry-free Wi-Fi network.

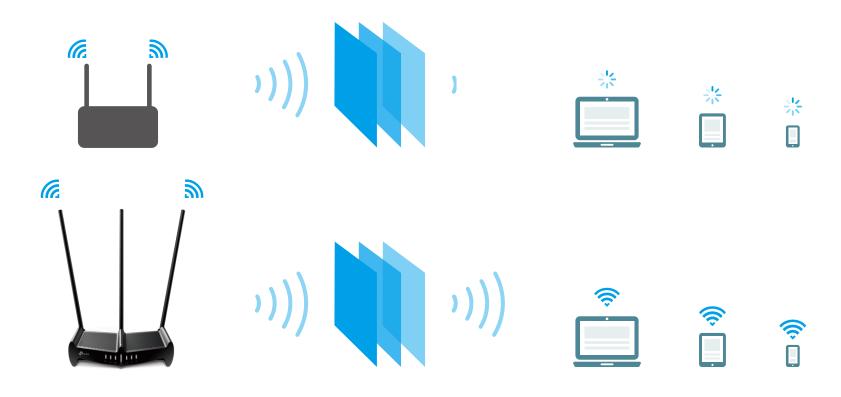

Highlights


High-Gain Stability

Three 9dBi antennas make stable connections for reliable Wi-Fi to all your devices.

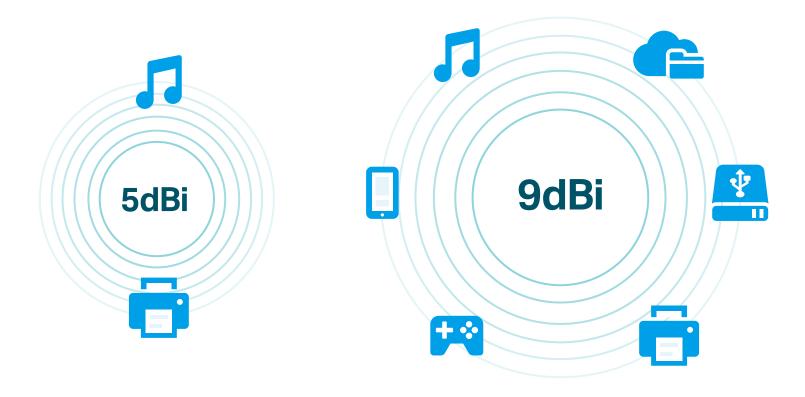


Tap into Multi-Mode

The RE Button lets you effortlessly switch between router and extender modes. Access point mode is also available from the web utility or Tether app.

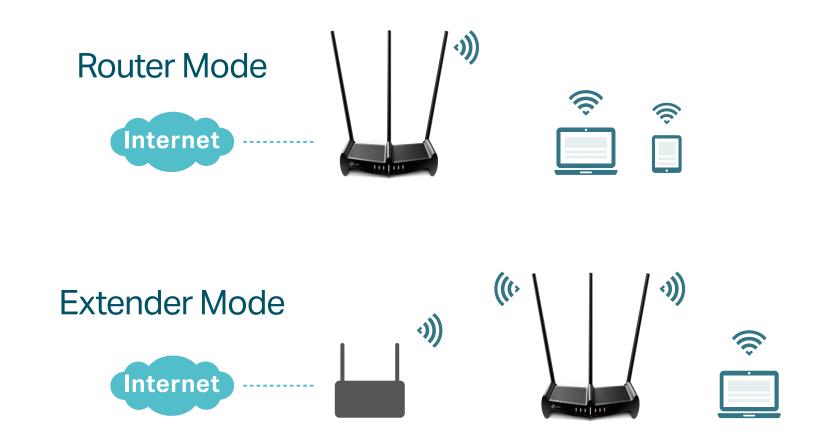

Features



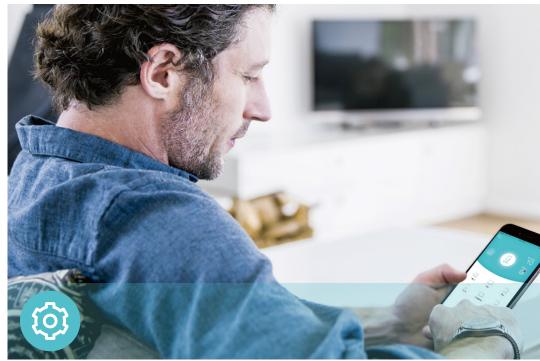



Reliability

- · Ultimate Wireless Speed Combined wireless speeds up to 450Mbps over 2.4GHz and 867Mbps over 5GHz
- · Support 802.11ac Provides a data transfer rate 3 times faster than 802.11n for each stream
- · Easy Bandwidth Management QoS allocates necessary speed of each connected device to ensure quality of multimedia streaming

Ease of Use

- · Intuitive Web UI Ensures quick and simple Installation without hassle
- · Fast Encryption One-touch WPA wireless security encryption with the WPS button
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android and iOS device

Security

- Guest Network Keeps your main network secure by creating a separate network for friends and visitors
- · Access Control Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
- · Parental Controls Restricts internet access time and contents for children devices
- · Encryptions for Secure Network WPA-PSK and WPA2-PSK encryptions provide active protection against security threats

Specifications

Hardware

- · Ethernet Ports: 4 10/100Mbps LAN Ports, 1 10/100Mbps WAN Port
- · Buttons: Power On/Off Button, Wi-Fi On/Off Button, Reset Button, WPS Button, RE Button
- · Antennas: Three 9dBi Detachable Antennas
- · External Power Supply: 12V/1.5A
- · Dimensions (W x D x H): 9.0 × 7.5 × 1.9 in. (228 × 190 × 48 mm)



Wireless

- · Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz
- · Frequency: 2.4GHz, 5GHz
- · Signal Rate: 867Mbps at 5GHz, 450Mbps at 2.4GHz
- · Transmit Power: CE: < 20dBm, FCC: <30dBm
- · Reception Sensitivity:

5GHz:

866M:-61dBm@10%PER

400M:-63dBm@10%PER

173M:-68dBm@10%PER

54M:-76dBm@10%PER

2.4GHz:

450M:-69dBm@10%PER

216M:-72dBm@10%PER

54M:-75dBm@10%PER

11M:-89dBm@8%PER

- · Wireless Function: Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics
- · Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK encryptions

Specifications

Software

- · Quality of Service: WMM, Bandwidth Control
- · WAN Type: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)/BigPond
- · Management: Access Control, Local Management, Remote Management
- · DHCP: Server, DHCP Client List, Address Reservation
- · Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- · Dynamic DNS: DynDns, NO-IP
- · Access Control: Parental Controls, Local Management Control, Host List, White List, Black List
- · Firewall Security: DoS, SPI Firewall, IP and MAC Address Binding
- · Protocols: IPv4, IPv6
- · Guest Network: 2.4GHz and 5GHz guest networks



For more information, please visit

http://www.tp-link.com/en/products/details/Archer C58HP.html

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries. Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

TP-Link Technologies Co., Ltd. Building 24 (floors 1, 3, 4, 5) and 28 (floors 1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China www.tp-link.com

Others

· Certification:

CE, FCC, RoHS

· System Requirements:

Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS, NetWare, UNIX or Linux

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser

Environment:

Operating Temperature: 0° C \sim 40 $^{\circ}$ C (32 $^{\circ}$ F \sim 104 $^{\circ}$ F) Storage Temperature: -40°C~70°C (-40°F ~158°F)

Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

Package Contents

AC1350 High Power Wireless Dual Band Router Archer C58HP

Power Supply Unit

Ethernet Cable

Quick Installation Guide

www.tp-link.com