



User Guide

Omada SDN Controller

About this Guide

This User Guide provides information for centrally managing Omada devices via the Omada SDN Controller. Please read this guide carefully before operation.

Intended Readers

This User Guide is intended for network managers familiar with IT concepts and network terminologies.

Conventions

When using this guide, notice that:

- Features available in the Omada SDN Controller may vary due to your region, controller type and version, and device model. All images, steps, and descriptions in this guide are only examples and may not reflect your actual experience.
- The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied. Users must take full responsibility for their application of any products.
- This guide uses the specific formats to highlight special messages. The following table lists the notice icons that are used throughout this guide.

In this guide, the following conventions are used:

Controller	Stands for the Omada On-Premises Controller and the Omada Cloud-Based Controller.
Omada On-Premises Controller	Includes the Omada Software Controller, Omada Hardware Controller, and Omada Integrated Gateway (Controller).
Omada Cloud-Based Controller / Omada Network System	The Omada Cloud-Based Controller is now referred to as the Omada Network system on the Omada Central. Note that the Omada Central integrates the Omada Network system and Omada Guard system. The Omada Network system works as an Omada Controller to manage network devices (gateways, switches, access points, OLTs, and more), while the Omada Guard system works as a VMS system to manage surveillance devices (security cameras, NVRs, and more). This guide involves instructions about the Omada Network system. For instructions about the Omada Guard system, refer to the Omada Guard User Guide.
Gateway/Router	Stands for the Omada Gateway/Router.
Switch	Stands for the Omada Switch.
AP	Stands for the Omada AP.

OLT	Stands for the DeltaStream GPON Optical Line Terminal.
Note:	The note contains the helpful information for a better use of the controller.
Configuration Guidelines:	Provide guidelines for the feature and its configurations.

More Resources

Main Site	https://www.omadanetworks.com/
Video Center	https://support.omadanetworks.com/video/
Documents	https://support.omadanetworks.com/document/
Product Support	https://support.omadanetworks.com/product/
Technical Support	https://support.omadanetworks.com/contact-support/

For technical support, the latest software, and management app, visit <https://support.omadanetworks.com/>.

CONTENTS

About this Guide

1.Omada SDN Solution Overview

1.1	Overview.....	2
1.2	Core Components	3

2.Get Started with Omada Controller

2.1	Set Up Your Software Controller.....	8
2.1.1	Determine the Network Topology	8
2.1.2	Install the Software Controller	8
2.1.3	Start and Log In to the Software Controller	11
2.2	Set Up Your Hardware Controller.....	15
2.2.1	Determine the Network Topology	15
2.2.2	Deploy the Hardware Controller.....	15
2.2.3	Start and Log in to the Controller	16
2.3	Set Up Your Integrated Gateway (Controller).....	19
2.3.1	Determine the Network Topology	19
2.3.2	Deploy the Integrated Gateway (Controller)	19
2.3.3	Start and Log in to the Controller	20
2.4	Set Up Your Cloud-Based Controller.....	24
2.5	Navigate the Controller UI	26

3.Get Started with Omada Network

3.1	Create Sites.....	33
3.2	Configure the Site Template.....	37
3.3	Adopt Devices	40
3.3.1	For Software Controller / Hardware Controller	40
3.3.2	For Integrated Gateway (Controller).....	49
3.3.3	For Cloud-Based Controller.....	57

4.Configure Controller Settings

4.1	System Settings	62
4.1.1	Controller Status	62
4.1.2	Controller Updates.....	62
4.1.3	HTTPS Certificate.....	63

4.1.4	System Logging	64
4.1.5	Access Config.....	65
4.2	Controller Settings	67
4.2.1	General Settings.....	67
4.2.2	Services.....	69
4.2.3	MSP Mode	69
4.2.4	Join User Experience Improvement Program	70
4.3	UI Interaction.....	71
4.4	History Data Retention.....	72
4.5	Server Settings	74
4.5.1	Mail Server	74
4.5.2	Built-in RADIUS.....	75
4.5.3	Radius Proxy Server	76
4.6	Account Security.....	78
4.6.1	Two-Factor Authentication (2FA)	78
4.6.2	Controller IP Access Rules.....	78
4.7	Platform Integration	79
4.7.1	Open API.....	79
4.7.2	Webhooks.....	80
4.8	SAML SSO.....	82
4.9	Maintenance.....	85
4.9.1	Restore	85
4.9.2	Backup	85
4.9.3	Backup Schedule.....	87
4.10	Migration.....	90
4.10.1	Site Migration	90
4.10.2	Controller Migration.....	94
4.11	Export Data.....	100
4.11.1	Export Data.....	100
4.11.2	Export for Support.....	100
4.11.3	Auto Send Data to Email.....	101
4.12	Cloud Access.....	103

5. Configure General Network Settings

5.1	Configure Site Settings.....	106
5.2	Configure SSH Settings.....	111
5.3	Configure Reboot Schedules	112
5.4	Configure Port Schedules.....	113

5.5	Configure mDNS Settings.....	115
5.6	Configure Bonjour Service	116
5.7	Configure SNMP Settings	117
5.8	Configure VoIP Settings	118
5.8.1	Call Settings	118
5.8.2	VoIP Devices	121
5.8.3	VoIP Phone Number	123
5.8.4	Call Logs	125
5.8.5	Advanced Settings	125
5.9	Use CLI Configuration	131
5.9.1	Site CLI.....	133
5.9.2	Device CLI.....	134

6.Configure Wired Networks

6.1	Overview.....	138
6.2	Set Up an Internet Connection	139
6.3	Configure LAN Networks.....	157
6.4	Configure Multicast Features	166
6.5	Configure Network Isolation	168
6.6	Configure LAN DNS.....	169

7.Configure Wireless Networks

7.1	Set Up Basic Wireless Networks	172
7.2	Configure Advanced Settings.....	177
7.3	Configure Hotspot 2.0.....	180
7.4	Configure WLAN Schedules	183
7.5	Configure 802.11 Rate Control.....	184
7.6	Configure MAC Filtering	185
7.7	Configure Multicast/Broadcast Management.....	186
7.8	Configure WLAN Optimization	187

8.Configure Network Authentication

8.1	Configure Portal Authentication.....	192
8.2	Configure 802.1X Authentication	203
8.3	Configure MAC-Based Authentication	207

9.Configure VPN Networks

9.1	VPN Overview	210
-----	--------------------	-----

9.2	Configure the Site-to-Site VPN	214
9.3	Configure the Client-to-Site VPN	220
9.4	Configure VPN Users.....	238
9.5	Configure IPsec Failover	240
9.6	Configure the SSL VPN.....	241
9.7	Configure the WireGuard VPN	248

10.Configure Network Transmission Settings

10.1	Configure Routing Settings.....	251
10.2	Configure NAT Settings.....	255
10.3	Configure DHCP Reservation	260
10.4	Configure Bandwidth Control.....	262
10.5	Configure Session Limit	264
10.6	Configure Gateway QoS.....	266
10.7	Configure Switch QoS.....	270
10.8	Configure OUI Based VLAN.....	273

11.Configure Network Profiles

11.1	Create Groups	276
11.2	Create Time Range Profiles.....	278
11.3	Create Rate Limit Profiles	280
11.4	Create PPSK Profiles	281
11.5	Create RADIUS Profile Profiles	284
11.6	Create LDAP Profiles.....	288
11.7	Configure APN Profiles	291

12.Configure Network Security

12.1	Configure ACL	294
12.2	Configure URL Filtering.....	305
12.3	Configure Application Control	309
12.4	Configure IDS/IPS for Threat Management	312
12.4.1	Configure IDS/IPS.....	312
12.4.2	Manage Threats in a Site	313
12.4.3	Manage Threats Globally.....	314
12.5	Configure the Firewall.....	317
12.6	Configure Attack Defense	320

13. Configure Settings by Device Type

13.1	Configure Gateway Settings.....	325
13.1.1	Dynamic DNS	325
13.1.2	DNS Proxy	328
13.1.3	DNS Cache	329
13.1.4	MAC Filtering	329
13.1.5	IP-MAC Binding	330
13.1.6	UPnP	332
13.1.7	IPTV	333
13.2	Configure Switch Settings.....	335
13.2.1	Port Profile	335
13.2.2	Port Settings.....	339
13.2.3	VRRP	348
13.3	Configure EAP Settings	350
13.3.1	EoGRE Tunnel	350
13.3.2	Bluetooth Settings	351

14. Manage Network Devices

14.1	Manage the Device List	356
14.2	Manage the Gateway	359
14.2.1	Properties Window.....	359
14.2.2	Device Management Window.....	360
14.3	Configure the Gateway	364
14.4	Manage the Switch	372
14.4.1	Properties Window.....	372
14.4.2	Device Management Window.....	373
14.5	Configure the Switch	376
14.6	Manage the AP	382
14.6.1	Properties Window.....	382
14.6.2	Device Management Window.....	383
14.7	Configure the AP	390
14.8	Manage the OLT	395
14.8.1	Properties Window.....	395
14.8.2	Device Management Window.....	396
14.9	Configure the OLT	398
14.10	Create and Manage Stack Groups	399
14.10.1	Introduction to Stack.....	399
14.10.2	Create a Stack Group	399

14. 10. 3	Configure and Monitor the Stack Group.....	400
14. 11	Create and Manage Bridge Groups.....	401
14. 11. 1	Introduction to Bridge	401
14. 11. 2	Create a Bridge Group	401
14. 11. 3	Configure and Monitor the Bridge Group.....	402
14. 12	View the Configuration Result.....	403

15. Manage Clients

15. 1	Manage Clients	405
15. 1. 1	Manage the Client List	405
15. 1. 2	Manage a Client.....	406
15. 2	Manage Client Authentication in Hotspot.....	411
15. 2. 1	Dashboard	411
15. 2. 2	Authorized Clients	411
15. 2. 3	Vouchers	412
15. 2. 4	Local Users	417
15. 2. 5	Form Auth Data.....	421
15. 2. 6	Operators	421

16. Manage Accounts

16. 1	Introduction to User Accounts.....	424
16. 2	Create and Manage Roles.....	425
16. 3	Create and Manage Local User Accounts.....	426
16. 3. 1	Edit the Owner Account.....	426
16. 3. 2	Create and Manage Other Local Accounts	426
16. 4	Create and Manage Cloud User Accounts	429
16. 4. 1	Set Up the Cloud Owner Account.....	429
16. 4. 2	Create and Manage Other Cloud Accounts	429
16. 5	Manage User Accounts Across Controllers	432

17. Monitor and Maintain the Network

17. 1	Monitor the Network with Dashboard	435
17. 1. 1	Overview	435
17. 1. 2	Topology.....	435
17. 1. 3	Clients.....	440
17. 1. 4	Traffic.....	440
17. 2	Monitor the Network with Map	441
17. 2. 1	Heat Map.....	441

17.2.2	Device Map.....	446
17.2.3	Site Map	449
17.3	Monitor the Network with Insights.....	452
17.3.1	Reports	452
17.3.2	Application Analytics	453
17.4	Monitor the Network with Logs.....	454
17.4.1	Manage Alerts.....	454
17.4.2	Manage Events.....	455
17.4.3	Manage Audit Logs.....	456
17.4.4	Configure Alert/Event Notifications.....	456
17.4.5	Configure Audit Log Notifications	458
17.4.6	Configure Remote Logging.....	459
17.5	Maintain the Network with Tools	461
17.5.1	Network Check.....	461
17.5.2	Packet Capture	462
17.5.3	Terminal.....	464
17.5.4	Cable Test.....	465
17.5.5	Interference Detection	465
17.6	Maintain PoE Devices with IntelliRecover	468

18.Manage Customer Networks in MSP Mode

18.1	Overview.....	472
18.2	Quick Start	472
18.2.1	Enable the MSP Mode.....	472
18.2.2	Add and Manage Customers	473
18.2.3	Add Sites and Devices.....	475
18.3	Add and Manage MSP Accounts.....	475

19.Configure the SD-WAN

19.1	Introduction to SD-WAN.....	477
19.2	Configure the SD-WAN	477

20.Configure Multi-Controller Clusters

20.1	Introduction to Multi-Controller Clusters.....	483
20.2	Configure Hot-Standby Backup Clusters	484
20.3	Configure Distributed Clusters.....	486
20.3.1	Configure an Existing Controller via Web.....	487
20.3.2	Configure a New Controller via Commands	489

Chapter 1

Omada SDN Solution Overview

Omada SDN (Software-defined Networking) Solution offers centralized and efficient management for configuring enterprise networks comprised of gateways, switches, wireless access points, OLTs (Optical Line Terminals), and more via the On-Premises Controller as well as the Omada Central.

With a reliable network management platform powered by Omada, you can develop comprehensive, software-defined networking across demanding, high-traffic environments with robust wired and wireless solutions.


The chapter includes the following sections:

- [1.1 Overview](#)
- [1.2 Core Components](#)

1.1 Overview

Omada SDN Solution is designed to provide business-class networking solutions for demanding, high-traffic environments such as campuses, hotels, malls, and offices. It simplifies deploying and managing large-scale enterprise networks and offers easy maintenance, ongoing monitoring, and flexible scalability.

This figure shows a sample architecture of an Omada SDN enterprise network:

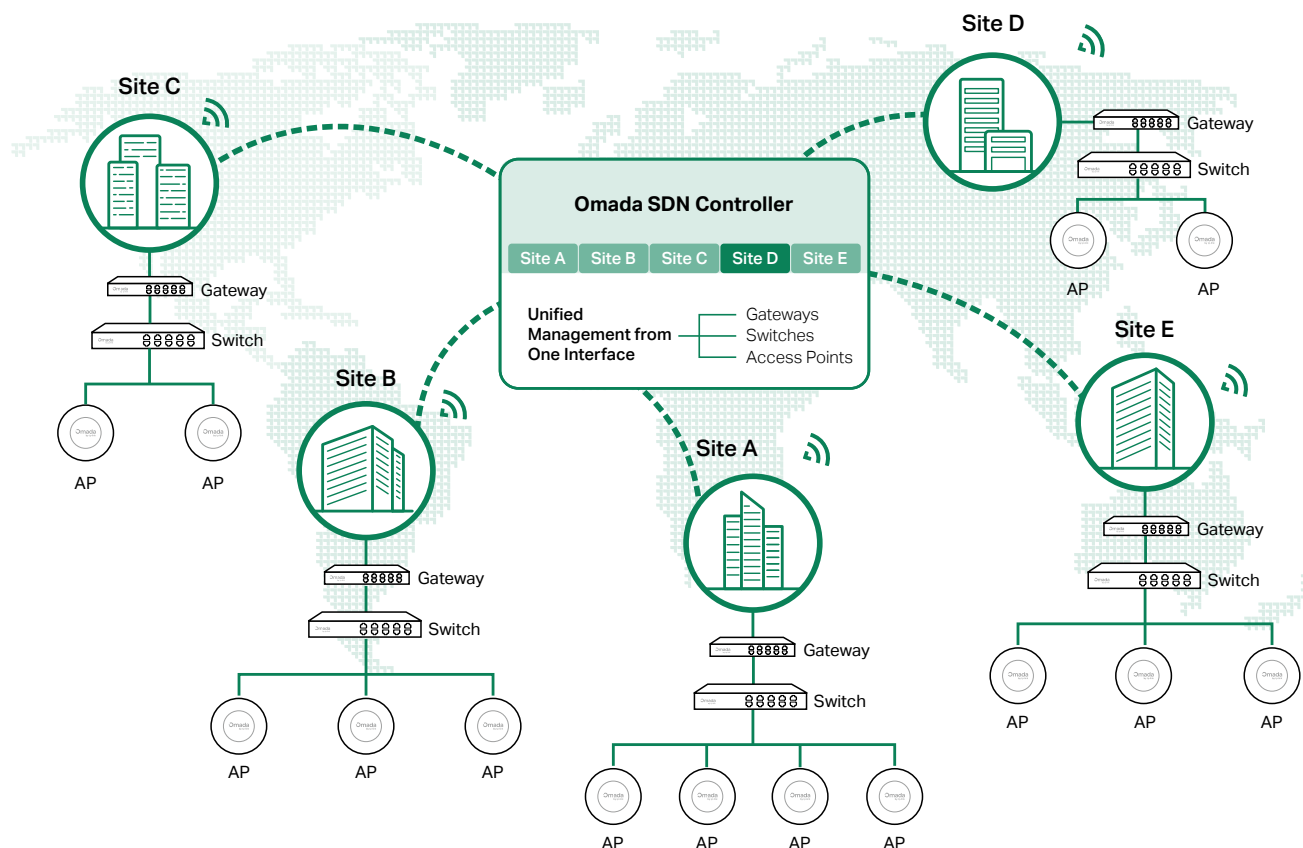

The interconnected elements that work together to deliver a unified enterprise network include: SDN Controller, gateways, switches, access points, and client devices. Beginning with a base of client devices, each element adds functionality and complexity as the network is developing, interconnecting with the elements above and below it to create a comprehensive, secure wired and wireless solution.

The SDN Controller is a command center and management platform at the heart of the network. With a single platform, the network administrators configure and manage enterprise networks comprised of gateways, switches, and wireless access points in batches. This unleashes new levels of management to avoid complex and costly over-provisioning.

1.2 Core Components

An Omada SDN network consists of the following core components:


- **SDN Controller** — A command center and management platform at the heart of network solution for the enterprise. With a single platform, the network administrators configure and manage all Omada products which have all your needs covered in terms of routing, switching and Wi-Fi.
- **Gateways** — Boast excellent data processing capabilities and an array of powerful functions, including IPsec/OpenVPN/PPTP/L2TP VPN, Load Balance, and Bandwidth Control, which are ideal for the business network where a large number of users require a stable, secure connection.
- **Switches** — Offer flexible and cost-effective network solution with powerful Layer 2 features and PoE options. Advanced features such as Access Control, QoS, LAG and Spanning Tree will satisfy advanced business networks.
- **Access Points** — Satisfy the mainstream Wi-Fi Standard and address your high-density access needs with Omada's innovation to help you build the versatile and reliable wireless network for all business applications.
- **OLTs** — Work with GPON APs to enable rapid optical network construction. Leveraging OLTs with single PON ports and optical splitters, GPON APs provide excellent scalability and enable high-density device management.

SDN Controller

Tailored to different needs and budgets, Omada SDN Controller offers diverse deployment solutions. Omada Software Controller, Hardware Controller, and Cloud-Based Controller each has their own set of advantages and applications. The controllers differ in forms, but they have almost the same browser-based management interface and serve the same functions of network management.


For more information about the Omada Controller, refer to <https://www.omadanetworks.com/business-networking/omada/controller/>.

- **Omada Software Controller**
Omada Software Controller can be hosted on any computers with Windows or Linux systems on your network.

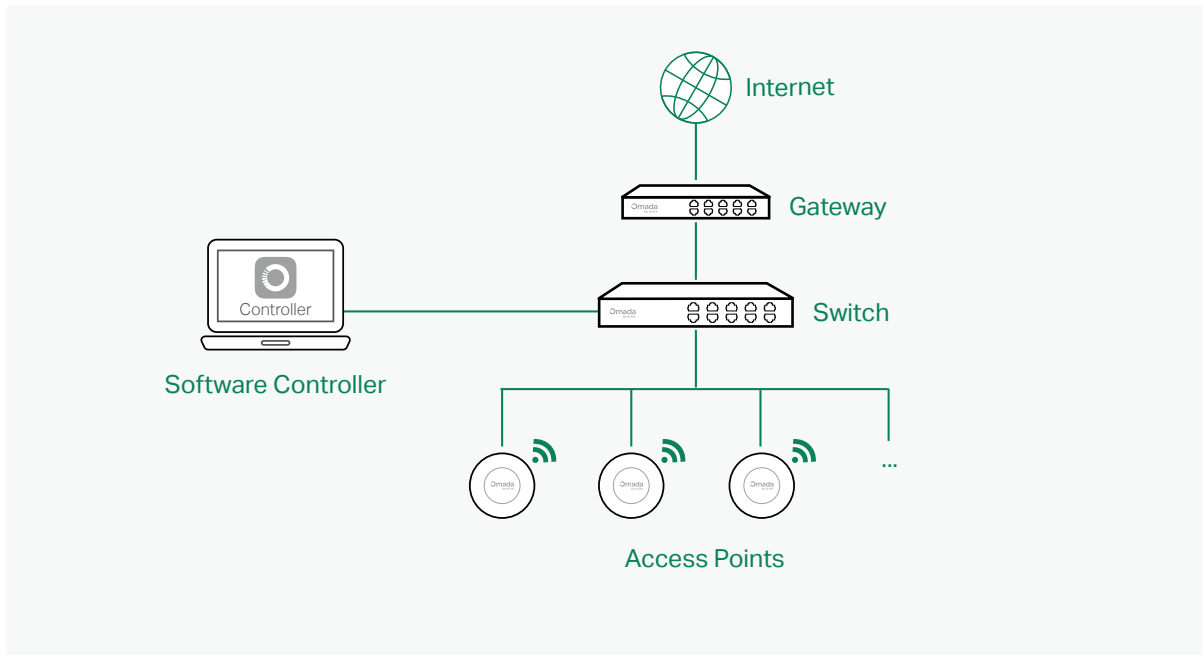


■ Omada Hardware Controller

Omada Hardware Controller is the management device which is pre-installed with Omada Software Controller. You just need to purchase the device, then the built-in software controller is ready to use. About the size of a mobile phone, the device is easy to deploy and install on your network.

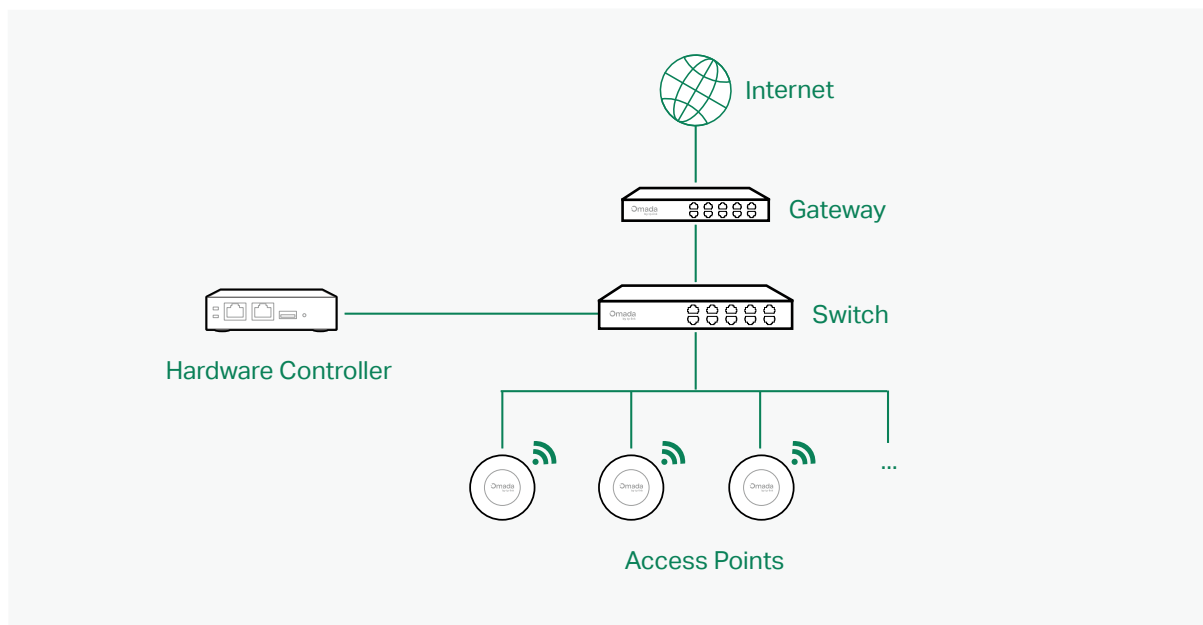


■ Omada 3-in-1 Integrated Gateway (Controller)

Omada 3-in-1 Integrated Gateway integrates PoE+ ports and Controller ability. It is the management device which is pre-installed with Omada Software Controller. You just need to purchase the device, then the built-in software controller is ready to use. It can also work as the Gateway and Switch at the same time, allowing you to connect to Omada access points and PoE-supported devices with ease.

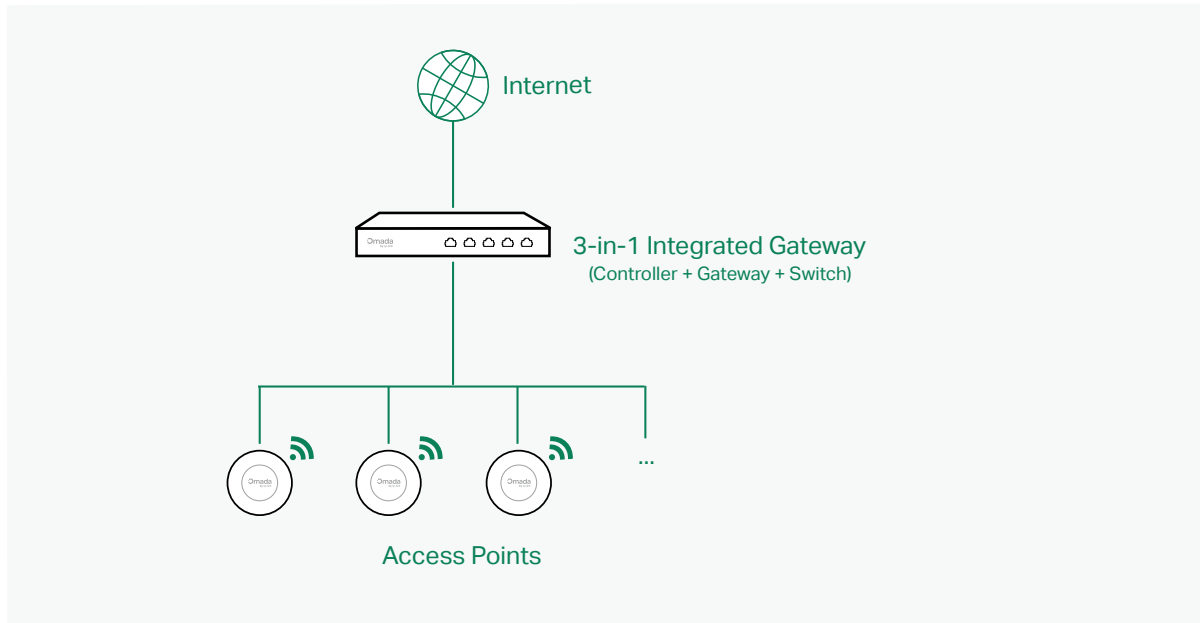

■ Omada Cloud-Based Controller (Omada Network System)

The Omada Cloud-Based Controller is now referred to as the Omada Network system on the Omada Central. It is deployed on the Omada Cloud server, providing the Essentials version for free management of essential features and the Standard version for basic and advanced features through subscription-based licensing.

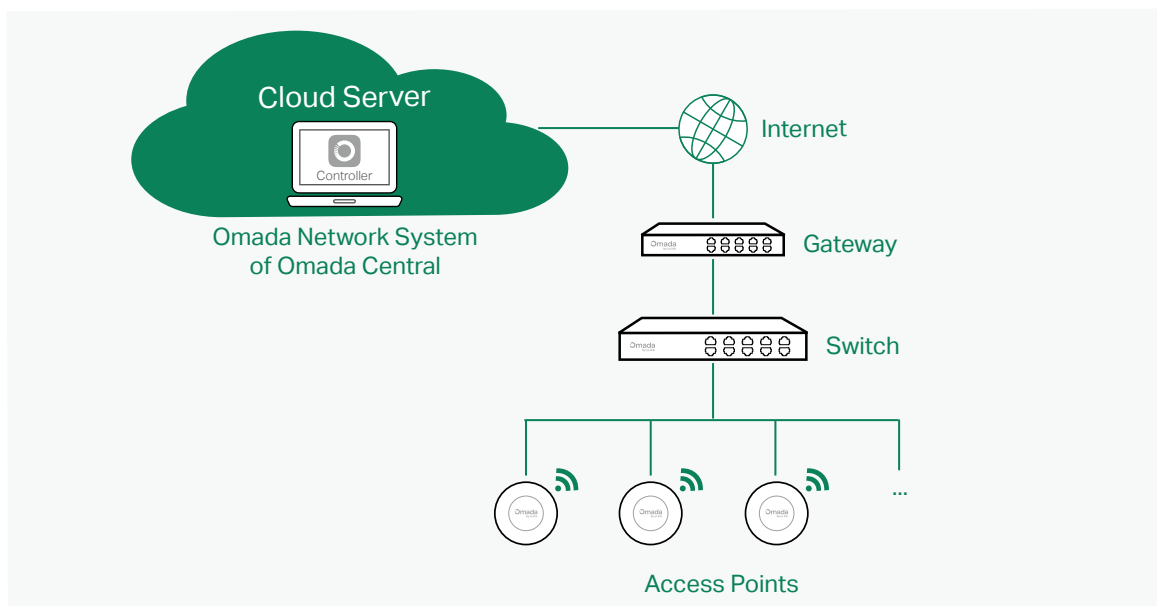

Gateways

Omada Gateway supports Gigabit Ethernet connections on both WAN and LAN ports which keep the data moving at top speed. Including all the routing and network segmentation functions that a business gateway must have, VPN Gateway will be the backbone of the SDN network. Moreover, the gateway provides a secure and easy approach to deploy site-to-site VPN tunnels and access for remote clients.

Managing the gateway centrally through Omada SDN Controller is available on certain models only. For more information, refer to <https://www.omadanetworks.com/omada-sdn/product-list/>.

Switches

Omada Switch provides high-performance and enterprise-level security strategies and lots of advanced features, which is ideal access-edge for the SDN network.

Managing the switch centrally through Omada SDN Controller is available on certain models only. For more information, refer to <https://www.omadanetworks.com/omada-sdn/product-list/>.

Access Points

Omada Access Point provides business-class Wi-Fi with superior performance and range which guarantees reliable wireless connectivity for the SDN network.

Managing the access points centrally through Omada SDN Controller is available on certain models only. For more information, refer to <https://www.omadanetworks.com/omada-sdn/product-list/>.

OLTs

OLTs and GPON APs are commonly used in all-optical network deployments, especially for FTTH/FTTR applications. As the shift toward fiber-to-the-home and the phase-out of copper accelerates, the OLT + GPON AP combination is emerging as a preferred enterprise networking solution.

Managing the OLTs centrally through Omada SDN Controller is available on certain models only. For more information, refer to <https://www.omadanetworks.com/omada-sdn/product-list/>.

Chapter 2

Get Started with Omada Controller

This chapter guides you on how to get started with Omada Controller to configure the network. The controllers differ in forms, but they have almost the same browser-based management interface for network management. Therefore, they have almost the same initial setup steps, including building your network topology, deploying your controller, and logging in to the controller. The chapter includes the following sections:

- [2. 1 Set Up Your Software Controller](#)
- [2. 2 Set Up Your Hardware Controller](#)
- [2. 3 Set Up Your Integrated Gateway \(Controller\)](#)
- [2. 4 Set Up Your Cloud-Based Controller](#)
- [2. 5 Navigate the Controller UI](#)


2.1 Set Up Your Software Controller

Omada Controller is designed for scalable networks. Deployments and configurations vary according to actual situations. Understanding your network requirements is the first step when planning to provision any project. After you have identified these requirements, follow the steps below to initially set up the Software Controller:

- 1) Determine the network topology.
- 2) Install the Software Controller.
- 3) Start and log in to the controller.

2.1.1 Determine the Network Topology

The network topology that you create for the controller varies depending on your business requirements. The following figure shows a typical topology for a high-availability use case.

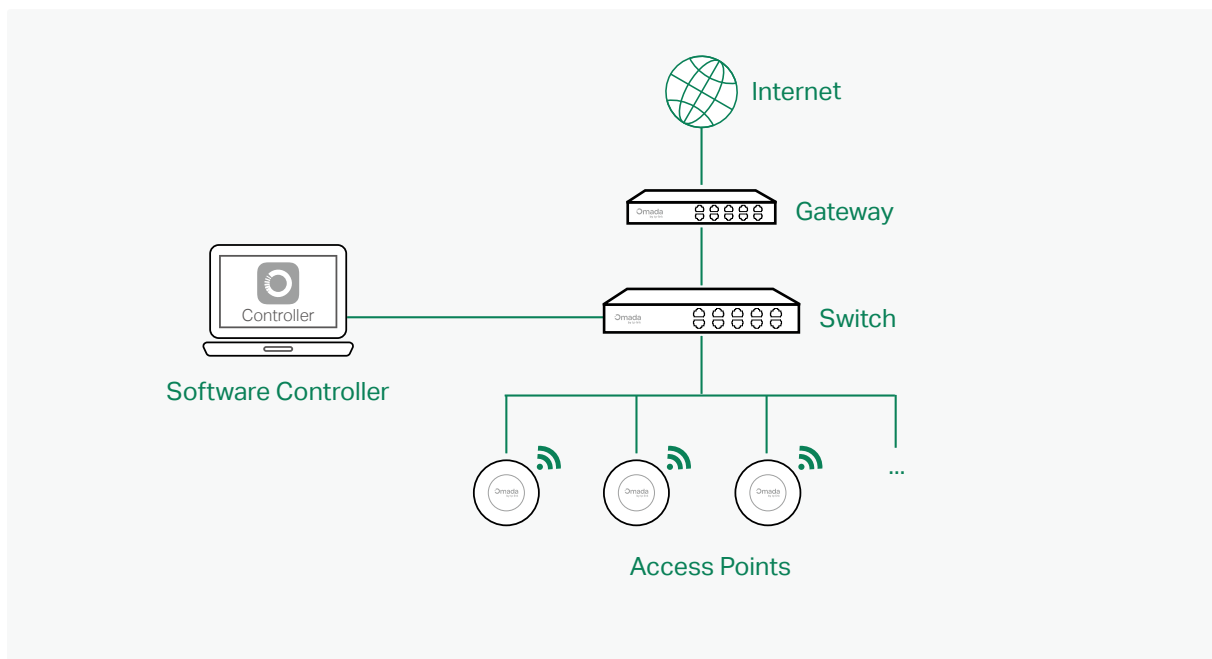

Note:

When using the Omada Controller, we recommend that you deploy the full topology with Omada devices. If you use third-party devices, Omada Controller cannot discover and manage them.

2.1.2 Install the Software Controller

Omada Software Controller is provided for both Windows and Linux operating systems. Determine your operating system and follow the introductions below to install the Software Controller.

Installation on Windows Host

Omada Software Controller can be hosted on any computers with Windows systems on your network. Make sure your PC's hardware and system meet the following requirements, then properly install the Software Controller.

■ Hardware Requirements

To guarantee operational stability, we recommend that you use the hardware which meets or exceeds the following specifications:

CPU: Intel Core i3-8100, i5-6500, or i7-4700 with 2 or more cores and 4 or more threads.

Memory: 16 GB RAM or more.

■ System Requirements

Operating System: Microsoft Windows 10/11/Server. (We recommend that you deploy the controller on a 64-bit operating system to guarantee the software stability.)

Web Browser: Mozilla Firefox 90 (or above) or Google Chrome 97 (or above).

■ Install the Software Controller

Download the installation file of Software Controller from <https://support.omadanetworks.com/download/software/omada-controller/>. Then follow the instructions to install the controller. After a successful installation, the controller shortcut icon will be created on your desktop.

Installation on Linux Host

Two versions of installation package are provided: **.tar.gz** file and **.deb** file. Both of them can be used in multiple versions of Linux operating system, including Ubuntu and Debian.

Make sure your PC's hardware and system meet the following requirements, then choose the proper installation files to install the Software Controller.

■ Hardware Requirements

To guarantee operational stability, we recommend that you use the hardware which meets or exceeds the following specifications:

CPU: Intel Core i3-8100, i5-6500, or i7-4700 with 2 or more cores and 4 or more threads.

Memory: 16 GB RAM or more.

■ System Requirements

Operating System: 64-bit Linux operating system, including Ubuntu 20.04/22.04/24.04, and Debian 11/12. Only support x64 version.

Web Browser: Mozilla Firefox 90 (or above) or Google Chrome 97 (or above).

■ Install the Software Controller

Download the installation file of Software Controller from <https://support.omadanetworks.com/download/software/omada-controller/>. Check the prerequisites and follow the steps based on your file version to install the controller.

- Prerequisites for installing

To successfully install the Software Controller, ensure that you have performed the following tasks before your installation:

- a. Ensure that the Java Runtime Environment (JRE) has been installed in your system. The controller requires that the system has Java 17 installed. Download the file according to your operating system from https://www.java.com/download/linux_manual.jsp and follow the instructions to install the JRE.

For Ubuntu 20.04 or above, you can use the command: **apt-get install openjdk-17-jre-headless** to get the Java 17 installed.

- b. Ensure that MongoDB has been installed in your system. The controller works when the system runs MongoDB 3.6-8.0 LTS versions. Download the file according to your operating system from the <https://www.mongodb.com/try/download> and follow the instructions to install the MongoDB.
- c. Ensure that you have **jsvc** and **curl** installed in your system before installation, which is vital to the smooth running of the system. If your system does not have **jsvc** or **curl** installed, you can install it manually with the command: **apt-get install** or **yum install**. For example, you can use the command: **apt-get install jsvc** or **yum install jsvc** to get **jsvc** installed. And if dependencies are missing, you can use the command: **apt-get -f install** to fix the problem.

- Install the .tar.gz file

- a. Make sure your PC is running in the root mode. You can use this command to enter root mode:

sudo

- b. Extract the tar.gz file using the command:

tar zxvf Omada_Controller_vx.x.x_linux_x64_targz.tar.gz

- c. Install the Controller using the command:

sudo bash ./install.sh

- Install the .deb file

- a. Make sure your PC is running in the root mode. You can use this command to enter root mode:

sudo

- b. Install the .deb file using the command:

dpkg -i Omada_Controller_vx.x.x_linux_x64.deb

If dependencies are missing during the installation, you can use the command: **apt-fix-broken install** to fix the problem.

After installing the controller, use the following commands to check and change the status of the controller.

- a. **tpeap start** — Start the controller, use the command.
- b. **tpeap stop** — Stop running the Controller.
- c. **tpeap status** — Show the status of Controller.

For more detailed information about the installation on Linux hosts, refer to [How to install Omada Software Controller on Linux system](#).

Note:


- For installing the .tar.gz, if you want the Controller to run as a user (it runs as root by default) you should modify OMADA_USER value in bin/control.sh.
- To uninstall the Controller, go to the installation path: /opt/tplink/EAPController, and run the command: sudo bash ./uninstall.sh.
- During uninstallation, you can choose whether to back up the database. The backup folder is /opt/tplink/eap_db_backup.
- During installation, you will be asked whether to restore the database if there is any backup database in the folder /opt/tplink/eap_db_backup.

2. 1. 3 Start and Log In to the Software Controller

Launch the Software Controller and follow the instructions to complete basic configurations, and then you can log in to the management interface.

Launch the Software Controller

Double-click the controller shortcut icon and the following window will pop up. After a while, your web browser will automatically open.

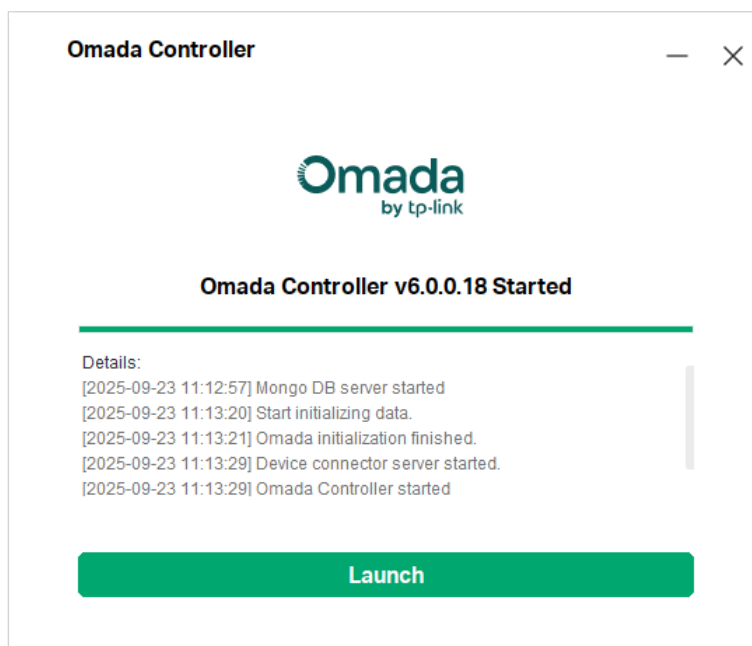
**Note:**

- If your browser does not open automatically, click [Launch](#). You can also launch a web browser and enter <http://127.0.0.1:8088> in the address bar.
- If your web browser opens but prompts a problem with the website's security certificate, click Continue.

Complete Basic Configurations

In the web browser, you can see the configuration page. Follow the setup wizard to complete the basic settings for the Controller.

1. Click **Let's Get Started**.

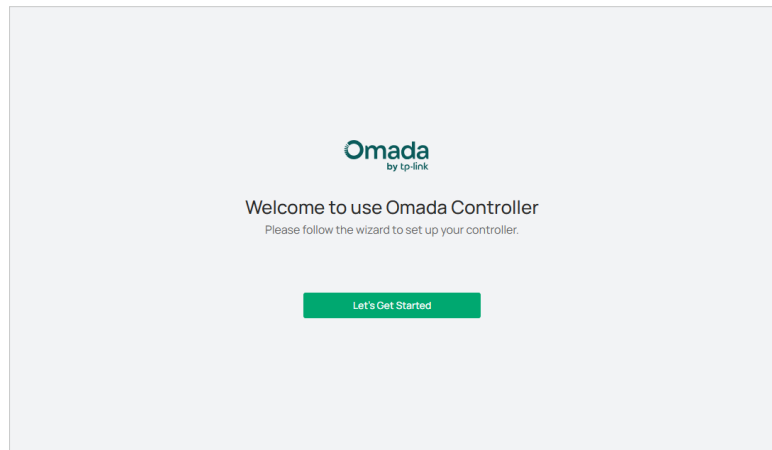

2. Set up controller access settings.

Controller Access

Create an administrator name and password for local login to Omada Controller.

Controller Main Administrator

Administrator Name

Password

Confirm Password

Email ⓘ

To enjoy Omada Cloud Service, you can log in and bind your TP-Link ID to your controller.

Cloud Access ☒

TP-Link ID

Password


No TP-Link ID? [Register now.](#)

Terms

☐ I accept the [Terms of Use](#) and confirm that I have fully read and understood the [Privacy Policy](#).

- a. Create an Administrator username and password for login to the controller. Specify the email address for resetting your password in case that you forget the password. After logging into the Controller, set a mail server so that you can receive emails and reset your password. For how to set a mail server, refer to [4. 5. 1 Mail Server](#).
- b. If you want to access the controller to manage networks remotely, enable **Cloud Access**, and bind your TP-Link ID to your Controller.
- c. Read and agree to the Terms of Use.
- d. Click **Next**.

3. Choose how would you like to set up your new controller. You can configure a new setup or restore from backup file.

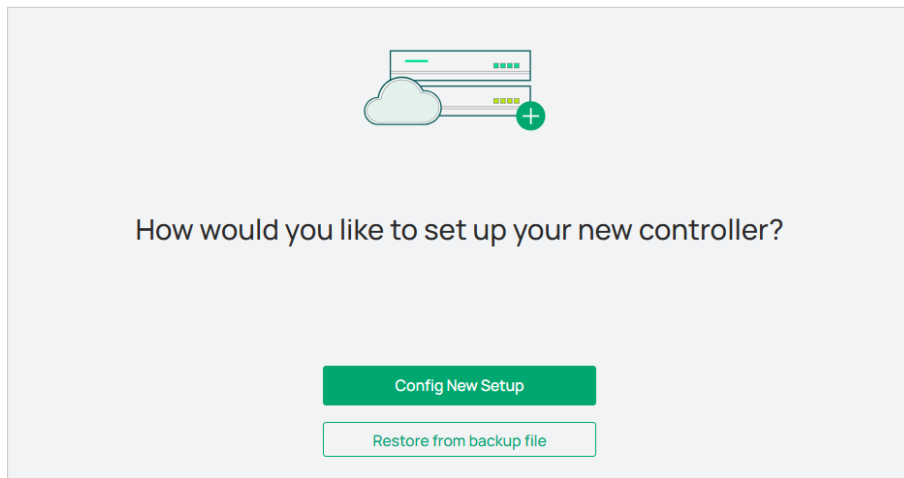

4. Follow the setup wizard to set up the controller.


✓ Successful!

Please confirm the settings below. Once finished you will be directed to the management interface.

Controller Name	Omada Controller_Office
Controller Country/Region	United States
Controller Time Zone	(UTC-08:00) Pacific Time (US & Canada)
Administrator Name	test
Cloud Access	On
TP-Link ID	
Site Name	Office_test
Site Country/Region	United States
Site Time Zone	(UTC-08:00) Pacific Time (US & Canada)
Device Username	test
Device Password	*****
Application Scenario	Office
Network Name (SSID)	test
Password	*****

Log In to the Management Interface

Once the basic configurations are finished, the browser will be redirected to the following page. Log in to the management interface using the username and password you have set in the basic configurations.

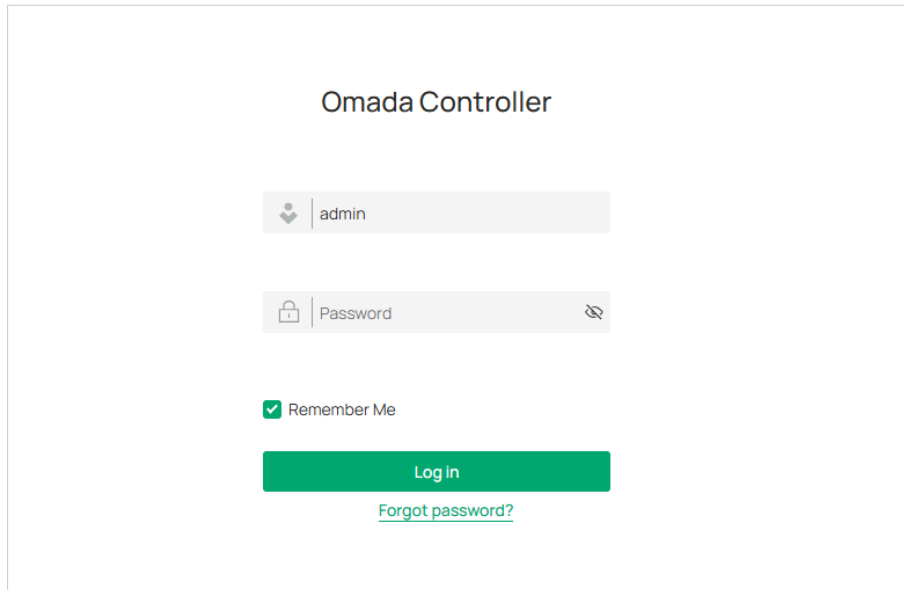The image shows the Omada Controller login page. At the top, the text "Omada Controller" is centered. Below it, there are two input fields: the first is for the username, with a dropdown arrow icon and the text "admin"; the second is for the password, with a lock icon, the text "Password", and a toggle icon for password visibility. Below these fields is a checkbox labeled "Remember Me" which is checked. At the bottom, there is a green "Log in" button and a link labeled "Forgot password?".

Omada Controller

 admin

 Password 

☒ Remember Me

[Log in](#)

[Forgot password?](#)

Note:

In addition to the Controller Host, other hosts in the same LAN can also manage EAPs via remote access to the Controller Host. For example, if the IP address of the Controller Host is 192.168.0.100 and the Controller is running normally on this host, you can enter <https://192.168.0.100:8043>, or <http://192.168.0.100:8088> in the web browser of other hosts in the same LAN to log in to the the Controller and manage EAPs. Or you can log in to the Controller using other management devices through Cloud service.


2.2 Set Up Your Hardware Controller

Omada Controller is designed for scalable networks. Deployments and configurations vary according to actual situations. Understanding your network requirements is the first step when planning to provision any project. After you have identified these requirements, follow the steps below to initially set up the Hardware Controller:

- 1) Determine the network topology.
- 2) Deploy the Hardware Controller.
- 3) Start and log in to the controller.

2.2.1 Determine the Network Topology

The network topology that you create for the controller varies depending on your business requirements. The following figure shows a typical topology for a high-availability use case.

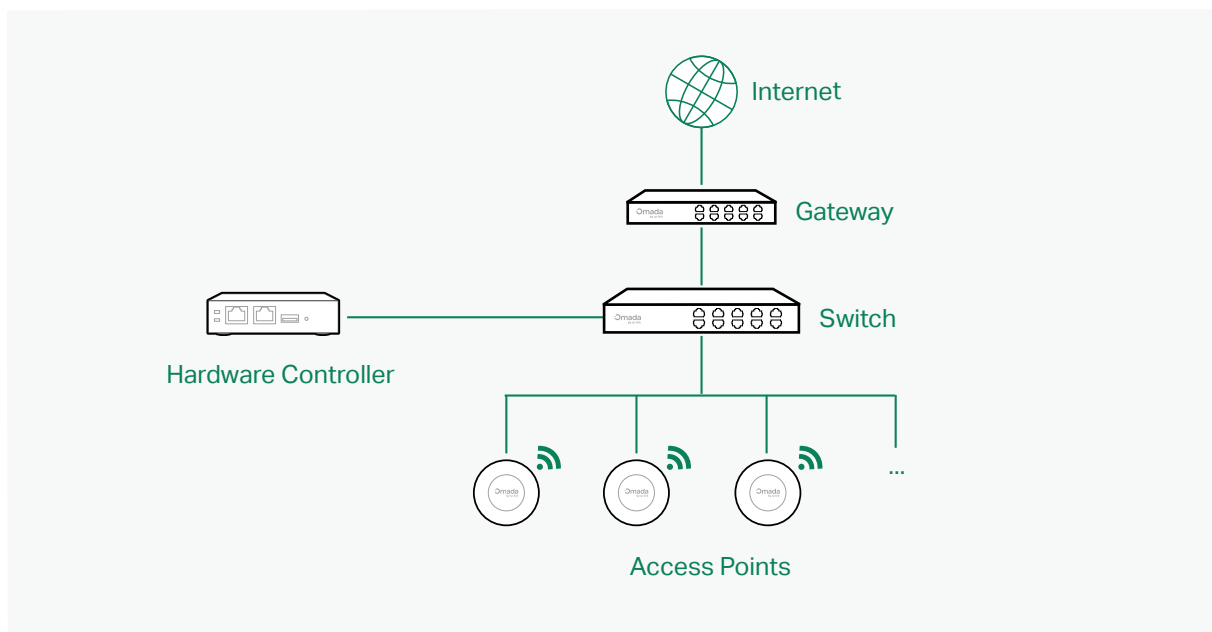

Note:

When using the Omada Controller, we recommend that you deploy the full topology with Omada devices. If you use third-party devices, Omada Controller cannot discover and manage them.

2.2.2 Deploy the Hardware Controller

Omada Hardware Controller comes with the pre-installed controller software, so installation is not necessary. After deploying the Hardware Controller on your network infrastructure, proceed to configure the controller.

2.2.3 Start and Log in to the Controller

Log In to the Management Interface


Follow the steps below to enter the management interface of the Hardware Controller:

1. Make sure that your management device has the route to access the controller.
2. Check the DHCP server (typically a router) for the IP Address of the controller. If the controller fails to get a dynamic IP address from the DHCP server, the default fallback IP address 192.168.0.253, is used.
3. Launch a web browser and type the IP address of the controller in the address bar, then press **Enter** (Windows) or **Return** (Mac).

Complete Basic Configurations

In the web browser, you can see the configuration page. Follow the setup wizard to complete the basic settings for the Controller.

1. Click [Let's Get Started](#).

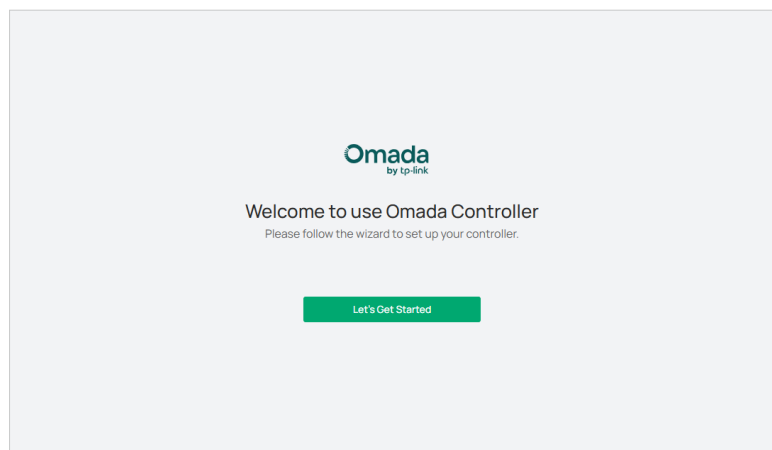

2. Set up controller access settings.

Controller Access

Create an administrator name and password for local login to Omada Controller.

Controller Main Administrator

Administrator Name

Password

Confirm Password

Email ⓘ

To enjoy Omada Cloud Service, you can log in and bind your TP-Link ID to your controller.

Cloud Access ☒

TP-Link ID

Password

[Log in and bind](#) No TP-Link ID? [Register now.](#)

Terms

☐ I accept the [Terms of Use](#) and confirm that I have fully read and understood the [Privacy Policy](#)

- a. Create an Administrator username and password for login to the controller. Specify the email address for resetting your password in case that you forget the password. After logging into the Controller, set a mail server so that you can receive emails and reset your password. For how to set a mail server, refer to [4. 5. 1 Mail Server](#).
 - b. If you want to access the controller to manage networks remotely, enable [Cloud Access](#), and bind your TP-Link ID to your Controller.
 - c. Read and agree to the Terms of Use.
 - d. Click [Next](#).
3. Choose how would you like to set up your new controller. You can configure a new setup or restore from backup file.



How would you like to set up your new controller?

[Config New Setup](#)

[Restore from backup file](#)

4. Follow the setup wizard to set up the controller.

 **Successful!**

Please confirm the settings below. Once finished you will be directed to the management interface.

Controller Name	Omada Controller_Office
Controller Country/Region	United States
Controller Time Zone	(UTC-08:00) Pacific Time (US & Canada)
Administrator Name	test
Cloud Access	On
TP-Link ID	
Site Name	Office_test
Site Country/Region	United States
Site Time Zone	(UTC-08:00) Pacific Time (US & Canada)
Device Username	test
Device Password	*****
Application Scenario	Office
Network Name (SSID)	test
Password	*****

Log In to the Management Interface

Once the basic configurations are finished, the browser will be redirected to the following page. Log in to the management interface using the username and password you have set in the basic configurations.

Omada Controller

 admin

 Password 

☒ Remember Me

Log in

[Forgot password?](#)

Note:

In addition to the Controller Host, other hosts in the same LAN can also manage EAPs via remote access to the Controller Host. For example, if the IP address of the Controller Host is 192.168.0.100 and the Controller is running normally on this host, you can enter <https://192.168.0.100:8043>, or <http://192.168.0.100:8088> in the web browser of other hosts in the same LAN to log in to the Controller and manage EAPs. Or you can log in to the Controller using other management devices through Cloud service.


2.3 Set Up Your Integrated Gateway (Controller)

Omada Controller is designed for scalable networks. Deployments and configurations vary according to actual situations. Understanding your network requirements is the first step when planning to provision any project. After you have identified these requirements, follow the steps below to initially set up the Integrated Gateway (Controller):

- 1) Determine the network topology.
- 2) Deploy the Integrated Gateway (Controller).
- 3) Start and log in to the controller.

2.3.1 Determine the Network Topology

The network topology that you create for the controller varies depending on your business requirements. The following figure shows a typical topology for a high-availability use case.

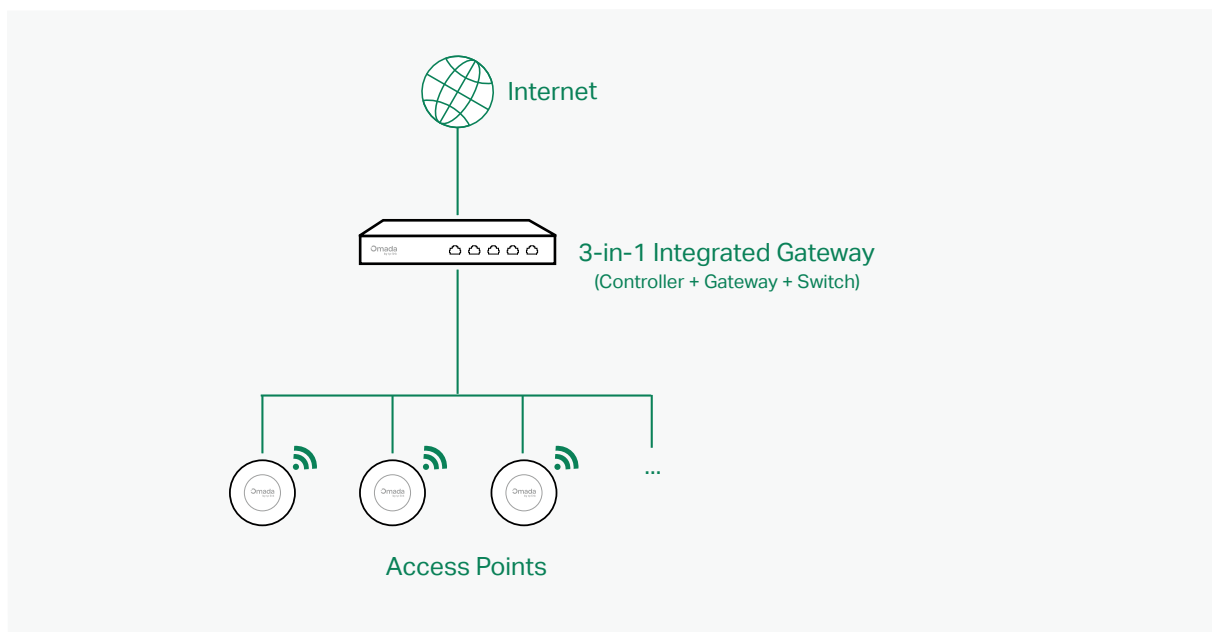

Note:

When using the Omada Controller, we recommend that you deploy the full topology with Omada devices. If you use third-party devices, Omada Controller cannot discover and manage them.

2.3.2 Deploy the Integrated Gateway (Controller)


Omada Integrated Gateway (Controller) comes with the pre-installed controller software, so installation is not necessary. After deploying the Integrated Gateway (Controller) on your network infrastructure, proceed to configure the controller.

2.3.3 Start and Log in to the Controller

Log In to the Management Interface

Follow the steps below to enter the management interface of the Integrated Gateway (Controller):


1. Connect a computer to a LAN port of the Integrated Gateway (Controller) with an RJ45 port properly. If your computer is configured with a fixed IP address, change it to obtain an IP address automatically.
2. Launch a web browser and type the default management address **192.168.0.1** in the address bar, then press **Enter** (Windows) or **Return** (Mac). The management interface will start up.

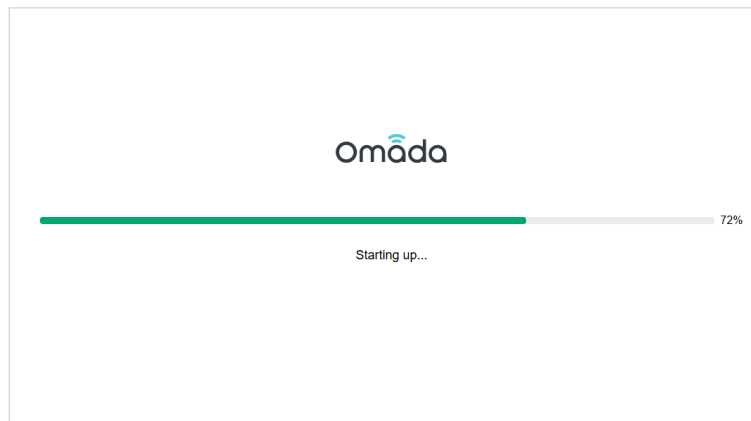

Complete Basic Configurations

In the web browser, you can see the configuration page. Follow the setup wizard to complete the basic settings for the Controller.

1. Click **Let's Get Started**.

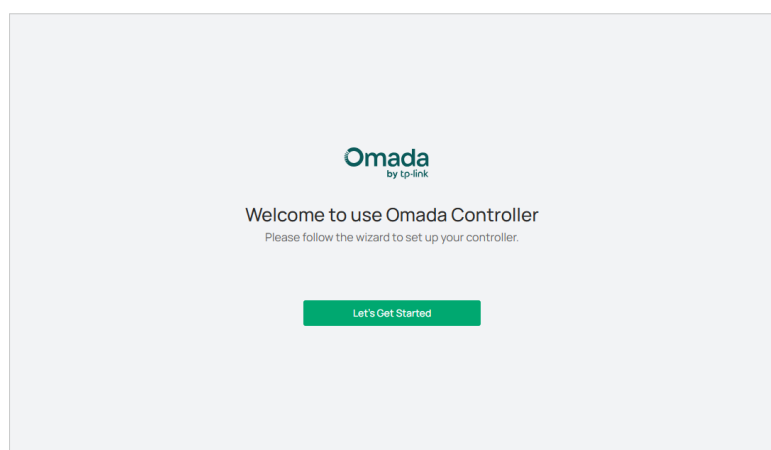

2. Set up controller access settings.

Controller Access

Create an administrator name and password for local login to Omada Controller.

Controller Main Administrator

Administrator Name

test

Enter the username with letters (case-sensitive), numbers, underscores, or hyphens.

Email

jane.zhuang@tp-link.com.hk

Password

Confirm Password

Allow Remote Binding

☐

To enjoy Omada Cloud Service, you can log in and bind your TP-Link ID to your controller.

Cloud Access

☒

TP-Link ID

Password


Log in and bind

No TP-Link ID? [Register now.](#)

Terms

☐ I accept the [Terms of Use](#) and confirm that I have fully read and understood the [Privacy Policy](#)

- a. Create an Administrator username and password for login to the controller. Specify the email address for resetting your password in case that you forget the password. After logging into the Controller, set a mail server so that you can receive emails and reset your password. For how to set a mail server, refer to [4. 5. 1 Mail Server](#).
 - b. If you want to allow the device to connect to the cloud portal remotely, enable [Allow Remote Binding](#).
 - c. If you want to access the controller to manage networks remotely, enable [Cloud Access](#), and bind your TP-Link ID to your Controller.
 - d. Read and agree to the Terms of Use.
 - e. Click [Next](#).
3. Choose how would you like to set up your new controller. You can configure a new setup or restore from backup file.

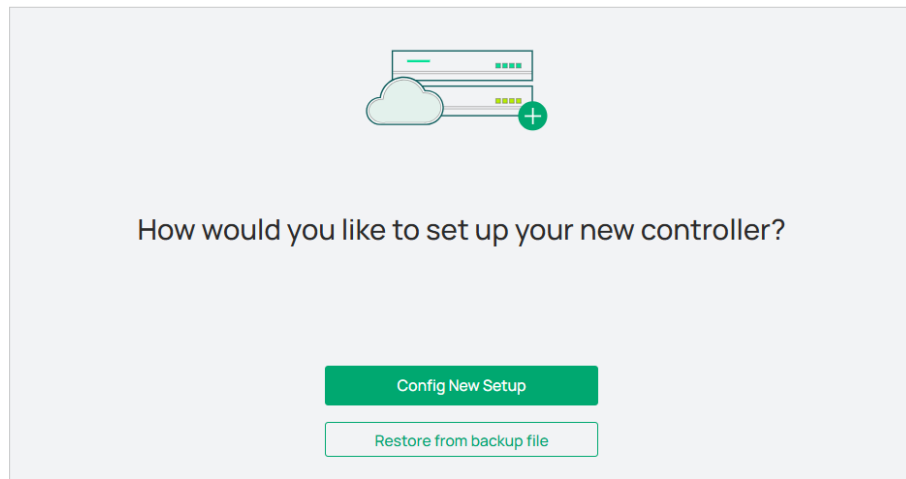

4. Follow the setup wizard to set up the controller. The integrated gateway will be adopted by the build-in controller by default.

 **Successful!**

Please confirm the settings below. Once finished you will be directed to the management interface.

Controller Name	Omada Controller_Office
Controller Country/Region	United States
Controller Time Zone	(UTC) Coordinated Universal Time
Administrator Name	test
Cloud Access	Off
Site Name	Office_test
Site Country/Region	United States
Site Time Zone	(UTC) Coordinated Universal Time
Device Username	test
Device Password	*****
Application Scenario	Office
Internet Connection Type	SFP WAN/LAN1-Dynamic IP; WAN3-Dynamic IP
Network Name (SSID)	test
Password	*****

Log In to the Management Interface

Once the basic configurations are finished, the browser will be redirected to the following page. Log in to the management interface using the username and password you have set in the basic configurations.

Omada Controller

 admin

 Password 

☒ Remember Me

Log in

[Forgot password?](#)

2.4 Set Up Your Cloud-Based Controller

The Omada Cloud-Based Controller is now referred to as the Omada Network system on the Omada Central.

Omada Central integrates the Omada Network system and Omada Guard system. The Omada Network system works as an Omada Controller to manage network devices (gateways, switches, access points, OLTs, and more), while the Omada Guard system works as a VMS system to manage surveillance devices (security cameras, NVRs, and more). The Omada Central

Omada Central offers the Essentials version for easy and free management of essential features, and the Standard version for basic and advanced features through subscription-based licensing.


View the compatible device list below to see if your devices can be centrally managed by the Omada Central:

Essentials version: <https://www.omadanetworks.com/omada-cloud-essentials/product-list/>

Standard version: <https://www.omadanetworks.com/omada-cloud-based-controller/product-list/>

To set up the Omada Central, follow the steps below:

1. Launch a web browser and enter <https://omada.tplinkcloud.com> in the address bar. Enter your TP-Link ID and password to log in. If you do not have a TP-Link ID, create a TP-Link ID first.
2. On the **Cloud-Based Systems** page, click **Add Organization** and choose the type of your organization.

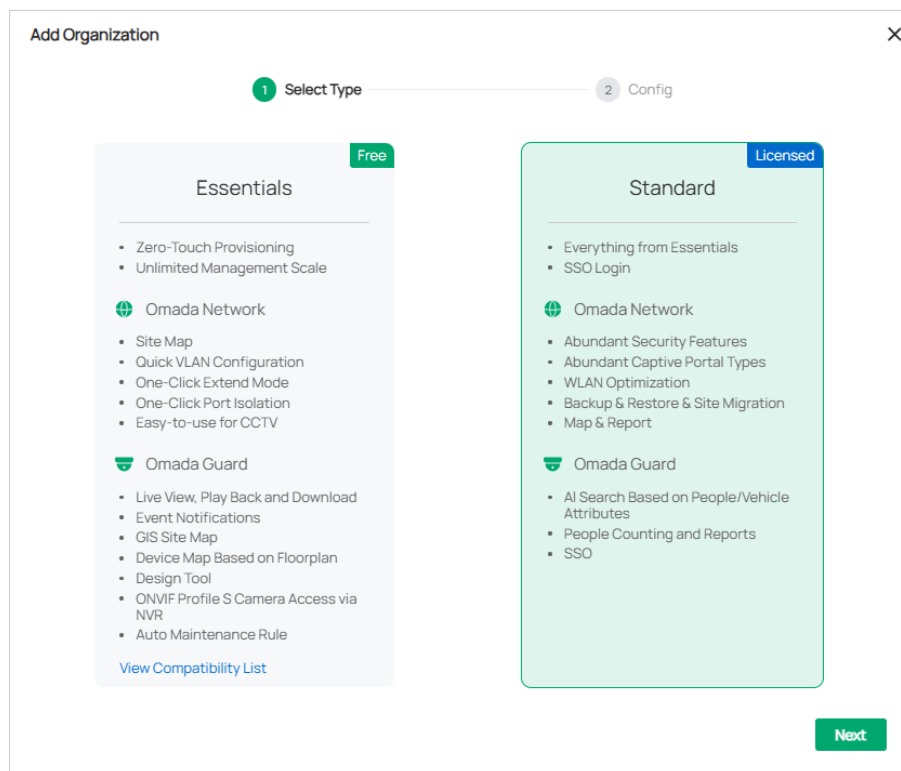

Essentials

Select this type to create an Essentials organization for easy and free management of essential features. To check whether your devices can be managed by Omada Central Essentials, click [View Compatibility List](#).


Standard	Select this type to create a Standard organization for basic and advanced features through subscription-based licensing.
----------	--

3. Follow the instructions to configure set up the organization.

Log In to the Management Interface

After creating an organization, you will automatically access the organization.

You can click the Organization drop-down list in the top left of the screen to manage the organization list or switch organizations.

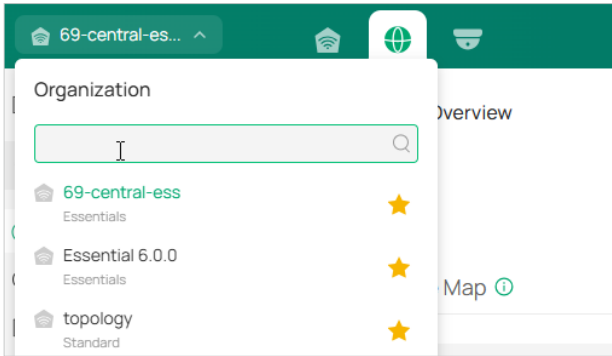

In the organization list, you can click an organization to access it.

Search Name					+ Add Organization
ORGANIZATION NAME	TYPE	SITE NUMBER	DEVICE NUMBER	ALERT NUMBER	ACTION
Test1	Essentials	2	0	0	
Test2	Standard	1	0	0	
Showing 1-2 of 2 records < 1 > 10 / page Go to page Go					

For more instructions, refer to the Omada Central Start Guide.

2.5 Navigate the Controller UI

As you start using the management interface of the controller (Controller UI) to configure and monitor your network, it is helpful to familiarize yourself with the Controller UI.

Note: Features available in the Omada SDN Controller may vary due to your region, controller type and version, and device model.

■ Global Overview

Know the status of your sites at a glance, and manage sites in the platform. The panel is divided into sections and placed in the order that you are most likely to use them when configuring and monitoring the network.


- **Site Monitoring** — Keep you informed of accurate, real-time status of every site.
- **Site Management** — Manage all sites to deploy the whole network.
- **Account Settings** — Manage all administrative accounts.

NAME	TEMPLATE	COUNTRY/REGION	ALERTS	GATEWAY	SWITCHES	OLTS	EAPS	CLIENTS	ACTION
Site 1	Template 1	United States	41		0 / 1	0 / 1	0 / 5 / 0	12 51 124	
Site 2	Template 2	United States	12		0 / 0	0 / 0	0 / 5 / 0	12 51 124	
Site 3	Template 3	United States	12	/	0 / 1	0 / 1	0 / 1 / 0	12 51 124	
Site 4	Template 4	United States	12	/	0 / 2	0 / 2	0 / 5 / 0	12 51 124	
Site 5	Template 5	United States	12	/	0 / 2	0 / 7	0 / 8 / 0	12 51 124	
Site 6	Template 6	United States	12	/	0 / 2	0 / 2	0 / 8 / 0	12 51 124	
Site 7	Template 7	United States	12	/	0 / 1	0 / 1	0 / 12 / 0	12 51 124	
Site 8	Template 8	United States	12	/	0 / 1	0 / 1	0 / 8 / 0	12 51 124	
Site 9	Template 9	United States	0	/	0 / 1	0 / 1	0 / 8 / 0	12 51 124	
Site 10	Template 10	United States	0	/	0 / 2	0 / 1	0 / 8 / 0	12 51 124	

■ Site Overview


Know the status of your network at a glance, gain insights, and manage network devices all in the platform. By visualizing data, key information is presented on a single screen, allowing you to quickly understand the status and trends of your business.

- **Statistics & Monitoring** — Keep you informed of accurate, real-time status of every network device and client.
- **Configuration** — Configure all network devices, including network configuration, device configuration, and authentication.

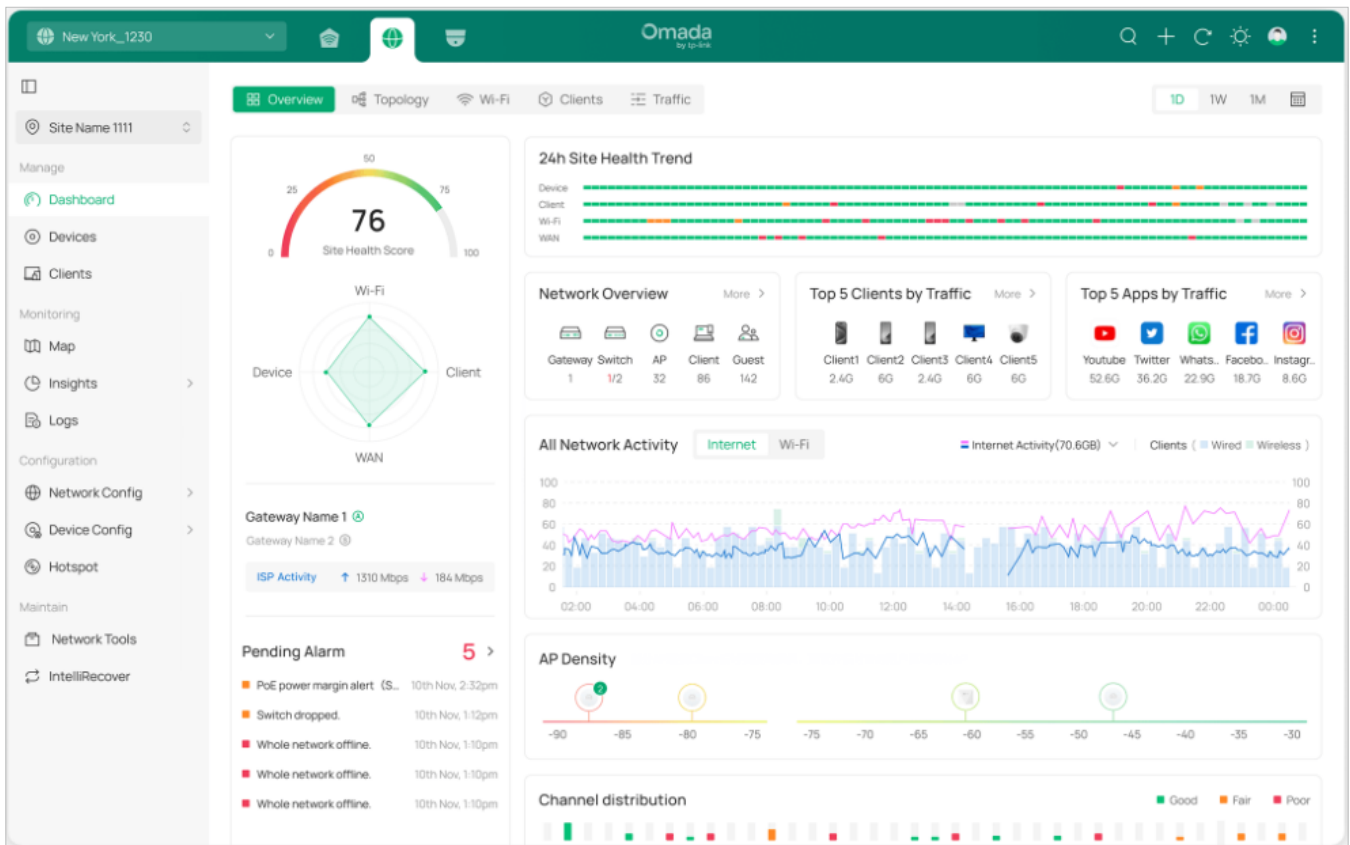

■ Monitoring


Network administrators can monitor the status of all network devices and clients in real time. The system provides detailed connection statuses, data usage, and alert logs, ensuring the stability and security of network operations.

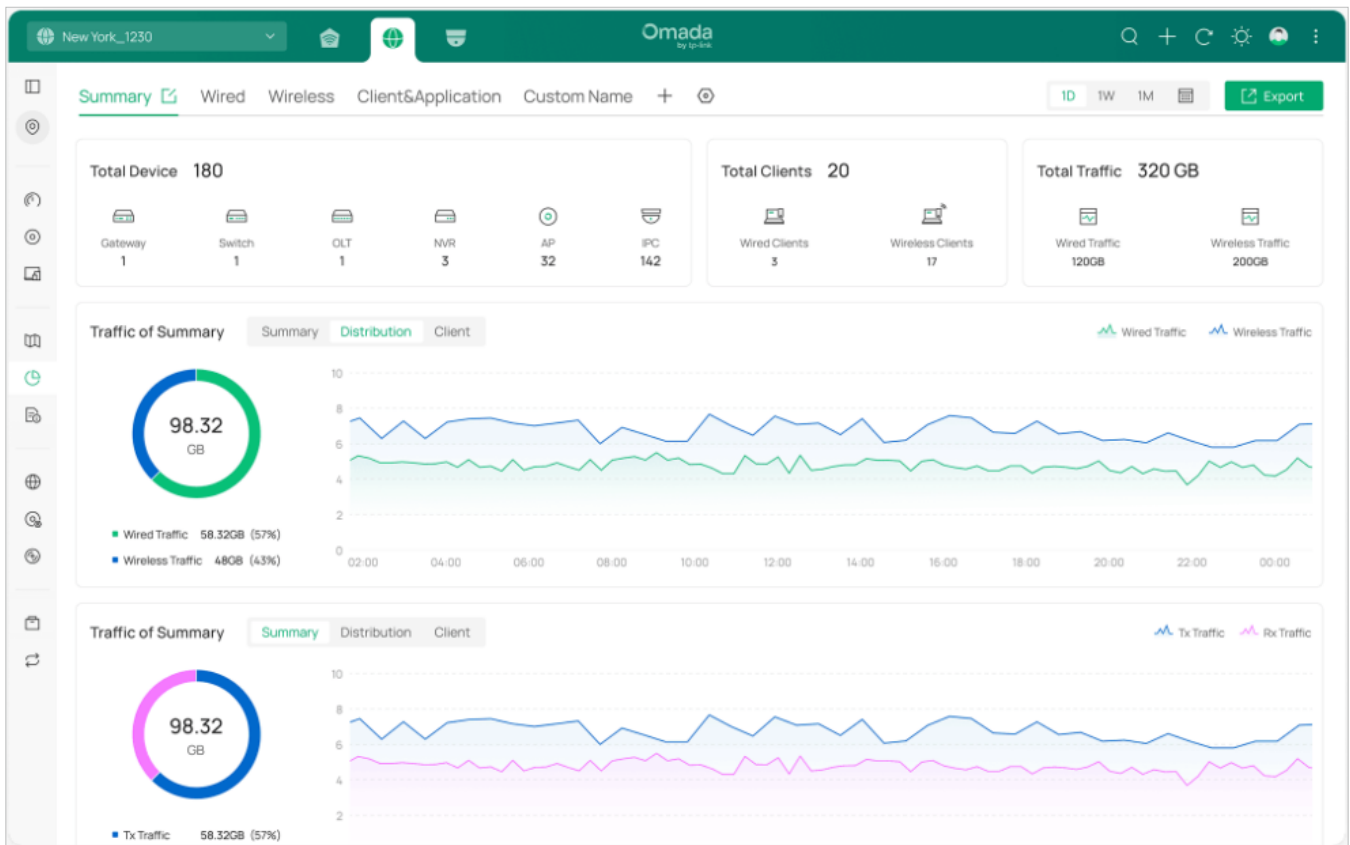

■ Configuration

Set up and manage network, device, and authentication configurations for the optimal overall network performance.

- **Network Config** — Manage and optimize network configurations to ensure efficient and secure network connections.
- **Device Config** — Centrally set up and manage device configurations by device type, improving device performance and stability.

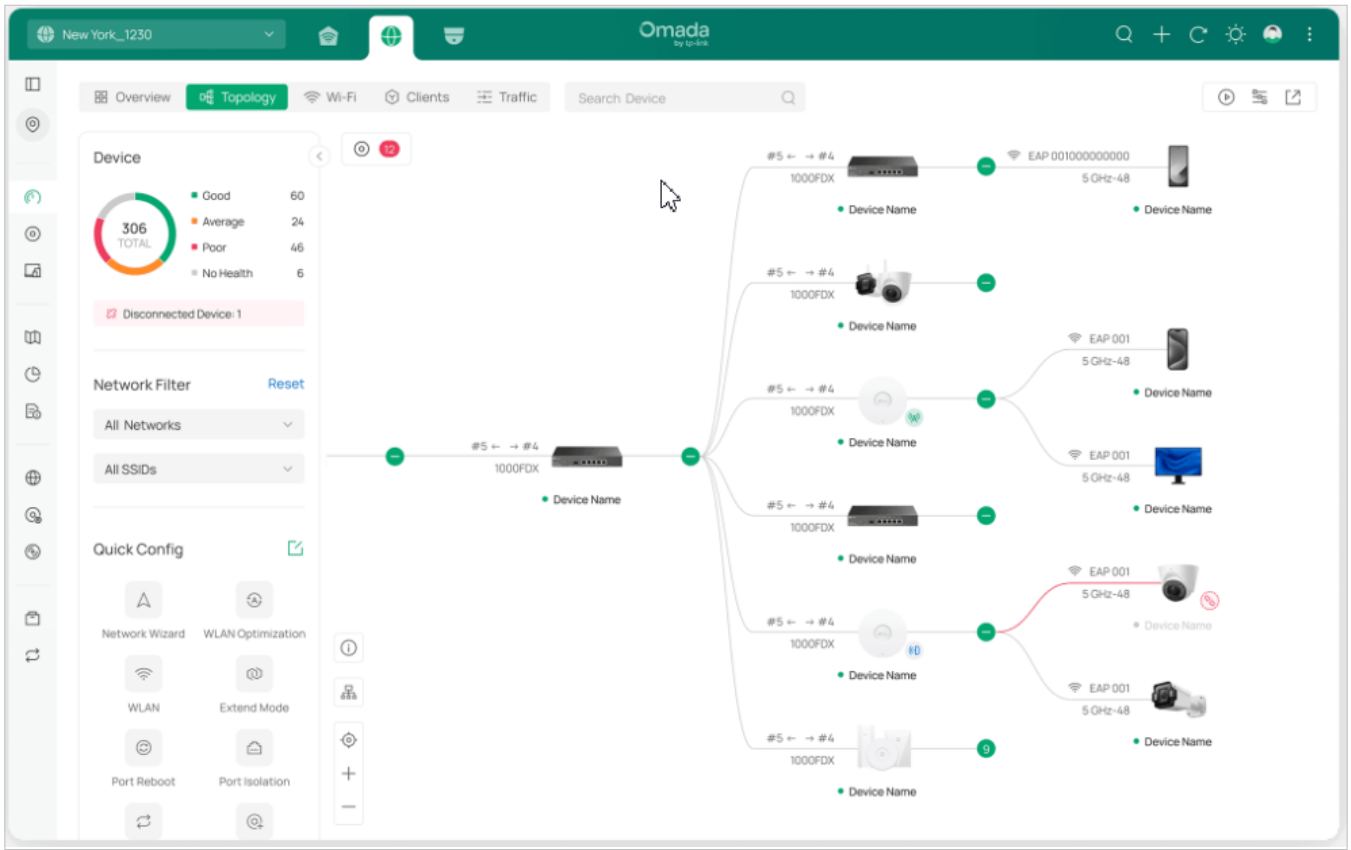

The Controller UI is grouped into task-oriented menus. These menus are located in the left-hand navigation bar of the page. Note that the settings and features that appear in the UI depend on your user account permissions. The following image depicts the main elements of the Controller UI.

■ Elements in top right corner

The elements in the top right corner of the screen give quick access to:



Global Search Feature	Click the Search icon and enter the keywords to quickly look up the functions or devices that you want to configure. And you can search for the devices by their MAC addresses and device names.
Refresh Page	Click the Refresh icon to refresh the page.
Theme Settings	Change theme settings to light mode, dark mode, or system theme to improve your overall screen experience.
My Account	Click the Account icon to display account information, Account Settings and Log Out. You can change your password on Account Settings.

More Settings

Click the More icon for more settings.

Feedback: Click to send your feedback to us.

About: Click to display the controller info.

Tutorial: Click to view the quick Getting Started guide which demonstrates the navigation and tools available for the controller.

Old UI Layout/New UI Layout: Click to switch between the previous UI layout and the new UI layout.

■ Navigation bar in the left

In Global View, the left-hand navigation bar provides access to:

Global/Site View drop-down list

Allows you to access the Global View or access a site quickly.

Global View: Know the status of your Site at a glance, and manage sites in the platform.

Site View: Know the status of your network at a glance, gain insights, and manage network devices all in the platform.

Dashboard

Displays the sites in the organization and their status. You can switch between the site list view and site map view.

Site Template

Allows you to configure site templates and bind sites to them to facilitate batch configuration and management of sites.

Devices

Displays the devices on all sites and their general information. This list view can change depending on your monitoring need through customizing the columns.

You can click any device on the list for device details and settings.

Logs

Displays the logs about systems events and devices. Comprehensive logs make historical information more accurate, readily accessible, and usable, which allows for proactive troubleshooting. And you can determine alert-level events and enable pushing notifications.

Firmware

Allows you to update the firmware of network devices in a one-time or periodic manner.

Security

Allows you to manage threats that the controller discovered to ensure network security.

Note: This option will be hidden if no Omada device that supports this function is adopted.

SD-WAN

Allows you to easily connect multiple gateways together without complicated VPN configuration.

Note: This option will be hidden if no Omada device that supports this function is adopted.

Accounts

Allows you to manage all administrative accounts of the controller.

Settings

Allows you to configure global settings in minutes and maintain the Omada network for best performance.

In Site View, the left-hand navigation bar provides access to:

Global/Site View drop-down list	Allows you to access the Global View or access a site quickly. Global View: Know the status of your Site at a glance, and manage sites in the platform. Site View: Know the status of your network at a glance, gain insights, and manage network devices all in the platform.
Dashboard	Displays a summarized view of the network status through different visualizations. The dashboard is a powerful tool that arms you with real-time data for monitoring the network.
Devices	Displays the devices in the site and their general information. This list view can change depending on your monitoring need through customizing the columns. You can click any device on the list for device details and settings.
Clients	Displays a list view of wired and wireless clients, IPCs, and NVRs that are connected to the network. This list view can change depending on your monitoring need through customizing the columns. You can click any entry on the list for more detailed information and settings.
Map	Displays the geographic location of each device and site in Device Map and Site Map. You can also upload images of your location for a visual representation of your network in Heat Map.
Insights	Displays the statistics of various network indicators and their changes over time in Reports and detailed traffic information in Application Analytics.
Logs	Records the activities of the system, devices, users and administrators. Comprehensive logs make historical information more accurate, readily accessible, and usable, which allows for proactive troubleshooting. And you can determine alert-level events and enable pushing notifications.
Network Config	Allows you to manage and optimize network configurations to ensure efficient and secure network connections.
Device Config	Allows you to centrally set up and manage device configurations by device type, improving device performance and stability.
Hotspot	Allows you to centrally monitor and manage the clients authorized by portal authentication.
Network Tools	Provides various network tools for you to test the device connectivity, capture packets for troubleshooting, open Terminal to execute CLI or Shell commands, and perform cable tests.
IntelliRecover	Allows you to monitor the status of PoE devices, automatically repairing abnormal devices.

Chapter 3

Get Started with Omada Network


Get started with your network on Omada SDN Controller by creating sites and adopting devices so that you can configure and monitor your devices centrally while keeping things organized. The chapter includes the following sections:

- [3.1 Create Sites](#)
- [3.2 Configure the Site Template](#)
- [3.3 Adopt Devices](#)

3.1 Create Sites

Overview

Different sites are logically separated network locations, like different subsidiary companies or departments. It's best practice to create one site for each LAN (Local Area Network) and add all the devices within the network to the site, including the router, switches and APs.

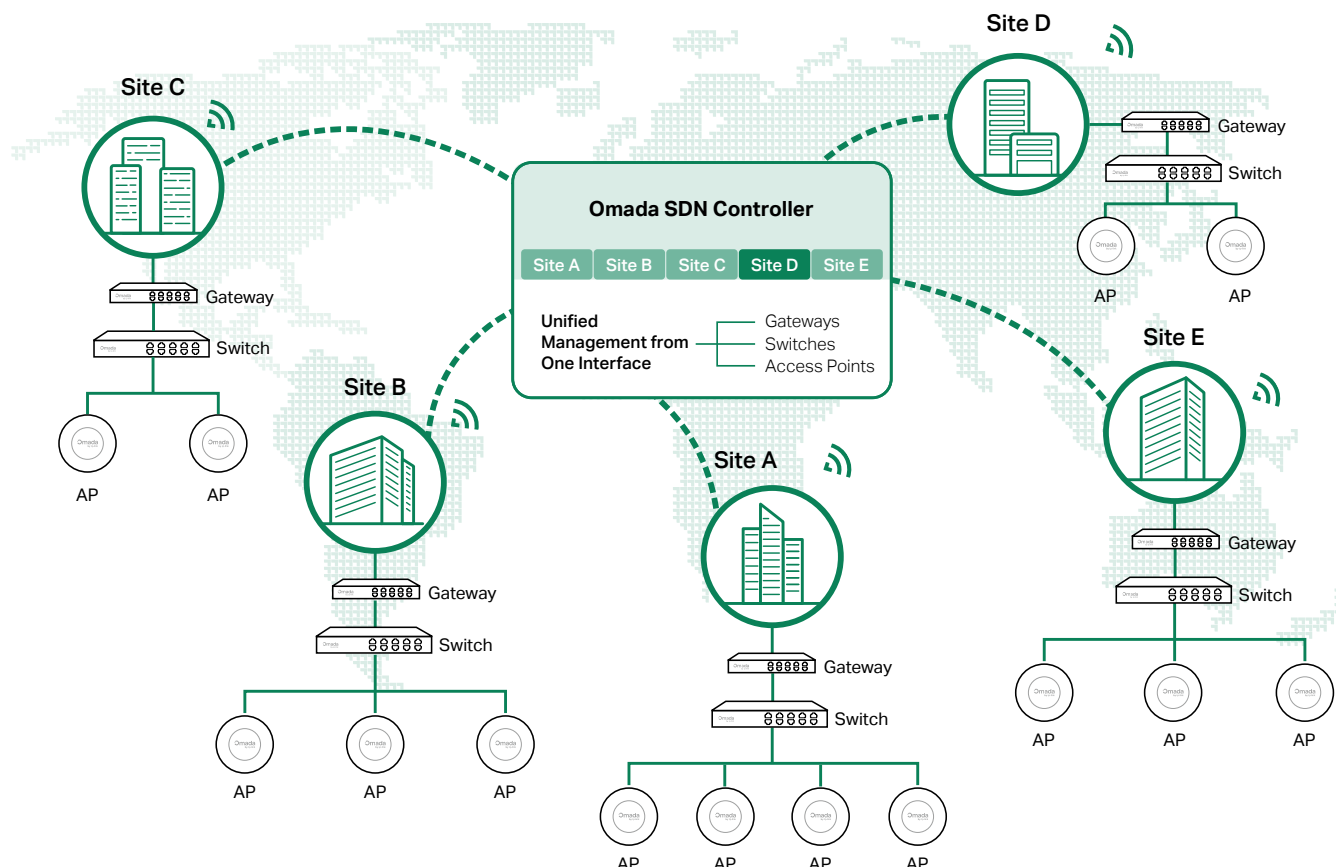

Devices at one site need unified configurations, whereas those at different sites are not relative. To make the best of a site, configure features simultaneously for multiple devices at the site, such as VLAN and PoE Schedule for switches, and SSID and WLAN Schedule for APs, rather than set them up one by one.

Configuration

To create and manage a site, follow these steps:

- 1) Create a site.
- 2) View and edit the site.
- 3) Access the site.

Step 1: Create a Site

To create a site, choose one from the following methods according to your needs.

■ Create a site from scratch

1. Launch the controller and access the Global View.
2. Go to [Dashboard](#) > [Site List](#) and click [Add New Site](#).

Check Switch Categories'. At the bottom is an 'Application Scenario' dropdown menu and two buttons: 'Apply' (green) and 'Cancel' (grey)." data-bbox="139 210 800 627"/>

3. Enter a [Site Name](#) to identify the site, and configure other parameters according to actual site needs and location.
4. Create a device username and password for login to newly adopted devices.
5. Click [Apply](#). The new site will be added to the [Site List](#).

■ Copy an existing site

You can quickly create a site based on an existing one by copying its site configuration, wired configuration, and wireless configuration among others. After that, you can flexibly modify the new site configuration to make it different from the old.

1. In the [Site List](#), click the Copy icon in the ACTION column of the site which you want to copy.




The 'Site Copy' dialog box has a title bar with 'Site Copy' and a close button (X). It contains a text input field for 'Site Name'. Below the input field is a note: 'Note: With Site Copy, you can create a new site with the same configuration as the existing site.' At the bottom are two buttons: 'Apply' (green) and 'Cancel' (gray).

2. Enter a [Site Name](#) to identify the new site.
3. Click [Apply](#). The new site will be added to the [Site List](#).

■ Import a site from another controller

If you want to migrate seamlessly from an old controller to a new one, import the site configuration file of the old controller into the new. Before that, you need to export the site configuration file from the old controller, which is covered in the Site Migration chapter in this guide.

1. In the [Site List](#), click [Import Site](#).

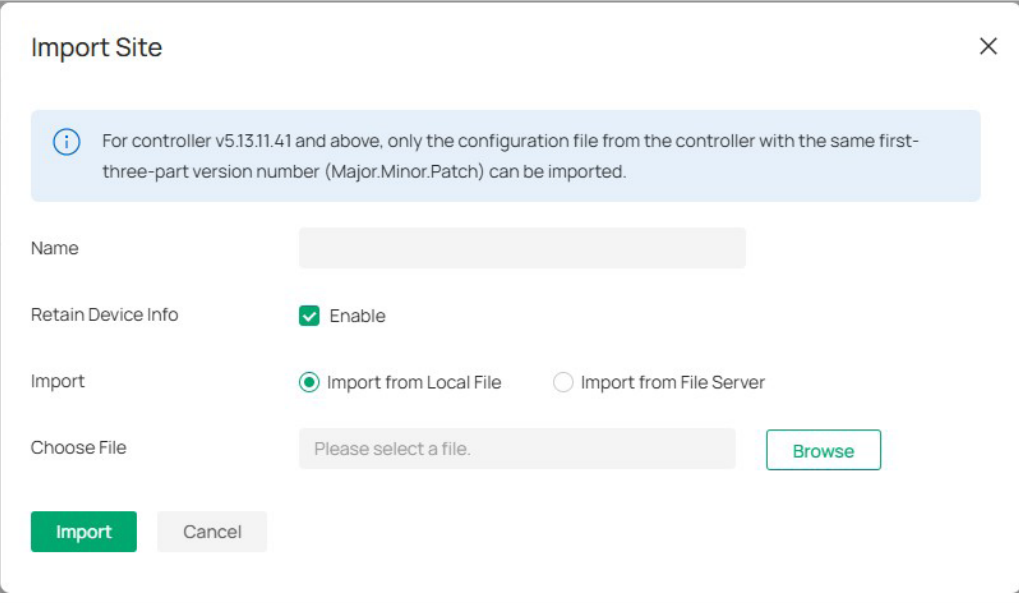

The 'Import Site' dialog box has a title bar with 'Import Site' and a close button (X). It features an information icon and a message: 'For controller v5.13.11.41 and above, only the configuration file from the controller with the same first-three-part version number (Major.Minor.Patch) can be imported.' Below this is a text input field for 'Name'. There is a checkbox for 'Retain Device Info' which is checked and labeled 'Enable'. Under the 'Import' section, there are two radio buttons: 'Import from Local File' (selected) and 'Import from File Server'. Below these is a 'Choose File' section with a text input field containing 'Please select a file.' and a 'Browse' button (green). At the bottom are 'Import' (green) and 'Cancel' (gray) buttons.

2. Enter a [Site Name](#) to identify the site, and configure other parameters according to actual site needs.
3. Browse your file explorer and choose a site configuration file.
4. Click [Import](#). The new site will be added to the [Site List](#).

Step 2: View and Edit the Site

After you create the site, you can view the site status in the [Site List](#). You can click the icons in the ACTION column to edit, copy, delete and launch the site.

NAME	TEMPLATE	COUNTRY/REGION	ALERTS	GATEWAY	SWITCHES	OLTS	EAPS	CLIENTS	ACTION
S1	-	Mainland China		/	0 / 0 / 0	0 / 0	0 / 0 / 0		

Showing 1-1 of 1 records < 1 > 10 /page

Step 3: Access the Site

To monitor and configure a site, you need first access the site.

Click the Launch icon in the ACTION column of the site to access the site.

Alternatively, select the site from the Global/Site View drop-down list in the left of the page.

Note:

Configuration items in Global View will be applied to the whole system while configuration items in Site View will be applied to the site which you are currently in.

3.2 Configure the Site Template

Overview

The Site Template feature is implemented at the Controller's Global View to facilitate users to configure and manage sites in bulk. Most of the site's functions are supported to be set up in the Site Templates, such as Internet/LAN/WLAN/ACL/URL Filtering/Portal/MAC Authentication, etc. By binding each site to a different template, you can quickly and easily realize the batch configuration of a large number of sites. For example, if a Controller manages several different sites and needs to make bulk configuration changes for them for business changes or other reasons, you can create Site Templates ahead of time and then apply the target Site Templates directly to the sites to be changed without having to go into each site individually to make adjustments to them. The greater the number of sites, the more the feature will work.

In addition, you can also create Device Template in Site template, then choose to bind the devices with the same model to the related Device template after binding them to Site template, which greatly improves the efficiency of managing and configuring devices. For instance, a large number of SG3452XP v2.20 are deployed on the same site, but the configurations are not exactly the same, in this case, it's possible to create a Device Template for each configuration, i.e. to set up different Ports/VLAN interface/Static Route/Service settings, and then apply each Device Template to the required devices.

Configuration

1. Launch the controller and access the Global View.
2. Go to the [Site Template](#) page. Click [Add New Site Template](#). Name the template and select the configurable modules according to your needs.

Note:

- Most of the site's Configurable Modules are supported to be set up in the Site Template, some of them are mandatory and some are optional (you can set them up only if they are selected here). Please refer to <https://www.omadanetworks.com/support/faq/4341> to know all modules supported in Site Template feature in detail.
- After the Site Template is created, its configurable modules cannot be changed.

Add New Site Template

×

Template Name

ⓘ

Besides mandatory modules, you can select optional modules below for the current template.

Configurable Modules

☐ All

☐ Logs

Logs

Audit Log

Network Config

☐ General Settings

Site CLI

Reboot Schedule

Port Schedule

☐ Network Settings

WLAN Optimization

☐ Security

Application Control

Firewall

Create

Cancel

3. Click **Create**. The created site template will be displayed.

SITE TEMPLATE NAME	BOUND SITES	ACTION
test	1	   

4. Click the edit icon in the Action column of the created site template, set up the network config, device config, and log settings according to site needs.

Note: For configuration of the function modules, refer to the related chapters in this guide.

Edit Template template_1

Back

Site Settings

Site Configuration

Time Zone

(UTC) Coordinated Universal Time

Network Time Protocol

☐ Enable

Daylight Saving Time

Disabled

General Config

LED

☒ Enable

Remember Device

☐ Enable

Portal Logout Domain

portal.tp-link.net

Wireless Features

Mesh


☒ Enable

Save

Cancel


5. In Device Template, you can create a template for specific device type and model, then click the edit icon in the Action column of the created device template to set up device settings. Device template parameters vary by device type and model.

38

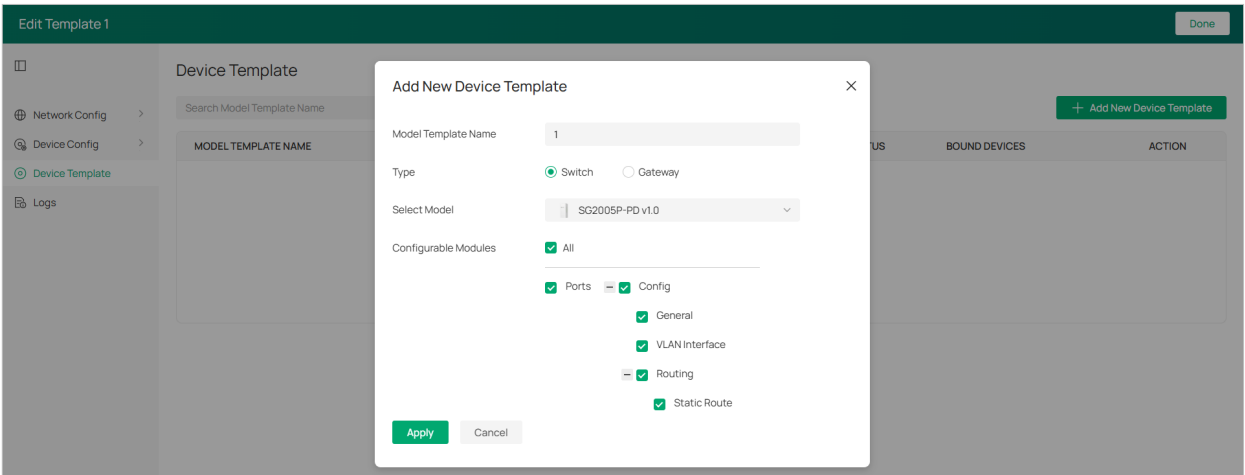

6. Save the settings to go back to the template list.
7. Click the Bound Site List icon in the Action column of the template, and click **Bind New Site** to bind the template to your desired sites. The template's configuration will be synchronized to the bound sites.

In the Action column of a site, you can also click the Re-Apply icon to re-apply template settings or click the Unbind icon to unbind the template from the site.

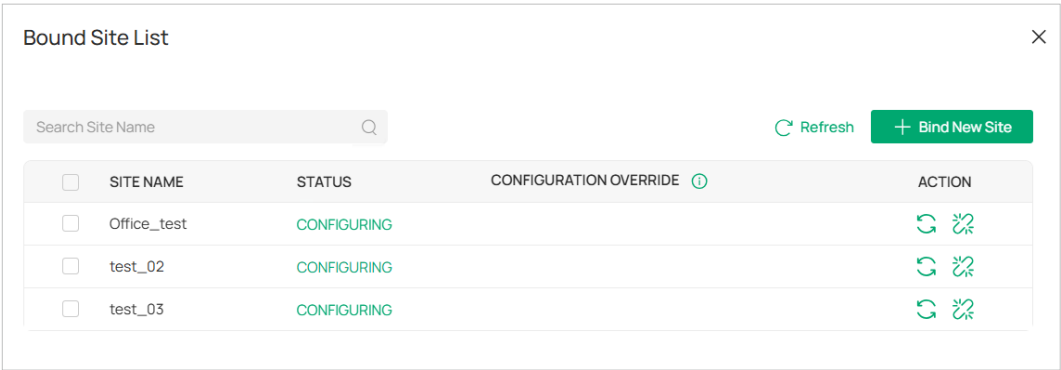


For more configuration instructions about the site template and device template, refer to <https://www.omadanetworks.com/support/faq/4341>.

3.3 Adopt Devices

Overview

After you create a site, add your devices to the site by making the controller adopt them. Make sure that your devices in each LAN are added to the corresponding site so that they can be managed centrally.

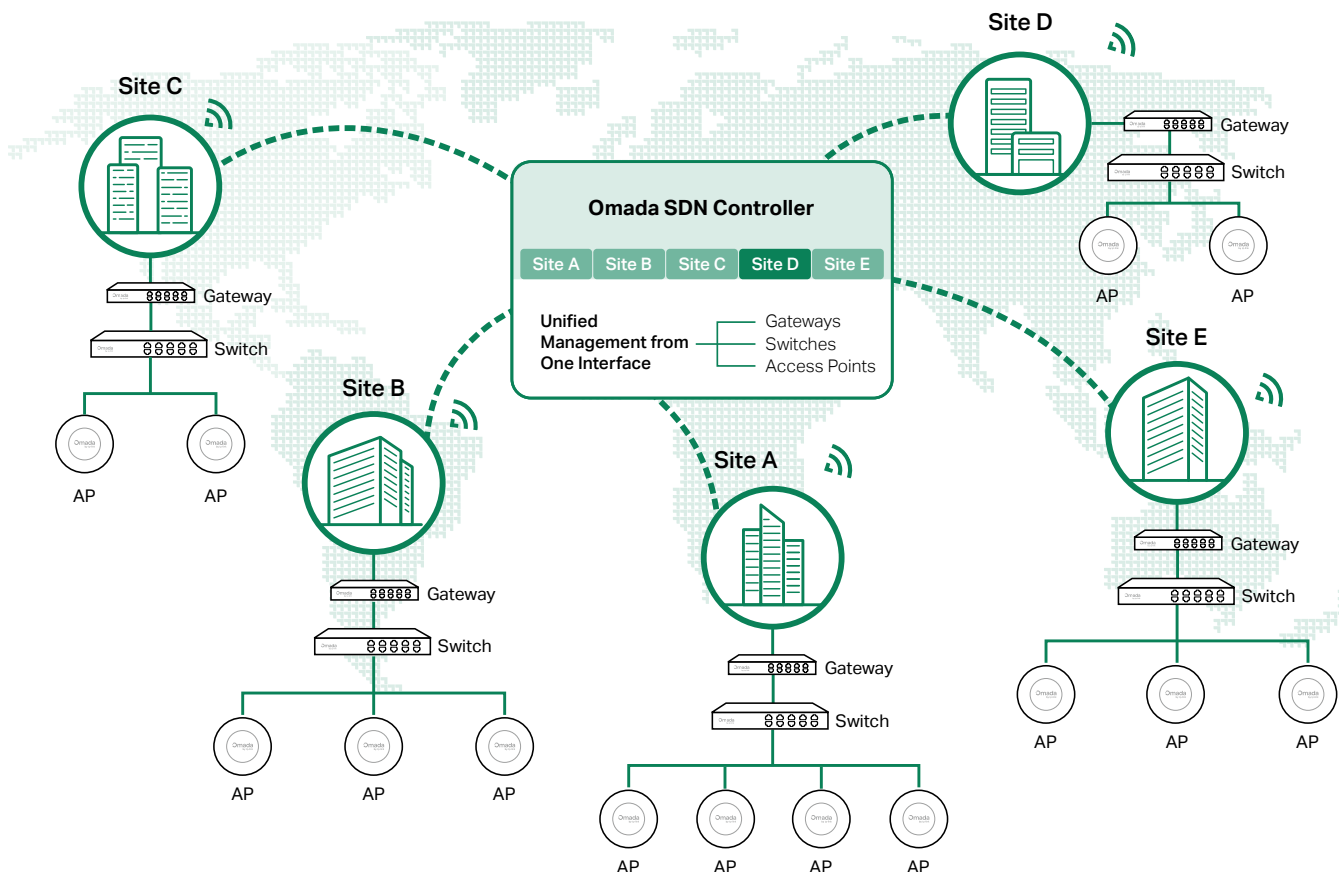

Configuration

Choose a procedure according to the type of your controller:

- [3.3.1 For Software Controller / Hardware Controller](#)
- [3.3.2 For Integrated Gateway \(Controller\)](#)
- [3.3.3 For Cloud-Based Controller](#)

3.3.1 For Software Controller / Hardware Controller

To adopt the devices on the controller, follow these steps:

- 1) Prepare for communication between the controller and devices.
- 2) Prepare for device discovery.
- 3) Adopt the devices.

Step 1: Prepare for Communication

Note:


If the controller and devices are in the same LAN, subnet and VLAN, skip this step.


Make sure that the controller can communicate with the devices. Otherwise, the controller cannot discover or adopt the devices by any means. If the controller and devices are in different LANs, subnets or VLANs, use the following techniques to build up the connection according to your scenario.

1. Set up the Network

■ Scenario 1: Across VLANs or Subnets

If the controller and devices are in different VLANs or subnets, you need to set up a layer 3 interface for each VLAN or subnet, and make sure the interfaces can communicate with each other.

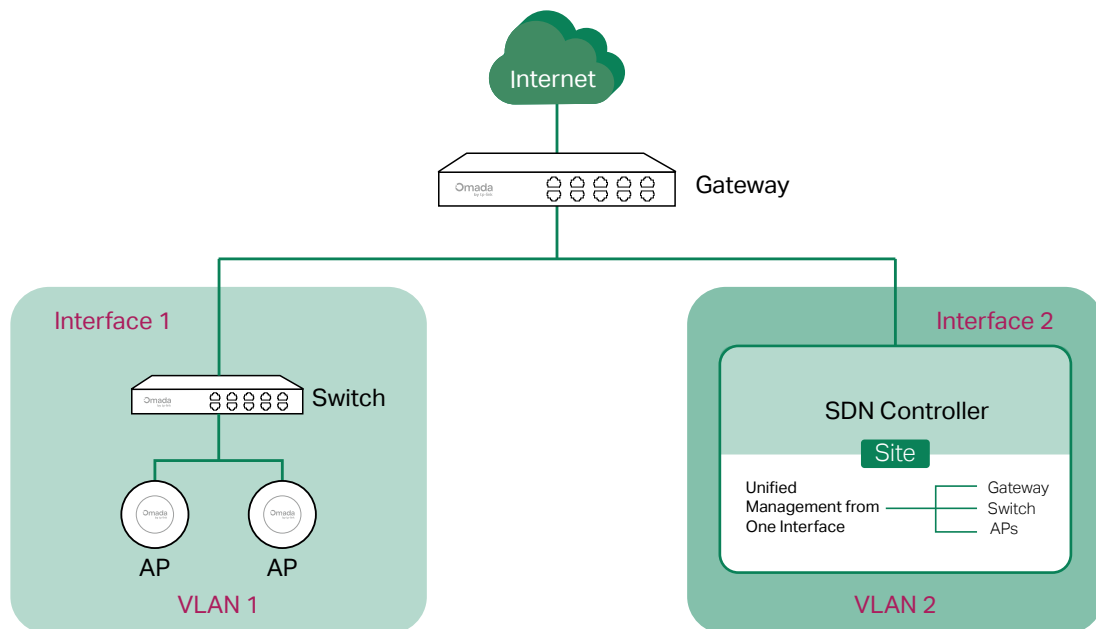

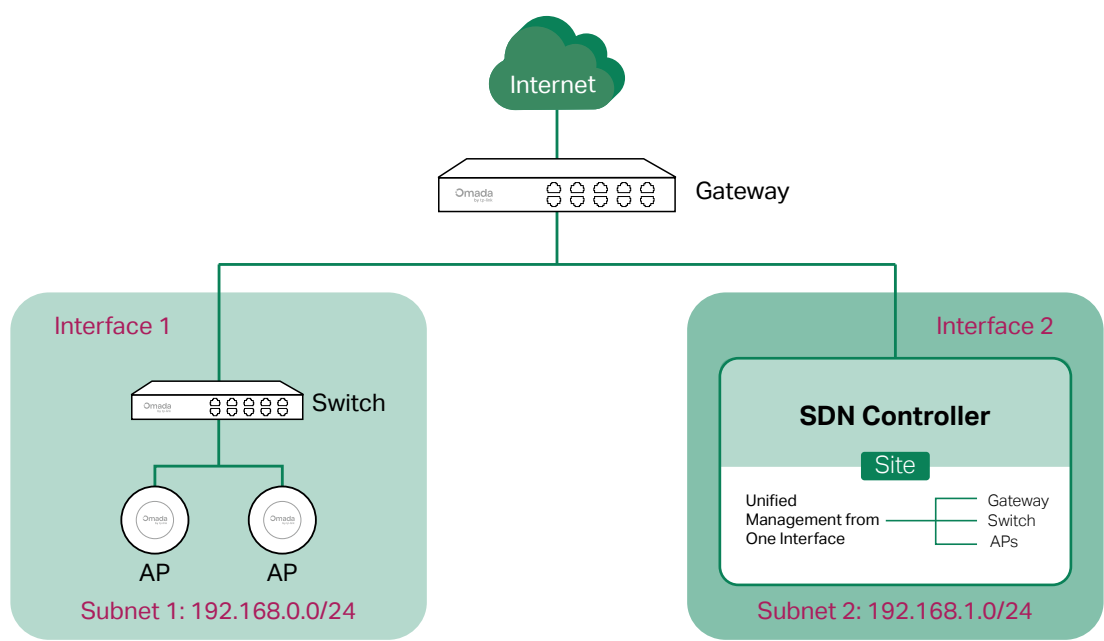


■ Scenario 2: Across LANs

If the controller and devices are in different LANs, you need to establish communication across the internet and the gateways.

By default, devices in LAN 1 cannot communicate with the controller in LAN 2, because Gateway B is in front of the controller and block access to it. To make the controller accessible to the devices, you can use Port Forwarding or VPN.

- Use Port Forwarding

Configure Port Forwarding on Gateway B and open port 29810-29817 for the controller, which are essential for discovering and adopting devices. If you are using firewalls in the networks, make sure that the firewalls don't block those ports.

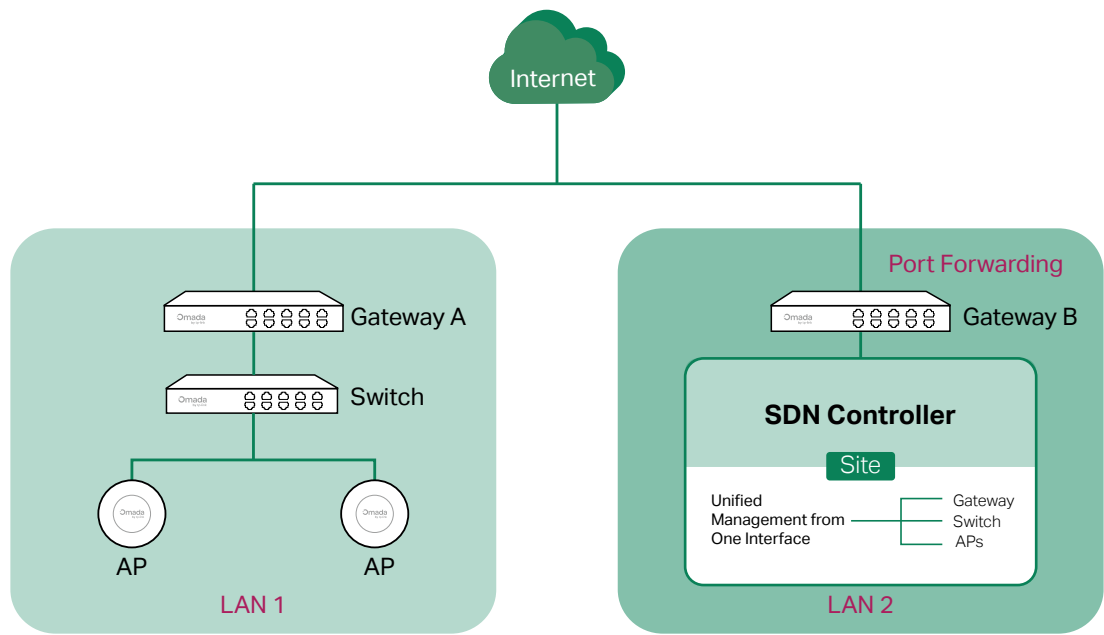

To configure Port Forwarding on Gateway B, you need first adopt Gateway B to a site on the controller. Then access the site and go to **Network Config > Transmission > NAT > Port Forwarding**. Click **Create New Rule** to load the following page. Specify a name to identify the Port Forwarding rule, check Enable for Status, select Any as Source IP, select the desired WAN port as Interface, disable DMZ, specify 29810-29817 as Source Port and Destination Port, specify the controller's IP address as Destination IP, and select All as Protocol. Then click **Create**.

Create New Rule

Name

Status
☒ Enable

Source IP
☒ Any ☐ Limited IP Address

Interface

DMZ
☐ Enable

Source Port
(1-65535. e.g. 80 or 80-100)

Destination IP
 . . .

Destination Port
(1-65535. e.g. 80 or 80-100)


Protocol
☒ All ☐ TCP ☐ UDP

Create

Cancel

- Use VPN

Set up a VPN connection between Gateway A and Gateway B in Standalone Mode. For details about VPN configuration, refer to the User Guide of the gateways.

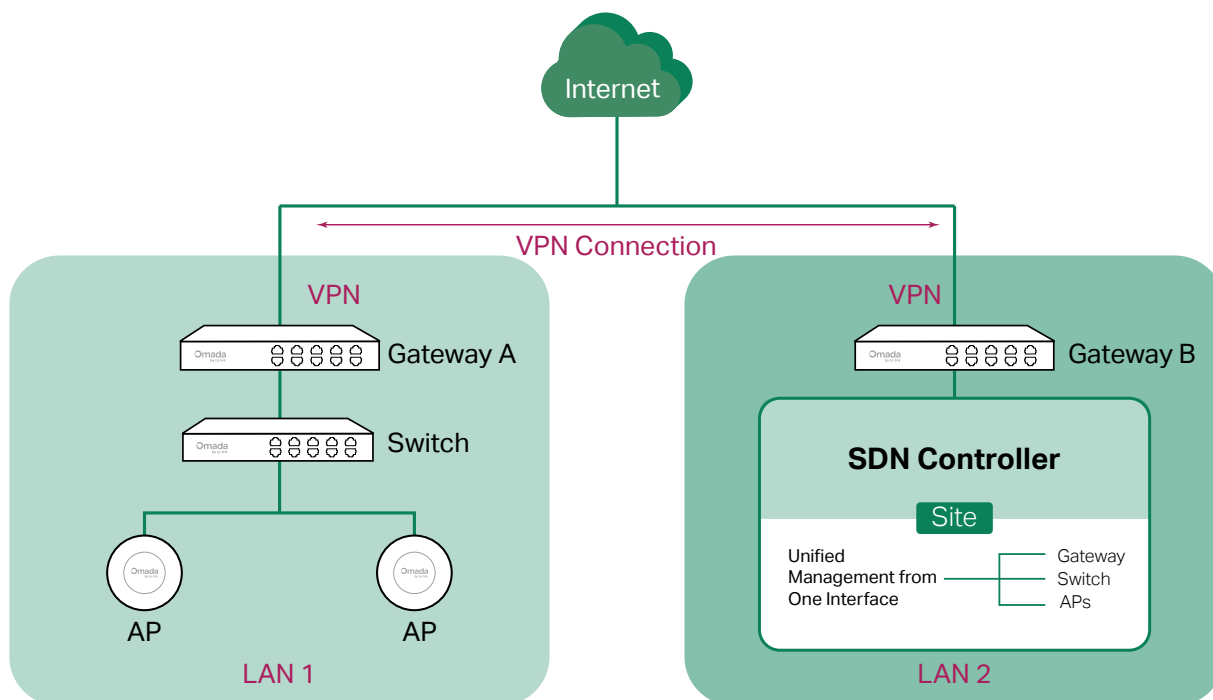

2. (Optional) Test the network

If you are not sure whether the controller and devices can establish communication, it's recommended to do the ping test from the devices to the controller.

Let's take a switch for example. Log into the web page of the switch in Standalone Mode. Then Go to **MAINTENANCE** > **Network Diagnostics** > **Ping** to load the following page, and specify Destination IP as the IP address of the controller (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead). Then click **Ping**.

Note:

To ping the gateway, turn off Block WAN Ping on the **Settings** > **Network Security** > **Attack Defense** page.

The screenshot shows the 'Ping Config' and 'Ping Result' sections of the Omada Network Manager interface. The 'Ping Config' section has four input fields: 'Destination IP' (192.168.0.26), 'Ping Times' (4), 'Data Size' (64), and 'Interval' (1000). A 'Ping' button is located to the right of these fields. The 'Ping Result' section shows the results of the ping test, including the destination IP, the data size, and the round trip times for each packet. The results show that all four packets were received successfully with a 0% loss rate.

Destination IP	Ping Times	Data Size	Interval
192.168.0.26	4	64	1000

Ping Result

Pinging 192.168.0.26 with 64 bytes of data:

Reply from 192.168.0.26 : bytes=64 time=19ms TTL=64
Reply from 192.168.0.26 : bytes=64 time=3ms TTL=64
Reply from 192.168.0.26 : bytes=64 time=3ms TTL=64
Reply from 192.168.0.26 : bytes=64 time=3ms TTL=64

Ping statistics for 192.168.0.26 :

Packets: Sent=4, Received=4, Loss=0 (0%Loss)
Approximate round trip times in milliseconds:
Maximum=19ms, Minimum=3ms, Average=7ms

If the ping result shows the packets are received, it implies that the controller can communicate with the devices. Otherwise, the controller cannot communicate with the devices, then you need to check your network.

Step 2: Prepare for Device Discovery

Note:

If the controller and devices are in the same LAN, subnet and VLAN, skip this step. In this scenario, the controller can discover the devices directly, and no additional settings are required.


Make sure that the controller can discover the devices.

When the controller and devices are in different LANs, subnets or VLANs, the controller cannot discover the devices directly. You need to choose [Controller Inform URL](#), [Discovery Utility](#), or [DHCP Option 138](#) as the method to help the controller discover the devices.

■ Controller Inform URL

Controller Inform URL informs the devices of the controller's URL or IP address. Then the devices make contact with the controller so that the controller can discover the devices.

You can configure Controller Inform URL for devices in Standalone Mode. Let's take a switch for example. Log into the management page of the switch in Standalone Mode and go to **SYSTEM** > **Controller Settings** to load the following page. In **Controller Inform URL**, specify Inform URL/ IP Address as the controller's URL or IP address (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead). Then click **Apply**.

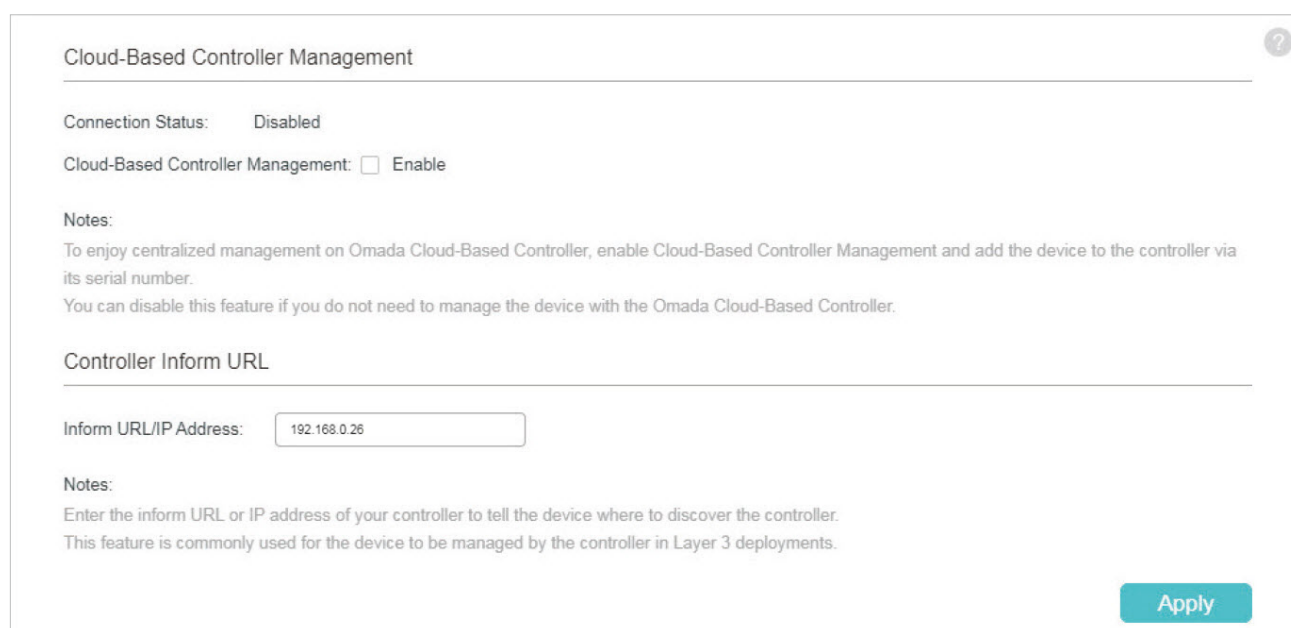


The screenshot shows the 'Controller Inform URL' configuration page. At the top, it says 'Cloud-Based Controller Management' with a help icon. Below this, the 'Connection Status' is 'Disabled'. There is a checkbox for 'Cloud-Based Controller Management' which is currently unchecked. A 'Notes' section explains that enabling this feature allows for centralized management on the Omada Cloud-Based Controller. Below the notes, there is a section titled 'Controller Inform URL'. It contains a label 'Inform URL/IP Address:' followed by a text input field containing the IP address '192.168.0.26'. Another 'Notes' section below the input field explains that this feature is used to tell the device where to discover the controller. At the bottom right, there is a blue 'Apply' button.


■ Discovery Utility

Discovery Utility can discover the devices in the same LAN, subnet and VLAN, and inform the devices of the controller's IP address. Then the devices make contact with the controller so that the controller can discover the devices.

1. Download Discovery Utility from <https://support.omadanetworks.com/product/omada-software-controller/?resourceType=download> and then install it on your PC which should be located in the same LAN, subnet and VLAN as your devices.
2. Open Discovery Utility and you can see a list of devices. Select the devices to be adopted and click **Batch Setting**.

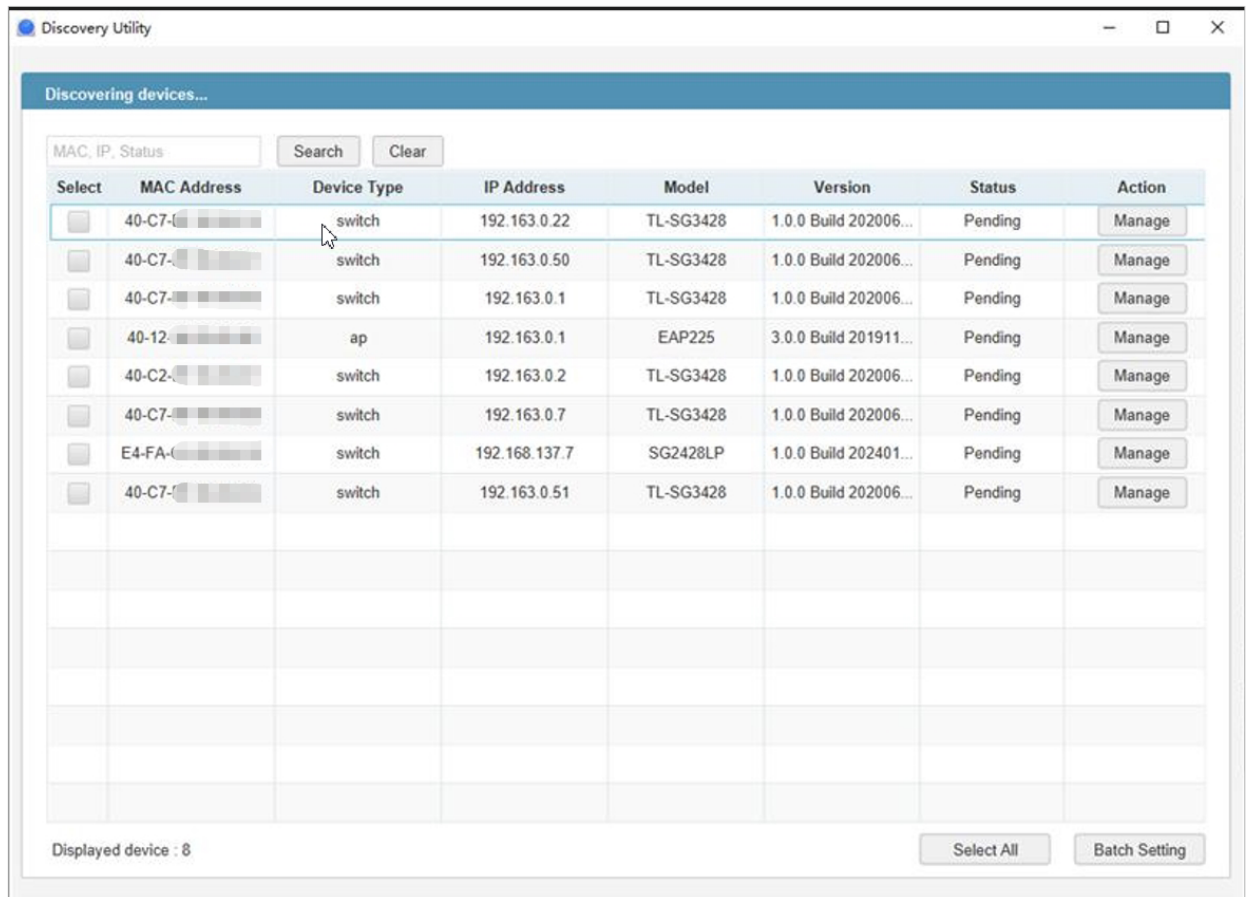

3. Specify Controller Hostname/IP as the IP address of the controller (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead), and enter the username and password of the devices. By default, the username and password are both admin. Then click **Apply**. Wait until the setting succeeds.

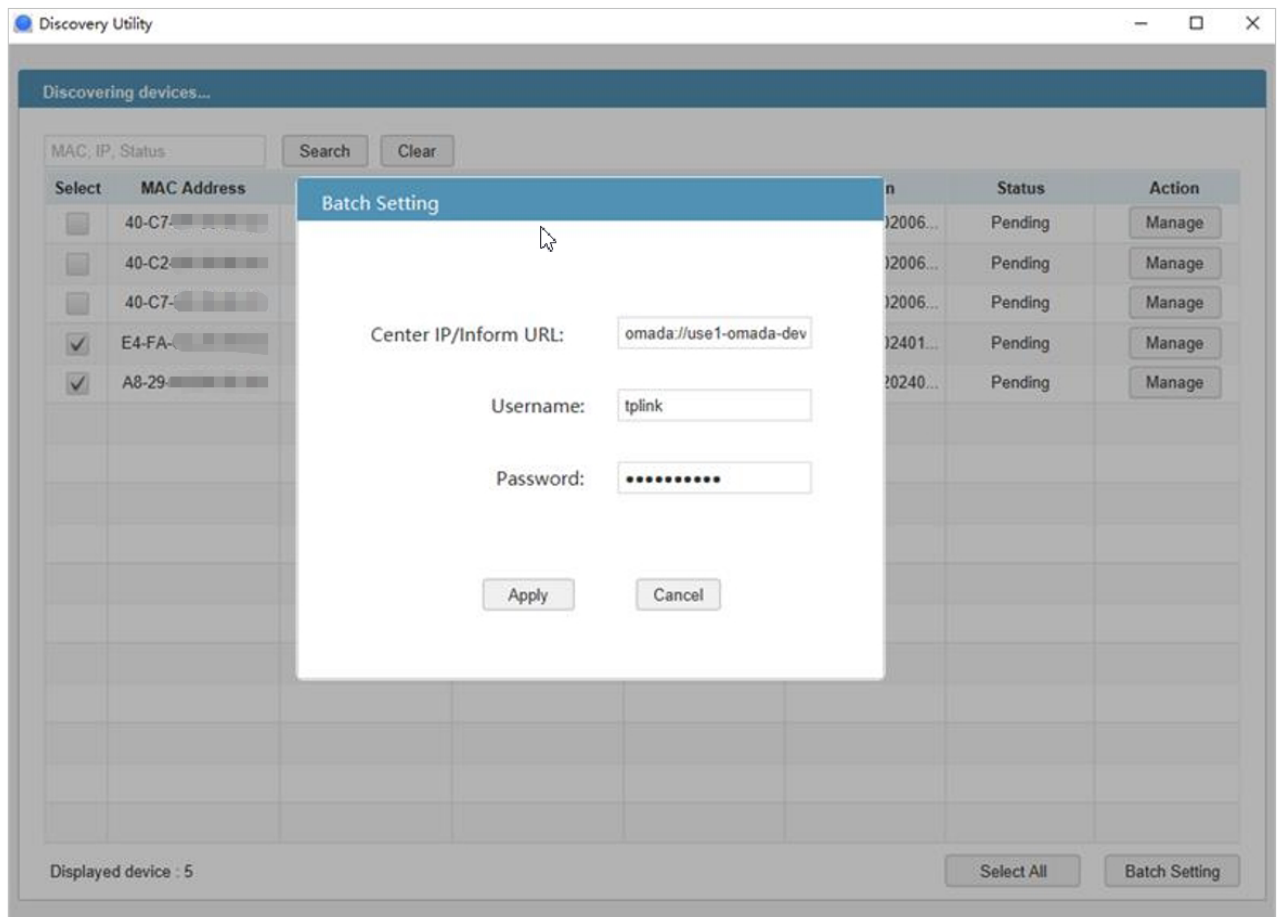

■ DHCP Option 138

DHCP Option 138 informs a DHCP client, such as a switch or an EAP, of the controller's IP address when the DHCP client sends DHCP requests to the DHCP server, which is typically a gateway.

1. To use DHCP Option 138, you need to adopt the gateway on the controller first, which may require other techniques like [Controller Inform URL](#) or [Discovery Utility](#) if necessary.
2. After the gateway is adopted, access the site and go to [Network Config](#) > [Network Settings](#) > [LAN](#).
3. Choose the LAN where the DHCP clients are located and click the Edit icon in the upper right.
4. Enable DHCP Server and configure common DHCP parameters. Then click [Advanced DHCP Options](#) and specify Option 138 as the controller's IP address (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead).
5. Configure other parameters and save the settings.

DHCP Server

☒ Enable

192 . 168 . 0 . 1 - 192 . 168 . 0 . 254

Advanced Settings

Advanced DHCP Options

Option 2

Seconds

(Optional)

Option 42

(Optional)

Option 44

(Optional)

Option 60

(Optional)

Option 66

(Optional)

Option 67

(Optional)

Option 138

192 . 168 . 0 . 1

(Optional)

6. To make DHCP Option 138 take effect, you need to renew DHCP parameters for the DHCP clients. One possible way is to disconnect the DHCP clients and then reconnect them.

Step 3: Adopt the Devices

1. Launch the controller and access a site.
2. Go to [Devices](#) and click [Add Devices](#). Choose a method to add your devices.

Add Devices

For Switches, only the Switch Series supported by the currently selected site will be adopted. You can edit the Switch Series in the Site List.
OLTs can be added via Auto Find only.
When adopting a mesh EAP, the system will automatically select an uplink AP for it.

Add to Site

Please Select...

Mode

☒ Manually Add

☐ Auto Find

☐ Import

Fill in the devices' information to add them. The device username and password are optional when adding non-gateway devices. If they are not specified, the system will use the default account and password for adoption. But they are required when adding gateways.

INDEX	DEVICE KEY	DEVICE NAME (OPTIONAL)	DEVICE USERNAME (OPTIONAL)	DEVICE PASSWORD (OPTIONAL)
1	- - - -			

Apply

Cancel

- Manually Add

Fill in the devices' information to add them. The device username and password are optional when adding non-gateway devices. If they are not specified, the system will use the default account and password for adoption. But they are required when adding gateways.

- Auto Find

Automatically find the Omada devices with Inform URL configured to add them.

- **Import**

Download the template and fill in your devices' information. Then import the file. Up to 1500 devices can be imported at a time.

3. Once the devices are adopted, they are subject to central management in the site.

3.3.2 For Integrated Gateway (Controller)

The integrated gateway has been adopted by the build-in Controller by default during the initial setup.

To adopt other devices on the build-in controller of the Integrated Gateway, follow these steps:

- 1) Prepare for communication between the controller and devices.
- 2) Prepare for device discovery.
- 3) Adopt the devices.

Step 1: Prepare for Communication

Note:

If the controller and devices are in the same LAN, subnet and VLAN, skip this step.

Make sure that the controller can communicate with the devices. Otherwise, the controller cannot discover or adopt the devices by any means. If the controller and devices are in different LANs, subnets or VLANs, use the following techniques to build up the connection according to your scenario.

1. Set up the Network

■ Scenario 1: Across VLANs or Subnets

If the controller and devices are in different VLANs or subnets. You need to set up a layer 3 interface for each VLAN or subnet, and make sure the interfaces can communicate with each other.


■ Scenario 2: Across LANs

As shown in the following figure, the controller and devices are in different LANs. You need to establish communication across the internet and the gateways.

By default, devices in LAN 1 cannot communicate with the controller in LAN 2, because Gateway A blocks their access to the controller. To make the controller accessible to the devices, you can use Port Forwarding or VPN.

- Use Port Forwarding

Configure Port Forwarding and open port 29810-29817 for the controller, which are essential for discovering and adopting devices. If you are using firewalls in the networks, make sure that the firewalls don't block those ports.

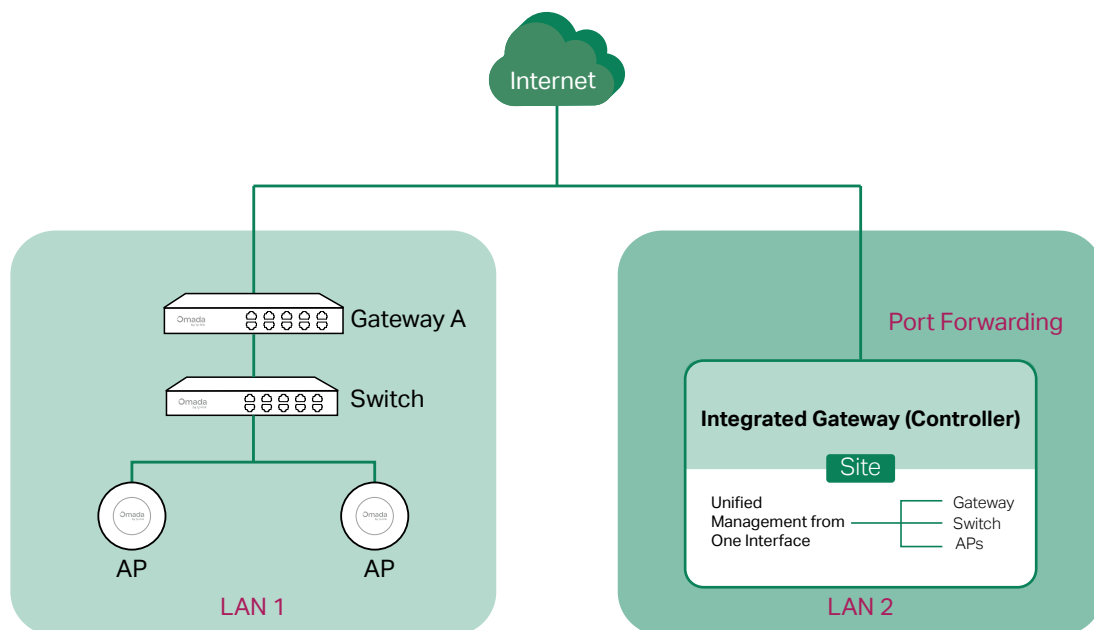

To configure Port Forwarding on the controller, go to **Network Config > Transmission > NAT > Port Forwarding**. Click **Create New Rule** to load the following page. Specify a name to identify the Port Forwarding rule, check Enable for Status, select Any as Source IP, select the desired WAN port as Interface, disable DMZ, specify 29810-29817 as Source Port and Destination Port, specify the controller's IP address as Destination IP, and select All as Protocol. Then click **Create**.

Create New Rule

Name

open-port-for-controller

Status

☒ Enable

Source IP

☒ Any ☐ Limited IP Address

Interface

WAN × ▼

DMZ

☐ Enable

Source Port

29810-29817 (1-65535, e.g. 80 or 80-100) ⓘ

Destination IP

192 . 168 . 0 . 26

Destination Port

29810-29813 (1-65535, e.g. 80 or 80-100) ⓘ

Protocol


☒ All ☐ TCP ☐ UDP

Create

Cancel

- Use VPN

Set up a VPN connection between Gateway A and the controller. For details about VPN configuration, refer to the corresponding chapter of this guide.

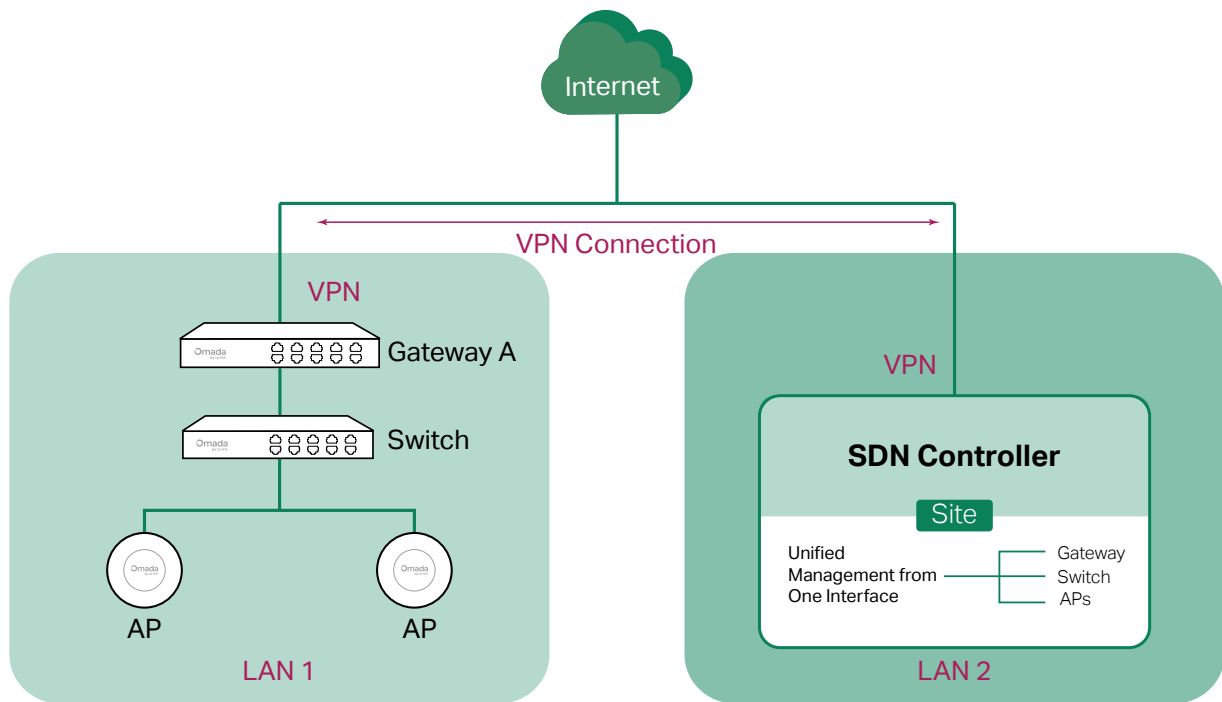

2. (Optional) Test the network

If you are not sure whether the controller and devices can establish communication, it's recommended to do the ping test from the devices to the controller.

Let's take a switch for example. Log into the web page of the switch in Standalone Mode. Then Go to **MAINTENANCE > Network Diagnostics > Ping** to load the following page, and specify Destination IP as the IP address of the controller (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead). Then click **Ping**.

Note:

To ping a router, please turn off Block WAN Ping on the **Settings > Network Security > Attack Defense** page.

Ping Config

Destination IP: (Format: 192.168.0.1 or 2001::1)
Ping Times: (1-10)
Data Size: bytes (1-1500)
Interval: milliseconds (100-1000)

Ping

Ping Result

Pinging 192.168.0.26 with 64 bytes of data:

Reply from 192.168.0.26 : bytes=64 time=19ms TTL=64

Reply from 192.168.0.26 : bytes=64 time=3ms TTL=64

Reply from 192.168.0.26 : bytes=64 time=3ms TTL=64

Reply from 192.168.0.26 : bytes=64 time=3ms TTL=64

Ping statistics for 192.168.0.26 :

Packets: Sent=4, Received=4, Loss=0 (0%Loss)

Approximate round trip times in milliseconds:

Maximum=19ms, Minimum=3ms, Average=7ms

If the ping result shows the packets are received, it implies that the controller can communicate with the devices. Otherwise, the controller cannot communicate with the devices, then you need to check your network.

Step 2: Prepare for Device Discovery

Note:

If the controller and devices are in the same LAN, subnet and VLAN, skip this step. In this scenario, the controller can discover the devices directly, and no additional settings are required.

Make sure that the controller can discover the devices.

When the controller and devices are in different LANs, subnets or VLANs, the controller cannot discover the devices directly. You need to choose [Controller Inform URL](#), [Discovery Utility](#), or [DHCP Option 138](#) as the method to help the controller discover the devices.

■ Controller Inform URL

Controller Inform URL informs the devices of the controller's URL or IP address. Then the devices make contact with the controller so that the controller can discover the devices.

You can configure Controller Inform URL for devices in Standalone Mode. Let's take a switch for example. Log into the management page of the switch in Standalone Mode and go to **SYSTEM** > **Controller Settings** to load the following page. In **Controller Inform URL**, specify Inform URL/

IP Address as the controller's URL or IP address (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead). Then click **Apply**.

Cloud-Based Controller Management

Connection Status: Disabled

Cloud-Based Controller Management: ☐ Enable

Notes:
To enjoy centralized management on Omada Cloud-Based Controller, enable Cloud-Based Controller Management and add the device to the controller via its serial number.
You can disable this feature if you do not need to manage the device with the Omada Cloud-Based Controller.

Controller Inform URL

Inform URL/IP Address:


Notes:
Enter the inform URL or IP address of your controller to tell the device where to discover the controller.
This feature is commonly used for the device to be managed by the controller in Layer 3 deployments.

Apply


■ Discovery Utility

Discovery Utility can discover the devices in the same LAN, subnet and VLAN, and inform the devices of the controller's IP address. Then the devices make contact with the controller so that the controller can discover the devices.

1. Download Discovery Utility from <https://support.omadanetworks.com/product/omada-software-controller/?resourceType=download> and then install it on your PC which should be located in the same LAN, subnet and VLAN as your devices.
2. Open Discovery Utility and you can see a list of devices. Select the devices to be adopted and click **Batch Setting**.

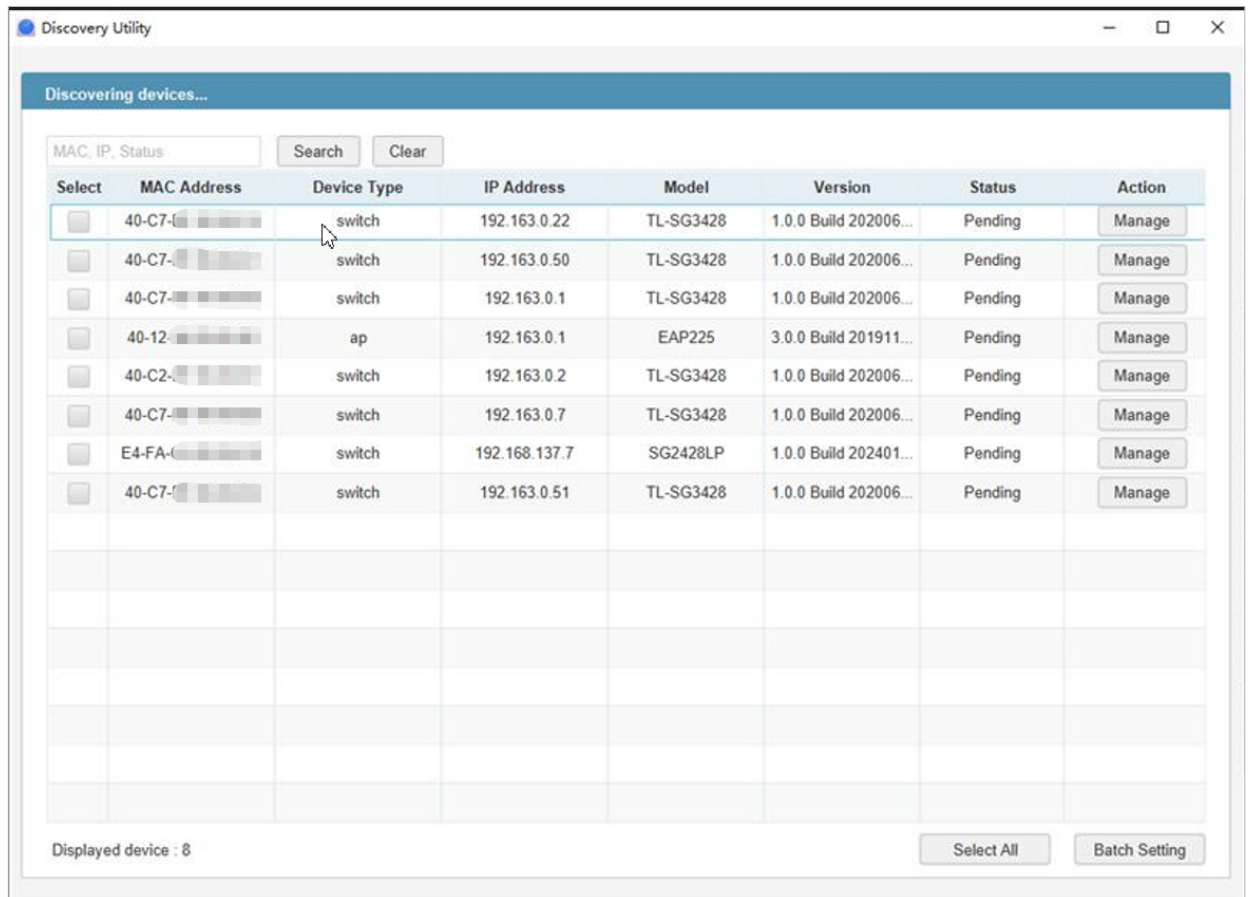

- Specify Controller Hostname/IP as the IP address of the controller (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead), and enter the username and password of the devices. By default, the username and password are both admin. Then click [Apply](#). Wait until the setting succeeds.

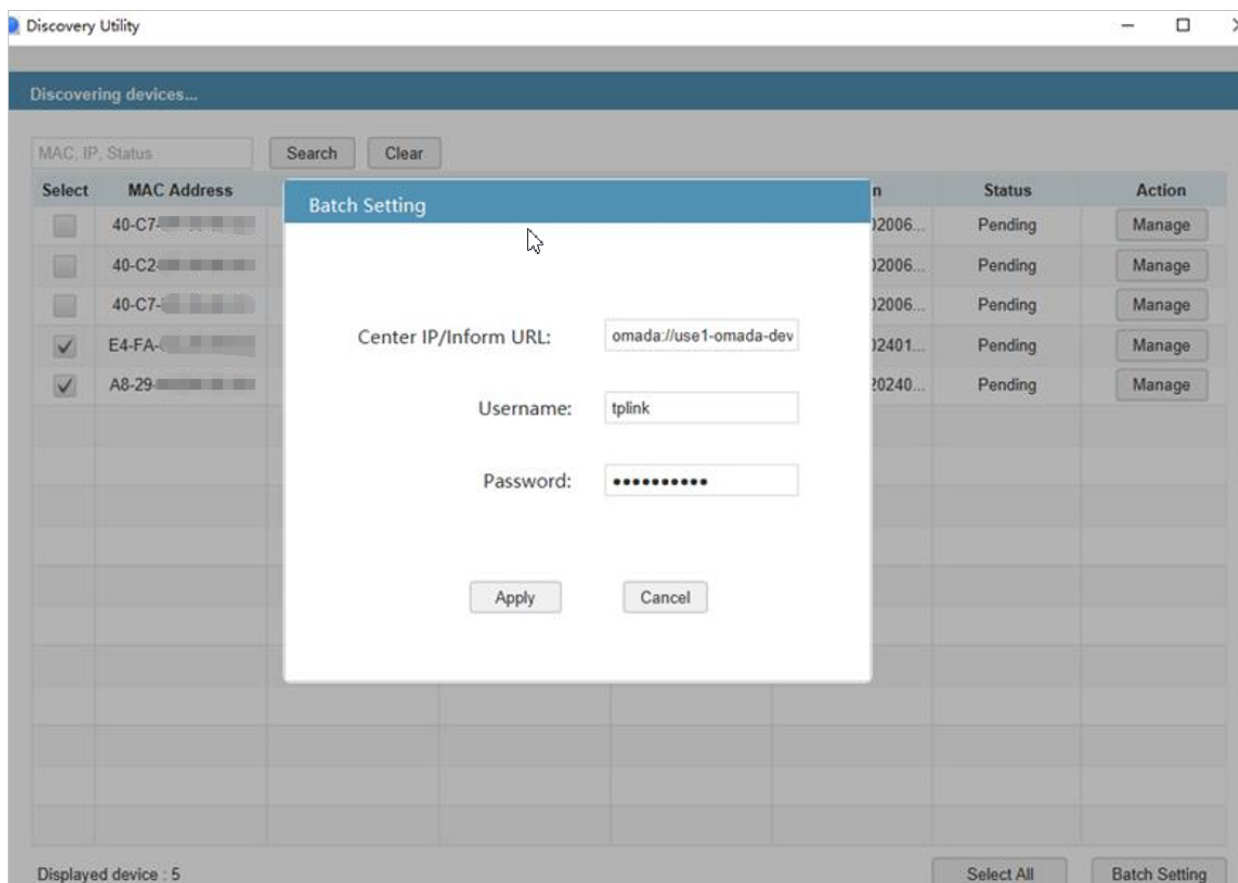

■ DHCP Option 138

DHCP Option 138 informs a DHCP client, such as a switch or an EAP, of the controller's IP address when the DHCP client sends DHCP requests to the DHCP server, which is typically a gateway.

1. To use DHCP Option 138, you need to adopt the gateway on the controller first, which may require other techniques like [Controller Inform URL](#) or [Discovery Utility](#) if necessary.
2. After the gateway is adopted, access the site and go to [Network Config](#) > [Network Settings](#) > [LAN](#).
3. Choose the LAN where the DHCP clients are located and click the Edit icon in the upper right.
4. Enable DHCP Server and configure common DHCP parameters. Then click [Advanced DHCP Options](#) and specify Option 138 as the controller's IP address (if you have configured Port Forwarding on the controller side, use the public WAN IP address of the gateway instead).
5. Configure other parameters and save the settings.

DHCP Server

☒ Enable

192 . 168 . 0 . 1 - 192 . 168 . 0 . 254

Advanced Settings

Advanced DHCP Options

Option 2

Seconds

(Optional)

Option 42

(Optional)

Option 44

(Optional)

Option 60

(Optional)

Option 66

(Optional)

Option 67

(Optional)

Option 138

192 . 168 . 0 . 1

(Optional)

6. To make DHCP Option 138 take effect, you need to renew DHCP parameters for the DHCP clients. One possible way is to disconnect the DHCP clients and then reconnect them.

Step 3: Adopt the Devices

1. Launch the controller and access a site.
2. Go to [Devices](#) and click [Add Devices](#). Choose a method to add your devices.

Add Devices

For Switches, only the Switch Series supported by the currently selected site will be adopted. You can edit the Switch Series in the Site List.
OLTs can be added via Auto Find only.
When adopting a mesh EAP, the system will automatically select an uplink AP for it.

Add to Site

Please Select...

Mode

☒ Manually Add

☐ Auto Find

☐ Import

Fill in the devices' information to add them. The device username and password are optional when adding non-gateway devices. If they are not specified, the system will use the default account and password for adoption. But they are required when adding gateways.

INDEX	DEVICE KEY	DEVICE NAME (OPTIONAL)	DEVICE USERNAME (OPTIONAL)	DEVICE PASSWORD (OPTIONAL)	
1	- - - -				

Apply

Cancel

- Manually Add

Fill in the devices' information to add them. The device username and password are optional when adding non-gateway devices. If they are not specified, the system will use the default account and password for adoption. But they are required when adding gateways.

- Auto Find

Automatically find the Omada devices with Inform URL configured to add them.

- **Import**

Download the template and fill in your devices' information. Then import the file. Up to 1500 devices can be imported at a time.

3. Once the devices are adopted, they are subject to central management in the site.

3.3.3 For Cloud-Based Controller


To adopt the devices on the controller, follow these steps:

- 1) Connect to the internet.
- 2) Prepare for controller management.
- 3) Adopt the devices.

Step 1: Connect to the Internet

1. Set up the network.

Make sure that your devices are connected to the internet.

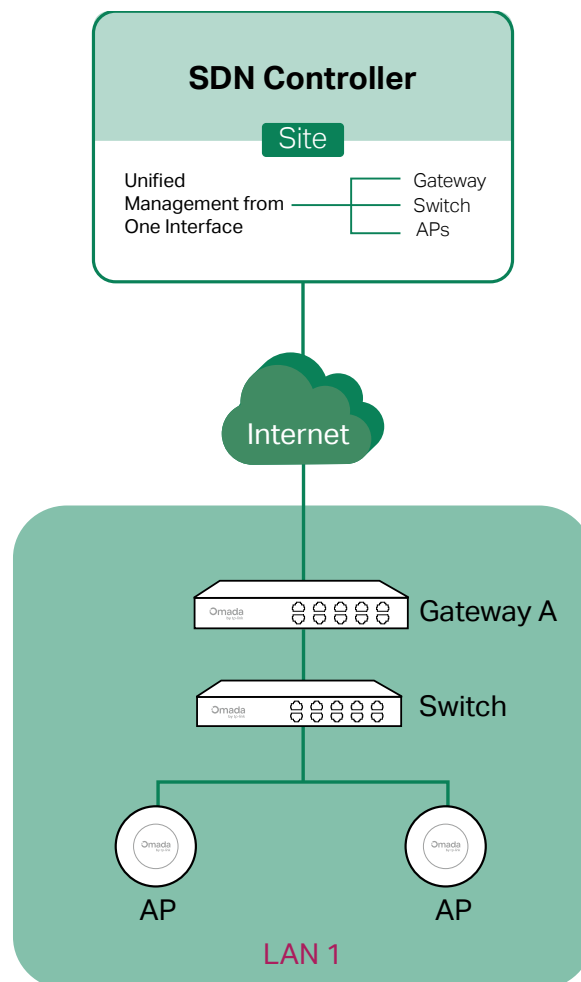

If you are using firewalls in your network, make sure that the firewall doesn't block traffic from the controller. To configure your firewall policy, you may want to know the URL of the controller. After you open the web page of the controller, you can get the URL from the address bar of the browser.

2. (Optional) Test the network.

If you are not sure whether the devices are connected to the internet, it's recommended to do the ping test from the devices to a public IP address, such as 8.8.8.8.

Let's take a switch for example. Log into the web page of the switch in Standalone Mode. Go to **MAINTENANCE > Network Diagnostics > Ping** to load the following page. Specify Destination IP as a public IP address, such as 8.8.8.8. Then click **Ping**.

The screenshot displays the 'Ping Config' web interface. It features four input fields for configuration: 'Destination IP' (set to 8.8.8.8), 'Ping Times' (set to 4), 'Data Size' (set to 64), and 'Interval' (set to 1000). Each field has a format or range hint. A 'Ping' button is located on the right. Below the configuration section is a 'Ping Result' section with a light blue header. It shows the command 'Pinging 8.8.8.8 with 64 bytes of data:' followed by four successful replies, each showing 'bytes=64 time=3ms TTL=64'. Below this, 'Ping statistics for 8.8.8.8:' are shown with 'Packets: Sent=4, Received=4, Loss=0 (0%Loss)'. At the bottom, 'Approximate round trip times in milliseconds:' are listed as 'Maximum=3ms, Minimum=3ms, Average=3ms'.

Field	Value	Hint
Destination IP:	8.8.8.8	(Format: 192.168.0.1 or 2001::1)
Ping Times:	4	(1-10)
Data Size:	64	bytes (1-1500)
Interval:	1000	milliseconds (100-1000)

Ping Result

Pinging 8.8.8.8 with 64 bytes of data:

- Reply from 8.8.8.8 : bytes=64 time=3ms TTL=64
- Reply from 8.8.8.8 : bytes=64 time=3ms TTL=64
- Reply from 8.8.8.8 : bytes=64 time=3ms TTL=64
- Reply from 8.8.8.8 : bytes=64 time=3ms TTL=64

Ping statistics for 8.8.8.8 :

Packets: Sent=4, Received=4, Loss=0 (0%Loss)

Approximate round trip times in milliseconds:

Maximum=3ms , Minimum=3ms, Average=3ms

If the ping result shows the packets are received, it implies that the devices are connected to the internet. Otherwise, the devices are not connected to the internet, then you need to check your network.

Step 2: Prepare for Controller Management


Note:

If your devices are on the factory default setting, skip this step.

The Cloud-Based Controller Management feature allows the devices to be adopted by the Cloud-Based Controller. Make sure Cloud-Based Controller Management is enabled on the devices. For details, refer

to the User Guide of your devices, which can be downloaded from <https://support.omadanetworks.com/product/>.

Let's take a switch for example. Log into the web page of the switch in Standalone Mode. Go to **SYSTEM > Controller Settings** to load the following page. In **Cloud-Based Controller Management**, enable Cloud-Based Controller Management and click **Apply**.

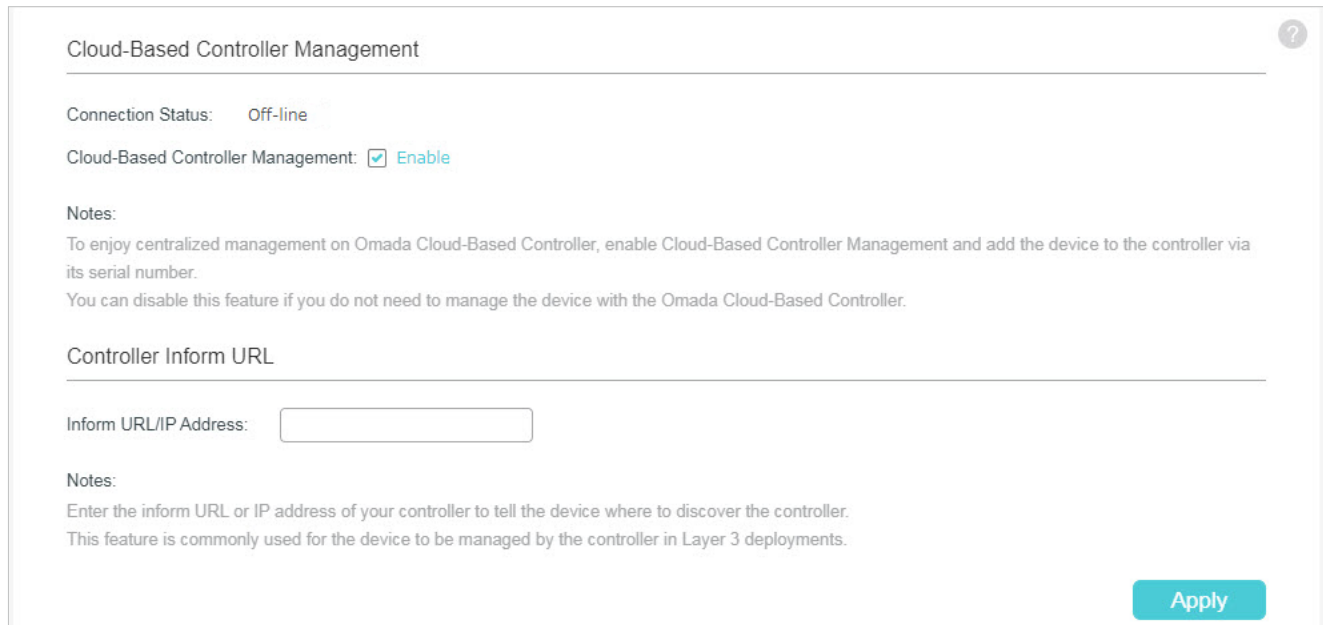

The screenshot shows the 'Cloud-Based Controller Management' configuration page. At the top, the title 'Cloud-Based Controller Management' is displayed with a help icon. Below the title, the 'Connection Status' is 'Off-line'. The 'Cloud-Based Controller Management' toggle is checked and labeled 'Enable'. A 'Notes' section explains that to enjoy centralized management, the feature must be enabled and the device added to the controller via its serial number. It also states that the feature can be disabled if not needed. Below this, the 'Controller Inform URL' section has a text input field for the 'Inform URL/IP Address'. Another 'Notes' section explains that the URL or IP address is used to tell the device where to discover the controller, and that this feature is commonly used for Layer 3 deployments. An 'Apply' button is located at the bottom right.

Cloud-Based Controller Management

Connection Status: Off-line

Cloud-Based Controller Management: ☒ Enable

Notes:

To enjoy centralized management on Omada Cloud-Based Controller, enable Cloud-Based Controller Management and add the device to the controller via its serial number.

You can disable this feature if you do not need to manage the device with the Omada Cloud-Based Controller.

Controller Inform URL

Inform URL/IP Address:

Notes:

Enter the inform URL or IP address of your controller to tell the device where to discover the controller.

This feature is commonly used for the device to be managed by the controller in Layer 3 deployments.

Apply

Step 3: Adopt the Devices

1. Ensure your devices are compatible with your Cloud-Based Controller.
 - Omada Central Essentials:
<https://www.omadanetworks.com/omada-cloud-essentials/product-list/>
 - Omada Central Standard:
<https://www.omadanetworks.com/omada-cloud-based-controller/product-list/>
2. Launch an Omada Central organization, go to **Omada Network**, and access a site.

3. Go to **Devices** and click **Add Devices**. Choose a method to add your devices.

Add Devices

For Switches, only the Switch Series supported by the currently selected site will be adopted. You can edit the Switch Series in the Site List.

OLTs can be added via Auto Find only.

When adopting a mesh EAP, the system will automatically select an uplink AP for it.

Add to Site

Please Select...

Mode

☒ Manually Add

☐ Auto Find

☐ Import

Type

☐ Add by Serial Number

☒ Add by Device Key

Fill in the devices' information to add them. The device username and password are optional when adding non-gateway devices. If they are not specified, the system will use the default account and password for adoption. But they are required when adding gateways.

INDEX	DEVICE KEY	DEVICE NAME (OPTIONAL)	DEVICE USERNAME (OPTIONAL)	DEVICE PASSWORD (OPTIONAL)	
1	- - - -				

Apply

Cancel

• **Manually Add**

Fill in the devices' information to add them. The device username and password are optional when adding non-gateway devices. If they are not specified, the system will use the default account and password for adoption. But they are required when adding gateways.

• **Auto Find**

Automatically find the Omada devices with Inform URL configured to add them.

• **Import**

Download the template and fill in your devices' information. Then import the file. Up to 1500 devices can be imported at a time.

4. Once the devices are adopted, they are subject to central management in the site.

Chapter 4

Configure Controller Settings

Controller settings control the appearance and behavior of the controller and provide methods of data backup, restoration, migration, and more. The chapter includes the following sections:

- [4. 1 System Settings](#)
- [4. 2 Controller Settings](#)
- [4. 3 UI Interaction](#)
- [4. 4 History Data Retention](#)
- [4. 5 Server Settings](#)
- [4. 6 Account Security](#)
- [4. 7 Platform Integration](#)
- [4. 8 SAML SSO](#)
- [4. 9 Maintenance](#)
- [4. 10 Migration](#)
- [4. 11 Export Data](#)
- [4. 12 Cloud Access](#)

4. 1 System Settings

Launch the controller and access the Global View. Go to [Settings > System Settings](#).

4. 1. 1 Controller Status

In [Controller Status](#), you can view the controller-related information and status.

Controller Status

Controller Name	Omada Controller_Office
MAC Address	
System Time	Jul 31, 2025 07:13:05 pm
Uptime	9day(s) 16h 20m 37s

Controller Name	Displays the controller name, which identifies the controller. You can specify the controller name in Controller Settings.
MAC Address	Displays the MAC address of the controller.
System Time	Displays the system time of the controller. The system time is based on the time zone which you configure in Controller Settings.
Uptime	Displays how long the controller has been working.

4. 1. 2 Controller Updates

In [Controller Updates](#), you can view the controller version information and check for updates.

Controller Updates

Join Early Access Program

Release Channel

Beta

Controller Version

6.0.0.8

Check for Updates

Click **Check for Updates** to check and save the release channel information.

Controller Update Notification

Join Early Access Program	Enable the option to join the program and check for firmware in the Release Channel > Beta for upgrading, so you can try out in-development features and help improve them.
Release Channel	Select the Release Channel of the controller to check whether the corresponding Channel has a newer version.
Controller Version	Display the software version of the controller.
Check for Updates	Click to check for any updates of the controller.
Controller Update Notification	Enable the option and the system will query the cloud for controller firmware updates.

4.1.3 HTTPS Certificate

If you have assigned a domain name to the controller for login, to eliminate the “untrusted certificate” error message in the login process, import the corresponding SSL certificate and private key issued by the certificate authority in [HTTPS Certificate](#).

Note:

- HTTPS Certificate configuration is only available for the Software Controller and Hardware Controller.
- You need to restart you controller for the imported SSL certificate to take effect.

HTTPS Certificate


 • If you have assigned a domain name to the controller for login, to eliminate the “untrusted certificate” error message in the login process, import the corresponding SSL certificate and private key issued by the certificate authority. Then restart your controller for the SSL certificate to take effect.
 • If you cannot access the controller through the assigned domain name after you delete the certificate, please clear your browser cache.
 • If you access the Controller http port through a domain name, you will not be automatically redirected. Please delete the HSTS cache.

File Format

JKS

SSL Certificate

Import

Keystore Password





File Format	Select the format of your certificate, and import the certificate file.
SSL Certificate	Import the SSL certificate to create an encrypted link between the controller and server. JKS: Import your SSL certificate and enter the Keystore Password if your SSL certificate has the password. Otherwise, leave it blank. PFX: Import your SSL certificate and enter the Private Key Password if your SSL certificate has the password. Otherwise, leave it blank. PEM: Import your SSL certificate and SSL Key.

Note:

For the PEM-formatted certificate:

- Starts with: -----BEGIN CERTIFICATE-----
- Ends with: -----END CERTIFICATE-----
- Certificate chain is supported and no blank line is allowed between two certificate chains.

For the PEM-formatted key:

- RSA encryption is required.
- Starts with: -----BEGIN RSA PRIVATE KEY-----
- Ends with: -----END RSA PRIVATE KEY -----
- The key can be placed behind certificate file, and they can be imported together.

4. 1. 4 System Logging

In **System Logging**, you can customize the log level if needed.

System Logging

Logging Level Type

Custom

1. The default auto logging level is Info.

2. Debug logging will generate a lot of logs, which may affect the controller performance. If you need to collect debug logs of certain modules, adjust the logging level of the modules only, and reset the level in time after log collection.

Manager Logs

Debug

Client Info Logs

Debug

Network Monitoring Logs

Debug

System Setting Logs

Debug

Account Logs

Debug

Log-related Operation Logs

Debug

Others

Debug

Logging Level Type	Choose whether to customize the log level.
Manager Logs	Select the log level of the manager module, which mainly includes device management and site-related configurations.
Client Info Logs	Select the log level of the client info module, which mainly includes functions related to client monitoring.
Network Monitoring Logs	Select the log level of the network monitoring module, which mainly includes functions related to data monitoring.

System Setting Logs	Select the log level of the system setting module, which mainly includes system data related functions.
Account Logs	Select the log level of the account module, which mainly includes account-related functions.
Log-related Operation Logs	Select the log level of the log-related operation module, which mainly includes related functions of the log page.
Others	Select the log level of other modules.

4.1.5 Access Config

In **Access Config**, you can specify the port used by the controller for management and portal.

Note:

- Access Config is only available on the on-premises controller.
- Once applying the change of HTTPS and HTTP port, restart the controller to make the change effective.
- For security, the HTTPS and HTTP port for Portal should be different from that for controller management.

Access Config

Controller Hostname/IP

192.168.0.100

Auto Refresh IP

☐

HTTPS Port for Controller Management

8043

(443 or 1024-65535)

HTTP Port for Controller Management

8088

(80 or 1024-65535)

Once applying the change of HTTPS and HTTP port, restart the controller to make the change effective. After restart, visit the following URLs to log in to the Omada Controller:

- [http://\[Omada Controller Host's IP address or URL\]:\[HTTP Port\]](#)
- [https://\[Omada Controller Host's IP address or URL\]:\[HTTPS Port\]](#)

Portal URL

☒ Auto Refresh ☐ Manual

HTTP redirect to HTTPS for Portal

☐

HTTPS Port for Portal

8843

(1024-65535)

HTTP Port for Portal

8088

(80 or 1024-65535)

Once applying the change of HTTPS and HTTP port, restart the controller to make the change effective. For security, the HTTPS and HTTP port for Portal should be different from that for controller management.

Device Management

☒ Enable ☐

Device Management Hostname/IP

192.168.0.1

Controller Hostname/IP	Enter the hostname or IP address of the controller which will be used as the Controller URL in the notification email for resetting your controller password. You can keep it default and IP address recognized by the controller will be used as the Controller URL.
Auto Refresh IP	(Only for hardware controller) Enable the feature and the hardware controller will refresh its IP address automatically.
HTTPS Port for Controller Management	Specify the HTTPS port used by the controller for management. After setting the port, you can visit https://[Controller Host's IP address or URL]:[HTTPS Port] to log in to the Controller.

HTTP Port for Controller Management	Specify the HTTP port used by the controller for management. After setting the port, you can visit https://[Controller Host's IP address or URL]:[HTTP Port] to log in to the Controller.
Portal URL	Set the Portal URL. Auto Refresh: The device will automatically use the actual IP address of the Controller as the portal redirection destination. Manual: Manually enter a domain name or IP address that clients can access.
HTTP redirect to HTTPS for Portal	If enabled, clients will be redirected to Captive Portal using HTTPS instead of HTTP.
HTTPS Port for Portal	Specify the HTTPS port used by the controller for Portal.
HTTP Port for Portal	Specify the HTTP port used by the controller for Portal.
Device Management	When enabled, the controller will apply the Device Management Hostname/IP you specified to managed devices for remote management.

4.2 Controller Settings

Launch the controller and access the Global View. Go to **Settings > Controller Settings** (for an on-premises controller) or **Settings > Organization Settings** (for a Cloud-Based Controller).

4.2.1 General Settings

In **General Settings**, you can configure general settings of the controller.

■ **For Hardware Controller and Integrated Gateway (Controller)**

Note: The Country/Region, Time Zone, and Daylight Saving Time settings are the same as those of the default site.

General Settings

Controller Name

Omada Controller_Office

Country/Region

United States

ⓘ

Time Zone

(UTC-08:00) Pacific Time (US & C...

ⓘ

Daylight Saving Time

Manual

ⓘ

- DST is applicable only when the device supports the feature. To make DST work properly, it is recommended to upgrade your devices to the latest firmware version.
- The DST configuration here only takes effect on the controller. To configure the DST for sites, go to the Site Configuration.
- With DST configured, the valid duration of Local User will be influenced accordingly.

Time Offset

60 Minutes

Starts On

Week

1st

Day

Sunday

Month

January

Time

00:00

ⓘ

Ends On

Week

1st

Day

Sunday

Month

January

Time

00:00

ⓘ

Controller Name	Specify the Controller Name to identify the controller.
Country/Region	Select the location of the controller. The configuration here only takes effect on the controller. To configure the Country/Region for sites, go to the Site Configuration.
Time Zone	Select the Time Zone of the controller according to your region. For controller settings and statistics, time is displayed based on the Time Zone. The configuration here only takes effect on the controller. To configure the Time Zone for sites, go to the Site Configuration.
Daylight Saving Time	Enable the feature if your country/region implements DST (Daylight Saving Time).
Time Offset	Select the time added in minutes when Daylight Saving Time starts.
Starts On	Specify the time when the DST starts. The clock will be set forward by the time offset you specify.

Ends On	Specify the time when the DST ends.The clock will be set back by the time offset you specify.
■ For Software Controller / Cloud-Based Controller Controller Settings General Settings Controller Name Omada Controller_CE8354 Country/Region United States Time Zone (UTC) Coordinated Universal Tim... Daylight Saving Time Manual • DST is applicable only when the device supports the feature. To make DST work properly, it is recommended to upgrade your devices to the latest firmware version. • The DST configuration here only takes effect on the controller. To configure the DST for sites, go to the Site Configuration. • With DST configured, the valid duration of Local User will be influenced accordingly. Time Offset 60 Minutes Starts On Week Day Month Time 1st Sunday January 00:00 Ends On Week Day Month Time 1st Sunday January 00:00	
Controller Name	Specify the Controller Name to identify the controller.
Country/Region	Select the location of the controller. The configuration here only takes effect on the controller. To configure the Country/Region for sites, go to the Site Configuration.
Time Zone	Select the Time Zone of the controller according to your region. For controller settings and statistics, time is displayed based on the Time Zone. The configuration here only takes effect on the controller. To configure the Time Zone for sites, go to the Site Configuration.
Daylight Saving Time	Enable the feature if your country/region implements DST (Daylight Saving Time).
Time Offset	Select the time added in minutes when Daylight Saving Time starts.
Starts On	Specify the time when the DST starts. The clock will be set forward by the time offset you specify.
Ends On	Specify the time when the DST ends.The clock will be set back by the time offset you specify.

4.2.2 Services

In **Services**, you can configure remote logging and client idle threshold.

Services

Client Idle Threshold

5

Minutes

(3-10)

Device Web HTTP Access

☒ Enable

Device Web HTTPS Access

☒ Enable


Client Recognition

☒ Enable

Client Idle Threshold	The controller will consider a client offline (thus disconnect it) when it is idle for longer than the specified threshold. If the specified threshold is too short, clients may be disconnected frequently.
Device Web HTTP Access	This function controls HTTP access to the web pages of managed Omada devices. If it is turned off, HTTP access to the devices' web pages will be unavailable.
Device Web HTTPS Access	This function controls HTTPS access to the web pages of managed Omada devices. If it is turned off, HTTPS access to the devices' web pages will be unavailable.
Client Recognition	With the feature enabled, network devices will report client information in real time to ensure the accuracy of client identification.

4.2.3 MSP Mode

In **MSP Mode**, you can convert your standard enterprise organization to an MSP organization. For more settings in MSP mode, refer to [10 Manage Customer Networks in MSP Mode](#).

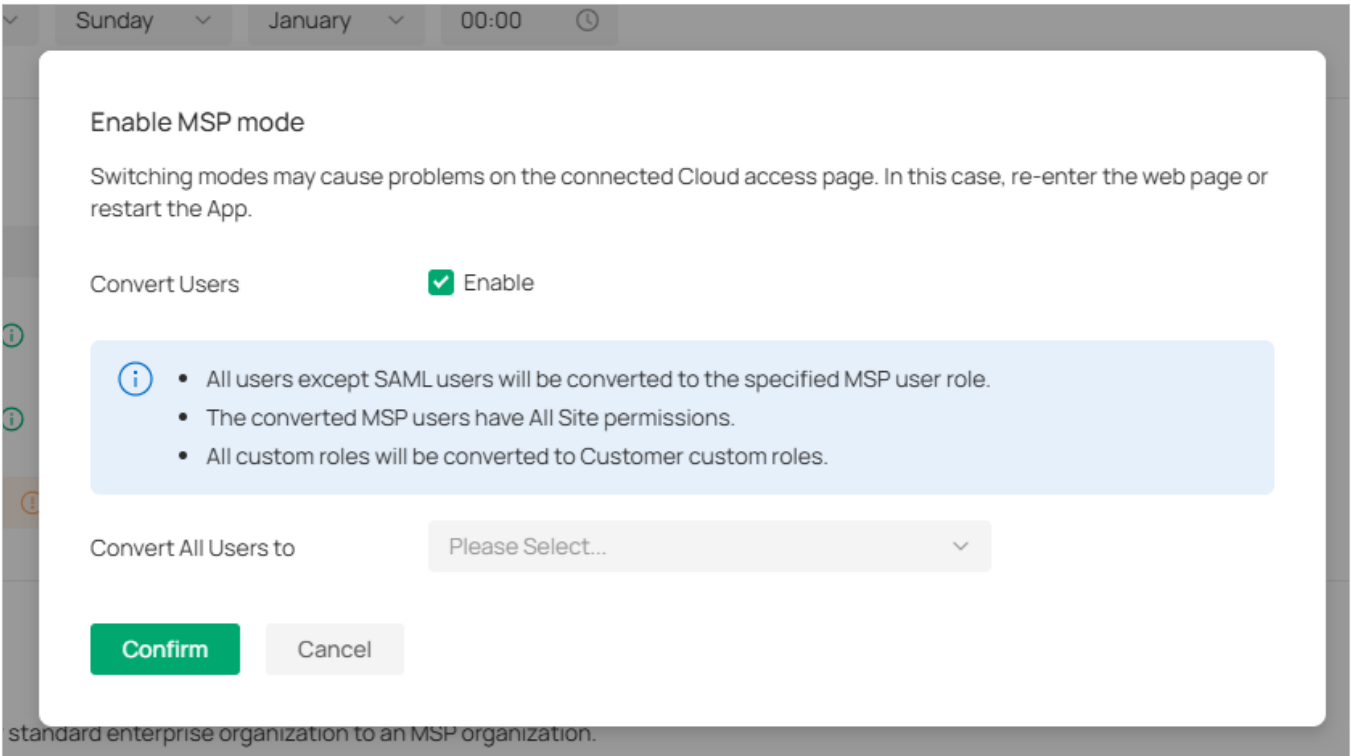

Convert Users	When enabled, all users except SAML users will be converted to the specified MSP user role. The converted MSP users have All Site permissions. All custom roles will be converted to Customer custom roles.
Convert All Users to	Select to convert all users to MSP Admin or MSP Viewer .

4. 2. 4 Join User Experience Improvement Program

You can participate in the user experience improvement program and help improve the quality and performance of TP-Link products by sending statistics and usage information.

Join User Experience Improvement Program

☒

By joining this program, you have fully read and understood our [User Experience Improvement Program Policy](#). You can opt out of the program at any time.

4.3 UI Interaction

In [UI Interaction](#), you can customize the UI interaction settings of the controller according to your preferences.

Launch the controller and access the Global View. Go to [Settings > UI Interaction](#).

UI Interaction

User Interface

Refresh Interval

2 Minutes

Notifications

Devices Update Notifications

☒

Enable ⓘ

Refresh Interval	Specify the interval to automatically refresh the UI interface.
Devices Update Notification	With this feature enabled, you will receive an update notification when a new firmware version for your device is available.

4.4 History Data Retention

In [History Data Retention](#), you can specify how the controller retains its data.

Launch the controller and access the Global View. Go to [Settings > History Data Retention](#).

History Data Retention

Client Data Retention

Connected Client

1 Day

Clients' History Data

Enable

When enabled, client history, client logs will be recorded. This will occupy much storage space.

Client History

1 Month

Data Trend Record

Enable

Record Time

1 Month

Time-Based Settings

The settings below will affect the graphical display of Statistics and Report.

Time Series with 5 Minutes Granularity

2 Days

Time Series with Hourly Granularity

7 Days

Time Series with Daily Granularity

3 Months

Time Series with Weekly Granularity

6 Months

Others

Portal Authentication Records

1 Month

Log

1 Month

Interference Detection

1 Month

Connected Client	Record connected clients according to the time you specified. When the limit is exceeded, the oldest disconnected known client may be deleted.
Clients' History Data	When enabled, client history and client logs will be recorded. This will occupy much storage space.
Client History	Specify the retention time of client online and offline records.
Data Trend Record	When enabled, client trend statistics and charts will be retained, which will take up lots of storage space.

Time Series with 5 Minutes Granularity	Displays the retention time of AP, switch, gateway, and client data. Corresponding to 5-minute statistics.
Time Series with Hourly Granularity	Displays the retention time of AP, switch, gateway, and client data. Corresponding to hourly statistics.
Time Series with Daily Granularity	Specify the retention time of AP, switch, gateway, and client data. Corresponding to daily statistics.
Time Series with Weekly Granularity	Specify the retention time of client data. Corresponding to weekly statistics.
Portal Authentication Records	Specify the retention time of portal authorization records. Corresponding to Hotspot - Authorized Clients.
Log	Specify the retention time of logs.
Interference Detection	Specify the retention time of scanned Interference Detection. Corresponding to Network Tools-Interference Detection.

4.5 Server Settings

Launch the controller and access the Global View. Go to [Settings > Server Settings](#).

4.5.1 Mail Server

With the Mail Server, the controller can send emails for resetting your password, pushing notifications, and delivering the system logs. The Mail Server feature works with the SMTP (Simple Mail Transfer Protocol) service provided by an email service provider.

Configuration

1. Log in to your email account and enable the SMTP (Simple Mail Transfer Protocol) Service. For details, refer to the instructions of your email service provider.
2. Launch the controller and access the Global View. Go to [Settings > Server Settings](#). Enable [Mail Server](#) and configure the parameters. Then apply the settings.

Mail Server

With the Mail Server, the controller can send emails for resetting your password, pushing notifications, and delivering the system logs. For security reasons, we recommend that you configure Mail Server carefully.

SMTP

Port

465

(1-65535)

SSL

Enable

Authentication

Enable

Sender Email

Test Email

SMTP	Enter the URL or IP address of the SMTP server according to the instructions of the email service provider.
Port	Configure the port used by the SMTP server according to the instructions of the email service provider.
SSL	Enable or disable SSL according to the instructions of the email service provider. SSL (Secure Sockets Layer) is used to create an encrypted link between the controller and the SMTP server.
Authentication	Enable or disable Authentication according to the instructions of the email service provider. If Authentication is enabled, the SMTP server requires the username and password for authentication.
Username	When Authentication is enabled, enter your email address as the username.

Authorization Code	When Authentication is enabled, enter the authorization code as the password, which is provided by the email service provider when you enable the SMTP service.
Sender Email	(Optional) Specify the email address of the sender. If you leave it blank, the controller will use your current email address.
Test Email	Test the Mail Server configuration by sending a test email to an email address that you specify.

4.5.2 Built-in RADIUS

A RADIUS server maintains a database which stores the identity information of legal users. It authenticates users against the database when the users are requesting to access the network, and provides authorization and accounting services for them.

For the on-premises controller, you can set up the built-in RADIUS server for user authentication.

Note:
Built-in RADIUS server is only available for the Software Controller and Hardware Controller. It has been removed from OC200 due to specification restriction.

Built-in RADIUS

Built-in RADIUS

Status

Disabled

Server Address Type

Manually

Auto

Secret

Password

Authentication Port

1812

(1-65535)

Enable Tunneled Reply

Enable

Server Certificate

File Format

JKS

SSL Certificate

Import

Keystore Password

Download Root CA

Built-in RADIUS	Toggle on to enable the built-in RADIUS server.
Status	Displays the current status of the server.

Server Address Type	Specify the built-in server address type. When the controller is on a computer with multiple network adapters, and the type is configured as Auto, the server address will be sent to the device according to the ports connected to the device. When the type is configured as Manual, the user needs to manually configure the server's IP address, which should be the address the device can communicate with.
Secret	Specify the RADIUS server key.
Authentication Port	Specify the RADIUS server authentication port.
Enable Tunneled Reply	Enable this option if you want to allow the reply of the Tunneled Reply-related attributes to the device. Only after this option is enabled can the client be assigned a VLAN.
File Format	Select the format of your certificate, and import the certificate file.
SSL Certificate	Import the SSL certificate to create an encrypted link between the controller and server. JKS: Import your SSL certificate and enter the Keystore Password if your SSL certificate has the password. Otherwise, leave it blank. PFX: Import your SSL certificate and enter the Private Key Password if your SSL certificate has the password. Otherwise, leave it blank. PEM: Import your SSL certificate and SSL Key.
Download Root CA	Export the installable built-in authentication server root certificate. If the user uploads a certificate, the root certificate of the uploaded certificate will be exported; otherwise the default root certificate will be exported. The DNS name of the default root certificate is "Omada".

Note:

For the PEM-formatted certificate:

- Starts with: -----BEGIN CERTIFICATE-----
- Ends with: -----END CERTIFICATE-----
- Certificate chain is supported and no blank line is allowed between two certificate chains.

For the PEM-formatted key:

- RSA encryption is required.
- Starts with: -----BEGIN RSA PRIVATE KEY-----
- Ends with: -----END RSA PRIVATE KEY -----
- The key can be placed behind certificate file, and they can be imported together.

4.5.3 Radius Proxy Server

A Radius proxy authenticates and authorizes users or devices and also tracks the usage of those services. You can configure the Radius Proxy Server for user authentication.

Radius Proxy Server

Radius Proxy Server

Disabled

Authentication Port

1812

(1-65535)

Radius Proxy Server	Toggle on to enable the Radius Proxy Server.
Status	Displays the current status of the server.
Authentication Port	Specify the port that the controller listens for to receive radius messages from devices.

4.6 Account Security

Launch the controller and access the Global View. Go to [Settings > Account Security](#).

4.6.1 Two-Factor Authentication (2FA)

You can enable Two-Factor Authentication (2FA) to improve the security of the controller.

Two-Factor Authentication (2FA)



With this function enabled on the controller, all accounts will be forced to enable Two-Factor Authentication (2FA).

Two-Factor Authentication (2FA)	This function improves the security of the controller by requiring two factors of identification to access resources and data. With this function enabled, all accounts will be forced to enable 2FA upon user login. You can also enable 2FA for accounts on the Accounts > User page.
---------------------------------	--

4.6.2 Controller IP Access Rules

You can enable Controller IP Access Rules, so that only the IPv4 addresses you specified can access the controller locally. IPv6 addresses will be blocked.

Controller IP Access Rules



With this function enabled on the controller, only the IPv4 addresses you specified can access the controller locally. IPv6 addresses will be blocked.

 This function can be configured by the Main Administrator and Super Administrator only.

- The rules take effect as the allow list. Ensure that your access IP is in the list. If you want to allow Dynamic IP, configure it in the form of IP Range or Subnet Mask.
- The IP address of the local PC with the controller installed will not be restricted by this function.

Search IP Description 

+ Add IP Address

TYPE	IP ADDRESSES	DESCRIPTION	ACTION
 No Data.			

Type	Specify the IP address type: Single IP Address, Single Subnet Mask, or IP Range.
IP Addresses	Specify the IP addresses that are allowed to access the controller.
Description	Enter a description for identification.

4.7 Platform Integration

4.7.1 Open API

Overview

Omada's Open API supports the REST API of most Controller services. This feature allows Omada users to write custom applications, embed APIs, or combine their own applications. The REST API supports HTTP GET and POST operations by providing specific URLs for each query, and the output of these operations is returned in JSON format.

To access the API securely, the Omada API framework supports the OAuth protocol for authentication and authorization, and supports the authorization code mode and client mode.

Access Token provides temporary and secure access to the API. For security reasons, Access Token has a limited lifespan. Access Token in authorization code mode uses the refresh API to obtain a new Access Token, and client mode obtains a new token through clientKey and clientSecret.


To use the Open API function, first create a new application, the smallest API access unit, which can be specified as client mode or authorization code mode. After creation, you can configure your own application for Open API access.

Configuration

1. In Global View, go to [Settings](#) > [Platform Integration](#) > [Open API](#).
2. Click [Add New App](#).
3. Specify the App name, choose the access mode and configure the parameters.

- **Authorization code mode**

The authorization code grant type is used to obtain both access tokens and refresh tokens and is optimized for confidential clients. Since this is a redirection-based flow, the client must be capable of interacting with the resource owner's user-agent (typically a web browser) and capable of receiving incoming requests (via redirection) from the authorization server.

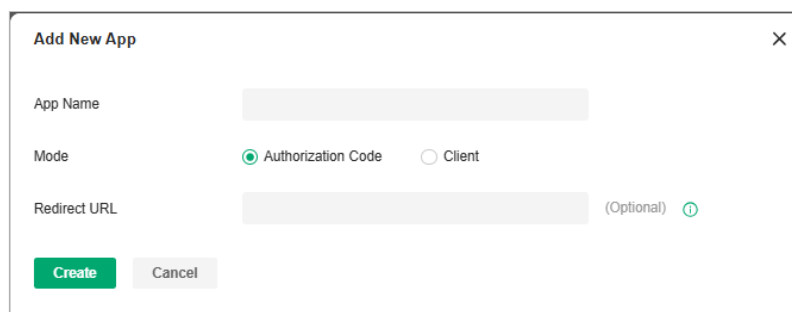

The screenshot shows a modal window titled "Add New App" with a close button (X) in the top right corner. Inside the modal, there are three main sections: "App Name" with a text input field, "Mode" with two radio button options, "Authorization Code" (which is selected) and "Client", and "Redirect URL" with a text input field. To the right of the "Redirect URL" field is the text "(Optional)" followed by a small circular icon with an exclamation mark. At the bottom left of the modal are two buttons: a green "Create" button and a grey "Cancel" button.

Redirect URL

Specify the redirect URL for Oauth2.0 authorization flow.

• **Client mode**

The client can request an access token using only its client credentials (or other supported means of authentication) when the client is requesting access to the protected resources under its control, or those of another resource owner that have been previously arranged with the authorization server (the method of which is beyond the scope of this specification).

Add New App

App Name

Mode

☐ Authorization Code

☒ Client

Role

Role

Privileges

Site Privileges

☐ All sites (including newly created sites)

☒ Sites

Choosing Sites

None

Create

Cancel

Role

Specify the authority role of the client through the Open API.

Site Privileges

Specify the site privileges of the client through the Open API.

4. Apply the settings. The application will be added for Open API access.

APPLICATION	CLIENT ID	CLIENT SECRET	MODE	ACTION
app_01	733a23c22a364225a9e7749c510db9b7		Authorization Code	  
app_02	38c8bba399ec47a5b913d116c736c225		Client	  

Showing 1-2 of 2 records < 1 > 10 / page Go to page Go

For more instructions, click [Online API Document](#) in the upper right corner of the web page to get the Open API Access Guide.

4.7.2 Webhooks

Overview

Webhook is an API concept and one of the usage paradigms of microservice APIs. It is also called a reverse API, that is, the front end does not actively send requests, but is completely pushed by the back

end. In Omada, Webhook is used for the active push function of messages such as alerts.

Configuration

1. In Global View, go to [Settings > Platform Integration > Webhooks](#).
2. Click [Create New Webhook](#).

Create Webhook

Name

Shared Secret

(Optional)

URL

Payload Template

Omada

Retry Policy

☒ None

☐ Important (Up to 5 retries over 60 minutes)

☐ Critical (Up to 5 retries over 24 hours)

Create

Cancel

Name	Specify the Webhook entry name.
Shared Secret	Specify the authentication secret key. If it is not filled in, the system will automatically generate a key. If it is manually cleared, the system will no longer generate a key.
URL	Specify the Webhook URL address.
Payload Template	Select a template for message push.
Retry Policy	Specify the Webhook retry policy: None (no retry), Important (up to 5 retries over 60 minutes), and Critical (up to 5 retries over 24 hours).

3. Save the settings. The webhook entry will be added.

NAME	URL NUM	PAYLOAD TEMPLATE	WEBHOOK ID	SHARED SECRET	LAST UPDATE	RETRY POLICY	ACTION
webhook_01	1	Omada	5188a5900d1688109bdc369e2c3b762e	31c968b2-bd35-4a7f-871c-e1f72862cd81	Feb 12, 2025 04:27:41 am	None	

You can click the icon in the ACTION column to test the connectivity, view the dispatch logs, and edit, or delete the Webhook entry.

4.8 SAML SSO

Overview

SAML (Security Assertion Markup Language) SSO (Single Sign On) enables clients to access multiple web applications using one set of login credentials. To complete the SAML SSO interconnection, the system administrator needs to configure the IdP (identity provider) information when the current system serves as the SP (service provider), or configure the SP information when the current system serves as the IdP.

Prerequisites

- This chapter takes the configuration of the current system as an example to explain the operation. Other systems also need to be configured. SAML SSO works only after all systems are configured.
- If you need to connect with other systems that serve as the IdP, please obtain the metadata file of the IdP first, then configure the SP.
- If you need to connect with a third-party IdP, please configure the third-party IdP first and obtain its metadata file.

Configuration

1. Configure the SAML user group.
 - a. In Global View, go to [Accounts > SAML User Group](#).
 - b. Click [Add New SAML User Group](#). Configure the parameters and click [Create](#).

← Add New SAML User Group

Role

SAML User Group Name

samlRole

Valid Period

☐ Permanent

☒ Temporary

Oct 01, 2025

–

Oct 04, 2025

Role

Admin

The selected role includes the permission to create new users.

Privileges

Site Privileges

☒ All sites (including newly created sites)

☐ Specific sites

SAML User Group Name	Specify the role name.
----------------------	------------------------

Valid Period	Set the validity period of the user. Permanent: The user account will have permissions permanently unless modified or deleted. Temporary: The user account will have permissions only in the period you set. Note that Temporary Users don't have account-related permissions, including permissions such as User Manager, Roles Manager, SAML User Group Manager, SAML Users Manager, and SAML SSO Manager.
Role	Specify the authority role of the account.
Site Privileges	Specify the site privileges of the client through the Open API.

2. Configure the IdP.

Use a third-party system as the IdP and follow the steps below to configure the parameters:

- Create an IdP. Fill in the initial information except the name.
- Use the IdP metadata information for SP configuration on the Controller.
- Edit the IdP information, including Entity ID, Sign-On URL, and Relay State.

Note:

- The above three parameters use the information of View SAML Attribute in SP configuration.
- Relay State is base64(resourceId_omadId).
- Edit the Attribute, and configure the username and usergroup_name. The usergroup_name is the **SAML User Group Name** you configured in step 1.

3. Configure the SP.

Use the Controller as the SP and follow the steps below to configure the parameters:

- In Global View, go to **Settings > SAML SSO**.
- Click **Add New SAML Connection**.

Identity Provider Name	Specify the IdP name.
Description	Enter a description for identification.

Configuration Method

Configure the metadata. You can upload the metadata file, use URL parsing, or manually fill in the information.

- c. Click [View SAML Attribute](#) to view the SP configuration. This will be used for IdP configuration on the third-party system.

Subsequent Processing

After configuring all systems, verify whether the SAML SSO configuration is successful as follows:

1. In the configured IdP system, find the SP login entry and click to log in.
2. On the login page, enter the Username and Password to log in.
3. Go to the SP system and verify that the user has logged in.

For more instructions, refer to [How to Configure SAML SSO on Omada Controller](#).

4.9 Maintenance

You can back up the configuration and data of your controller to prevent any loss of important information.

If necessary, restore the controller to a previous status using the backup file.

4.9.1 Restore

Launch the controller and access the Global View. Go to **Settings > Maintenance**. In **Restore**, click **Browse** and select a backup file from your computer or file server. Click **Restore**.

Restore

Import

☒ Import from Local File

☐ Import from File Server

Retain Device Info

☒ Enable

Restore

Please select a file.

Browse

Restore

- Note:
- The controller will be restored to the selected file and all current configurations will be lost.
 - Only the configuration file of controller v5.0.x or above is supported.
 - The current controller only supports the configuration file of the controller with the same or a smaller first-three-part version number (Major.Minor.Patch).

Import	Select where you store the restore file. Import from Local File: Import the data locally. It is not supported when accessing the controller via cloud. Import from File Server: Import the data from a file server. Select the desired file server type (FTP / TFTP / SFTP / SCP) and configure the parameters.
Retain Device Info	Select this option if you want to retain device information.
Restore	Select the backup file to restore the information.

4.9.2 Backup

Launch the controller and access the Global View. Go to **Settings > Maintenance**. In **Backup**, click **Export** to export and save the backup file.

If you want to export the data to a file server, configure the parameters accordingly and click **Export**.

Backup

Backup Contents

☒ Settings

☒ User Info ⓘ

☒ Authenticated Clients ⓘ

☒ Firmware Update Logs

Retained Data Backup

7 Days

ⓘ

Except for the selected backup contents, all data will not be backed up.

Export

☒ Export to Local File

☐ Export to File Server

Export

Backup Contents	Select the data contents to back up. Settings: All the controller settings will be backed up. User Info: All local and cloud user information except for the main admin will be retained. Make sure Cloud Access is enabled on the Controller to be restored. Otherwise the Cloud account will not be retained correctly. Authenticated Clients: The authenticated client information will be backed up and can be used to verify clients for portal authentication. It is recommended to select this option if your network uses portal authentication. Firmware Update Logs: The firmware update logs will be backed up.
Retained Data Backup	Select the length of time in days that data will be backed up. 7 Days/30 Days/60 Days/90 Days/180 Days/365 Days: Back up the data in the recent days. All Time: (Only for Software Controller) Back up all data in the controller.
Export	Select where you want to export the data to. Export to Local File: Export and save the data locally. It is not supported when accessing the controller via cloud. Export to File Server: Export and save the data to a file server. Select the desired file server type (FTP / TFTP / SFTP / SCP) and configure the parameters.

4.9.3 Backup Schedule

With Backup Schedule enabled, the controller will be scheduled to back up the configurations and data automatically at the specified time. You can easily restore the configurations and data when needed.

Note:

- On Omada Cloud-Based Controller, there is no need to configure Backup Schedule. It will automatically save the configurations and data on the cloud.

Launch the controller and access the Global View. Go to **Settings > Maintenance**. In **Backup Schedule**, enable Backup Schedule and configure the parameters. Click **Save**.

Backup Schedule

Backup Schedule

Occurrence

EveryMonthon1at12:00in Coordinated Universal Time

Backup Contents

Configuration File:

Settings

User Info

Authenticated Clients

Firmware Update Logs

Data:

Client List

Alert & Event List

Audit Log List

Retained Data Backup

30 Days

Except for the selected backup contents, all data will not be backed up.

Storage

Save to Local File (the same path as the controller software)

Save to File Server

Maximum Number of Files

7(1-100)

Save

Cancel

Occurrence

Specify when to perform Auto Backup regularly. Select **Every Day**, **Week**, **Month**, or **Year** first and then set a time to back up files.

Note the time availability when you choose **Every Month**. For example, if you choose to automatically backup the data on the 31st of every month, Backup Schedule will not take effect when it comes to the month with no 31st, such as February, April, and June.

87

Backup Contents	Select the data contents to back up. Settings: All the controller settings will be backed up. User Info: All locPast Connections and cloud user information except for the main admin will be retained. Make sure Cloud Access is enabled on the Controller to be restored. Otherwise the Cloud account will not be retained correctly. Authenticated Clients: The authenticated client information will be backed up and can be used to verify clients for portal authentication. It is recommended to select this option if your network uses portal authentication. Firmware Update Logs: The firmware update logs will be backed up. Known Clients: Back up the list of the known clients. Past Connections: Back up the list of the past connections. To export past connections data, you need to first enable Client's History Data in 5.4 History Data Retention. Logs: Back up the list of the logs. Audit Log List: Back up the list of the audit logs.
Retained Data Backup	Select the length of time in days that data will be backed up. 7 Days/30 Days/60 Days/90 Days/180 Days/365 Days: Back up the data in the recent days. All Time: (Only for Software Controller) Back up all data in the controller.
Storage	Select where you want to save the backup file. Save to Local File: The backup file will be saved as a local file. Save to File Server: The backup file will be saved in the specified file server.
Saving Path	(Only for Hardware Controller) Select a path to save the backup files.
Maximum Number of Files	(When selecting Save to Local File) Specify the maximum number of backup files to save.
Type	(When selecting Save to File Server) Specify the file server you are using. Four types of file server are available: FTP, TFTP, SFTP, and SCP.
Server Hostname/IP	(When selecting Save to File Server) Specify the Hostname/IP corresponding to the file server.
Port	(When selecting Save to File Server) Specify the port corresponding to the file server.
FTP Username	(When selecting FTP as File Server) Specify the username of the FTP file server.
FTP Password	(When selecting FTP as File Server) Specify the password of the FTP file server.

SFTP Username	(When selecting SFTP as File Server) Specify the username of the SFTP file server.
SFTP Password	(When selecting SFTP as File Server) Specify the password of the SFTP file server.
SCP Username	(When selecting SCP as File Server) Specify the username of the SCP file server.
SCP Password	(When selecting SCP as File Server) Specify the password of the SCP file server.
File Path	(When selecting Save to File Server) Specify the file path.

You can view the name, backup time and size of backup files in [Backup Files List](#).

Backup Files List			
FILE NAME	BACKUP TIME	SIZE	ACTION
autobackup_5.15.20.11_NoLimit_2025-02-11_19-23-00_1739330580010.cfg	2025-02-11 07:23:00 pm	7.78 KB	  
autobackup_5.15.20.11_2025-02-11_19-23-00_1739330580010_NoLimit_data.zip	2025-02-11 07:23:00 pm	953 B	 

To restore, export or delete the backup file, click the icon in the [Action](#) column.

	Restore the configurations and data in the backup file. All current configurations will be replaced after the restoration. To keep the backup data safe, please wait until the operation is finished. This will take several minutes.
	Export the backup file. The exported file will be saved in the saving path of your web browser.
	Delete the backup file.

Note:

If the backup file is saved to file server and the type SCP / TFTP is selected, it will not included in the Backup Files List, and it cannot be exported, restored, or deleted.

4.10 Migration


Migration services allow users to migrate the configurations and data to any other controller. Migration services include Site Migration and Controller Migration, covering all the needs to migrate both a single site and the whole controller.

4.10.1 Site Migration

Overview

Site Migration allows the administrators to export a site from the current controller to any other controller that has the same version. All the configurations and data of the site will be migrated to the target controller.

The process of migrating configurations and data from a site to another controller can be summarized in three steps: Export Site, Migrate Site and Migrate Devices.

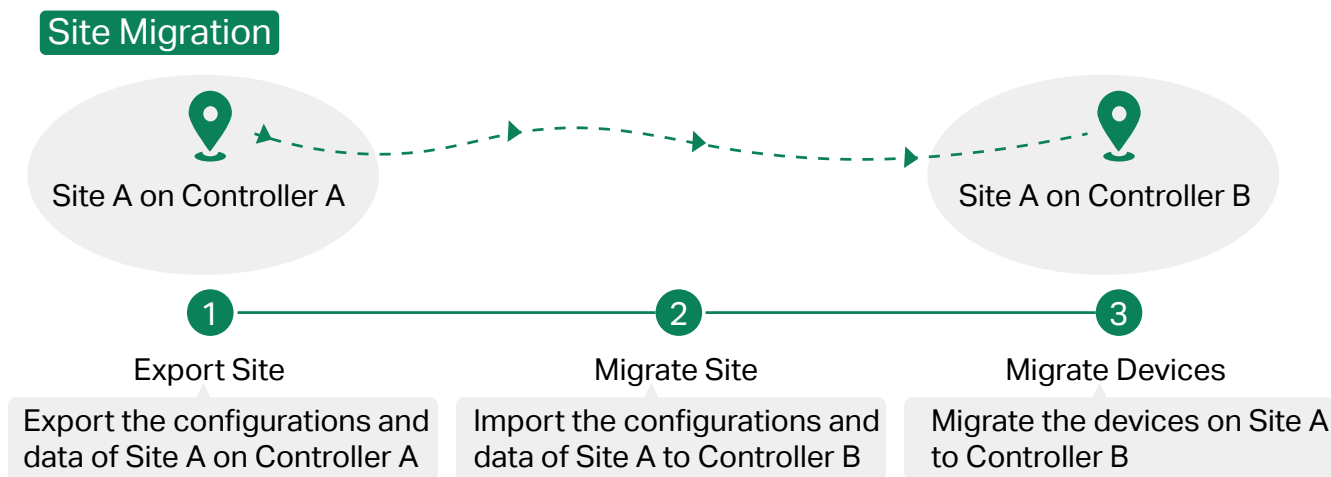

Step 1: Export Site

Export the configurations and data of the site to be migrated as a backup file.

Step 2: Migrate Site

In the target controller, import the backup file of the original site.

Step 3: Migrate Devices

Migrate the devices which are on the original site to the target controller.

Configuration


To migrate a site to another controller, follow these steps below.

Note:


The connection to internet will be lost for several minutes during the migration. Clients need to connect the wireless network again after the migration is completed. Please choose the time to start migration operation carefully.

Step 1: Export Site

1. Launch the controller and access the Global View. Go to **Settings > Migration**. On the **Site Migration** tab, click the start button.

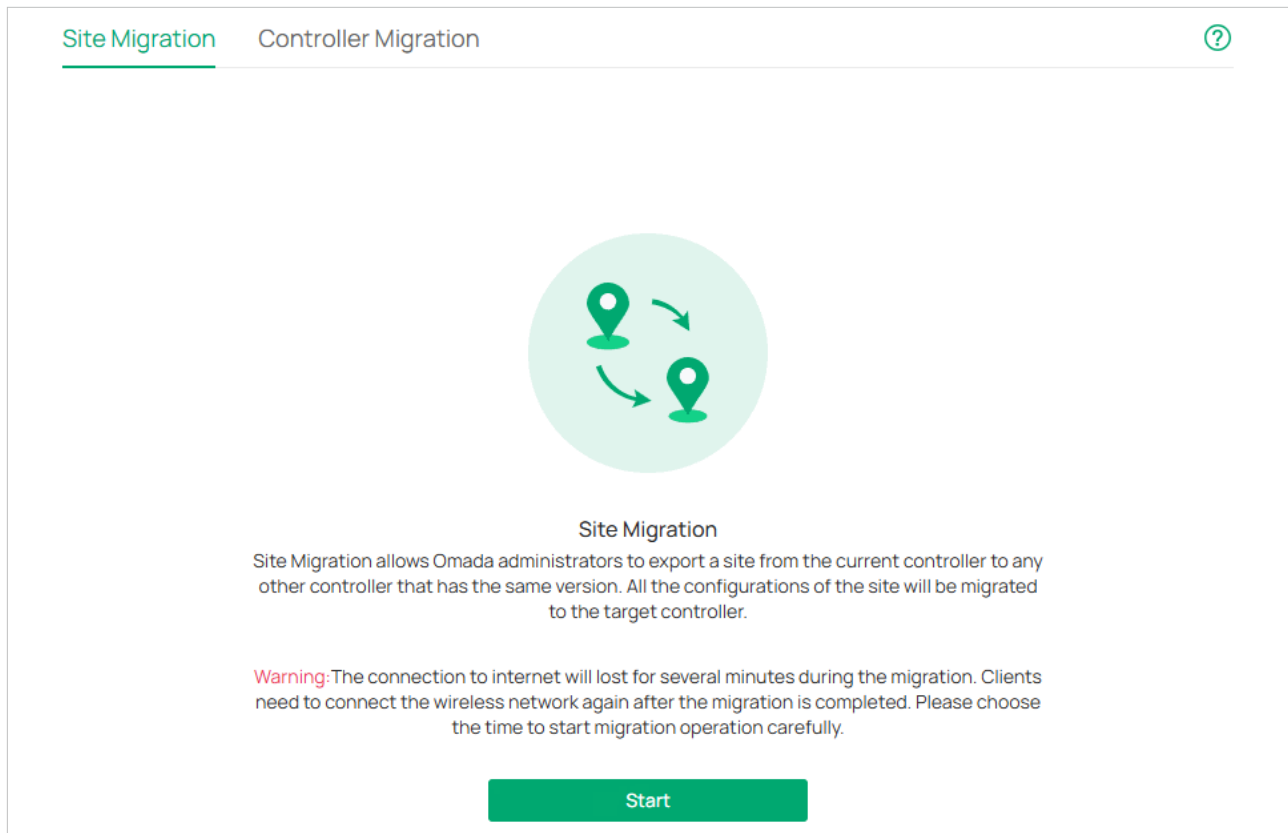


2. Select the site to be imported into the second controller in the **Select Site** drop-down list. Select where you want to export and save the backup file. Click **Export** to download the file of the current site. If you have backed up the file, click **Skip**.

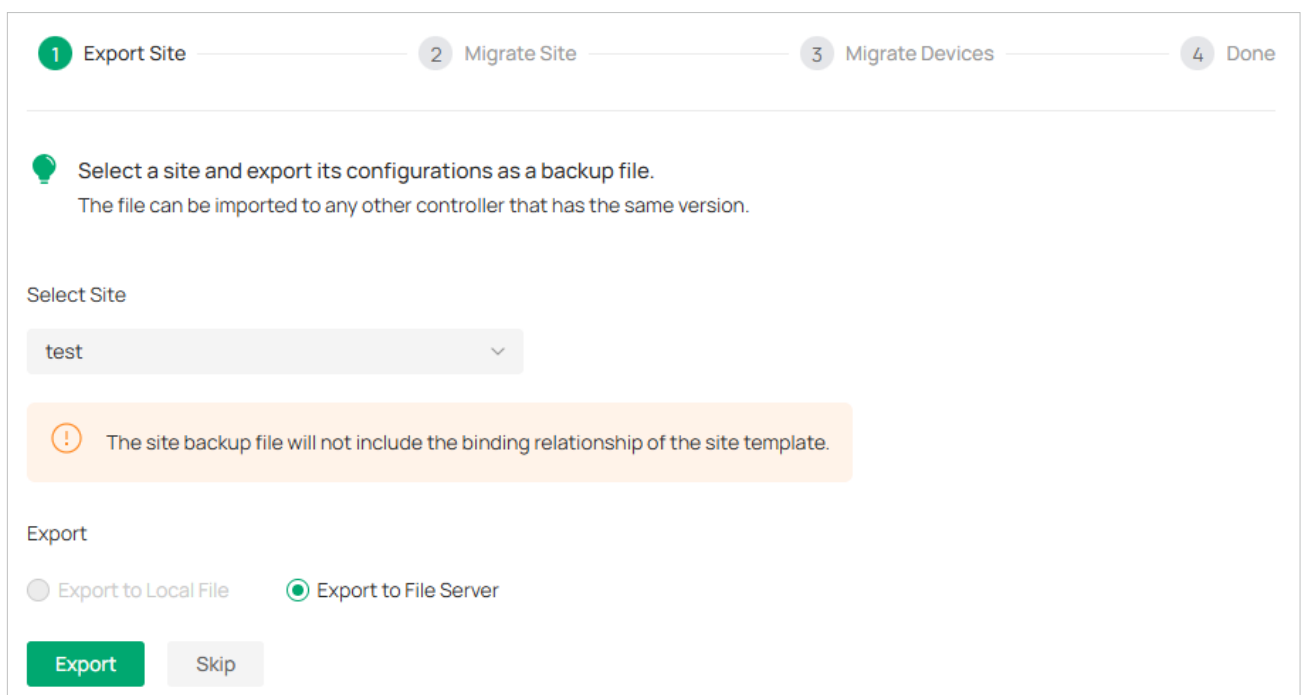


Step 2: Migrate Site

1. Start and log in to the target controller, access the Global View, go to [Dashboard](#) > [Site List](#), and click [Import Site](#) to upload the backup file of your site, and then the following window will pop up. Note that for organization v5.13.11.41 and above, only the configuration file from the organization with the same first-three-part version number (Major.Minor.Patch) can be imported.

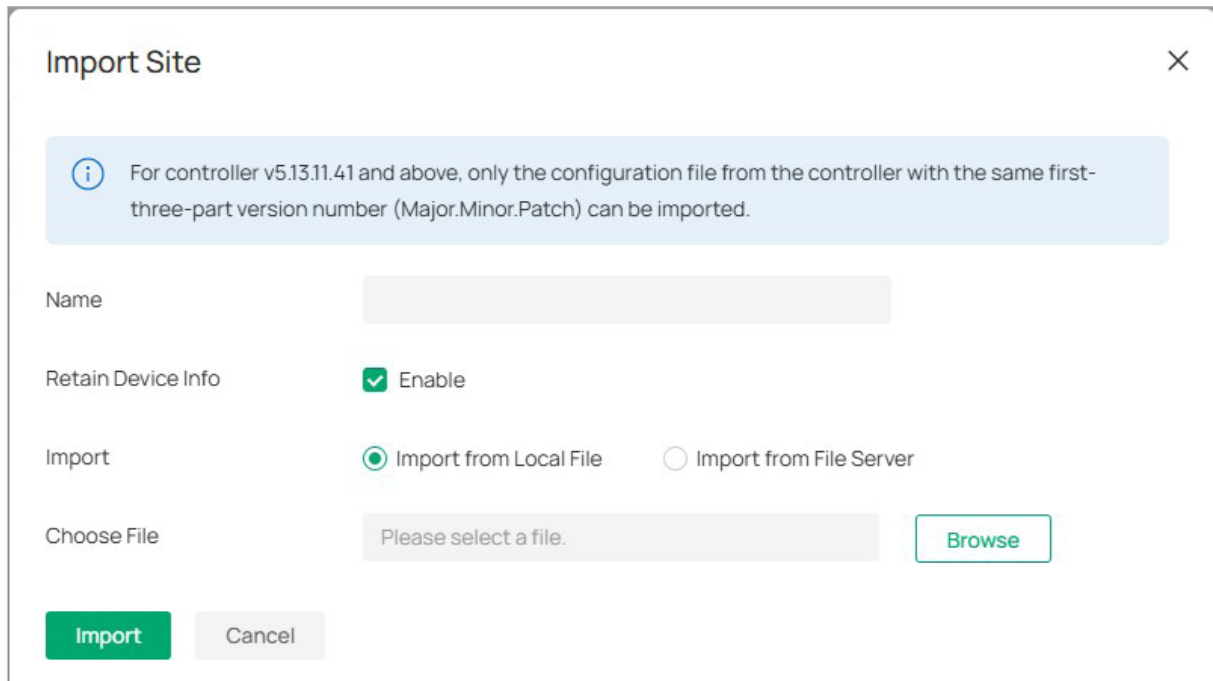

The 'Import Site' dialog box features a title bar with a close button (X). Below the title is a light blue information banner with an 'i' icon and text: 'For controller v5.13.11.41 and above, only the configuration file from the controller with the same first-three-part version number (Major.Minor.Patch) can be imported.' The main area contains a 'Name' text input field. Below it is a 'Retain Device Info' section with a checked checkbox and the label 'Enable'. The 'Import' section has two radio buttons: 'Import from Local File' (selected) and 'Import from File Server'. Below the radio buttons is a 'Choose File' section with a text input field containing 'Please select a file.' and a green 'Browse' button. At the bottom are two buttons: a green 'Import' button and a grey 'Cancel' button.

2. Enter a unique name for the new site. Click [Browse](#) to upload the file of the site to be imported and click [Import](#) to import the site.
3. After the file has been imported to the target controller, go back to the previous controller and click [Confirm](#).

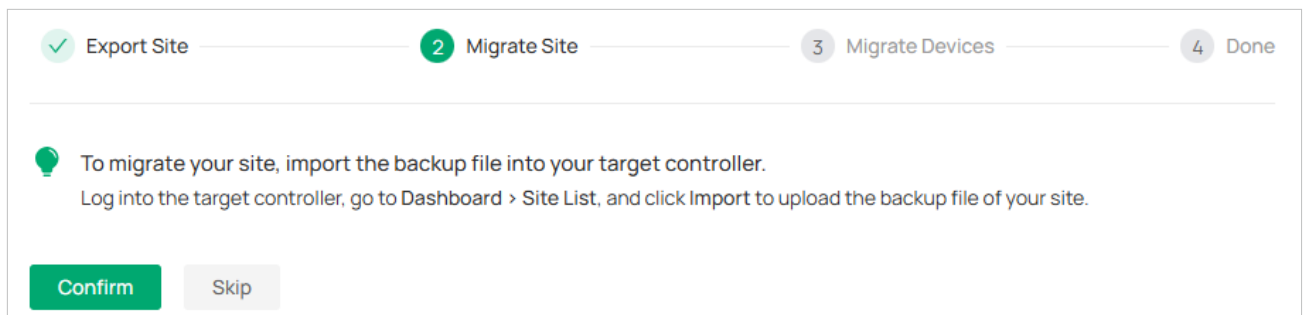

The migration progress bar shows four steps: 'Export Site' (completed with a green checkmark), '2 Migrate Site' (current step, highlighted with a green circle), '3 Migrate Devices' (grey circle), and '4 Done' (grey circle). Below the progress bar is a light blue information banner with a lightbulb icon and text: 'To migrate your site, import the backup file into your target controller. Log into the target controller, go to Dashboard > Site List, and click Import to upload the backup file of your site.' At the bottom are two buttons: a green 'Confirm' button and a grey 'Skip' button.

Step 3: Migrate Devices

1. Enter the IP address or URL of your target controller into Controller IP/Inform URL input field. In this

case, the IP address of the target controller is 10.0.3.23.

✓ Export Site

✓ Migrate Site

3 Migrate Devices

4 Done

💡

Select the devices to be migrated and enter the URL or IP address of your target controller.
The selected devices will try to discover the target controller.

Controller IP/Inform URL

10.0.3.23

Note:
Make sure that you enter the correct IP address or URL of the target controller to establish the communication between managed devices and your target controller. Otherwise the managed devices cannot be adopted by the target controller.

2. Select the devices that are to be migrated by clicking the box next to each device. By default, all the devices are selected. Click **Migrate Devices** to migrate the selected devices to the target controller.

✓ Export Site

✓ Migrate Site

3 Migrate Devices

4 Done

💡

Select the devices to be migrated and enter the URL or IP address of your target controller.
The selected devices will try to discover the target controller.



Controller IP/Inform URL

10.0.3.23

Device List:

Search Name/Model

Q

✓	DEVICE NAME	STATUS	MODEL
✓	 OC-EF 	CONNECTED 	EAP683 UR
✓	 E0-D3 	CONNECTED	EAP655-Wall

<

1

>

10 /page

▼

Select 2 of 2 items [Unselect All](#)

Migrate Devices

3. Verify that all the migrated devices are visible and connected on the target controller. When all the migrated devices are in Connected status on the Device page on the target controller, click **Forget**

Devices to finish the migration process.

✓ Export Site

✓ Migrate Site

✓ Migrate Devices

4 Done

💡 Migration succeeded! We suggest you forget the successfully migrated devices.
Go to the Device page of your target controller and check if the migrated devices are visible and connected. This process may take several minutes.

✓	DEVICE NAME	STATUS	MODEL	ACTION
✓	 0C-EF- 	DISCONNECTED 	EAP683 UR	Cancel Migration
✓	 E0-D3- 	DISCONNECTED 	EAP655-Wall	Cancel Migration

< 1 >

10 /page

Select 2 of 2 items [Unselect All](#)

Forget Devices

Skip


4. When the migration process is completed, all the configuration and data are migrated to the target controller. You can delete the previous site if necessary.

4. 10. 2 Controller Migration

Overview

Controller Migration allows administrators to migrate the configurations and data from the current controller to any other controller that has the same version.

The process of migrating configurations and data from the current controller to another controller can be summarized in three steps: Export Controller, Migrate Controller and Migrate Devices.

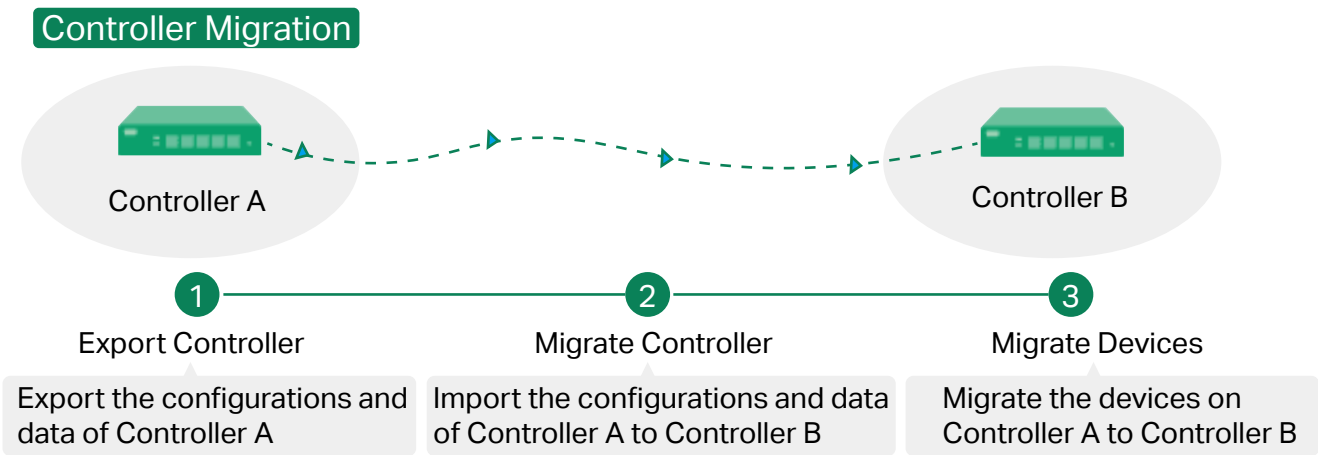

Step1: Export Controller

Export the configurations and data of the current controller as a backup file.

Step2: Migrate Controller

In the target controller, import the backup file of the current controller.

Step3: Migrate Devices

Migrate the devices on the current controller to the target controller.

Configuration


To migrate your controller, follow these steps below.

Note:

The connection to internet will be lost for several minutes during the migration. Clients need to connect the wireless network again after the migration is completed. Please choose the time to start migration operation carefully.

Step1: Export Controller

1. Launch the controller and access the Global View. Go to [Settings > Migration](#). On the Controller Migration tab, click the start button on the following page.

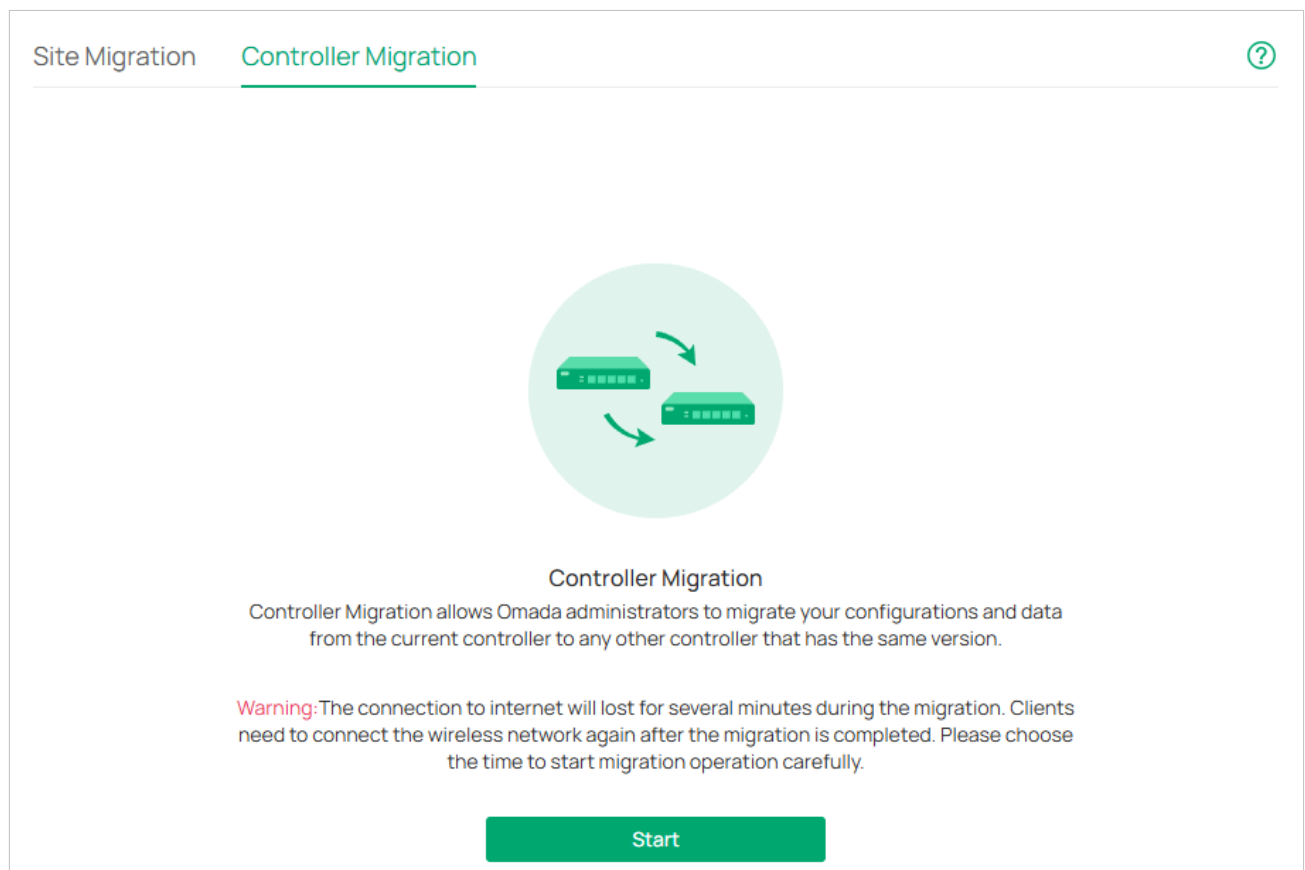

2. Select the length of time in days that data will be backed up in the [Retained Data Backup](#), and where you want to export and save the data. Click [Export](#) to export the configurations and data of your

current controller as a backup file. If you have backed up the file, click [Skip](#).

The screenshot shows a four-step migration wizard. Step 1, 'Export Controller', is active. It contains a lightbulb icon and text: 'Export the configurations and data of your current controller as a backup file. The file can be imported to any other controller that has the same version.' Below this is a section titled 'Backup Contents' with four checkboxes: 'Settings' (checked), 'User Info' (unchecked with an info icon), 'Authenticated Clients' (unchecked with an info icon), and 'Firmware Update Logs' (unchecked). Under the 'Export' section, there are two radio buttons: 'Export to Local File' (unchecked) and 'Export to File Server' (checked). At the bottom are two buttons: 'Export' (green) and 'Skip' (grey).

Step2: Migrate Controller

1. Log in to the target controller. Launch the controller and access the Global View. Go to [Settings](#) > [Maintenance](#) > [Restore](#). Click [Browse](#) to locate and choose the backup file of the previous controller. Then click [Restore](#) to upload the file.

The screenshot shows the 'Restore' configuration screen. It has a title 'Restore'. Under the 'Import' section, there are two radio buttons: 'Import from Local File' (checked) and 'Import from File Server' (unchecked). Under the 'Retain Device Info' section, there is a checked checkbox labeled 'Enable'. In the 'Restore' section, there is a text input field with the placeholder 'Please select a file.' and a green 'Browse' button to its right. At the bottom left is a green 'Restore' button with an info icon to its right.

2. After the file has been imported to the target controller, go back to the previous controller and click

Confirm.

✓ Export Controller

2 Migrate Controller

3 Migrate Devices

4 Done

 Log into the target controller and go to Maintenance- Backup & Restore and upload the backup file of your controller.

Confirm

Skip

Step3: Migrate Devices

1. Enter the IP address or URL of your target controller into Controller IP/Inform URL input field. In this case, the IP address of the target controller is 10.0.3.23.

✓ Export Controller

✓ Migrate Controller

3 Migrate Devices

4 Done

 Select the devices to be migrated and enter the URL or IP address of your target controller.
The selected devices will try to discover the target controller.

Controller IP/Inform URL

10.0.3.23

Note:

Make sure that you enter the correct IP address or URL of the target controller to establish the communication between managed devices and your target controller. Otherwise the managed devices cannot be adopted by the target controller.

2. Select the devices that are to be migrated by clicking the box next to each device. By default, all the

devices are selected. Click [Migrate Devices](#) to migrate the selected devices to the target controller.

✓ Export Controller

✓ Migrate Controller

3 Migrate Devices

4 Done

💡

Select the devices to be migrated and enter the URL or IP address of your target controller.
The selected devices will try to discover the target controller.

Controller IP/Inform URL

10.0.3.23

Device List:

Search Name/Model

✓		DEVICE NAME	STATUS	MODEL	SITE NAME
✓	+ 	Stack STACK		-	MySite
✓		PoE Switch	CONNECTED	SG3210XHP-M2	MySite

< 1 > 10 /page ▾

Select 2 of 2 items [Unselect All](#)

Migrate Devices

3. Verify that all the migrated devices are visible and connected on the target controller. When all the migrated devices are in Connected status on the Device page on the target controller, click [Forget Devices](#) to finish the migration process.

✓ Export Controller

✓ Migrate Controller

✓ Migrate Devices

4 Done

 Migration succeeded! We suggest you forget the successfully migrated devices.
Go to the Device page of your target controller and check if the migrated devices are visible and connected. This process may take several minutes.

✓		DEVICE NAME	STATUS	MODEL	SITE NAME	ACTION
✓	+ 	Stack STACK		-	MySite	Cancel Migration
✓		PoE Switch	DISCONNECTED 	SG3210XHP-M2	MySite	Cancel Migration

< 1 >

10 /page ▾

Select 2 of 2 items [Unselect All](#)

Forget Devices

Skip

When the migration process is completed, all the configuration and data are migrated to the target controller. You can uninstall the previous controller if necessary.

4. 11 Export Data

4. 11. 1 Export Data

You can export data to monitor or debug your devices.

Launch the controller and access the Global View. Go to [Settings > Export Data](#). Select the type of data from the export list and click [Export](#).

Export Data

Export Data

Export List

Device List

Mode

☒ Default Columns

☐ All Columns

☐ Current Display Columns

 If you select All or Current Display Columns, data exporting will be time-consuming if there are lots of devices.

Format

XLSX

Export

Export List	Device List: Export the list of managed devices. Client List (All): Export the list of all clients that are connected to the networks. Alert & Event List: Export the list of the alerts and events. Audit Log List: Export the list of the audit logs. Authorized Client List: Export the list of authorized clients. Voucher Codes: Export the list of the voucher codes. Client Connection Records: Export the list of the client connection records. Threat Management: Export the list of the threat management data.
Mode	Select the columns to export. We recommend selecting Default Columns , which include commonly needed columns such as DEVICE NAME, MAC ADDRESS, MODEL, etc. If you select All Columns or Current Display Columns , data exporting will be time-consuming if there are lots of devices.
Format	The data can be exported to the file in the format of .CSV or .XLSX.

4. 11. 2 Export for Support

In [Export for Support](#), you can export configuration data and running logs for technical support to

diagnose network problems. The exported data will not contain users' personal information.

Export for Support

Export configuration data and running logs for technical support to diagnose network problems. The exported data will not contain users' personal information.

Export Running Logs

Export Configuration Data

Export Running Logs	Click to export running logs.
Export Configuration Data	Click to export configuration data.

Note:
Configuration data cannot be imported into the controller through restore.

4. 11. 3 Auto Send Data to Email

In **Auto Send Data to Email**, you can send the data report to the specified email addresses regularly.

Auto Send Data to Email

Send data to the specified email addresses regularly.

Send Email

☒ Enable

Data Content

☒ Device List

Report Name

Report Type

☐ CSV ☒ XLSX

Occurrence

Every Day at 00:00 in Chennai, Kolkata, Mumbai, New Delhi ⓘ

Send To Email Address

Enter the email addresses and tap Enter after each email address. (Each Controller can send up to 100 emails every 24 hours via Cloud Access.)

Send to

Apply

Cancel

Data Content	Specify the data content to send.
--------------	-----------------------------------

Report Name	Specify the name of the data report.
Report Type	Specify the file format of the data report.
Occurrence	Specify the time to send the data report.
Send to	Specify the email to send the data report.
Note: Cloud Access or SMTP is required to enable the Send Email feature.	

4.12 Cloud Access

Overview

With Cloud Access, it is convenient for you to manage your controller from anywhere, as long as you have access to the internet.

Configuration

To manage your controller from anywhere, follow these steps:


1. Prepare your controller for Cloud Access

■ For Software Controller / Hardware Controller:

Note:

- Before you start, make sure your Software Controller Host or Hardware Controller has access to the internet.
- If you have enabled cloud access and bound your TP-Link ID in the quick setup wizard, skip this step.

- 4) Launch the controller and access the Global View. Go to [Settings > Cloud Access](#). Enable Cloud Access.

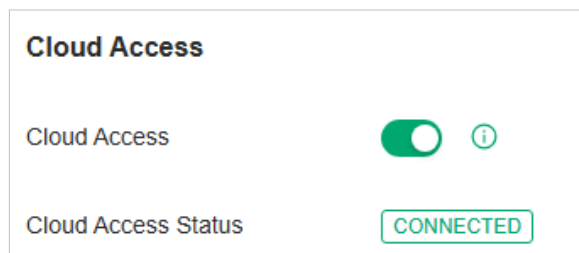

- 5) Enter your TP-Link ID and password. Then click [Log In and Bind](#).

Log In and Bind Your TP-Link ID

 Enter the email address and password of your TP-Link ID. Note that it is not the account that you have used to log in to this controller.

TP-Link ID

No TP-Link ID? [Register Now](#)

Password

Log In and Bind

Cancel

■ For Cloud-Based Controller

Your Cloud-Based Controller is based on the Cloud, so it is naturally accessible through Cloud Service.

No additional preparation is needed.

2. Access your controller through Cloud Service

Go to <https://omada.tplinkcloud.com> and login with your TP-Link ID and password. A list of controllers that have been bound with your TP-Link ID will appear. Then click the launch icon in the Action column to manage the controller.

ORGANIZATION NAME	TYPE	SITE NUMBER	DEVICE NUMBER	ALERT NUMBER	ACTION
☆ TestJ	Standard	2	0	0	 
☆ test	Standard	1	0	0	 
☆ Test_2	Standard	0	0	0	 

Showing 1-3 of 3 records < 1 > 10 / page Go to page

Chapter 5

Configure General Network Settings

This chapter guides you on how to configure general network settings with the SDN Controller. The chapter includes the following sections:

- [5. 1 Configure Site Settings](#)
- [5. 2 Configure SSH Settings](#)
- [5. 3 Configure Reboot Schedules](#)
- [5. 4 Configure Port Schedules](#)
- [5. 5 Configure mDNS Settings](#)
- [5. 6 Configure Bonjour Service](#)
- [5. 7 Configure SNMP Settings](#)
- [5. 8 Configure VoIP Settings](#)
- [5. 9 Use CLI Configuration](#)

5.1 Configure Site Settings

1. Launch the controller and access a site.
2. Go to **Network Config > General Settings > Site Settings**.

Site Settings

Site Configuration

Site Name

site1

Application Scenario

Office

Country/Region

United States

Time Zone

(UTC-08:00) Pacific Time (US & Canada)

Network Time Protocol

☐ Enable

Daylight Saving Time

Disabled

Longitude

(Optional)

Latitude

(Optional)

Address

(Optional)

Refresh

Inform URL

omada://192.168.0.1?dPort=29810&mPort=29814&omadaId=686b223db5b75b3b07f84a00

Copy URL

General Config

Save

Cancel

3. Configure the parameters according to actual site needs.

- Site Configuration

In Site Configuration, you can view and modify the site name, location, time zone, and application scenario of the current site.

Site Name	Specify the name of the current site. It should be no more than 64 characters.
Application Scenario	Specify the application scenario of the site. To customize your scenario, click Create New Scenario in the drop-down list.
Country/Region	Select the location of the site.
Time Zone	Select the time zone of the site.
Network Time Protocol	Enter the IP address(es) of the NTP (Network Time Protocol) server. NTP server assigns network time to the EAP devices.
Daylight Saving Time	Enable the feature if your country/region implements DST.
Time Offset	Select the time added in minutes when Daylight Saving Time starts.
Starts On	Specify the time when the DST starts. The clock will be set forward by the time offset you specify.
Ends On	Specify the time when the DST ends. The clock will be set back by the time offset you specify.

Longitude / Latitude / Address	Configure the parameters according to where the site is located. These fields are optional.
Inform URL	Site Inform URL adds site information based on the Controller Inform URL to inform devices of the controller's URL or IP address as well as site info. Then the devices make contact with the controller so the controller can discover them and adopt them to the site.

- General Config

In General Config, you can control the LED status of devices in the site, remember all devices in the site, configure the controller to send generated system logs to the log server.

LED	Enable or disable LEDs of all devices in the site. By default, the device follows the LED setting of the site it belongs to. To change the LED setting for certain devices, configure the devices on the Devices page.
Remember Device	When enabled, the controller will remember all devices in the site. After device reset and power-on, the controller will automatically adopt the device if the controller can find it.
Portal Logout Domain	Customize the domain name for portal-authenticated clients to open the logout page. If not specified, the default value is the domain name in the configuration file (in \properties\omada.properties in the controller installation path).

- Wireless Features

Wireless features include Mesh, Auto Failover, Connectivity Detection, Full-Sector DFS, EAP LLDP, Fast Roaming, Non-Stick Roaming, AI Roaming, Band Steering, Multicast/Broadcast Rate Limit and Beacon Control. They are applicable to APs and wireless gateways/routers. With these wireless features configured properly, you can improve the network's stability, reliability and communication efficiency.

Wireless features are recommended to be configured by network administrators with the WLAN knowledge. If you are not sure about your network conditions and the potential impact of all settings, keep [Wireless Features](#) as their default configurations.

Mesh	When enabled, APs supporting Mesh can establish the mesh network at the site.
Auto Failover	(For APs in the mesh network) Auto Failover is used to automatically maintain the mesh network. When enabled, the controller will automatically select a new wireless uplink for the AP if the original uplink fails. To enable this feature, enable Mesh first.

Connectivity Detection	(For APs in the mesh network) Specify the method of Connection Detection when mesh is enabled. In a mesh network, the APs can send ARP request packets to a fixed IP address to test the connectivity. If the link fails, the status of these APs will change to Isolated. Auto (Recommended): Select this method and the mesh APs will send ARP request packets to the default gateway for the detection. Custom IP Address: Select this method and specify a desired IP address. The mesh APs will send ARP request packets to the custom IP address to test the connectivity. If the IP address of the AP is in different network segments from the custom IP address, the AP will use the default gateway IP address for the detection.
Full-Sector DFS	(For APs in the mesh network) With this feature enabled, when radar signals are detected on current channel by one AP, the other APs in the mesh network will be also informed. Then all APs in the mesh network will switch to an alternate channel. To enable this feature, enable Mesh first.
EAP LLDP	Click the checkbox to enable EAP LLDP (Link Layer Discovery Protocol) for device discovery and auto-configuration of VoIP devices.
Fast Roaming	With this feature enabled, wireless clients that support 802.11k/v can improve fast roaming experience when moving among different APs and wireless gateways/routers. By default, it is disabled. This feature is available for some certain devices.
Non-Stick Roaming	This feature helps disconnect “sticky clients” receiving weak signals from their suboptimal Wireless Device, allowing them to switch to a superior Wireless Device and improve network efficiency. Note that this may cause temporary disconnections or hinder re-association in rare cases.
Ping-Pong Roaming Suppression	This feature helps prevent clients from frequently roaming between two APs in areas where weak signals overlap, thereby improving connection stability. Note that this may cause clients not able to connect to certain AP in rare cases, and also may dynamic change tx power of AP.
AI Roaming	With Fast Roaming enabled, you can enable AI Roaming to facilitate Fast Roaming, which improves roaming experience of the wireless clients that support 802.11k/v. This feature is available for certain models.
Band Steering	Band steering can adjust the number of clients in 2.4 GHz, 5 GHz and 6 GHz bands to provide better wireless experience. When enabled, multi-band clients will be steered to the 5 GHz and 6 GHz band according to the configured parameters. This function can improve the network performance because the 5 GHz and 6 GHz band supports a larger number of non-overlapping channels and is less noisy.
Multicast/Broadcast Rate Limit	With rate limit configured for Other Multicast, multicast services such as multicast video will be affected.

Management Frame Control

Beacons are transmitted periodically by the AP and wireless gateway/router to announce the presence of a wireless network for the clients. Click , select the band, and configure the following parameters of Beacon Control.

Beacon Interval: Specify how often the APs and wireless gateways/routers send a beacon to clients. By default, it is 100.

DTIM Period: Specify how often the clients check for buffered data that are still on the AP or wireless gateway/router awaiting pickup. By default, the clients check for them at every beacon.

DTIM (Delivery Traffic Indication Message) is contained in some Beacon frames indicating whether the AP or wireless gateway/router has buffered data for client devices. An excessive DTIM interval may reduce the performance of multicast applications, so we recommend that you keep the default interval, 1.

RTS Threshold: RTS (Request to Send) can ensure efficient data transmission by avoiding the conflict of packets. If a client wants to send a packet larger than the threshold, the RTS mechanism will be activated to delay packets of other clients in the same wireless network.

We recommend that you keep the default threshold, which is 2347. If you specify a low threshold value, the RTS mechanism may be activated more frequently to recover the network from possible interference or collisions. However, it also consumes more bandwidth and reduces the throughput of the packet.

Airtime Fairness: With this option enabled, each client connecting to the AP or wireless gateway/router can get the same amount of time to transmit data so that low-data-rate clients do not occupy too much network bandwidth and network performance improves as a whole. We recommend you enable this function under multi-rate wireless networks.

Probe Response Maximum Retransmission: Set the maximum number that the AP retransmits probe responses if it does not receive a client acknowledgment. When a client sends a probe request to detect the network, the AP responds with a probe response. However, factors like interference, long distance, or mobile devices (such as passing clients) may cause response loss and trigger retransmissions. Frequent invalid retransmissions in high-density scenarios will occupy wireless channel resources. It is recommended to keep the default value of 1 to balance reliability and efficiency.

Probe Response Threshold: When enabled, the AP will filter probe requests with signal strength below the set threshold and stop responding, which may affect weak signal terminals from discovering the network. It is recommended to enable this feature only in high-density scenarios and select the Auto mode to optimize efficiency. In Auto mode, the AP dynamically calculates the threshold based on historical coverage data to avoid wasting wireless resources for devices in non-target areas. In Custom mode, you need to set the threshold manually.

- Device Account

You can specify a device account for all adopted devices on the site in batches. Once the devices are adopted by the controller, their username and password become the same as settings in Device Account to protect the communication between the controller and devices. By default, the username is admin and the password is generated randomly.

Username / Password	Enter a username and password for all devices in the site. The new username and password will be applied to all the managed devices. For newly adopted devices, once they are adopted by the controller, their username and password becomes the same as settings in device account.
---------------------	--

- Auto Send Data to Email

In Export Data, you can export the data of the Controller to monitor or debug the connected devices.

Send Email	Check the box to enable automatic data report.
------------	--

Data Content	Specify the content of data report.
--------------	-------------------------------------

Report Name	Specify the name of data report.
-------------	----------------------------------

Report Type	Specify the file format of data report: csv or xlsx.
-------------	--

Occurrence	Set the time to send the data report.
------------	---------------------------------------

Send To Email Address	Enter the email addresses to send the data reports. Press Enter after each email address to separate them. (Each Controller can send up to 100 emails every 24 hours via Cloud Access.)
-----------------------	---

5.2 Configure SSH Settings

Overview

SSH (Secure Shell) provides a method for you to securely configure and monitor network devices via a command-line user interface on your SSH terminal.

Note:
If you use an SSH terminal to manage devices which are managed by the controller, you can only get the User privilege.

Configuration

Launch the controller and access a site. Go to [Network Config](#) > [General Settings](#) > [SSH](#). Enable SSH Login globally and configure the parameters. Then click [Apply](#).

SSH

SSH Login

SSH Server Port

22

(22 or 1025-65535)

Layer 3 Accessibility

Enable ⓘ

Apply

Reset

SSH Server Port	Specify the SSH Sever Port which your network devices use for SSH connections. You need to configure the SSH Server Port correspondingly on your SSH terminal.
Layer 3 Accessibility	With this feature enabled, the SSH terminal from a different subnet can access your devices via SSH. With this feature disabled, only the SSH terminal in the same subnet can access your devices via SSH.

5.3 Configure Reboot Schedules

Overview

Reboot Schedule can make your devices reboot periodically according to your needs. You can configure Reboot Schedule flexibly by creating multiple Reboot Schedule entries.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [General Settings](#) > [Schedule](#) > [Reboot Schedule](#).
3. Click [Create New Reboot Schedule](#) to load the following page and configure the parameters.

Create New Reboot Schedule

Name

Status

☒ Enable

Occurrence

Every

Month

 on

1

 at

12:00

 in

Pacific Time (US & Canada)

Device List

	NAME	STATUS	MODEL	VERSION
☐	 5C-E9-31-B5-97-C4	DISCONNECTED	ER706W-4G v1.0	1.0.1
☐	 A8-42-A1-61-4A-7E	DISCONNECTED	SG2210P v5.20	5.20.0
☐	 98-25-4A-60-31-1A	DISCONNECTED	EAP660 HD(US) v2.0	1.0.3

Select 0 of 3 items

Select All

Showing 1-3 of 3 records

< 1 >

10 / page

Go to page

Go

Create

Cancel

Name	Enter the name to identify the Reboot Schedule entry.
Status	Enable or disable the Reboot Schedule entry.
Occurrence	Specify the date and time for the devices to reboot.
Devices List	Select the devices which the Reboot Schedule applies to.

4. Click [Create](#). The new Reboot Schedule entry will be added to the table.

5.4 Configure Port Schedules

Overview

In Port Schedule, you can set schedules to control the PoE feature of the PoE switch or control the on/off behavior of the switch port. When the PoE feature is disabled, the PoE switches will not supply power to the connected PoE devices during the specified time period, but the switches can still transmit data; when the Port feature is disabled, please check your topology and related configurations to avoid network problems. You can configure PoE or Port Schedule flexibly by creating multiple entries.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [General Settings](#) > [Schedule](#) > [Port Schedule](#).
3. Click [Create New Port Schedule](#) to load the following page and configure the parameters.

Create New Port Schedule

Name

Status

☒ Enable

Type

☒ PoE Schedule ☐ Port Schedule

This function only affects PoE power supply.

Time Range

Please select a Time Range entry.

Manage Time Range Entries

Device List

	NAME	PORTS	STATUS	MODEL	VERSION
☐		13579 ☐☐☐☐☐ 246810	DISCONNECTED	SG2210P v5.20	5.20.0

Showing 1-1 of 1 records

<1>

10 / page

Go to page

Go

Create

Cancel

Name	Enter the name to identify the schedule entry.
Status	Enable or disable the schedule entry.
Type	Type:Specify the schedule type: PoE Schedule: This function only affects PoE power supply. Port Schedule: This function affects LAN connections of ports but does not affect PoE power supply. To avoid network problems, please check your topology and related configurations before turning off ports.

Time Range	When the Type is PoE Schedule, select the time range when the PoE switches will supply power to the powered devices. when the Type is Port Schedule, select the time range when the switches will turn on the designated ports. You can create a Time Range entry by clicking Create New Time Range Entry from the drop down list.
Devices List	When Type is PoE Schedule, select the PoE switch and PoE port to apply the schedule. When Type is Port Schedule, select the switch and port to apply the schedule.

4. Click **Create**. The new schedule entry will be added to the table.

5.5 Configure mDNS Settings

Overview

mDNS (Multicast DNS) Repeater can help forward mDNS request/reply packets between different VLANs. With this function, you can create a forwarding rule to allow the devices in the specified Client VLAN to discover the mDNS service in the specified Service VLAN. You can also specify the services to be forwarded.

Configuration

1. Launch the controller and access a site. Go to **Network Config > General Settings > mDNS**.
2. Click **Create New Rule**. Configure the parameters.

Create New Rule

Name

Status

☐ Enable

Device Type

☒ AP ☐ Gateway

Bonjour Service

Please Select...

Manage Bonjour Service

Services Network

VLAN

(Range: 1-4094. Enter only one VLAN.)

Client Network

VLAN

(Range: 1-4094. Enter one or multiple VLANs. For example: 1,2-100)

Apply

Cancel

Name	Specify the rule name for identification.
Status	Enable or disable this rule.
Device Type	Specify the device type for which the rule takes effect.
Bonjour Service	Specify the services to be forwarded.
Services Network - VLAN	When Device Type is AP, specify the VLANs where the mDNS services are located. You can enter VLAN ranges or VLAN IDs separated by comma.
Client Network - VLAN	When Device Type is AP, specify the VLANs where the Client devices are located. You can enter VLAN ranges or VLAN IDs separated by comma.
Services Network - Network	When Device Type is Gateway, specify the networks where the mDNS services are located.
Client Network - Network	When Device Type is Gateway, specify the networks where the Client devices are located.

3. Apply the settings.

5.6 Configure Bonjour Service

Overview

mDNS (Multicast DNS) Repeater can help forward mDNS request/reply packets between different VLANs. With this function, you can create a forwarding rule to allow the devices in the specified Client VLAN to discover the mDNS service in the specified Service VLAN. You can also specify the services to be forwarded.

Configuration

To configure the Bonjour Service profiles, follow these steps:

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [General Settings](#) > [mDNS](#) > [Bonjour Service](#).
3. Click [Create New Bonjour Service](#) to add a new profile .

Add Service

Service Name

Service ID

⊕ Add

Confirm

Cancel

4. Configure the parameters.

Service Name	Enter a name to identify the profile.
Service ID	Specify the domain name corresponding to the mDNS service. It is used to identify and filter mDNS packets.

5. Click [Apply](#) to save the profile.

5.7 Configure SNMP Settings

Overview

SNMP (Simple Network Management Protocol) provides a convenient and flexible method for you to configure and monitor network devices. Once you set up SNMP for the devices, you can centrally manage them with an NMS (Network Management Station).

The controller supports multiple SNMP versions including SNMPv1, SNMPv2c and SNMPv3.

Note: If you use an NMS to manage devices which are managed by the controller, you can only read but not write SNMP objects.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [General Settings](#) > [SNMP](#).
3. Configure the parameters. Then click [Apply](#).

SNMP

ⓘ Agile (Easy Managed) Switch does not support SNMP.

SNMPv1 & SNMPv2c

SNMPv1 & SNMPv2c ☒

Community String

SNMPv3

SNMPv3 ☒

Username

Password

Apply

Reset

SNMPv1 & SNMPv2c	Enable or disable SNMPv1 and SNMPv2c globally.
Community String	With SNMPv1 & SNMPv2c enabled, specify the Community String, which is used as a password for your NMS to access the SNMP agent. You need to configure the Community String correspondingly on your NMS.
SNMPv3	Enable or disable SNMPv3 globally.
Username	With SNMPv3 enabled, specify the username for your NMS to access the SNMP agent. You need to configure the username correspondingly on your NMS.
Password	With SNMPv3 enabled, specify the password for your NMS to access the SNMP agent. You need to configure the password correspondingly on your NMS.

5.8 Configure VoIP Settings

VoIP (Voice over Internet Protocol) allows you to make voice calls using a broadband Internet connection instead of a regular (or analog) phone line. You can configure the VoIP settings for your devices on Omada Central Essentials.

5.8.1 Call Settings

Overview

You can create telephony provider profiles, digit map profiles, call blocking profiles, and emergency number settings to facilitate telephony configurations.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [General Settings](#) > [VoIP](#) > [Call Settings](#).
3. Click [Create New Provider Profile](#). Configure the parameters and click [Create](#).

Create New Provider Profile

Profile Name

Telephony Provider

Other Provider

▼

Registrar Address

i

Port Settings

—

Registrar Port

5060

(1-65535)

SIP Proxy

0.0.0.0

SIP Proxy Port

5060

(1-65535)

Outbound Proxy

0.0.0.0

Outbound Proxy Port

5060

(1-65535)

Register via Outbound Proxy

☒ Enable

Create

Cancel

Profile Name	Enter a name to identify the profile.
Telephony Provider	Choose your telephony provider, then enter the parameters specified by your provider. The parameters differ according to your selection. If your provider is not listed, choose Other Provider, then refer to the following to configure the parameters:
Registrar Address	Specify the registrar address specified by your provider. Usually it is a domain name, if not, an IP address.
Registrar Port	Specify the registrar port. Typically 5060, unless your provider specifies a different port.
SIP Proxy	Specify the IP address or URL of the SIP proxy server.
SIP Proxy Port	Specify the SIP proxy port. Typically 5060, unless your provider specifies a different port.
Outbound Proxy	Specify the IP address or URL of the outbound proxy server.
Outbound Proxy Port	Specify the outbound proxy port. Typically 5060, unless your provider specifies a different port.
Register via Outbound Proxy	When enabled, the connected VoIP devices will use the specified Outbound Proxy for SIP registration. When disabled, the connected VoIP devices will use the Registrar Address above for SIP registration.

4. Configure other call settings according to actual site needs.

■ Digit Map

A digit map can be used to match digits to control phone numbers from being dialed. A phone number can be dialed out only when its digit sequence matches the digit map. Click [Create New Digit Map](#). Configure the parameters and click [Create](#).

Create New Digit Map

Profile Name

Digit Map

(1024 characters at most.)

Create

Cancel

Profile Name	Enter a name to identify the profile.
--------------	---------------------------------------

Digit Map	Enter a digit map by referring to the setting examples.
-----------	---

■ Call Blocking

Call Blocking allows the connected VoIP devices to block unwanted incoming and outgoing calls.

Click [Create New Call Blocking Profile](#). Configure the parameters and click [Create](#).

Create New Call Blocking Profile

Name

Incoming Calls Blocking

☒

Incoming Calls Blocking Type

Please Select...

▼

Outgoing Calls Blocking

☒

Outgoing Calls Blocking Type

Please Select...

▼

Create

Cancel

Profile Name	Enter a name to identify the profile.
Incoming Calls Blocking	Enable this option to block unwanted incoming calls.
Incoming Calls Blocking Type	Specify the types of incoming calls to block. Specific Number: Specify one or more phone numbers to block incoming calls from them. Anonymous Number: Block all unknown incoming calls.
Outgoing Calls Blocking	Enable this option to block unwanted outgoing calls.

**Outgoing Calls
Blocking Type**

Specify the types of outgoing calls to block.

Mobile: Block outgoing calls to mobile numbers.

Landline: Block outgoing calls to landline numbers.

Long Distance: Block outgoing calls to long-distance numbers.

International: Block outgoing calls to international numbers.

Calls with specific number prefix: Specify one or more number prefixes to block outgoing calls to phone numbers with the prefixes.

5.8.2 VoIP Devices

Overview

In VoIP Devices, you can configure and manage the connected VoIP devices.

Configuration

1. Launch the controller and access a site.
2. Go to **Network Config > General Settings > VoIP > VoIP Devices**.
3. Click the **Telephony Settings** icon. Configure the parameters and click **Apply**.

Port Settings

Port 1

Number for Outgoing Calls

Auto

Number for Incoming Calls

VAD Support

☒ Enable

Speaker Gain

Mic Gain

Port 2

Number for Outgoing Calls

Auto

Number for Incoming Calls

VAD Support

☒ Enable

Speaker Gain

Mic Gain

Device Settings

Call Blocking

☒ Enable

Blocking Profile

Advanced Settings

Bound Interface

Default

Locale Selection

AT - AUSTRIA

No Answer Time

18

seconds

(5 - 60)

T.38 Support

☐ Enable

Number for Outgoing Calls

Select the phone number used by your telephony device to make outgoing calls. The default is Auto, which means the device will automatically select an available phone number to make calls.

Number for Incoming Calls

Select the phone numbers used by your telephony device to receive incoming calls. The default is all registered numbers, which means the device can use all registered numbers to receive calls.

VAD Support	VAD (Voice Activity Detection) saves bandwidth consumption by avoiding transmission of silence packets. It also ensures that the bandwidth is reserved only when voice activity is activated.
Speaker Gain	Adjust the slider to control the speaker sound.
Mic Gain	Adjust the slider to control the microphone sound.
Call Blocking	Enable this function to block unwanted calls.
Blocking Profile	Select a blocking profile to block unwanted calls.
Digit Map Profile	Select a digit map profile to control phone numbers from being dialed. A phone number can be dialed out only when its digit sequence matches the digit map.
Locale Selection	Select your location. The system is embedded with the default location-based parameters such as ring tones.
DSCP for SIP / DSCP for RTP	DSCP (Differentiated Services Code Point) is the first 6 bits in the ToS (Type of Service) byte. DSCP marking allows you to ensure preferential treatment for higher-priority traffic on the network based on the DSCP value. Select DSCP for the SIP (Session Initiation Protocol) and RTP (Real-time Transport Protocol) respectively. If you are unsure, please keep the default value.
DTMF Relay Setting	Select a protocol for DTMF relay setting. If you are unsure of which one to select, please keep the default value.
Registry Expiration Time	Enter the expiration time of the SIP registration.
Registry Retry Interval	Enter the time duration for which the system sends a request to retry registering automatically prior to the Registry Expiration Time. If you are unsure, please keep the default value.
T.38 Support	Select the check box to enable T.38 support that allows fax documents to be transferred in real-time between two standard Group 3 facsimile terminals over the Internet or other networks using IP protocols. This function is only effective between two T.38-enabled terminals.
End with #	Select the check box to use the pound sign (#) as an end-of-dialing.

5.8.3 VoIP Phone Number

Overview

On this page, you can configure phone numbers for VoIP-enabled devices on the current

site.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [General Settings](#) > [VoIP](#) > [VoIP Phone Number](#).
3. Choose a method to add phone numbers:

- Add phone numbers separately

Click [Add](#). Configure the parameters and click [Save](#).

PHONE NUMBER	USERNAME	PASSWORD	PROVIDER PROFILE	DEVICE MAC	STATUS	ACTION
Phone Number		Password	Please Select...	Please Select...		

PHONE NUMBER	The number used to make calls. This number cannot be reused across different devices.
USERNAME	The account name used to register the phone number. Please enter it according to the registration server configuration.
PASSWORD	The authentication password used to register the phone number. Please enter it according to the registration server configuration.
PROVIDER PROFILE	Specify the provider profile associated with the phone number. The phone number will be registered on the corresponding server.
DEVICE MAC	Specify the VoIP device associated with the phone number. Up to eight phone numbers can be added to a device.
STATUS	Displays the phone number's registration status.
ACTION	Edit or delete an added phone number.

- Import phone numbers in batches

Click [Import](#). Download the template and fill in your phone number information. Then import the file.

Import Phone Number List

×

Download the [template](#) and fill in your phone number information. Then import the file.

Choose File

Please select a file.

Browse

Import

Cancel

5. 8. 4 Call Logs

Overview

In Call Logs, you can record the details of incoming calls and outgoing calls.

Configuration

- 1. Launch the controller and access a site.
- 2. Go to [Network Config](#) > [General Settings](#) > [VoIP](#) > [Call Logs](#).
- 3. Enable [Call Logs](#) and click [Apply](#). The calls will be recorded in the table below.

Call Logs

Call Logs

Apply

Device Number, Device

Start date - End date

All (0) Incoming (0) Outgoing (0) Forwarding (0) Missed/Rejected (0)

Delete All

DATE	STATUS	DUARTION	NUMBER/CONTACTS	DEVICE NUMBER	TELEPHONY DEVICE	PORT
No Data.						

5. 8. 5 Advanced Settings

Overview

In Advanced Settings, you can configure Telephone Book, Emergency Number, DND (Do Not Disturb), and Call Forwarding.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config > General Settings > VoIP > Advanced Settings](#).
3. Configure the functions according to actual site needs.

■ Telephone Book

In Telephone Book, you can save contact details and assign a speed dial number to the contact.

Click [Create New Contact Person](#). Configure the parameters and click [Create](#).

Create New Contact Person

First Name

Last Name

Private Phone Number

Work Phone Number

Mobile Phone Number

Speed Dial

☐ Enable

Create

Cancel

First Name / Last Name	Enter the last name and first name of your contact.
Private Phone Number	Enter the private phone number of your contact.
Work Phone Number	Enter the work phone number of your contact.
Mobile Phone Number	Enter the mobile phone number of your contact.
Speed Dial Number Type	Select the type of number for speed dial. Speed Dial allows you to quickly place a call with fewer numbers to dial.
Speed Dial Number	Set the speed dial number. After saving the settings, you can simply press this number followed by # to place a call.

■ Emergency Number Settings

Emergency number settings can be helpful to make a call for help when emergency occurs. Enable **Emergency Number**. Configure the parameters and click **Apply**.

Emergency Number Settings

Emergency Number

☒

No Operation Time

3

seconds

(2-8)

Emergency Number

ⓘ + Add Number

Apply

Cancel

Emergency Number	Enable this function to allow the telephony device to call a specific contact when the handset is picked up but no operation is done within a specific time period.
No Operation Time	Specify the time period before the telephony device makes a call automatically.
Emergency Number	Specify one or more phone numbers for emergency calls. The telephony device will call these numbers in order if the previous call is not answered.

• DND (Do Not Disturb)

DND (Do Not Disturb) allows you to temporarily block all incoming calls based on your specific schedule.

Enable **DND**. Configure the parameters and click **Apply**.

DND(Do Not Disturb)

ⓘ This feature is only available for DSL gateways.

DND

☒

Schedule

☒ Every Day

☐ Weekends

☐ Weekdays

From

00:00

ⓘ

To

06:00

ⓘ

Apply

Cancel

Schedule	Specify the days you want to block the incoming calls.
----------	--

From / To	Set the start time and end time of the DND period you want to block incoming calls.
-----------	---

- Call Forwarding

Call Forwarding allows you to redirect incoming calls to a designated phone number. Click **Add New Call Forwarding**. Enable the function, configure the parameters, and click **Add**.

Add New Call Forwarding

Enable

☒

Incoming calls to be Forward

All Incoming Calls

▼

Destination Telephone Number

Call Forward Condition

☒ Unconditional

☐ No Answer

Add

Cancel

Incoming Calls to be Forwarded	Select a call type to be forwarded. All Incoming Calls: If this option is selected, all incoming calls will be forwarded. Calls to the Telephone Number: If this option is selected, select a telephone number from the list. Any incoming calls to this number will be forwarded. Calls to the Phone: If this option is selected, select a telephony device from the list. Any incoming calls to this device will be forwarded. Calls from a Person in the Telephone Book: If this option is selected, select a contact from the list. Any incoming calls from this contact will be forwarded. Calls from the Telephone Number: If this option is selected, enter a specific telephone number. Any incoming calls from this number will be forwarded.
Destination Telephone Number	Enter a Destination Telephone Number that incoming calls will be redirected to.

Call Forward Condition

- Select the Call Forward Condition.
- Unconditional:** All incoming calls will be redirected to the designated telephone number whether the receiver is busy or not.
 - No Answer:** Incoming calls that are not answered for the specified time period will be redirected to the designated telephone number.

Voice Main

Voice Mail allows callers to leave voice messages on an external USB storage device with the appropriate configuration files when calls are not answered. To use this function, plug the USB storage device into the USB port on the router. This feature is only available for DSL gateways.

Enable **Voice Mail**, configure the parameters, and click **Apply**. The voice mails will be recorded in the Voice Mail List.

Voice Mail

No Answer Time

18

(5-60s)

Remote Access to Voice Mail

Remote Access PIN

Store Voice Mail in USB

Select USB Device

Greeting for Voice Mail

Default

Custom

Default Greeting

Play

Voice Mail Duration

60

(20-120s)

- No Answer Time** Enter the duration for the incoming calls to go to voicemail or the destination telephone number when there is no response.
- Remote Access to Voice Mail** (Optional) If you want to listen to your voice mails remotely, enable Remote Access to Voice Mail.
- Remote Access PIN** To access your voice mail remotely, dial the number for incoming calls. When your personal greeting starts, press *. Enter your Remote Access PIN when prompted.

Store Voice Mail in USB	Enable Store Voice Mail in USB. Select a path in the USB storage device to save your voice mail.
Greeting for Voice Mail	Select the Greeting for Voice Mail to use either the default or your custom greeting for the voice mail. You can click the Play icon to play the greeting.
Default Greeting	Click the Play icon to play the greeting.
Voice Mail Duration	Specify the length of each voice mail.

5.9 Use CLI Configuration

CLI configuration is essentially to configure devices via command lines. It is a supplementary means of GUI configuration. CLI configuration may conflict with GUI configuration.

The Controller supports two types of CLI configuration: Site CLI and Device CLI.

■ Site CLI

Site CLI supports batch configuration of devices that support CLI configuration on the site.

■ Device CLI

Device CLI supports batch configuration of selected devices.

Currently, CLI configuration only supports switches. Please refer to the CLI Reference Guide of the correspond Omada switch to understand the CLI commands.

If you need to use CLI configuration, please read the precautions and User Guide carefully. You can contact TP-Link technical support if necessary.

After applying the CLI configuration, you can go to **Devices > Application Result** to view the configuration results.

General Precautions

1. The GUI and CLI configuration should be planned globally according to the actual network topology and requirements.
2. To avoid conflicts, it is recommended not to use the CLI to configure the existing functions of the GUI.
 - a. When adopting a new device, the Controller will apply configurations to the device in the order of GUI, Site CLI, and then Device CLI. If there is a configuration conflict, the configuration applied last takes effect.
 - b. CLI profiles (including Site CLI profiles and Device CLI profiles) will only be sent to devices once after applied, unless the "Apply Again" button in the Application Result is clicked to trigger the full configurations application.
 - c. When a device upgrades its firmware, the Controller will apply the full configurations to the device in the order of GUI, Site CLI, and then Device CLI.
 - d. Since the configurations applied later will overwrite the previous configurations, the configuration results of different devices may be different after the same function has been modified repeatedly via GUI, Site CLI and Device CLI.
3. The Controller will not verify the existing GUI and CLI configurations of devices. Be sure to check the existing configurations before performing new configurations. Otherwise, unexpected results may occur after the configurations are applied, and the devices may even go offline.
4. To avoid configuration conflicts, if you really need to use the CLI to configure a certain function, it is recommended not to configure it via GUI at the same time.

5. To avoid disconnection of devices from the Controller due to configuration errors or conflicts, it is recommended to configure VLAN, VLAN Interface, IP Address, ACL, etc. via GUI, and avoid modifying related configurations via CLI.

Repeated Configurations

When the same function is configured via CLI multiple times, the previous configuration may be overwritten, and the last configuration shall prevail.

- a. It is recommended to confirm the currently effective commands via the CLI configuration viewing function "Show Running Config".
- b. If you need to cancel a certain configuration, use the "no" command.
- c. If you need to modify a certain configuration, you can enter a new command to overwrite the configuration.
- d. Apply the final configuration, and confirm that the function is configured correctly and takes effect via the CLI configuration viewing function.

Execution Failures

If a CLI command fails to be executed, an error will be reported and subsequent commands will be executed. You can view the error details via the error message, and the commands that have been successfully executed before will not be undone. It is recommended to follow the steps below:

- a. Use the CLI configuration viewing function (Show Running Config) to confirm the commands that have taken effect. If you need to cancel them, you can enter "no" commands and apply them to devices.
- b. Troubleshoot and correct the command error, regenerate the CLI configuration, and apply it to devices.

Command Modification

If you need to modify the commands issued via CLI, please follow the steps below:

- a. Use the CLI configuration view function (Show Running Config) to confirm the commands that have taken effect, and sort out the commands that need to be canceled.
- b. Enter "no" commands to cancel the configurations, and apply them to devices.

Prohibited Commands

1. CLI commands such as modifying user name and password, managing VLAN, SDM profile, reboot, reset, upgrade, import and export configurations have been prohibited. When using other CLI commands, please also pay attention to avoid affecting the management of the Controller.

2. Device CLI supports the variable function. The variable content does not have too many restrictions, for example, you can enter CLI commands, but it is not recommended to use it in this way.

5.9.1 Site CLI

Overview

Site CLI enables batch configurations of all devices that support CLI configuration on the site via command lines.

Configuration

1. Go to [Network Config > General Settings > CLI Configuration > Site CLI](#).
2. Click [Create New Site CLI Profile](#) and create a CLI profile according to your needs.

Create New Site CLI Profile

Name

Description

(Optional)

CLI

Import CLI from Device

Import CLI from File

Note:

1.The # character is a special command, which indicates entering the configure mode. Please use it in a separate line. If you add other commands after it in the same line, they will be ignored.

2.If a command starts with the ! character, the command will be ignored.

Save

Cancel

- Note:
- The # character is a special command, which indicates entering the configure mode. Please use it in a separate line. If you add other commands after it in the same line, they will be ignored.

If a command starts with the ! character, the command will be ignored.

Name	Specify the name of the CLI profile.
Description	(Optional) Enter a description for identification.
CLI	Enter the command lines manually.
Import CLI from Device	Click and select a device that supports CLI configuration to import its running config.
Import CLI from File	Click and select an existing command file to import command lines.

3. Click [Save](#) to add the profile. The new profile is in inactive state and will not be applied to devices.

Search Name

Create New Site CLI Profile

NAME	DESCRIPTION	STATUS	ACTION
Loopback Interval	Modify the loopback detection interval		Apply

Showing 1-1 of 1 records < 1 > 10 / page Go to page Go

4. Click [Apply](#) to apply the CLI. The profile will change to active state and apply configurations to all devices that support CLI configuration on the site.

Note:

Once the profile becomes active, you will be unable to edit it.

To check whether the profile is successfully applied to devices and takes effect, click [View CLI Details](#) to view the configuration results on the [Devices > Application Result](#) page.

Note:

Deleting a CLI profile will not take effect on existing configurations on devices. To delete the configurations, use the “no” command.

5.9.2 Device CLI

Overview

Device CLI enables batch configuration of specific devices via command lines.

Device CLI supports variables. You can use the %x% format to define a variable x, and then set different values for different switches. When the Controller applies the Device CLI configuration to switches, it will automatically modify the variable %x% to the values you set.

Configuration

1. Go to [Network Config > General Settings > CLI Configuration > Device CLI](#). Click [Create New Device CLI Profile](#) and create a CLI profile according to your needs.

Create New Device CLI Profile

1 CLI Template

2 Device Variable Settings

Name

Description

CLI

Variables:

Note:

1.The # character is a special command, which indicates entering the configure mode. Please use it in a separate line. If you add other commands after it in the same line, they will be ignored.

2.If a command starts with the ! character, the command will be ignored.

Import CLI from Device

Import CLI from File

Next

Cancel

Note:

- The # character is a special command, which indicates entering the configure mode. Please use it in a separate line. If you add other commands after it in the same line, they will be ignored.
- If a command starts with the ! character, the command will be ignored.

Name	Specify the name of the CLI profile.
Description	(Optional) Enter a description for identification.
CLI	Enter the command lines manually. You can enter %xxx% in the CLI template to define variables.
Import CLI from Device	Click and select a device that supports CLI configuration to import its running config.
Import CLI from File	Click and select an existing command file to import command lines.

2. Click **Next**. Select the devices to apply the CLI profile.

Create New Device CLI Profile

✓ CLI Template

2 Device Variable Settings

Choose Device

Please Select...

Save

← Back

3. Click **Save** to add the profile. The new profile is in inactive state and will not be applied to devices.

Search Name or Device Name				+ Create New Device CLI Profile
NAME	DEVICE NAME	DESCRIPTION	STATUS	ACTION
Multicast Snooping	A8-42-A1-61-4A-7E	Drop Unknown Groups		✎ 🗑 Apply

Showing 1-1 of 1 records < 1 > 10 / page Go to page [Go](#)

Note: Device CLI configurations are bound to the device and do not support Site Copy.

- Click [Apply](#) to apply the CLI. The profile will change to active state and apply configurations to the devices you selected.

Note:

Once the profile becomes active, you will be unable to edit it.

To check whether the profile is successfully applied to devices and takes effect, click [View CLI Details](#) to view the configuration results on the [Devices > Application Result](#) page.

Note:

Deleting a CLI profile will not take effect on existing configurations on devices. To delete the configurations, use the "no" command.

Chapter 6

Configure Wired Networks


This chapter guides you on how to configure wired networks with the SDN Controller. The chapter includes the following sections:

- [6. 1 Overview](#)
- [6. 2 Set Up an Internet Connection](#)
- [6. 3 Configure LAN Networks](#)
- [6. 4 Configure Multicast Features](#)
- [6. 5 Configure Network Isolation](#)
- [6. 6 Configure LAN DNS](#)

6.1 Overview

Wired networks enable your wired devices and clients including the gateway, switches, APs and PCs to connect to each other and to the internet.

As shown in the following figure, wired networks consist of two parts: Internet and LAN.

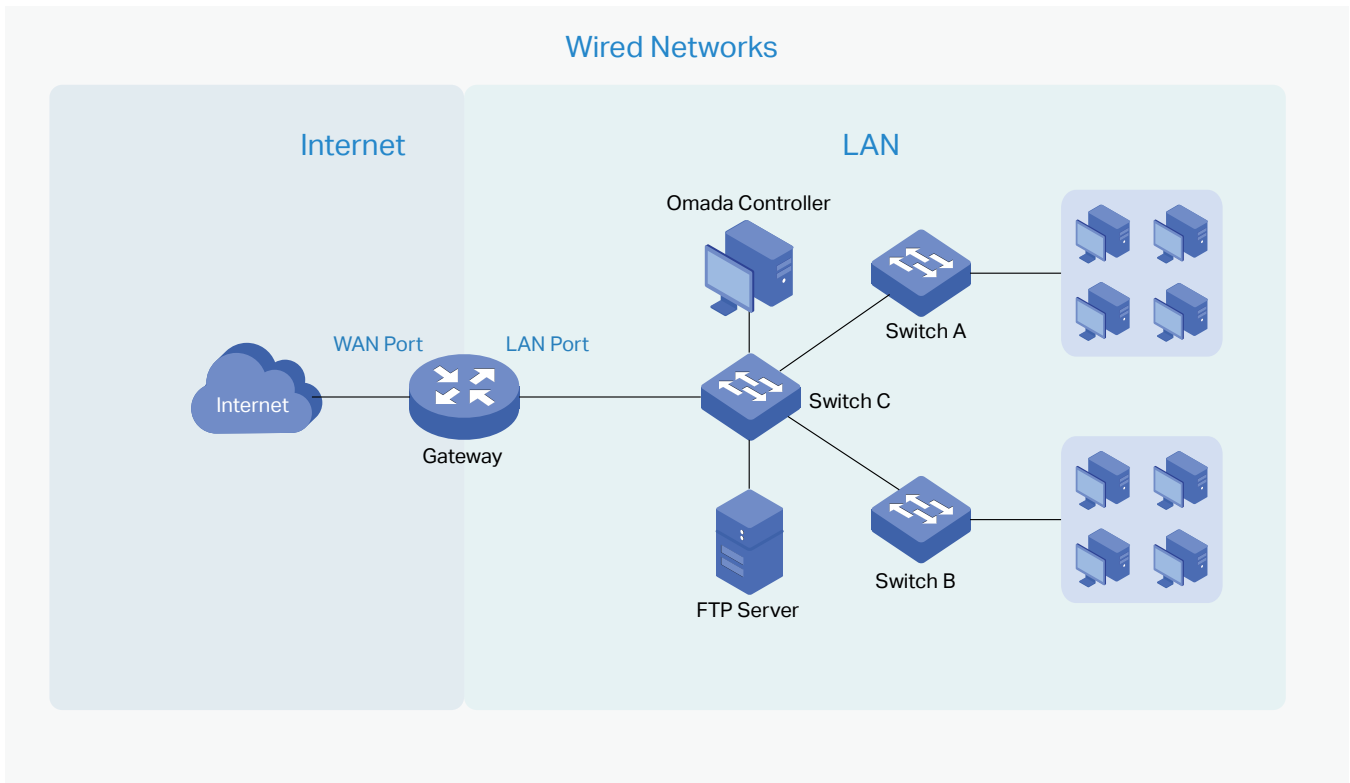

For Internet, you determine the number of WAN ports on the gateway and how they connect to the internet. You can set up an IPv4 connection and IPv6 connection to your internet service provider (ISP) according to your needs. The parameters of the internet connection for the gateway depend on which connection types you use. For an IPv4 connection, the following internet connection types are available: Dynamic IP, Static IP, PPPoE, L2TP, and PPTP. For an IPv6 connection, the following internet connection types are available: Dynamic IP (SLAAC/ DHCPv6), Static IP, PPPoE, 6to4 Tunnel, and Pass-Through (Bridge). And, when more than one WAN port is configured, you can configure Load Balancing to optimize the resource utilization if needed.

For LAN, you configure the wired internal network and how your devices logically separate from or connect to each other by means of VLANs and interfaces. Advanced LAN features include IGMP Snooping, DHCP Server and DHCP Options, PoE, Voice Network, 802.1X Control, Port Isolation, Spanning Tree, LLDP-MED, and Bandwidth Control.

6.2 Set Up an Internet Connection

Configuration

To set up an internet connection, follow these steps:

- 1) Configure the number of WAN ports on the gateway based on needs.
- 2) Configure WAN Connections. You can set up the IPv4 connection, IPv6 connection, or both.
- 3) (Optional) Configure Load Balancing if more than one WAN port is configured.

Step 1: Select WAN Mode

Launch the controller and access a site. Go to [Network Config](#) > [Network Settings](#) > [Internet](#) to load the following page. In the [WAN Mode](#) section, configure the number of WAN ports deployed by the gateway and other parameters. Then click [Apply](#).

WAN Mode ⓘ

WAN Settings Overrides ☒

ⓘ

- With WAN Settings Overrides disabled, the WAN settings of the newly adopted Omada gateway in standalone mode will take effect on the Controller.
- When WAN Settings Overrides is enabled, the Omada gateway will use the configurations on the Controller after adoption. Please make sure the configurations are correct. Otherwise the Omada gateway may be unable to access the internet after adoption.
- If the number of preconfigured WAN ports does not match the number of WAN ports enabled in the adopted Omada gateway, the Omada gateway will automatically reboot after adoption.
- If the adopted device does not support some pre-configurations, the relevant configurations will be deleted after adoption.
- The site has been bound to a site template. If a gateway template is created in the site template, WAN configurations will be overwritten by the configurations in the template, including Online Detection, WAN Port status, Load Balancing configurations, etc. Turning on or off the WAN port will cause the configuration items using this WAN port to change to the override state.

Gateway Model

DR3220v-4G v1.20

Online Detection Interval

Custom

Custom Time

10

Seconds

(1-3600)

ⓘ

Online Detection results will influence whether Load Balancing and Link Backup features take effect. The smaller the online detection interval, the faster Load Balancing and Link Backup features will respond, and meanwhile more detection packets will be sent.

WAN Settings Overrides	With this option disabled, the WAN settings of the newly adopted Omada gateway in standalone mode will take effect on the controller. When this option is turned on, the gateway will use the configurations on the Controller after adoption. Please make sure the configurations are correct. Otherwise the gateway may be unable to access the internet after adoption. If the adopted device does not support some pre-configurations, the relevant configurations will be deleted after adoption.
Gateway Model	Specify the gateway model and version. If you change the gateway, follow the web instructions to select WAN ports and copy WAN port settings. If the number of preconfigured WAN ports does not match the number of WAN ports enabled in the adopted Omada gateway, the gateway will automatically reboot after adoption.

Online Detection Interval	Select how often the WAN ports detect WAN connection status. If you don't want to enable online detection, select Disable. Online Detection results will influence whether Load Balancing and Link Backup features take effect. The smaller the online detection interval, the faster Load Balancing and Link Backup features will respond, and meanwhile more detection packets will be sent.
---------------------------	---

Step 2: Configure WAN Connections

Note: The number of configurable WAN ports is decided by WAN Mode.

- Set Up DSL WAN Connection

Launch the controller and access a site. Go to [Network Config > Network Settings > Internet](#). In the [WAN Ports Config](#) section, click the edit icon of USB Modem and configure the parameters.

Edit DSL WAN

Description

(Optional)

Location

United States

ISP

Other

DSL Modulation Type

☒ VDSL

☐ ADSL

Description	Enter a description for identification.
Location	Select your location.
ISP	Select your ISP (internet service provider).
DSL Modulation Type	Select the modulation type for your DSL connection.

- Set Up USB Modem Connection

Launch the controller and access a site. Go to [Network Config > Network Settings > Internet](#). In the [WAN Ports Config](#) section, click the edit icon of USB Modem and configure the parameters.

USB Modem

Description

(Optional)

USB Modem

No USB modem Connected.

Config Type

Auto

Location

Argentina

Mobile ISP

Claro

SIM/UIIM PIN

(Optional)

Connection Mode

☒ Connect Automatically

☐ Connect Manually

Authentication Type

Auto

MTU Size

1480

bytes

Use the following DNS Servers

☐ Enable

USB 3.0 Interference Reduction

☐ Enable

+ Advanced DHCP Options

Description	Enter a description for identification.
USB Modem	Display whether a USB modem is connected to the device and the name of the connected USB modem.
Config Type	Select a configuration type for the USB modem. Auto: Use the Location and Mobile ISP information below for configuration. Manually: Enter the Dial Number, APN, Username, and password provided by your Mobile ISP.
Location	Select your location.
Mobile ISP	Select your mobile ISP.

SIM/UIM PIN	(Optional) Enter the PIN of your SIM card. The field is required when the following information appears in the Message: PIN protection is enabled and the PIN is invalid.
Connection Mode	Select the connection mode. Connect Automatically: The router will use the USB modem to connect to the internet automatically. Connect Manually: You need to turn on/off the internet manually for the gateway on the device page.
Authentication Mode	Select the Authentication mode for the USB modem. The default value is Auto, and it is recommended to keep the default value.
MTU Size	Specify the MTU (Maximum Transmission Unit) of the USB WAN port. The default value is 1480, and it is recommended to keep the default value. MTU is the maximum data unit transmitted in the physical network.
Use the following DNS Servers	Enable the feature if you want to specify the Primary and Secondary DNS servers manually.
USB 3.0 Interference Reduction	Enable this option if you want to lower the data transfer speed of a USB 3.0 port to improve performance on the 2.4GHz Wi-Fi band. Enabling the feature trades USB 3.0 speed for better wireless stability.

- Set Up IPv4 Connection

Launch the controller and access a site. Go to **Network Config > Network Settings > Internet**. In the **WAN Ports Config** section, click the edit icon of a WAN port and configure the Connection Type according to the service provided by your ISP.

Connection Type	Dynamic IP: If your ISP automatically assigns the IP address and the corresponding parameters, choose Dynamic IP. Static IP: If your ISP provides you with a fixed IP address and the corresponding parameters, choose Static IP. PPPoE: If your ISP provides you with a PPPoE account, choose PPPoE. L2TP: If your ISP provides you with an L2TP account, choose L2TP. PPTP: If your ISP provides you with a PPTP account, choose PPTP.
------------------------	--

■ **Dynamic IP**

Choose Connection Type as Dynamic IP and configure the parameters.

IPv4

Connection Type

Dynamic IP

▼

—

Advanced Settings

Unicast DHCP

☐ Enable

i

Primary DNS Server

.

.

.

(Optional)

Secondary DNS Server

.

.

.

(Optional)

Host Name

(Optional)

MTU

1500

(576-1500, default:1500)

VLAN ID

i

☐ 0

WAN IP Alias

Unicast DHCP	With this option enabled, the gateway will require the DHCP server to assign the IP address by sending unicast DHCP packets. Usually you need not to enable the option.
Primary DNS Server / Secondary DNS Server	Enter the IP address of the DNS server provided by your ISP if there is any.
Host Name	Enter a name for the gateway.
MTU	Specify the MTU (Maximum Transmission Unit) of the WAN port. MTU is the maximum data unit transmitted in the physical network. When the connection type is Dynamic IP, MTU can be set in the range of 576-1500 bytes. The default value is 1500.
VLAN ID	Add the WAN port to a VLAN and you need to specify the VLAN ID. Generally, you don't need to manually configure it unless required by your ISP.
VLAN Priority	Priority is only available when Internet VLAN is enabled. The VLAN Priority function helps to prioritize the internet traffic based on your needs. You can determine the priority level for the traffic by specifying the tag. The tag ranges from 0 to 7. None means the packet will be forwarded without any operation.
WAN IP Alias	WAN IP Alias supports configuring multiple IP addresses on one WAN port, and these IP addresses can be used to configure virtual server and other functions.

■ Static IP

Choose Connection Type as Static IP and configure the parameters.

IPv4

Connection Type

Static IP

IP Address

.

.

.

Subnet Mask

.

.

.

Default Gateway

.

.

.

(Optional)

—

Advanced Settings

Primary DNS Server

.

.

.

(Optional)

Secondary DNS Server

.

.

.

(Optional)

MTU

1500

(576-1500, default:1500)

VLAN ID

i

☐

0

WAN IP Alias

IP Address	Enter the IP address provided by your ISP.
Subnet Mask	Enter the subnet mask provided by your ISP.
Default Gateway	Enter the default gateway provided by your ISP.
Primary DNS Server / Secondary DNS Server	Enter the IP address of the DNS server provided by your ISP if there is any.
MTU	Specify the MTU (Maximum Transmission Unit) of the WAN port. MTU is the maximum data unit transmitted in the physical network. When the connection type is Static IP, MTU can be set in the range of 576-1500 bytes. The default value is 1500.
VLAN ID	Add the WAN port to a VLAN and you need to specify the VLAN ID. Generally, you don't need to manually configure it unless required by your ISP.
VLAN Priority	Priority is only available when Internet VLAN is enabled. The VLAN Priority function helps to prioritize the internet traffic based on your needs. You can determine the priority level for the traffic by specifying the tag. The tag ranges from 0 to 7. None means the packet will be forwarded without any operation.
WAN IP Alias	WAN IP Alias supports configuring multiple IP addresses on one WAN port, and these IP addresses can be used to configure virtual server and other functions.

■ **PPPoE**

Choose Connection Type as PPPoE and configure the parameters.

IPv4

Connection Type

PPPoE

Username

Password

Advanced Settings

Get IP Address from ISP

Enable

Primary DNS Server

.

.

.

(Optional)

Secondary DNS Server

.

.

.

(Optional)

Connection Mode

Connect Automatically

Connect Manually

Time-based

Redial Interval

10

Seconds

(1-99999)

Service Name

(Optional)

MTU

1492

(576-1492, default:1492)

MRU

1492

(576-1492, default:1492)

MSS Clamping

Disable

Auto

Custom

(536-1452)

VLAN ID

0

Secondary Connection

None

Static IP

Dynamic IP

Username	Enter the PPPoE username provided by your ISP.
Password	Enter the PPPoE password provided by your ISP.
Get IP address from ISP	With this option enabled, the gateway gets IP address from ISP when setting up the WAN connection. With this option disabled, you need to specify the IP Address provided by your ISP.

Primary DNS Server / Secondary DNS Server	Enter the IP address of the DNS server provided by your ISP if there is any.
Connection Mode	Connect Automatically: The gateway activates the connection automatically when the connection is down. You need to specify the Redial Interval, which decides how often the gateway tries to redial after the connection is down. Connect Manually: You can manually activate or terminate the connection. Time-Based: During the specified period, the gateway will automatically activate the connection. You need to specify the Time Range when the connection is up.
Redial Interval	Specify how often the gateway tries to redial after the connection is down.
Service Name	Keep it blank unless your ISP requires you to configure it.
MTU	Specify the MTU (Maximum Transmission Unit) of the WAN port. MTU is the maximum data unit transmitted in the physical network. When the connection type is PPPoE, MTU can be set in the range of 576-1492 bytes. The default value is 1492.
MRU	Specify the MRU (Maximum Receive Unit) of the WAN port. MRU is the maximum data unit transmitted in the Data link layer.
MSS Clamping	Specify the upper limit of the value of the MSS (Maximum Segment Size) field negotiated by the sending and receiving parties when establishing TCP connection to avoid IP fragmentation. If the value of the MSS field negotiated by the communication parties exceeds the specified value, the gateway will change the negotiated MSS field to the specified value Disabled: Disable the MSS Clamping function, and the gateway will not intervene in the MSS value negotiated by the communication parties. Auto: Automatically calculate MSS value based on path MTU. Custom: Select this option to specify the MSS value. It should not exceed the MTU value.
VLAN ID	Add the WAN port to a VLAN and you need to specify the VLAN ID. Generally, you don't need to manually configure it unless required by your ISP.
VLAN Priority	Priority is only available when Internet VLAN is enabled. The VLAN Priority function helps to prioritize the internet traffic based on your needs. You can determine the priority level for the traffic by specifying the tag. The tag ranges from 0 to 7. None means the packet will be forwarded without any operation.

Secondary Connection

Secondary connection is required by some ISPs. Select the connection type required by your ISP.

None:

Select this if the secondary connection is not required by your ISP.

Static IP:

Select this if your ISP provides you with a fixed IP address and subnet mask for the secondary connection. You need to specify the IP Address and Subnet Mask provided by your ISP.

Dynamic IP:

Select this if your ISP automatically assigns the IP address and subnet mask for the secondary connection.

■ L2TP

Choose Connection Type as L2TP and configure the parameters.

IPv4

Connection Type

L2TP

Username

Password

VPN Server/Domain Name

Get IP Address from ISP

☒ Enable

Primary DNS Server

.

.

.

(Optional)

Secondary DNS Server

.

.

.

(Optional)

Connection Mode

☒ Connect Automatically

☐ Connect Manually

☐ Time-based

Redial Interval

10

Seconds

(1-99999)

MTU

1460

(576-1460, default:1460)

MSS Clamping

☐ Disable

☒ Auto

☐ Custom

(536-1420)

VLAN ID

0

Secondary Connection

☐ Static IP

☒ Dynamic IP

Username	Enter the L2TP username provided by your ISP.
Password	Enter the L2TP password provided by your ISP.

VPN Server / Domain Name	Enter the VPN Server/Domain Name provided by your ISP.
Get IP address from ISP	With this option enabled, the gateway gets IP address from ISP when setting up the WAN connection. With this option disabled, you need to specify the IP address provided by your ISP.
Primary DNS Server / Secondary DNS Server	Enter the IP address of the DNS server provided by your ISP if there is any.
Connection Mode	Connect Automatically: The gateway activates the connection automatically when the connection is down. You need to specify the Redial Interval, which decides how often the gateway tries to redial after the connection is down. Connect Manually: You can manually activate or terminate the connection. Time-Based: During the specified period, the gateway will automatically activate the connection. You need to specify the Time Range when the connection is up.
Redial Interval	Specify how often the gateway tries to redial after the connection is down.
MTU	Specify the MTU (Maximum Transmission Unit) of the WAN port. MTU is the maximum data unit transmitted in the physical network. When the connection type is L2TP, MTU can be set in the range of 576-1460 bytes. The default value is 1460.
MSS Clamping	Specify the upper limit of the value of the MSS (Maximum Segment Size) field negotiated by the sending and receiving parties when establishing TCP connection to avoid IP fragmentation. If the value of the MSS field negotiated by the communication parties exceeds the specified value, the gateway will change the negotiated MSS field to the specified value Disabled: Disable the MSS Clamping function, and the gateway will not intervene in the MSS value negotiated by the communication parties. Auto: Automatically calculate MSS value based on path MTU. Custom: Select this option to specify the MSS value. It should not exceed the MTU value.
VLAN ID	Add the WAN port to a VLAN and you need to specify the VLAN ID. Generally, you don't need to manually configure it unless required by your ISP.
VLAN Priority	Priority is only available when Internet VLAN is enabled. The VLAN Priority function helps to prioritize the internet traffic based on your needs. You can determine the priority level for the traffic by specifying the tag. The tag ranges from 0 to 7. None means the packet will be forwarded without any operation.

Secondary Connection	Select the connection type required by your ISP. Static IP: Select this if your ISP provides you with a fixed IP address and subnet mask for the secondary connection. You need to specify the IP Address , Subnet Mask , Default Gateway (Optional) , Primary DNS Server (Optional) , and Secondary DNS Server (Optional) provided by your ISP. Dynamic IP: Select this if your ISP automatically assigns the IP address and subnet mask for the secondary connection.
----------------------	--

■ PPTP

Choose Connection Type as PPTP and configure the parameters.

IPv4

Connection Type

PPTP

Username

Password

VPN Server/Domain Name

Get IP Address from ISP

☒ Enable

Primary DNS Server

.

.

.

(Optional)

Secondary DNS Server

.

.

.

(Optional)

Connection Mode

☒ Connect Automatically
☐ Connect Manually
☐ Time-based

Redial Interval

10

Seconds

(1-99999)

MTU

1420

(576-1420, default:1420)

MSS Clamping

☐ Disable ☒ Auto ☐ Custom

(536-1380)

VLAN ID

0

Secondary Connection

☐ Static IP ☒ Dynamic IP

Username	Enter the PPTP username provided by your ISP.
Password	Enter the PPTP password provided by your ISP.
VPN Server / Domain Name	Enter the VPN Server/Domain Name provided by your ISP.

Get IP address from ISP	With this option enabled, the gateway gets IP address from ISP when setting up the WAN connection. With this option disabled, you need to specify the IP address provided by your ISP.
Primary DNS Server / Secondary DNS Server	Enter the IP address of the DNS server provided by your ISP if there is any.
Connection Mode	Connect Automatically: The gateway activates the connection automatically when the connection is down. You need to specify the Redial Interval, which decides how often the gateway tries to redial after the connection is down. Connect Manually: You can manually activate or terminate the connection. Time-Based: During the specified period, the gateway will automatically activate the connection. You need to specify the Time Range when the connection is up.
Redial Interval	Specify how often the gateway tries to redial after the connection is down.
MTU	Specify the MTU (Maximum Transmission Unit) of the WAN port. MTU is the maximum data unit transmitted in the physical network. When the connection type is PPTP, MTU can be set in the range of 576-1420 bytes. The default value is 1420.
MSS Clamping	Specify the upper limit of the value of the MSS (Maximum Segment Size) field negotiated by the sending and receiving parties when establishing TCP connection to avoid IP fragmentation. If the value of the MSS field negotiated by the communication parties exceeds the specified value, the gateway will change the negotiated MSS field to the specified value Disabled: Disable the MSS Clamping function, and the gateway will not intervene in the MSS value negotiated by the communication parties. Auto: Automatically calculate MSS value based on path MTU. Custom: Select this option to specify the MSS value. It should not exceed the MTU value.
VLAN ID	Add the WAN port to a VLAN and you need to specify the VLAN ID. Generally, you don't need to manually configure it unless required by your ISP.
VLAN Priority	Priority is only available when Internet VLAN is enabled. The VLAN Priority function helps to prioritize the internet traffic based on your needs. You can determine the priority level for the traffic by specifying the tag. The tag ranges from 0 to 7. None means the packet will be forwarded without any operation.

Secondary Connection	Select the connection type required by your ISP. Static IP: Select this if your ISP provides you with a fixed IP address and subnet mask for the secondary connection. You need to specify the IP Address, Subnet Mask, Default Gateway (Optional), Primary DNS Server (Optional), and Secondary DNS Server (Optional) provided by your ISP. Dynamic IP: Select this if your ISP automatically assigns the IP address and subnet mask for the secondary connection.
----------------------	---

• Set Up IPv6 Connection

For IPv6 connections, check the box to enable the IPv6 connection, select the internet connection type according to the requirements of your ISP.

Connection Type	Dynamic IP (SLAAC/DHCPv6): If your ISP uses Dynamic IPv6 address assignment, either DHCPv6 or SLAAC+Stateless DHCP, select Dynamic IP (SLAAC/DHCPv6). Static IP: If your ISP provides you with a fixed IPv6 address, select Static IP. PPPoE: If your ISP uses PPPoEv6, and provides a username and password, select PPPoE. 6to4 Tunnel: If your ISP uses 6to4 deployment for assigning IPv6 address, select 6to4 Tunnel. 6to4 is an internet transition mechanism for migrating from IPv4 to IPv6, a system that allows IPv6 packets to be transmitted over an IPv4 network. The IPv6 packet will be encapsulated in the IPv4 packet and transmitted to the IPv6 destination through IPv4 network. Pass-Through (Bridge): In Pass-Through (Bridge) mode, the gateway works as a transparent bridge. The IPv6 packets received from the WAN port will be transparently forwarded to the LAN port and vice versa. No extra parameter is required.
-----------------	--

■ Dynamic IP (SLAAC/DHCPv6)

Choose Connection Type as Dynamic IP (SLAAC/DHCPv6) and configure the parameters.

Connection Type	Dynamic IP (SLAAC/DHCPv6) ▼		
Get IPv6 Address	☒ Automatically	☐ Via SLAAC	☐ Via DHCPv6
Prefix Delegation	☒ Enable ⓘ		
Prefix Delegation Size		(48-64) ⓘ	
DNS Address	☒ Get from ISP Dynamically	☐ Use the Following DNS Addresses	

Get IPv6 Address	Select the proper method whereby your ISP assigns IPv6 address to your gateway. Automatically: With this option selected, the gateway will automatically select SLAAC or DHCPv6 to get IPv6 addresses. Via SLAAC: With SLAAC (Stateless Address Auto-Configuration) selected, your ISP assigns the IPv6 address prefix to the gateway and the gateway automatically generates its own IPv6 address. Also, your ISP assigns other parameters including the DNS server address to the gateway. Via DHCPv6: With DHCPv6 selected, your ISP assigns an IPv6 address and other parameters including the DNS server address to the gateway using DHCPv6. Non-Address: With this option selected, the gateway will not get an IPv6 address.
Prefix Delegation	Select Enable to get an address prefix by DHCPv6 server from your ISP, or Disable to designate an address prefix for your LAN port manually. Clients in LAN will get an IPv6 address with this prefix.
Prefix Delegation Size	With Prefix Delegation enabled, enter the Prefix Delegation Size to determine the length of the address prefix. If you are not sure about the value, you can ask your ISP.
DNS Address	Select whether to get the DNS address dynamically from your ISP or designate the DNS address manually. Get from ISP Dynamically: The DNS address will be automatically assigned by the ISP. Use the Following DNS Addresses: Enter the DNS address provided by the ISP.

■ Static IP

Choose Connection Type as Static IP and configure the parameters.

Connection Type	Static IP	▼
IPv6 Address		(Format: 2001::)
Prefix Length		(1-128) ⓘ
Default Gateway		(Format: 2001::)
Primary DNS Server		(Format: 2001::)
Secondary DNS Server		(Optional. Format: 2001::)

IPv6 Address	Enter the static IPv6 address information received from your ISP.
Prefix Length	Enter the prefix length of the IPv6 address received from your ISP.

Default Gateway	Enter the default gateway provided by your ISP.
Primary DNS Server	Enter the IP address of the primary DNS server provided by your ISP.
Secondary DNS Server	(Optional) Enter the IP address of the secondary DNS server, which provides redundancy in case the primary DNS server goes down.

■ PPPoE

Choose Connection Type as PPPoE and configure the following parameters. Then click [Apply](#).

Connection Type

PPPoE

☐ Share the same PPPoE session with IPv4

Username

Password

Get IPv6 Address

☒ Automatically

☐ Via SLAAC

☐ Via DHCPv6

☐ Non-Address

☐ Specified by ISP

Prefix Delegation

☒ Enable

Prefix Delegation Size

(48-64)

DNS Address

☒ Get from ISP Dynamically

☐ Use the Following DNS Addresses

Share the same PPPoE session with IPv4	If your ISP provides only one PPPoE account for both IPv4 and IPv6 connections, and you have already established an IPv4 connection on this WAN port, you can check the box, then the WAN port will use the PPP session of IPv4 PPPoE connection to get the IPv6 address. In this case, you do not need to enter the username and password of the PPPoE account. If your ISP provides two separate PPPoE accounts for the IPv4 and IPv6 connections, or the IPv4 connection of this WAN port is not based on PPPoE, do not check the box and manually enter the username and password for the IPv6 connection.
Username	Enter the username of your PPPoE account provided by your ISP.
Password	Enter the password of your PPPoE account provided by your ISP.

Get IPv6 Address	Select the proper method whereby your ISP assigns IPv6 address to your gateway. Automatically: With this option selected, the gateway will automatically select the method to get IPv6 addresses between SLAAC and DHCPv6. Via SLAAC: With SLAAC (Stateless Address Auto-Configuration) selected, your ISP assigns the IPv6 address prefix to the gateway and the gateway automatically generates its own IPv6 address. Also, your ISP assigns other parameters including the DNS server address to the gateway. Via DHCPv6: With DHCPv6 selected, your ISP assigns an IPv6 address and other parameters including the DNS server address to the gateway using DHCPv6. Non-Address: With this option selected, the gateway will not get an IPv6 address. Specified by ISP: With this option selected, enter the IPv6 address you get from your ISP.
Prefix Delegation	Select Enable to get an address prefix by DHCPv6 server from your ISP, or Disable to designate an address prefix for your LAN port manually. Clients in LAN will get an IPv6 address with this prefix.
Prefix Delegation Size	With Prefix Delegation enabled, enter the Prefix Delegation Size to determine the length of the address prefix. If you are not sure about the value, you can ask your ISP.
DNS Address	Select whether to get the DNS address dynamically from your ISP or designate the DNS address manually. Get from ISP Dynamically: The DNS address will be automatically assigned by the ISP. Use the Following DNS Addresses: Enter the DNS address provided by the ISP.

■ 6to4 Tunnel

Choose Connection Type as 6to4 Tunnel and configure the parameters.

Connection Type

6to4 Tunnel

!

If you want to configure the IPv6 address on the LAN side, it is recommended to use the SLAAC+Stateless DHCP or SLAAC+RDNS dialing method on the LAN side. If you want to use the DHCPv6 configuration, ensure that the first 48 bits are the same as the 6to4 IPv6 address on the WAN side; otherwise IPv6 WAN-LAN connection may not work.

DNS Address

☒ Get from ISP Dynamically

☐ Use the Following DNS Addresses

DNS Address	Select whether to get the DNS address dynamically from your ISP or designate the DNS address manually. Get from ISP Dynamically: The DNS address will be automatically assigned by the ISP. Use the Following DNS Addresses: Enter the DNS address provided by the ISP.
-------------	--

■ **Pass-Through (Bridge)**

Choose Connection Type as Pass-Through (Bridge) and no configuration is required for this type of connection.

Connection Type

Pass-Through(Bridge) ▾

• **Set Up MAC Address**

Launch the controller and access a site. Go to [Network Config > Network Settings > Internet](#). In the [WAN Ports Config](#) section, click the edit icon of a WAN port and configure the MAC address according to actual needs.

MAC Address	Use Default MAC Address: The WAN port uses the default MAC address to set up the internet connection. It's recommended to use the default MAC address unless required otherwise. Customize MAC Address: The WAN port uses a customized MAC address to set up the internet connection and you need to specify the MAC address. Typically, this is required when your ISP bound the MAC address with your account or IP address. If you are not sure, contact the ISP.
-------------	--

Step 3: (Optional) Configure Load Balancing

Note: Loading Balancing is only available when you configure more than one WAN port.

Launch the controller and access a site. Go to [Network Config > Network Settings > Internet](#). In [Load Balancing](#), configure the following parameters and click [Apply](#).

Load Balancing

Load Balancing Weight

1

:

10

:

10

USB ModemSFP WAN/LAN1WAN2

Application Optimized Routing

☒ Enable ⓘ

Link Backup

☒ Enable

Primary WAN

Please Select... ▾

Backup WAN

Please Select... ▾

Failover Mode

☒ Enable backup link when any primary WAN fails

☐ Enable backup link when all primary WANs fail

Recover Mode

☐ Link Backup ⓘ

☒ Always Link Primary ⓘ

Apply

Cancel

Load Balancing Weight	Specify the ratio of network traffic that each WAN port carries.
-----------------------	--

Application Optimized Routing	With Application Optimized Routing enabled, the router will consider the source IP address and destination IP address (or destination port) of the packets as a whole and record the WAN port they pass through. Then the packets with the same source IP address and destination IP address (or destination port) will be forwarded to the recorded WAN port. This feature ensures that multi-connected applications work properly.
Link Backup	With Link Backup enabled, the router will switch all the new sessions from dropped lines automatically to another to keep an always on-line network.
Backup WAN / Primary WAN	The backup WAN port backs up the traffic for the primary WAN ports under the specified condition.
Failover Mode	Select whether to enable backup link when any primary WAN fails or all primary WANs fail.
Recover Mode	Link Backup: The system will switch all the new sessions from dropped line automatically to another to keep an always on-link network. Always Link Primary: Traffic is always forwarded through the primary WAN port unless it fails. The system will try to forward the traffic via the backup WAN port when it fails, and switch back when it recovers.

6.3 Configure LAN Networks

Overview

The LAN page allows you to configure wired internal network. Based on 802.1Q VLAN, Omada Controller provides a convenient and flexible way to separate and deploy the network. The network can be logically segmented by departments, application, or types of users, without regard to geographic locations.

Guidelines

To create a LAN, follow the guidelines:

- 1) Create a new Network with specific purpose. Select the device to serve as the DHCP Server based on the purpose of the VLAN, configure the VLAN on the selected device, specify the VLAN ID, and set related network parameters.
- 2) Bind the VLAN to the destination device port according to the actual use scenario. It can flexibly divide the network logic boundary to meet different business requirements.
- 3) Confirm the configuration and apply to activate the VLAN.
- 4) View the devices that are currently functioning in this VLAN through the topology view or check the configuration of this VLAN on the device ports through the port view.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Network Settings](#) > [LAN](#). Click [Add](#) to create a network.

Basic Configuration

Name

DHCP Server Device ⓘ

VLAN Type ☒ Single ☐ Multiple ⓘ

VLAN (1-4090) ⓘ

Gateway/Subnet / ⓘ

DHCP Server ☒ Enable

-

+ Advanced Settings

+ Advanced DHCP Options

+ Configure IPv6

3. Set the network name and VLAN type.

Name	Enter a name to identify the network.
VLAN Type	Specify whether to use a single VLAN or multiple VLANs. If the VLAN Type is "Multiple" and the DHCP Server Device Type is "Gateway", a single network containing multiple VLAN IDs will be created. If the VLAN Type is "Multiple" and the DHCP Server Device Type is "External Device" or "None", multiple networks will be created, each corresponding to one VLAN.

- Select the **DHCP Server Device** type for the network. Parameters to configured will vary by device type.

■ **If you select a gateway, configure the following parameters:**

VLAN	Enter a VLAN ID with the value between 1 and 4090. Each VLAN can be uniquely identified by its VLAN ID, which is transmitted and received as IEEE 802.1Q tag in an Ethernet frame.
Gateway/Subnet	Enter the IP address and subnet mask in the CIDR format. The CIDR Notation here includes the IP address and subnet mask of the default gateway. The summary of the information that you entered will show up below in realtime.
DHCP Server	Click the checkbox to allow the device to serve as the DHCP server for this network. A DHCP server assigns IP addresses, DNS server, default gateway, and other parameters to all devices in the network. Deselect the box if there is already a DHCP server in the network. If selected, set the starting and ending IP addresses of the DHCP address pool in the fields provided.

You can expand and configure **Advanced Settings** if needed.

DNS Server	Select a method to configure the DNS server for the network. Auto: The DHCP server automatically assigns DNS server for devices in the network. It uses the IP address specified in the Gateway/Subnet entry as the DNS server address. Manual: Specify DNS servers manually. Enter the IP address of a server in each DNS server field.
Default Gateway	Enter the IP address of the default gateway. Auto: The DHCP server automatically assigns default gateway for devices in the network. It uses the IP address specified in the Gateway/Subnet entry as the default gateway address. Manual: Specify default gateway manually. Enter the IP address of the default gateway in the field.
Lease Time	Specify how long a client can use the IP address assigned from this address pool.
ARP Detection	When enabled, the gateway will broadcast ARP requests to obtain the status of the dumb terminal. It is recommended that the subnet mask be no less than 24 bits.

Domain Name	Enter the domain name.
QoS Queue	Click the checkbox to assign the traffic in this network to a queue, and the traffic will be forwarded with a certain priority.
Isolate Network	Enable this option if you want to isolate the network.
Snooping	Select the Snooping function to be enabled. IGMP Snooping: Click the checkbox to monitor IGMP (Internet Group Management Protocol) traffic and thereby manage multicast traffic. MLD Snooping: Click the checkbox to monitor MLD (Multicast Listener Discovery) traffic and thereby manage IPv6 multicast traffic.
DHCP Next Server	Specify the server IP address that the DHCP client will use in the next step.
Legal DHCP Servers	With Legal DHCP Server enabled, Omada switches ensure that users get IP addresses only from the DHCP servers whose IP addresses are specified here.
Legal DHCPv6 Servers	With Legal DHCPv6 Server enabled, Omada switches ensure that users get IPv6 addresses only from the DHCPv6 servers whose IPv6 addresses are specified here.
DHCP L2 Relay	With DHCP L2 relay enabled, Omada switches configure the Option 82 field of the DHCP packets and transmit the packets in the LAN.

You can expand and configure **Advanced DHCP Options** if needed.

Option 2	DHCP clients use DHCP option 2 to configure the time offset. The time offset field specifies the offset of the client's subnet in seconds from Coordinated Universal Time (UTC).
Option 42	DHCP clients use DHCP option 42 to configure the NTP server address.
Option 44	DHCP clients use DHCP option 44 to configure the NetBIOS over TCP/IP name server.
Option 60	Enter the value for DHCP Option 60. DHCP clients use this field to optionally identify the vendor type and configuration of a DHCP client. Mostly it is used in the scenario where the APs apply for different IP addresses from different servers according to the needs.
Option 66	Enter the value for DHCP Option 66. It specifies the TFTP server information and supports a single TFTP server IP address.
Option 67	Option 67 tells the client a path to a file from a TFTP server (option 66) that will be retrieved and used to boot. That file needs to be a basic boot loader that will do any other required work.
Option 138	Enter the value for DHCP Option 138. It is used in discovering the devices by the controller.

Option 252

Option 252 provides a DHCP client a URL to use to configure its proxy settings. It's defined in draft-ietf-wrec-wpad-01. If it was a statement like 'wpad-proxy-url' then only systems that understood it could use it (they'd have to recognize that string and know how to handle it)

You can expand and configure IPv6 connections for the LAN clients if needed. First, determine the method whereby the gateway assigns IPv6 addresses to the clients in the local network. Some clients may support only a few of these connection types, so you should choose it according to the compatibility of clients in the local network.

IPv6 Interface Type

Configure the type of assigning IPv6 address to the clients in the local network.

None: IPv6 connection is not enabled for the clients in the local network.

DHCPv6: The gateway assigns an IPv6 address and other parameters including the DNS server address to each client using DHCPv6.

SLAAC+Stateless DHCP: The gateway assigns the IPv6 address prefix to each client and the client automatically generates its own IPv6 address. Also, the gateway assigns other parameters including the DNS server address to each client using DHCPv6.

SLAAC+RDNSS: The gateway assigns the IPv6 address prefix to each client and the client automatically generates its own IPv6 address. Also, the gateway assigns other parameters including the DNS server address to each client using the RDNSS option in RA (Router Advertisement).

Pass-Through: Select this type if the WAN ports of the gateway use the Pass-Through for IPv6 connections.

With DHCPv6 selected, configure the following parameters.

Gateway/Subnet

Enter the IP address and subnet mask in the CIDR format. The CIDR notation here includes the IP address and subnet mask of the default gateway. The summary of the information that you entered will show up below in real time.

DHCP Range

Enter the starting and ending IP addresses of the DHCP address pool in the fields provided. For quick operation, click **Update DHCP Range** beside the Gateway/Subnet entry to get the IP address range populated automatically, and edit the range according to your needs.

Lease Time

This entry determines how long the assigned IPv6 address remains valid. Either keep the default 1440 minutes or change it if required by your ISP.

DHCPv6 DNS

Select a method to configure the DNS server for the network. With Auto selected, the DHCP server automatically assigns DNS server for devices in the network. With Manual selected, enter the IP address of a server in each DNS server field.

RA Priority

Specify the router priority to help a host choose its default gateway. If a host receives RA messages from multiple routers, it will select the router with the highest RA priority as the default gateway. In the case of routers with the same priority, it will select the router whose RA message is received first as the default gateway.

RA Valid Lifetime	Specify the validity lifetime of the prefix. The addresses automatically generated with the prefix can be used normally during the valid lifetime, and they will become invalid and be deleted after the valid lifetime expires.
RA Preferred Lifetime	Specify the preferred lifetime for stateless auto-configuration of addresses with the prefix. After the preferred lifetime expires, the addresses automatically configured by the hosts with this prefix will be abolished. A host cannot use an abolished address to establish a new connection, but it can still receive packets whose destination address is an abolished address. The RA Preferred Lifetime must be less than or equal to the RA Valid Lifetime.
With SLAAC+Stateless DHCP selected, configure the following parameters.	
Prefix	Configure the IPv6 address prefix for each client in the local network. Manual Prefix: With Manual Prefix selected, enter the prefix in the Address Prefix field. Get from Prefix Delegation: With Get from Prefix Delegation selected, select the WAN port with Prefix Delegation configured, and the clients will get the address prefix from the Prefix Delegation.
IPv6 Prefix ID	With Get from Prefix Delegation selected, enter the Prefix ID, which will be added to the prefix to obtain a /64 subnet. The range of IPv6 Prefix ID is determined by the larger value of Prefix Delegation Size and Prefix Delegation Length (obtained from the ISP). Note that if the Prefix Delegation Length is larger than 64, the IPv6 Prefix ID cannot be obtained from Prefix Delegation, please select another method. In site view, go to Network Config > Network Settings > Internet to configure Prefix Delegation Size.
DNS Server	Select a method to configure the DNS server for the network. Auto: With Auto selected, the DHCP server automatically assigns DNS server for devices in the network. Manual: With Manual selected, enter the IP address of a server in each DNS server field.
RA Priority	Specify the router priority to help a host choose its default gateway. If a host receives RA messages from multiple routers, it will select the router with the highest RA priority as the default gateway. In the case of routers with the same priority, it will select the router whose RA message is received first as the default gateway.
RA Valid Lifetime	Specify the validity lifetime of the prefix. The addresses automatically generated with the prefix can be used normally during the valid lifetime, and they will become invalid and be deleted after the valid lifetime expires.
RA Preferred Lifetime	Specify the preferred lifetime for stateless auto-configuration of addresses with the prefix. After the preferred lifetime expires, the addresses automatically configured by the hosts with this prefix will be abolished. A host cannot use an abolished address to establish a new connection, but it can still receive packets whose destination address is an abolished address. The RA Preferred Lifetime must be less than or equal to the RA Valid Lifetime.
With SLAAC+RDNSS selected, configure the following parameters.	

Prefix	Configure the IPv6 address prefix for each client in the local network. Manual Prefix: With Manual Prefix selected, enter the prefix in the Address Prefix field. Get from Prefix Delegation: With Get from Prefix Delegation selected, select the WAN port with Prefix Delegation configured, and the clients will get the address prefix from the Prefix Delegation.
IPv6 Prefix ID	With Get from Prefix Delegation selected, enter the Prefix ID, which will be added to the prefix to obtain a /64 subnet.
DNS Server	Select a method to configure the DNS server for the network. Auto: With Auto selected, the DHCP server automatically assigns DNS server for devices in the network. Manual: With Manual selected, enter the IP address of a server in each DNS server field.
RA Priority	Specify the router priority to help a host choose its default gateway. If a host receives RA messages from multiple routers, it will select the router with the highest RA priority as the default gateway. In the case of routers with the same priority, it will select the router whose RA message is received first as the default gateway.
RA Valid Lifetime	Specify the validity lifetime of the prefix. The addresses automatically generated with the prefix can be used normally during the valid lifetime, and they will become invalid and be deleted after the valid lifetime expires.
RA Preferred Lifetime	Specify the preferred lifetime for stateless auto-configuration of addresses with the prefix. After the preferred lifetime expires, the addresses automatically configured by the hosts with this prefix will be abolished. A host cannot use an abolished address to establish a new connection, but it can still receive packets whose destination address is an abolished address. The RA Preferred Lifetime must be less than or equal to the RA Valid Lifetime.
With Pass-Through selected, configure the following parameters.	
IPv6 Prefix Delegation Interface	Select the WAN port using Pass-Through (Bridge) for the IPv6 connection.

■ **If you select a switch, configure the following parameters:**

VLAN	Enter a VLAN ID with the value between 1 and 4094. Each VLAN can be uniquely identified by its VLAN ID, which is transmitted and received as IEEE 802.1Q tag in an Ethernet frame.
IP Address Mode	Select a method to configure the IP for the DHCP Server Static: Specify the IP of DHCP servers manually. Enter the IP address of server in IP Address/Subnet field. DHCP: The DHCP server is automatically assigned an IP address in the network.
IP Address/Subnet	Enter the IP address and subnet mask in the CIDR format.

DHCP Mode	Select a mode for the clients in the VLAN to obtain their IP address. None: Do not use DHCP to assign IP addresses. DHCP Server: Assign an IP address to the clients through a DHCP server. When DHCP Server is selected, you can specify the DHCP Range, and the IP addresses in the range can be assigned to the clients in the VLAN. Also, it is optional for you to specify the DHCP Option 138, Primary/Secondary DNS, Default Gateway, and Lease Time. DHCP Option 138 informs the DHCP client of the controller's IP address when the client sends a request to the DHCP server, and specify Option 138 as the controller's IP address here. Lease Time decides how long the client can use the assigned IP address. DHCP Relay: It allows clients in the VLAN to obtain IP addresses from a DHCP server on different subnet. When DHCP Relay is selected, specify the IP address of the DHCP server in Server Address.
DHCP Range	Enter the starting and ending IP addresses of the DHCP address pool in the fields provided.
DNS Server	Specify DNS servers manually. Enter the IP address of a server in each DNS server field.
Default Gateway	Specify default gateway manually. Enter the IP address of the default gateway in the field.
Lease Time	Specify how long a client can use the IP address assigned from this address pool.

You can expand and configure **Advanced Settings** if needed.

QoS Queue	Click the checkbox to assign the traffic in this network to a queue, and the traffic will be forwarded with a certain priority.
Snooping	Select the Snooping function to be enabled. IGMP Snooping: Click the checkbox to monitor IGMP (Internet Group Management Protocol) traffic and thereby manage multicast traffic. MLD Snooping: Click the checkbox to monitor MLD (Multicast Listener Discovery) traffic and thereby manage IPv6 multicast traffic.
Legal DHCP Servers	With Legal DHCP Server enabled, Omada switches ensure that users get IP addresses only from the DHCP servers whose IP addresses are specified here.
Legal DHCPv6 Servers	With Legal DHCPv6 Server enabled, Omada switches ensure that users get IPv6 addresses only from the DHCPv6 servers whose IPv6 addresses are specified here.
DHCP L2 Relay	With DHCP L2 relay enabled, Omada switches configure the Option 82 field of the DHCP packets and transmit the packets in the LAN.

You can expand and configure **Advanced DHCP Options** if needed.

DHCP Option 138	Enter the value for DHCP Option 138. It is used in discovering the devices by the Omada Controller.
------------------------	---

■ If you select **External Device**, configure the following parameters:

Note: This VLAN will be managed by an external device for network services. Please ensure that the external device has correctly configured the interface gateway and DHCP settings for this VLAN.

VLAN Type	Specify whether to use a single VLAN or multiple VLANs. If the VLAN Type is "Multiple" and the DHCP Server Device Type is "Gateway", a single network containing multiple VLAN IDs will be created. If the VLAN Type is "Multiple" and the DHCP Server Device Type is "External Device" or "None", multiple networks will be created, each corresponding to one VLAN.
VLAN	Enter a VLAN ID with the value between 1 and 4094. Each VLAN can be uniquely identified by its VLAN ID, which is transmitted and received as IEEE 802.1Q tag in an Ethernet frame.

You can expand and configure **Advanced Settings** if needed.

QoS Queue	Click the checkbox to assign the traffic in this network to a queue, and the traffic will be forwarded with a certain priority.
Snooping	Select the Snooping function to be enabled. IGMP Snooping: Click the checkbox to monitor IGMP (Internet Group Management Protocol) traffic and thereby manage multicast traffic. MLD Snooping: Click the checkbox to monitor MLD (Multicast Listener Discovery) traffic and thereby manage IPv6 multicast traffic.

■ If you select **None**, configure the following parameters:

Note: This VLAN has no gateway and no DHCP service, and will operate as a pure Layer 2 switching network. Devices within the VLAN need to be manually configured with static IP addresses and can only communicate with other devices in the same VLAN.

VLAN Type	Specify whether to use a single VLAN or multiple VLANs. If the VLAN Type is "Multiple" and the DHCP Server Device Type is "Gateway", a single network containing multiple VLAN IDs will be created. If the VLAN Type is "Multiple" and the DHCP Server Device Type is "External Device" or "None", multiple networks will be created, each corresponding to one VLAN.
VLAN	Enter a VLAN ID with the value between 1 and 4094. Each VLAN can be uniquely identified by its VLAN ID, which is transmitted and received as IEEE 802.1Q tag in an Ethernet frame.

You can expand and configure **Advanced Settings** if needed.

QoS Queue	Click the checkbox to assign the traffic in this network to a queue, and the traffic will be forwarded with a certain priority.
------------------	---


Snooping

Select the Snooping function to be enabled.

IGMP Snooping: Click the checkbox to monitor IGMP (Internet Group Management Protocol) traffic and thereby manage multicast traffic.

MLD Snooping: Click the checkbox to monitor MLD (Multicast Listener Discovery) traffic and thereby manage IPv6 multicast traffic.

6. Click **Next**. Select the port(s) to configure VLAN. The VLAN determines the Port VLAN Identifier (PVID) for switch ports. If you set the **VLAN Type** to **Multiple** in the previous step, select the port(s) to add it to the tagged network.

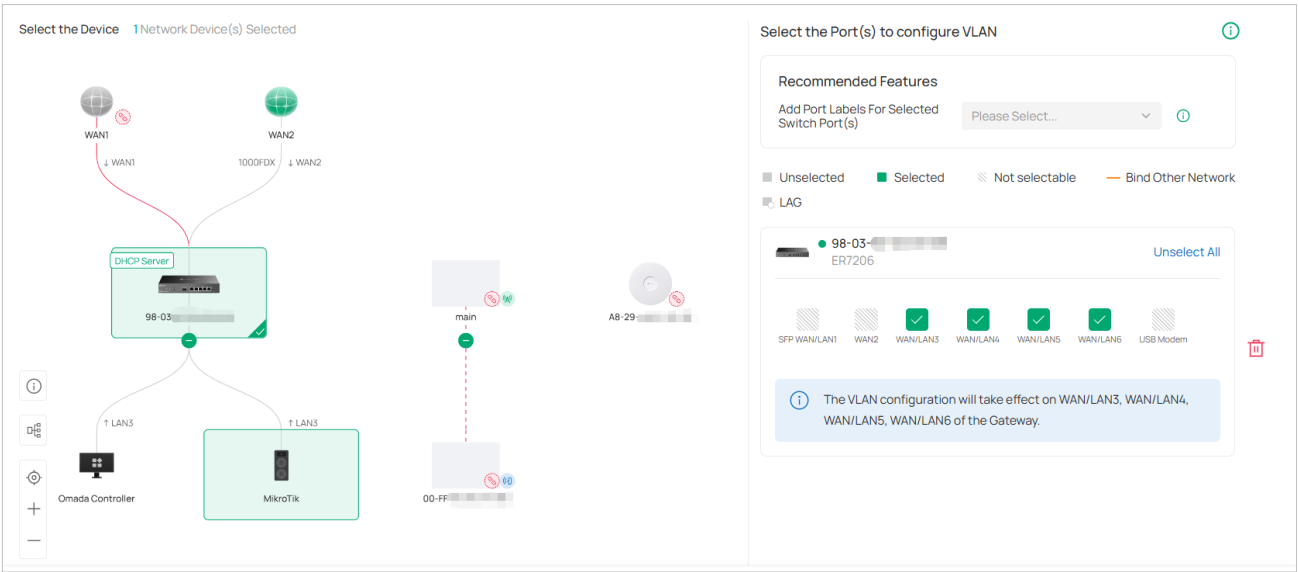

7. Configure recommended features if needed.

Port Isolation

When enabled, Port Isolation will be applied to the selected ports to enhance security.

Flow Control

When enabled, 802.3 pause frames notify IPCs to temporarily buffer video data during network congestion, preventing frame loss that would occur when packets are dropped. This requires IPC support for the protocol.

Add Port Labels For Selected Switch Port(s)

This option is used to add labels to the selected switch ports, facilitating centralized port management on the Device Config > Switch Ports page.

8. Click **Next**. Confirm your settings and click **Apply**. The VLAN network will be added to the list. Now you can view the devices that are currently functioning in this VLAN through the topology view or check the configuration of this VLAN on the device ports through the port view.

6.4 Configure Multicast Features

You can configure multicast features on the Multicast page to optimize multicast traffic management.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Network Settings](#) > [LAN](#) > [Multicast](#). Click [Add Multicast](#).

← Add Multicast

Name

Network

Please Select... ▾

Protocol

☒ IGMP (IPv4) ☐ MLD (IPv6)

Unknown Multicast

☒ Forward ☐ Discard ☐ Router Port First ⓘ

Querier

☐ Enable ⓘ

Manual Router Port

☐ Enable

⊟ Snooping Advanced Config

Report Suppression

☐ Enable

Member Port Aging Time

260seconds(60-600)

Router Port Aging Time

300seconds(60-600)

Leave Time

1seconds(1-30)

3. Configure the parameters and apply the settings.

Name	Enter a name to identify the Multicast network.
Network	Select the target network for multicast configuration, which will automatically enable its multicast snooping.
Protocol	Choose between IGMP (IPv4) or MLD (IPv6) based on network protocol requirements.
Unknown Multicast	Specify handling method for unidentified multicast packets. Forward: Flood unknown multicast traffic within VLAN. Discard: Drop unknown multicast packets. Router Port First: Forward to router ports (static/dynamic) if available; otherwise flood within VLAN.
Querier	Set a switch as the querier for a specific network, and configure more parameters in Advanced Settings.

Manual Router Port	Manually set Static Router Port and Forbidden Router Port. Static Router Port: Select one or more ports to be the Static Router Ports in the network. All multicast data in this network will be forwarded through the static router ports. Forbidden Router Port: Select one or more ports to forbid them from being router ports in the network.
Report Suppression	When enabled, the switch will only forward the first IGMP report message for each multicast group to L3 devices during one query interval. This feature prevents duplicate report messages from being sent to the L3 devices.
Member Port Aging Time	Specify the aging time of the member ports in the Network. If the switch does not receive any IGMP membership report messages for a specific multicast group from a dynamic member port, it will no longer consider this port as a member port of this multicast group and delete it from the multicast forwarding table.
Router Port Aging Time	Specify the aging time of the router ports in the Network. If the switch does not receive any IGMP general query message from a dynamic router port within the router port aging time, the switch will no longer consider this port as a router port and delete it from the router port list.
Leave Time	Specify the leave time for the Network. When the switch receives a leave message from a port to leave a multicast group, it will wait for a leave time before removing the port from the multicast group. During the period, if the switch receives any report messages from the port, the port will not be removed from the multicast group. Exceptions are as follows: If the member port ages out before the Leave Time ends and no report messages are received, the port will be removed from the multicast group once its Member Port Aging Time ends. The Leave Time mechanism will not take effect when Fast Leave takes effect.

6.5 Configure Network Isolation

When creating a VLAN, you can configure whether to isolate network segments in the advanced settings.

You can also configure network isolation on the Isolation Settings page to manage communication between VLANs.

Note: Network Isolation is only supported for networks with the Omada Gateway configured as the DHCP Server Device.

1. Launch the controller and access a site.
2. Go to **Network Config > Network Settings > LAN > Isolation Settings**.

Isolated Network ⓘ ⓘ
The Isolated network will only access the internet and cannot communicate with other networks.

Search Name, VLAN 🔍

2-5,8,20
VLAN 2-5,8,20

Interconnected Network
Interconnected networks can communicate with each other.

Search Name, VLAN 🔍 Add All

Default
VLAN 1

123
VLAN 123

_Test201
VLAN 201

_test301
VLAN 301

Clear All

Apply Cancel

3. Select the network to be isolated. Click the **Add** button on the right or drag to move the Network to the Isolated Network area to isolate it.

6.6 Configure LAN DNS

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Network Settings](#) > [LAN](#) > [LAN DNS](#).
3. Click [Create New LAN DNS](#) to load the following page, set the parameters, and save the settings.

Create New LAN DNS

Profile Name

Status

☐ Enable

Domain Name

Alias Domain Name

+ Add Alias Domain Name

Type

IP

IP Address

+ Add IP Address

IPv6 Address

+ Add IPv6 Address

Apply To LAN

Please Select...

Save

Cancel

Profile Name	Specify the name of the profile.
Status	Whether to enable this entry.
Domain Name	Enter the domain name.
Alias Domain Name	If a server provides different services and has multiple domain names, you can enter them here.
Type	There are three options, IP, CNAME, and FORWARD. IP: When selected, the gateway will respond to the DNS query of the specified domain name, and use the configured IP address as the DNS response to directly reply to the LAN host. Select this type when there is a web server in the intranet and you want hosts in the LAN to access the web server through private IP addresses instead of public IP addresses. CNAME: When selected, the gateway will map the domain name to the configured CNAME domain name, send it to the DNS server for query, and then reply to the LAN host with the IP corresponding to the CNAME domain name. FORWARD: When selected, the gateway will forward the DNS query of the LAN host to the specified DNS server, and reply the DNS response to the LAN host. The forwarding priority is higher than other public configurations, such as the DNS Server configured on the WAN port.
IP Address	When the Type is IP, it is the IPv4 address of the returned DNS response.
IPv6 Address	When the Type is IP, it is the IPv6 address of the returned DNS response.

Apply To LAN	When the Type is IP or CNAME, it is the LAN network to which the rule applies. You can choose to apply all LANs or apply to a single LAN or multiple LANs.
CNAME	When Type is CNAME, set the domain name to which Domain Name and Alias Domain Name need to be mapped.
DNS Server	When the Type is FORWARD, set the Domain Name and Alias Domain Name to be forwarded to a specific DNS Server, up to two DNS Servers can be configured.

Chapter 7

Configure Wireless Networks

Wireless networks enable your wireless clients to access the internet. Once you set up a wireless network, your APs typically broadcast the network name (SSID) in the air, through which your wireless clients connect to the wireless network and access the internet.

A WLAN group is a combination of wireless networks. Configure each group so that you can flexibly apply these groups of wireless networks to different APs according to your needs.

After setting up basic wireless networks, you can further configure WLAN Schedule, 802.11 Rate Control, MAC Filter, and other advanced settings.

This chapter guides you on how to configure wireless networks with the SDN Controller. The chapter includes the following sections:

- [7.1 Set Up Basic Wireless Networks](#)
- [7.2 Configure Advanced Settings](#)
- [7.3 Configure Hotspot 2.0](#)
- [7.4 Configure WLAN Schedules](#)
- [7.5 Configure 802.11 Rate Control](#)
- [7.6 Configure MAC Filtering](#)
- [7.7 Configure Multicast/Broadcast Management](#)
- [7.8 Configure WLAN Optimization](#)

7.1 Set Up Basic Wireless Networks

Configuration

To create, configure and apply wireless networks, follow these steps:

- 1) Create a WLAN group.
- 2) Create Wireless Networks
- 3) Apply the WLAN group to your APs

Step 1: Create a WLAN Group

Note: The controller provides a default WLAN group. If you simply want to configure wireless networks for the default WLAN group and apply it to all your APs, skip this step.

- 1. Launch the controller and access a site.
- 2. Go to [Network Config](#) > [Network Settings](#) > [WLAN](#) to load the following page.

WLAN Group

Default

+ Create New Wireless Network

SSID NAME	SECURITY	BAND	GUEST NETWORK	PORTAL	PORTAL NAME	ACCESS CONTROL RULE	RATE LIMIT	VLAN	ACTION
Office_Test	WPA-Personal	2.4 GHz 5 GHz 6 GHz	--	--	--	--	--	--	 

Showing 1-1 of 1 records < 1 > Go to page Go

- 3. Select [Create New Group](#) from the drop-down list of [WLAN Group](#) to load the following page. Enter a name to identify the WLAN group.

Add New WLAN Group

X

NAME

Copy WLANs

☐ Copy All SSIDs from the WLAN Group

Default

Save

Cancel

- 4. (Optional) If you want to create a new WLAN group based on an existing one, check [Copy All SSIDs from the WLAN Group](#) and select the desired WLAN group. Then you can further configure wireless networks based on current settings.

Add New WLAN Group

X

NAME

Test

Copy WLANs

☒ Copy All SSIDs from the WLAN Group

Default

Save

Cancel

Default

TP-Link

Test

test

5. Click **Save**. The new WLAN Group is added to the WLAN Group list. You can select a WLAN Group from the list to further create and configure its wireless networks. You can click the Edit icon to edit the name of the WLAN Group. You can click the Delete icon to delete the WLAN Group.

WLAN Group

Default

Create New Wireless Network

SSID NAME	SECURITY	BAND	GUEST NETWORK	PORTAL	PORTAL NAME	ACCESS CONTROL RULE	RATE LIMIT	VLAN	ACTION
Office_Test	WPA-Personal	2.4 GHz 5 GHz 6 GHz	--	--	--	--	--	--	

Showing 1-1 of 1 records

<1>

Go to page

Go

Step 2: Create Wireless Network

1. Select the WLAN group for which you want to configure wireless networks from the drop-down list of WLAN Group.

WLAN Group

Default

Create New Wireless Network

SSID NAME	SECURITY	BAND	GUEST NETWORK	PORTAL	PORTAL NAME	ACCESS CONTROL RULE	RATE LIMIT	VLAN	ACTION
Office_Test	WPA-Personal	2.4 GHz 5 GHz 6 GHz	--	--	--	--	--	--	

Showing 1-1 of 1 records

<1>

Go to page

Go

2. Click **Create New Wireless Network** to load the following page. Configure the basic parameters for the network.

Note: The 6 GHz band is only available for certain devices.

Create New Wireless Network

Network Name (SSID)

Device Type

☒ EAP

☐ Gateway

Band

☒ 2.4 GHz

☒ 5 GHz

☐ 6 GHz

Guest Network

☐ Enable

Security

WPA-Personal

Security Key

Password

+ Advanced Settings

+ WLAN Schedule

+ 802.11 Rate Control

+ MAC Filter

+ Multicast/Broadcast Management

Apply

Cancel

Network Name (SSID) Enter the network name (SSID) to identify the wireless network. The users of wireless clients choose to connect to the wireless network according to the SSID, which appears on the WLAN settings page of wireless clients.

Device Type	Select the type of devices that the wireless network can apply to.
Band	Enable the radio band(s) for the wireless network. When 6GHz is turned on, Security cannot be PPSK with/without RADIUS since 6GHz does not support them.
Guest Network	With Guest Network enabled, all the clients connecting to the SSID are blocked from reaching any private IP subnet.
Security	Select the encryption method for the wireless network based on needs.

3. Select the security strategy for the wireless network.

■ None

With None selected, the hosts can access the wireless network without authentication, which is applicable to lower security requirements.

Security

None

OWE

☐ Enable ⓘ

OWE	Opportunistic Wireless Encryption, also known as Enhanced Open, is a certification provided by the Wi-Fi Alliance as part of the WPA3 wireless security standard. OWE will enable two wireless APs per radio, one for access of OWE-supported stations, and one for access of other stations. An SSID with OWE enabled will be counted as two SSID entries.
-----	---

■ WPA-Personal

With WPA-Personal selected, traffic is encrypted with a Security Key you set,

Security

WPA-Personal

Security Key

Password

Security Key	Specify a security key to encrypt the traffic.
--------------	--

■ WPA-Enterprise

WPA-Enterprise requires an authentication server to authenticate wireless clients, and probably an accounting server to record the traffic statistics.

Security

WPA-Enterprise

RADIUS Profile

NAS ID

☒ Default (TP-Link: MAC Address)

☐ Follow Device Name ⓘ

☐ Custom

RADIUS Profile	Select a RADIUS Profile, which records the settings of the authentication server and accounting server. You can create a RADIUS Profile by clicking Create New Radius Profile from the drop-down list of RADIUS Profile. For details, refer to the network profile configuration section in this guide.
NAS ID	Configure a Network Access Server Identifier (NAS ID) for the authentication. Authentication request packets from the controller to the RADIUS server carry the NAS ID. The RADIUS server can classify users into different groups based on the NAS ID, and then choose different policies for different groups. The NAS ID can be a default one (TP-Link: MAC Address), follow the device name, or a customized one.

■ PPSK without RADIUS

PPSK (private pre-shared key) can provide a unique PSK for each wireless user. Compared with the traditional SSID solution with one password for all users, it is more secure.

Security	PPSK without RADIUS	
PPSK Profile		Manage PPSK Profile

PPSK Profile	Select a PPSK Profile, which records the PPSK settings. You can create a PPSK Profile by clicking Create New PPSK Profile from the drop-down list of PPSK Profile. For details, refer to the network profile configuration section in this guide.
------------------------------	---

■ PPSK with RADIUS

PPSK (private pre-shared key) can provide a unique PSK for each wireless use. PPSK with RADIUS requires an authentication server to authenticate wireless clients and probably an accounting server to record the traffic statistics. The SSID will not be applied to the device firmware not supporting PPSK.

Security	PPSK with RADIUS	
RADIUS Profile		
Authentication type	Generic Radius with bound MAC	
NAS ID		(Optional)
MAC Address Format	aa:bb:cc:dd:ee:ff	

RADIUS Profile	Select a RADIUS Profile, which records the settings of the authentication server and accounting server. You can create a RADIUS Profile by clicking + Create New Radius Profile from the drop-down list of RADIUS Profile. For details, refer to the network profile configuration section in this guide.
--------------------------------	---

Authentication type

Choose the authentication type.

Generic Radius with bound MAC: This method uses a device's unique MAC address as the username and password for a RADIUS server to grant or deny network access. This type needs to specify device MAC addresses.

EKMS: The EKMS (Eleven Key Matching Service) authentication type is used to connect to the ElevenOS server. Only the EKMS authentication method in PPSK with RADIUS supports domain name.

Generic Radius with unbound MAC: This method uses a client's MAC address as the username and password for a RADIUS server to grant or deny network access. This type does not need to specify device MAC addresses.

NAS ID

Configure a Network Access Server Identifier (NAS ID) for the authentication. Authentication request packets from the controller to the RADIUS server carry the NAS ID. The RADIUS server can classify users into different groups based on the NAS ID, and then choose different policies for different groups.

MAC Address Format

Select clients' MAC address format which the controller uses for authentication. Then configure the MAC addresses in the specified format as usernames for the clients on the RADIUS server.

- (Optional) You can also configure Advanced Settings, WLAN Schedule, 802.11 Rate Control, and MAC Filter, and more according to your needs. Related topics are covered later in this chapter.
- Click **Apply**. The new wireless network is added to the wireless network list under the WLAN group. You can click the Edit icon in the ACTION column to edit the wireless network. You can click the Delete icon in the ACTION column to delete the wireless network.

WLAN Group: Default 🔍 🔗 🗑️ + Create New Wireless Network									
SSID NAME	SECURITY	BAND	GUEST NETWORK	PORTAL	PORTAL NAME	ACCESS CONTROL RULE	RATE LIMIT	VLAN	ACTION
Office_Test	WPA-Personal	2.4 GHz 5 GHz 8 GHz	--	--	--	--	--	--	🔗 🗑️
Test 123	None	2.4 GHz 5 GHz	--	--	--	--	--	--	🔗 🗑️

Showing 1-2 of 2 records < 1 > Go to page Go

Step 3: Apply the WLAN Group

Note: The controller provides a default WLAN group. If you simply want to configure wireless networks for the default WLAN group and apply it to all your APs, skip this step.

■ Apply to a Single AP

Go to **Devices > Device List**. In the device list, click an AP, click **Manage Device** and go to **Config > Wireless > WLANs**. Select the WLAN group and apply the settings.

■ Apply to APs in batch

- Go to **Devices > Device List**. Click **Batch Action**, select **Batch Config**, check the boxes of your desired APs, and click **Config**.
- In the Properties window, go to **Wireless > WLANs**. Select the WLAN group and apply the settings.

7.2 Configure Advanced Settings

Launch the controller and access a site. Go to [Network Config](#) > [Network Settings](#) > [WLAN](#), click the Edit icon in the ACTION column of the wireless network which you want to configure, and click [Advanced Settings](#) to load the following page. Configure the parameters and click [Apply](#).

Advanced Settings

EoGRE Tunnel

☐ Enable

[Go To EoGRE Tunnel](#)

SSID Broadcast

☒ Enable

Prohibit Wi-Fi Sharing

☐ Enable

VLAN

☒ Default

☐ Custom

WPA Mode

WPA2-PSK / AES

▼

MLO

☐ Enable

PMF

☐ Mandatory

☐ Capable

☒ Disable

Group Key Update Period

☐ Enable GIK rekeying every

0

Secon... ▼

(30-86400)

802.11r

☐ Enable

Client Rate Limit Profile

Default

▼

SSID Rate Limit Profile

Default

▼

EoGRE Tunnel	Toggle on to enable the EoGRE (Ethernet over GRE) Tunnel for the wireless network. Note: If the function is unavailable, go to Device Config > EAP > EoGRE Tunnel to enable the feature globally.
SSID Broadcast	With SSID Broadcast enabled, APs broadcast the SSID (network name) in the air so that wireless clients can connect to the wireless network, which is identified by the SSID. With SSID Broadcast disabled, users of wireless clients must enter the SSID manually to connect to the wireless network.
Prohibit Wi-Fi Sharing	When enabled, the connected clients will be prohibited to share the Wi-Fi with other clients.

VLAN	Configure the uplink port VLAN(s) corresponding to the SSID. Default: Using untagged transmission. Custom: Configure an SSID-based VLAN pool by binding one or multiple networks (by network) or manually entering one or multiple VLAN IDs (by VLAN). When a client connects to the SSID, it will be assigned to a VLAN in the VLAN pool you configured. If a device does not support multiple VLANs, the smallest VLAN you configured will be applied to the SSID.
WPA Mode	If you select WPA-Personal or WPA-Enterprise as the security strategy, you can select the WPA Mode including the version of WPA, and the encryption type. Select the version of WPA according to your needs. Select the encryption type. Some encryption type is only available under certain circumstances. AES: AES stands for Advanced Encryption Standard. Auto: APs automatically decide the encryption type in the authentication process.
MLO	MLO (Multi-Link Operation) enables Wi-Fi 7 devices to simultaneously send and receive data across different frequency bands and channels. This ensures fast and reliable connections even in dense network environments.
PMF	Protected Management Frames (PMF) provide protection for unicast and multicast management action frames. When Mandatory is selected, non-PMF-capable clients may fail to connect to the network. Disable: Disables PMF for a network. It is not recommended to use this setting, only in case non-PMF-capable clients experience connection issues with the "Capable" option. Capable: Both types of clients, capable of PMF or not, can connect to the network. Clients capable of PMF will negotiate it with the AP. Mandatory: Only PMF-capable clients can connect to the network.
Group Key Update Period	If you select WPA-Personal or WPA-Enterprise as the security strategy, you can specify whether and how often the security key changes. If you want the security key to change periodically, enable GIK (Group Integrity Key) rekeying and specify the time period.
802.11r	802.11r allows faster roaming when both the AP and client have 802.11r capabilities. However, older devices may be incompatible with the feature. Currently 802.11r does not support WPA3-Enterprise encryption.
Client Rate Limit Profile	Specify the profile to limit the download and upload rates of each client to balance bandwidth usage. You can use the default profile or custom a profile.

SSID Rate Limit Profile

Specify the profile to limit the download and upload rates of each wireless band. Bandwidth is shared among all clients connected to the same wireless band of the same AP.

You can use the default profile or custom a profile.

Note: This feature requires new firmware updates for Omada APs, and the rate limit settings will only take effect on those APs running firmware that supports the feature.

7.3 Configure Hotspot 2.0

Overview

Hotspot 2.0 is a wireless network technology based on the IEEE 802.11u standard. It provides a simplified network selection mechanism for wireless clients, enabling them to automatically discover and securely access Hotspot 2.0-certified Wi-Fi networks.

Hotspot 2.0 is only available for a wireless network using WPA3-Enterprise encryption.

Configuration

Launch the controller and access a site. Go to [Network Config > Network Settings > WLAN](#), click the Edit icon in the ACTION column of a wireless network that is using WPA3-Enterprise encryption, and click [Hotspot 2.0](#) to load the following page. Enable Hotspot 2.0 and configure the parameters. Then click [Apply](#).

Hotspot 2.0 BETA

Hotspot 2.0

☒ Enable

Network Type

Private network

PLMN ID

(Optional, 10000-999999) + Add

Roaming Consortium OI

(Optional, Format: XX-XX-XX or XX-XX-XX-XX-XX) + Add

Operator Domain

(Optional)

Operator Friendly Name

(Optional)

DGAF Disable

☐ Enable

HESSID

- - - - -

(Optional)

Internet

☐ Enable

Network Availability IPv4

Address type not available

Network Availability IPv6

Address type not available

Venue Info

Venue Group

Unspecified

Venue Type

Unspecified

Venue Name

(Optional)

NAI Realm list

+ Add New Realm

REALM NAME	REALM ENCODING	CRED1	CRED2	CRED3	CRED4	ACTION

Network Type	Specify the 802.11u network type: public, private, or guest network.
PLMN ID	Enter the PLMN (Public Land Mobile Network) ID of the 802.11u 3GPP cellular network, which consists of the MCC (Mobile Country Code) and MNC (Mobile Network Code). Wireless clients can obtain this information through ANQP queries to determine whether to access the network. This is applicable to networks that have roaming relationships with mobile operators.

Roaming Consortium Oi	Enter the 802.11u roaming organization identifiers. For a network that has roaming relationships with other network operators, you can configure a roaming organization list for wireless clients to automatically identify trusted roaming network partners.
Operator Domain	Enter the domain name of the access network operator. Wireless clients can obtain this information through ANQP queries as the basis for network selection.
Operator Friendly Name	Network operator friendly name. This parameter can be used to define the names of different language environments, so that users of different languages can easily select the network. Currently, only English format input is provided.
DGAF Disable	In DGAF (downstream group-addressed forwarding) disable mode, the AP will not forward downstream multicast and broadcast packets. Downstream multicast and broadcast packets use the same GTK (Group Temporal Key) key, which poses a security risk. The AP will discard these ARP and multicast packets to prevent attackers from exploiting the vulnerability that all clients in the same BSS use the same GTK key to forge group address frames and attack clients. This function is disabled by default. When it is enabled, some multicast services will be unavailable. To ensure normal internet access, the AP will enable the ARP proxy and disable ARP-to-unicast conversion.
HESSID	Homogenous Extended Service Set Identifier. It is used to identify the same type of ESS network set. An area may have multiple Hotspot 2.0 networks. Based on the unique HESSID, wireless clients can identify which networks provide the same service without having to re-acquire network parameters. HESSID should be consistent with one of the BSSIDs of the APs in the zone.
Internet	Internet access support status (network reachability).
Network Availability IPv4	Available type information of IPv4 addresses. When a wireless client accesses a Hotspot 2.0 network, the AP can pass the available types of IPv4 addresses in the network to the client as ANQP parameters, so that the client can understand the types of IP addresses that can be obtained after accessing the network.
Network Availability IPv6	Available type information of IPv6 addresses. When a wireless client accesses a Hotspot 2.0 network, the AP can pass the available types of IPv6 addresses in the network to the client as ANQP parameters, so that the client can understand the types of IP addresses that can be obtained after accessing the network.
Venue Info	Indicates the venue information using the combination of the network's venue group and venue type (using the international building code). When a wireless client attempts to access a Hotspot 2.0 network, it can obtain the location type information of the current network from the AP for network selection.
Venue Name	Network's venue name, identifying the physical location of the network.

NAI Realm list

Add a profile to identify and describe a NAI (Network Access Identifier) realm accessible using the AP, and the method that this NAI realm uses for authentication.

Realm name: The name of the NAI realm. Usually the domain name of the service provider.

Realm Encoding: NAI realm name format. Two formats are supported:

- **RFC4282:** Realm formatted according to RFC 4282.
- **UTF-8:** UTF-8 formatted string not formatted according to IETF RFC 4282.

EAP Method: EAP authentication method supported by the NAI realm.

Authentication param: Configure the EAP authentication parameter identifier and authentication parameters.

7.4 Configure WLAN Schedules

Overview

WLAN Schedule can turn on or off your wireless network in the specific time period as you desire.

Configuration

Launch the controller and access a site. Go to [Network Config](#) > [Network Settings](#) > [WLAN](#), click the Edit icon in the ACTION column of the wireless network which you want to configure, and click [WLAN Schedule](#) to load the following page. Enable WLAN schedule and configure the parameters. Then click [Apply](#).

WLAN Schedule

WLAN Schedule

☒ Enable

Action

☒ Radio on ⓘ

☐ Radio off ⓘ

Time Range

Please select a Time Range entry. ▾

[Manage Time Range Entries](#)

Action	Radio On: Turn on your wireless network within the time range you set, and turn it off beyond the time range. Radio Off: Turn off your wireless network within the time range you set, and turn it on beyond the time range.
Time Range	Select the Time Range for the action to take effect. You can create a Time Range entry by clicking Create New Time Range Entry from the drop-down list of Time Range. For details, refer to the network profile configuration section in this guide.

7.5 Configure 802.11 Rate Control

Overview

Note: 802.11 Rate Control is only available for certain devices.

802.11 Rate Control can improve performance for higher-density networks by disabling lower bit rates and only allowing the higher. However, 802.11 Rate Control might make some legacy devices incompatible with your networks, and limit the range of your wireless networks.

Configuration

Launch the controller and access a site. Go to [Network Config](#) > [Network Settings](#) > [WLAN](#), click the Edit icon in the ACTION column of the wireless network which you want to configure, and click [802.11 Rate Control](#) to load the following page. Select one or multiple bands to enable minimum data rate control according to your needs, move the slider to determine what bit rates your wireless network allows, and configure the parameters. Then click [Apply](#).

Note: The 6 GHz band is only available for certain devices.

802.11 Rate Control

2.4 GHz Data Rate Control

☒ Enable Minimum Data Rate Control ⓘ

1 Mbps

54 Mbps

Lower DensityHigher Density

ⓘ Full device compatibility and range.

☐ Disable CCK Rates (1/2/5.5/11 Mbps)
☐ Require Clients to Use Rates at or Above the Specified Value
☒ Send Beacons at 1 Mbps

5 GHz Data Rate Control

☒ Enable Minimum Data Rate Control ⓘ

6 Mbps

54 Mbps

Lower DensityHigher Density

ⓘ Full device compatibility and range.

☐ Require Clients to Use Rates at or Above the Specified Value
☒ Send Beacons at 6 Mbps

Disable CCK Rates (1/2/5.5/11 Mbps)	Select whether to disable CCK (Complementary Code Keying), the modulation scheme which works with 802.11b devices. Disable CCK Rates (1/2/5.5/11 Mbps) is only available for 2.4 GHz band.
Require Clients to Use Rates at or Above the Specified Value	Select whether or not to require clients to use rates at or above the value specified on the minimum data rate controller slider.
Send Beacons at 1 Mbps/6 Mbps	Select whether or not to send Beacons at the minimum rate of 1Mbps for 2.4 GHz band or 6Mbps for 5 GHz band.

184

7.6 Configure MAC Filtering

Overview

MAC Filter allows or blocks connections from wireless clients of specific MAC addresses.

Configuration

Launch the controller and access a site. Go to [Network Config > Network Settings > WLAN](#), click the Edit icon in the ACTION column of the wireless network which you want to configure, and click [MAC Filter](#) to load the following page. Enable MAC Filter and configure the parameters .Then click [Apply](#).

MAC Filter

MAC Filter

☒ Enable

Policy

☐ Allow List

☒ Deny List

MAC Addresses List

Please select a MAC Group.

[Manage MAC Groups](#)

Policy	Allow List: Allow the connection of the clients whose MAC addresses are in the specified MAC Address List, while blocking others. Deny List: Block the connection of the clients whose MAC address are in the specified MAC Addresses List, while allowing others.
MAC Address List	Select the MAC Group which you want to allow or block according to the policy. You can create new MAC group by clicking + Create New MAC Group from the drop-down list of MAC Address List. For details, refer to the network profile configuration section in this guide.

7.7 Configure Multicast/Broadcast Management

Overview

Multicast/Broadcast Management allows packet conversion and multicast filtering.

Configuration

Launch the controller and access a site. Go to [Network Config > Network Settings > WLAN](#), click the Edit icon in the ACTION column of the wireless network which you want to configure, and click [Multicast/Broadcast Management](#) to load the following page. Configure the parameters .Then click [Apply](#).

Multicast/Broadcast Management

Multicast-to-Unicast Conversion

☒ IPv4

☐ IPv6

Converse multicast to unicast when the channel utilization is below

100

%

ARP-to-Unicast Conversion

☐ Enable

Multicast Filtering

☐ Enable

Multicast-to-Unicast Conversion	When the channel utilization is below the set value, the Wireless Device will convert the IPv4/IPv6 multicast packets into unicast packets and send them to the corresponding clients based on the learned multicast relationships. This improves the transmission efficiency of IPv4/IPv6 multicast.
ARP-to-Unicast Conversion	When enabled, the controller will convert ARP packets into unicast packets.
Multicast Filtering	When enabled, the device will filter the multicast packets of the specified protocols. Improper settings may cause network issues
Filtering Protocols	Choose IGMP/mDNS/ND/Others according to your need. Choose Others for MAC-based filtering, which will filter IP multicast packets that are not using IGMP, MLD, mDNS, or ND protocols.
MAC Group	If you want to allow packets from specific addresses to pass through, you can choose MAC Group and Create New MAC Group. Here you can set MAC Group Name and choose different methods to add the MAC Address.

7.8 Configure WLAN Optimization

Overview

WLAN Optimization helps improve the wireless network performance. With the WLAN Optimization feature, the controller will detect WiFi interference and monitor the wireless environment. Based on the environmental factors including network topology, deployment size, traffic, and client factors, the controller can determine the optimum wireless configurations (such as channel, bandwidth, power, etc.) for the access points (APs), and thus ensures that wireless clients of each AP can enjoy better WiFi experience.

In [WLAN Optimization](#), the results of the last 10 scans are displayed.

In [Optimization History](#), the past optimization records are displayed, and you can also restore the previous optimization results if needed.

Initiate WLAN Optimization

Note: The connection to internet will be lost for several minutes during the scanning and optimization. Please select a spare time of network to start scanning.

1. Launch the controller and access a site. Go to [Network Config > Network Settings > WLAN > WLAN Optimization](#).
2. Click [Optimization Adjustment](#) (recommended) or [Global Optimization](#) to initiate the optimization.

WLAN Optimization

Optimization Adjustment (Recommended): Refine AP settings using historical data and optimize as few APs as necessary.

Global Optimization: Re-configure all APs for the optimal configurations.

Note: The connection to internet will be lost for several minutes during the scanning and optimization. Please select a spare time of network to start scanning.


Optimization Adjustment

Global Optimization

Optimization Adjustment	The system will perform wireless optimization on some APs based on historical optimization results, historical client behavior, and the current wireless environment. To ensure the connection stability of wireless clients, the system will adjust as few wireless configurations as possible. This optimization option is recommended, but it is only available for non-initial optimizations since it requires historical optimization data.
Global Optimization	The system will perform wireless optimization on all APs, selecting the appropriate wireless configurations.

3. The controller will scan the wireless environment to conclude the optimum WLAN network configurations and display the result after completing the optimization.

187

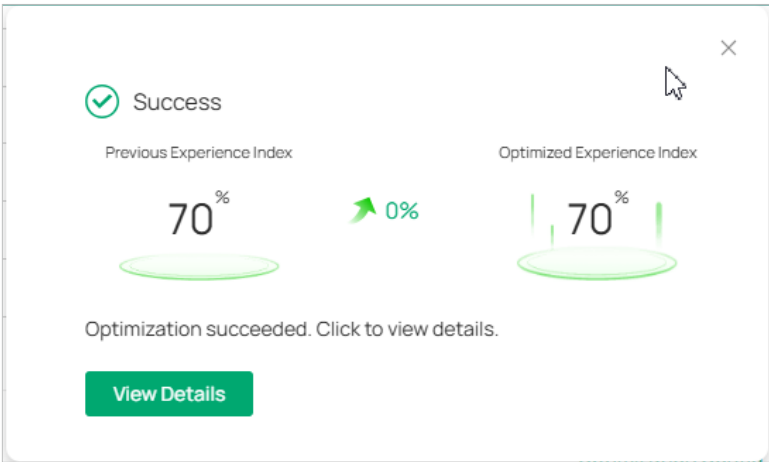

4. Click **View Details** to display more info. You can click **Apply Previous Settings** if you want to restore the previous optimization results.

Tip: You can also view the optimization results in the **Optimization History**.

Nov 15, 2025 15:14:50

Succeeded(1)Failed(0)

DEVICE NAME	IP ADDRESS	BAND	PREVIOUS/RECOMMENDED CHANNEL	PREVIOUS/RECOMMENDED CHANNEL WIDTH	PREVIOUS/RECOMMENDED BAND	PREVIOUS/R
OC-EF-	192.168.0.7	2.4 GHz	1 / 1	20 MHz / 20 MHz	✓ / ✓	20 / 20
		5 GHz	116 / 116	160 MHz / 160 MHz	✓ / ✓	28 / 28

Apply Recommended Settings

Apply Previous Settings

Customize Optimization Config

If you want to custom optimization configurations, click **Optimization Config** on the **WLAN Optimization** page, then set the parameters according to actual needs.

Optimization Config

Mode

☐ Default

☒ Custom

Automatic Channel Optimization

☒

Automatic Band Optimization

i

☒

Automatic Channel Width Optimization

i

☒

Automatic Power Optimization

☒

-

Advanced Settings

Power Range

i

☒ Auto

☐ Custom

Power Threshold

i

☒ Auto

☐ Custom

Channel Width Selection

i

☐ Enable

Excluded 5 GHz Channels

i

☐ Enable

Save

Cancel

Mode	Specify the optimization mode. Default: The controller will conduct the optimization with the default configurations. Custom: The controller will conduct the optimization with the configurations you set.
Automatic Channel Optimization	Enable this function, and the controller will scan the wireless environment to conclude the optimum operation channels for the APs.
Automatic Band Optimization	Enable this function in a high-density deployment scenario, and the controller will scan the wireless environment and determine whether to turn off some radio bands to reduce network interference, hence improving the performance of the entire network.
Automatic Channel Width Optimization	Enable this function in a high-density deployment scenario, and the controller will scan the wireless environment and determine whether to reduce some radio bandwidth to reduce network interference, hence improving the performance of the entire network.
Automatic Power Optimization	Enable this function, and the controller will scan the wireless environment to conclude the optimum transmission power for the APs.

Power Range	Select Custom if you want to optimize the power within the specified range. You can limit the transmit power range of each AP/wireless routers after the power deployment is completed. For high-density deployment, you can try to set a smaller power range. An over-low value may lead to limited coverage, while an over-high value may lead to strong interference. (Note: The deployment may fail if the minimum power you select exceeds the maximum power of the AP to be deployed.)
Power Threshold	Select Custom if you want to optimize the power within the specified threshold. You can adjust the power deployment override threshold according to the actual deployment height and spacing of APs/wireless routers, achieving optimal wireless coverage after RF optimization. The larger the threshold, the larger the adjusted overall power value.
Channel Width Selection	Select the channel width for each band, and the optimization will maintain the selected channel width.
Excluded 5 GHz Channels	When enabled, you can specify the channels so they will not execute the automatic optimization.

Exclude APs from WLAN Optimization

If you want to exclude certain APs from WLAN optimization, locate the **Excluded APs List** on the **WLAN Optimization** page, click **Add** to add the APs.

Some APs will be added to the list automatically, including APs in the mesh network and APs with unsupported firmware.

Excluded APs List ⓘ					⊕ Add
DEVICE NAME	IP ADDRESS	STATUS	MODEL	ACTION	
 10-27-55 	192.168.0.106	 DISCONNECTED	EAP660 HD(US) v1.0		
 30-68-1 	192.168.0.2	 CONNECTED 	EAP215-Bridge(US) v2.0		
 30-68-1 	192.168.0.4	 CONNECTED	EAP215-Bridge(US) v2.0		
 123 	192.168.0.101	 DISCONNECTED	EAP773(US) v1.0		

Chapter 8

Configure Network Authentication

Authentication is a portfolio of features designed to authorize network access to clients, which enhances the network security. Omada provides authentication services covering all the needs to authenticate both wired and wireless clients.

This chapter guides you on how to configure network authentication with the SDN Controller. The chapter includes the following sections:

- [8. 1 Configure Portal Authentication](#)
- [8. 2 Configure 802.1X Authentication](#)
- [8. 3 Configure MAC-Based Authentication](#)

8.1 Configure Portal Authentication

Overview

Portal authentication provides authentication service to the clients that only need temporary access to the network, such as the customers in a restaurant or in a supermarket. To access the network, these clients need to enter the authentication login page and use the correct login information to pass the authentication. In addition, you can customize the authentication login page and specify a URL which the authenticated clients will be redirected to.

Portal authentication takes effect on SSIDs and LAN networks. EAPs authenticate wireless clients which connect to the SSID with Portal configured, and the gateway authenticates wired clients which connect to the network with Portal configured. To make Portal authentication available for wired and wireless clients, ensure that both the gateway and EAPs are connected and working properly.

The controller provides several types of Portal authentication:

■ No Authentication

With this authentication type configured, clients can pass the authentication and access the network without providing any login information. Clients just need to accept the terms (if configured) and click the Login button.

■ Simple Password

With this authentication type configured, clients are required to enter the correct password to pass the authentication. All clients use the same password which is configured in the controller.

■ Hotspot

With this authentication type configured, clients can access the network after passing any type of the authentication:

- **Voucher**

Clients can use the unique voucher codes generated by the controller within a predefined time usage. Voucher codes can be printed out from the controller, so you can print the codes and distribute them to your costumers to tie the network access to consumption.

- **Local User**

Clients are required to enter the correct username and password of the login account to pass the authentication.

- **SMS**

Clients can get verification codes using their mobile phones and enter the received codes to pass the authentication.

- **RADIUS**

Clients are required to enter the correct username and password which are stored in the RADIUS server to pass the authentication.

- **Form Auth**

Clients are required to fill in a survey created by the network administrator to pass the authentication. It can be used for collecting feedback from your clients.

- **RADIUS Server**

Clients are required to enter the correct username and password created on the RADIUS server to pass the authentication.

- **External Portal Server**

The option of External Portal Server is designed for the developers. They can customize their own authentication type like Google account authentication according to the interface provided by the Controller.

- **Google**

Clients will be redirected to the Google login page and are required to complete the Google account login to pass the authentication.

Portal authentication can work with Access Control Policy, which grant specific network access to the users with valid identities. You can determine that the clients which didn't pass Portal authentication can only access the network resources allowed by Access Control Policy.

- **Pre-Authentication Access**

Pre-Authentication Access allows unauthenticated clients to access the specific network resources.

- **Authentication-Free Client**

Authentication-Free Clients allows the specific clients to access the specific network resources without authentication.

Create New Portal

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Authentication](#) > [Portal](#).
3. On [Portal](#) tab, click [Create New Portal](#). Specify the portal name and enable [Portal](#).

Create New Portal

Portal Name

Portal

Controller Online Required.

SSID & Network

Please Select...

Authentication Type

No Authentication

Authentication Timeout

8 Hours

Daily Limit

Enable

HTTPS Redirection

Enable

Landing Page

The Original URL

The Promotional URL

The Success Page

Clients will be directed to the URL they request for after they pass Portal authentication.

4. Select the SSIDs and LAN networks for the portal to take effect. The clients connected to the selected SSIDs or LAN networks will have to log into a web page to establish verification before accessing the network.
5. Select the Authentication Type and configure authentication settings.

■ No Authentication

Authentication Timeout	Select the login duration. Clients will be off-line after the authentication timeout.
Daily Limit	Click the checkbox to enable Daily Limit. With this feature enabled, after authentication times out, clients cannot get authenticated again until the next day. With this feature disabled, after authentication times out, clients can get authenticated again without limit.

■ Simple Password

Password	Specify the password for the portal.
Authentication Timeout	Select the login duration. Clients will be off-line after the authentication timeout.

■ Hotspot

Type	Select one or more authentication types according to your needs. Clients can access the network after passing any type of the authentication.
------	---

With different types of Hotspot selected, configure the related parameters.

- **Voucher Portal**

Voucher	Select Voucher and click Voucher Manager to manage the voucher codes. Refer to the voucher configuration chapter in this guide for detailed information about how to create vouchers.
----------------	---

- **Local User Portal**

Local User	Select Local User and click User Management to manage the information of the login accounts. Refer to the account configuration chapter in this guide for detailed information about how to create Local Users.
-------------------	---

- **SMS Portal**

Select SMS and configure the required parameters in the SMS section.

SMS	Clients can get verification codes using their mobile phones and enter the received codes to pass the authentication.
Twilio SID	Enter the Account SID for Twilio API Credentials.
Auth Token	Enter the Authentication Token for Twilio API Credentials.
Operating Phone Number	Enter the phone number that is used to send verification messages to the clients.
Maximum User Numbers	Click the checkbox and enter the maximum number of users allowed to be authenticated using the same phone number at the same time.
Authentication Timeout	Select the login duration. The client needs to log in again on the web authentication page to access the network.
Preset Country Code	Enter the default country code that will be filled automatically on the authentication page.

- **RADIUS Portal**

Select RADIUS and configure the required parameters in the RADIUS section.

Authentication Timeout	Clients are required to enter the correct username and password which are stored in the RADIUS server to pass the authentication.
RADIUS Profile	Select the RADIUS profile you have created. If no RADIUS profiles have been created, click Create New RADIUS Profile from the drop-down list or Manage RADIUS Profile to create one. The RADIUS profile records the information of the RADIUS server which provides a method for storing the authentication information centrally.

Portal Logout	Check the box to allow clients to log out of the portal by accessing a URL (portal.tplink.net/portal/logout by default). You can change the default URL by editing portal.logout.domain in the omada.properties file. Some devices may require firmware update to support Portal Logout. Please refer to Configuration Result for details.
NAS ID	Configure a Network Access Server Identifier (NAS ID) on the portal. Authentication request packets from the controller to the RADIUS server carry the NAS ID. The RADIUS server can classify users into different groups based on the NAS ID, and then choose different policies for different groups.
Disconnected Requests	With the feature enabled, the controller will listen on the receiver port for disconnect requests from the RADIUS server. When the controller receives the disconnect requests in correct format, the controller will terminate the RADIUS authentication session of the clients. Note that the feature is available only when the controller is accessible to the RADIUS server.
Receiver Port	Specify the port on which the controller listens when there are disconnect requests from the RADIUS server. Make sure that the specified port is not in use.
Status	The entry displays the status of the receiver port, including Running, Disabled, and Error. Running means that the port is available, Disabled means that the port is closed, and Error means that the port is already in use.

- **Configuring Form Authentication**

Select Form Auth and click [Create New Survey](#) in the Form Authentication section. Then follow the on-screen instructions to create a survey by adding the type and number of questions you need. You can click [Preview](#) to view how the survey looks like on website and phone.

Click [Publish](#) and then the created survey can be used for form authentication. A survey cannot be edited after it is published.

Survey Name	Specify a name for the survey for identification.
Duration	Specify how long clients can use the network after they pass the form authentication.

Created surveys will be displayed for you to choose for the form authentication.

- **RADIUS Server**

Authentication Timeout	Select the login duration. Clients will be off-line after the authentication timeout.
RADIUS Profile	Select the RADIUS profile you have created. If no RADIUS profiles have been created, click Create New RADIUS Profile from the drop-down list or click Manage RADIUS Profile to create one. The RADIUS profile records information of the RADIUS server including the IP address, port and so on.
NAS ID	Configure a Network Access Server Identifier (NAS ID) on the portal. Authentication request packets from the controller to the RADIUS server carry the NAS ID. The RADIUS server can classify users into different groups based on the NAS ID, and then choose different policies for different groups.

Disconnected Requests	With the feature enabled, the controller will listen on the receiver port for disconnect requests from the RADIUS server. When the controller receives the disconnect requests in correct format, the controller will terminate the RADIUS authentication session of the clients. Note that the feature is available only when the controller is accessible to the RADIUS server.
Receiver Port	Specify the port on which the controller listens when there are disconnect requests from the RADIUS server. Make sure that the specified port is not in use.
Status	The entry displays the status of the receiver port, including Running, Disabled, and Error. Running means that the port is available, Disabled means that the port is closed, and Error means that the port is already in use.
Authentication Mode	Select the authentication protocol for the RADIUS server.
Portal Customization	Select Local Web Portal or External Web Portal. The authentication login page of Local Web Portal is provided by the built-in portal server of the controller. The External Web Portal is provided by external portal server. Enter the authentication login page's URL provided by the external portal server in the External Web Portal URL field.

■ External LDAP Server

Authentication Timeout	Select the login duration. Clients will be off-line after the authentication timeout.
LDAP Profile	Select the LDAP profile you have created. If no LDAP profiles have been created, click Create New LDAP Profile from the drop-down list or click Manage LDAP Profile to create one. The LDAP profile records information of the LDAP server including the server address, port and so on.
Portal Customization	Select Local Web Portal or External Web Portal. The authentication login page of Local Web Portal is provided by the built-in portal server of the controller. The External Web Portal is provided by external portal server. Enter the authentication login page's URL provided by the external portal server in the External Web Portal URL field.

■ External Portal Server

Custom Portal Server	Specify the IP address or URL that redirect to an external portal server.
----------------------	---

■ Google

Authentication Timeout	Select the login duration. Clients will be off-line after the authentication timeout.
Client ID	Enter the Client ID provided by Google to integrate with Google OAuth 2.0.
Client Secret	Enter the Client Secret provided by Google to integrate with Google OAuth 2.0.

6. Configure redirection and landing settings.

HTTPS Redirection	Click the checkbox to enable HTTPS Redirection. With this feature enabled, the unauthorized clients will be redirected to the Portal page when they are trying to browse HTTPS websites. With this feature disabled, the unauthorized clients cannot browse HTTPS websites and are not redirected to the Portal page.
Landing Page	Select which page the client will be redirected to after a successful authentication. The Original URL: Clients are directed to the URL they request for after they pass Portal authentication. The Promotional URL: Clients are directed to the specified URL after they pass Portal authentication.

(Optional) Portal Customization

When creating or editing a portal entry, you can customize the Portal page in the [Portal Customization](#) section.

Note: Portal Customization is not available when you configure external authentication types.

Portal Customization

Type

☒ Edit Current Page

☐ Import Customized Page

Default Language

English

Background

☐ Solid Color

☒ Picture

Background Picture

Choose

Logo

☒ Enable

Logo Picture

Choose

Logo Size

Small

Medium

Large

Logo Position

Upper

Middle

Lower

Input Box Color

☐ #FFFFFF

Input Text Color

☒ #000000

Button Color

☒ #00778C

Button Text color

☐ #FFFFFF

Button Position

Upper

Middle

Lower

Button Text

Log In

Type	Select the type of the Portal page. Edit Current Page: Edit the related parameters to customize the Portal page based on the provided page. Import Customized Page: Click Import to import your unique Portal page for branding it as per your business.
Default Language	Select the default language displayed on the Portal page. The controller automatically adjusts the language displayed on the Portal page according to the system language of the clients. If the language is not supported, the controller will use the default language specified here.

Background	Select the background type. Solid Color: Configure your desired background color by entering the hexadecimal HTML color code manually or through the color picker. Picture: Click Choose and select a picture from your PC as the background.
Logo	Click to show the logo on the portal page.
Logo Picture	Click Choose and select a picture from your PC as the logo.
Logo Size/ Logo Position	Adjust the logo size and position on the Portal Page.
Input Box Color/ Input Text Color	(For certain authentication types) Configure your desired background and text color for the input box by entering the hexadecimal HTML color code manually or through the color picker.
Button Color/ Button Text Color	Configure your desired background and text color for the button by entering the hexadecimal HTML color code manually or through the color picker.
Button Position	Select the button position on the Portal Page.
Button Text	Enter the text for the button.
Welcome Information	Click the checkbox and enter text as the welcome information. You can specify the desired text font size and configure the text color by entering the hexadecimal HTML color code manually or through the color picker.
Terms of Service	Click the checkbox and enter text as the terms of service in the following box. Click Add Terms to enter the name and context of the terms which will appear after a client clicks the link in Terms of Service.
Copyright	Click the checkbox and enter text as the copyright in the following box. You can specify the desired text font size and configure the text color by entering the hexadecimal HTML color code manually or through the color picker.
Show Redirection Countdown After Authorized	When enabled, the system will show the portal's redirection countdown.

Click **Advertisement Options** and customize advertisement pictures on the authentication page if needed.

Advertisement Options

Advertisement

☐ Enable

Picture Resource

Choose

(1-5 Pictures)

Advertisement Duration Time

seconds

(1-30)

Picture Carousel Interval

seconds

(1-10)

Allow Users To Skip Advertisement

☐ Enable

Advertisement	Click the checkbox to enable the Advertisement feature. With this feature enabled, you can add advertisement pictures on the authentication page. These advertisement pictures will be displayed before the login page appears.
Picture Resource	Click Choose and select pictures from your PC as the advertisement pictures. When several pictures are added, they will be played in a loop.
Advertisement Duration Time	Enter the duration time for the advertisement pictures. For this duration, the pictures will be played in a loop. If the duration time is not enough for all the pictures, the rest will not be displayed.
Picture Carousel Interval	Enter the picture carousel interval. For example, if this value is set as 5 seconds, the first picture will be displayed for 5 seconds, followed by the second picture for 5 seconds, and so on.
Allow Users To Skip Advertisement	Click the checkbox to allow users to skip the advertisement.

(Optional) Access Control

On **Access Control** tab, you can configure access control rules if needed.

Access Control

Pre-Authentication Access

☒ Enable ⓘ

Pre-Authentication Access List

Add

TYPE	INFORMATION	ACTION
URL	www.amazon.com	

Showing 1-1 of 1 records < 1 > Go to page Go

Authentication-Free Client

☒ Enable ⓘ

Authentication-Free Client List

Add

TYPE	INFORMATION	ACTION
MAC Address	90-8C-43-70-11-12	

Showing 1-1 of 1 records < 1 > Go to page Go

Apply

Cancel

Pre-Authentication Access	Click the checkbox to enable Pre-Authentication Access. With this feature enabled, unauthenticated clients are allowed to access the subnets and web resources specified in the Pre-Authentication Access List below.
Pre-Authentication Access List	Click Add to configure the IP range or URL which unauthenticated clients are allowed to access.
Authentication-Free Policy	Click the checkbox to enable Authentication-Free Policy. With this feature enabled, you can allow certain clients to access the internet without Portal authentication.
Authentication-Free Client List	Click Add and enter the IP address or MAC address of Authentication-Free clients.


8.2 Configure 802.1X Authentication

Overview

802.1X provides port-based authentication service to restrict unauthorized clients from accessing to the network through publicly accessible switch ports. An 802.1X-enabled port allows only authentication messages and forbids normal traffic until the client passes the authentication.

Based on authenticated identity, 802.1X can also deliver customized services. For example, 802.1X and VLAN Assignment together make it possible to assign different authenticated users to different VLANs automatically.

802.1X authentication uses client-server model which contains three device roles: client/supplicant, authenticator and authentication server. This is described in the figure below:

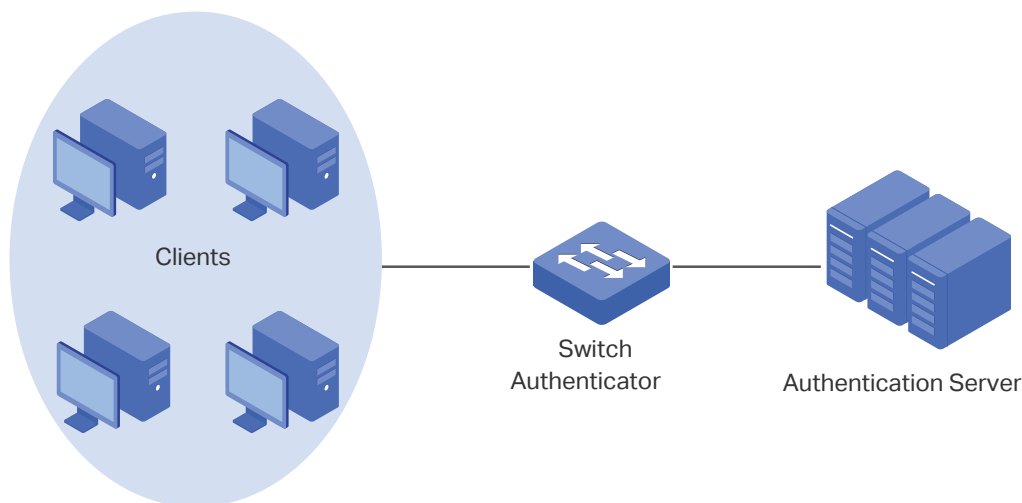

■ Client

A client, usually a computer, is connected to the authenticator via a physical port. We recommend that you install TP-Link 802.1X authentication client software on the client hosts, enabling them to request 802.1X authentication to access the LAN.

■ Authenticator

An authenticator is usually a network device that supports 802.1X protocol. As the above figure shows, the switch is an authenticator.

The authenticator acts as an intermediate proxy between the client and the authentication server. The authenticator requests user information from the client and sends it to the authentication server; also, the authenticator obtains responses from the authentication server and sends them to the client. The authenticator allows authenticated clients to access the LAN through the connected ports but denies the unauthenticated clients.

■ Authentication Server

The authentication server is usually the host running the RADIUS server program. It stores information of clients, confirms whether a client is legal and informs the authenticator whether a client is authenticated.

Based on authenticated identity, 802.1X can also deliver customized services. For example, 802.1X and VLAN Assignment together make it possible to assign different authenticated users to different VLANs automatically.


Configuration

To complete the 802.1X configuration, follow these steps:

- 1) Enable 802.1X.
- 2) Select the RADIUS profile you have created and configure other parameters.
- 3) Select the ports on which 802.1X Authentication will take effect.

Step 1: Enable 802.1X

Launch the controller and access a site. Go to [Network Config](#) > [Authentication](#) > [802.1X](#). Click  to enable 802.1X.

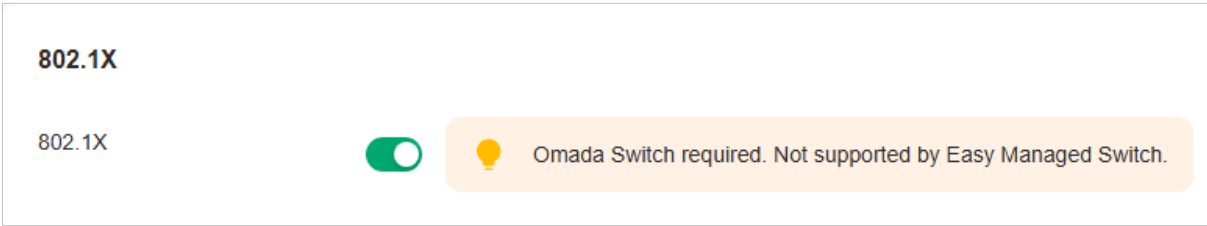

Step 2: Configure RADIUS Profile and Parameters

Select the RADIUS profile you have created. If no RADIUS profiles have been created, click [Create New RADIUS Profile](#) from the drop-down list or [Manage RADIUS Profile](#) to create one. The RADIUS profile records the information of the RADIUS server which acts as the authentication server during 802.1X authentication.

Basic Info

RADIUS Profile

Manage RADIUS Profile

Authentication Protocol

☐ PAP

☒ EAP

Authentication Type

☐ Port Based

☒ MAC Based

MAB

☐ Enable

Authentication Protocol	Select the authentication protocol for exchanging messages between the switch and RADIUS server. As a bridge between the client and RADIUS server, the switch forwards messages for them. It uses AP packets to exchange messages with the client, and processes the messages according to the specified authentication protocol before forwarding them to the RADIUS server. PAP: The AP packets are converted to other protocol (such as RADIUS) packets, and transmitted to the RADIUS server. EAP: The AP packets are encapsulated in other protocol (such as RADIUS) packets, and transmitted to the authentication server. To use this authentication mechanism, the RADIUS server should support AP attributes.
Authentication Type	Select the 802.1X authentication type. Port Based: After a client connected to the port gets authenticated successfully, other clients can access the network via the port without authentication. MAC Based: Clients connected to the port need to be authenticated individually. The RADIUS server distinguishes clients by their MAC addresses.

VLAN Assignment	This feature allows the RADIUS server to send the VLAN configurations to the port dynamically. After the port is authenticated, the RADIUS server assigns the VLAN based on the username of the client connecting to the port. The username-to-VLAN mappings must be already stored in the RADIUS server database. This feature is available only when the 802.1X authentication type is Port Based.
MAB	MAB (MAC Authentication Bypass) allows clients to be authenticated without any client software installed. MAB is useful for authenticating devices without 802.1X capability like IP phones. When MAB is enabled on a port, the switch will learn the MAC address of the client automatically and send the authentication server a RADIUS access request frame with the client's MAC address as the username and password. MAB takes effect only when 802.1X authentication is enabled on the port.

Step 3: Select the Ports

Select the ports to enable 802.1X authentication or MAB for them.

To enable 802.1X authentication, click the unselected ports. 802.1X-enabled ports will be marked with .

To enable MAB, click the ports marked with . MAB-enabled ports will be marked with .

Note: You can enable MAB only on 802.1X-enabled ports.



Note:

- You are not recommended to enable 802.1X authentication on the switch ports which connects to network devices without 802.1X capability like the router and APs.
- The switch authenticates wired clients which connect to the port with 802.1X enabled. And the gateway authenticates wired clients which connect to the network with Portal configured. Wired clients should pass Portal and 802.1X authentication to access the internet when both are configured.

8.3 Configure MAC-Based Authentication

Overview


MAC-Based Authentication allows or disallows clients access to wireless networks based on the MAC addresses of the clients. In this authentication method, the controller takes wireless clients' MAC addresses as their usernames and passwords for authentication. The RADIUS server authenticates the MAC addresses against its database which stores the allowed MAC addresses. Clients can access the wireless networks configured with MAC-based authentication after passing authentication successfully.

Note:

Both MAC-Based Authentication and Portal authentication can authenticate wireless clients. If both are configured on a wireless network, a wireless client needs to pass MAC-Based Authentication first and then Portal authentication for internet access. You can enable MAC-Based Authentication Fallback to allow clients bypass MAC-Based Authentication, which means the client needs to pass either of the two authentication. The client tries MAC-Based Authentication first, and is allowed to try portal authentication if it failed the MAC-Based Authentication.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Authentication](#) > [MAC-Based Authentication](#). Click  to enable MAC-Based Authentication.

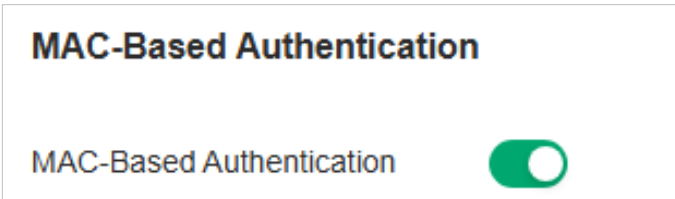

3. In the Basic Info, select the SSIDs, RADIUS Profile and other required parameters. Refer to the following table to configure the required parameters and click [Apply](#).

Basic Info		
SSID	Please Select...	
RADIUS Profile		Manage RADIUS Profile
NAS ID		(Optional)
MAC-Based Authentication Fallback	☐ Enable	
MAC Address Format	aa:bb:cc:dd:ee:ff	
Empty Password	☐ Enable	

SSID	Select one or more SSIDs for MAC-based authentication to take effect.
RADIUS Profile	Select the RADIUS profile you have created. If no RADIUS profiles have been created, click Create New RADIUS Profile from the drop-down list or Manage RADIUS Profile to create one. The RADIUS profile records the information of the RADIUS server which acts as the authentication server during MAC-Based Authentication.
NAS ID	Configure a Network Access Server Identifier (NAS ID) for the authentication. Authentication request packets from the controller to the RADIUS server carry the NAS ID. The RADIUS server can classify users into different groups based on the NAS ID, and then choose different policies for different groups.
MAC-Based Authentication Fallback	For the wireless network configured with both MAC-Based Authentication and Portal, if you enable this feature, a wireless client needs to pass only one authentication. The client tries MAC-Based Authentication first, and is allowed to try Portal authentication if it failed the MAC-Based Authentication. If you disable this feature as default, a wireless client needs to pass both the MAC-Based Authentication and portal authentication for internet access, and will be denied if it fails either of the authentication.
MAC Address Format	Select clients' MAC address format which the controller uses for authentication. Then configure the MAC addresses in the specified format as usernames for the clients on the RADIUS server.
Empty Password	Click to allow a blank password for MAC-Based Authentication. With this option disabled, the password will be the same as the username.

Chapter 9

Configure VPN Networks

VPN (Virtual Private Network) provides a means for secure communication between remote computers across a public wide area network (WAN), such as the internet. The gateways supports various VPN types.

This chapter guides you on how to configure VPN networks with the SDN Controller. The chapter includes the following sections:

- [9. 1 VPN Overview](#)
- [9. 2 Configure the Site-to-Site VPN](#)
- [9. 3 Configure the Client-to-Site VPN](#)
- [9. 4 Configure VPN Users](#)
- [9. 5 Configure IPsec Failover](#)
- [9. 6 Configure the SSL VPN](#)
- [9. 7 Configure the WireGuard VPN](#)

9.1 VPN Overview

VPN (Virtual Private Network) gives remote LANs or users secure access to LAN resources over a public network such as the internet. Virtual indicates the VPN connection is based on the logical end-to-end connection instead of the physical end-to-end connection. Private indicates users can establish the VPN connection according to their requirements and only specific users are allowed to use the VPN connection.

The core of VPN connection is to realize tunnel communication, which fulfills the task of data encapsulation, data transmission and data decompression via the tunneling protocol. The gateway supports common tunneling protocols that a VPN uses to keep the data secure:

■ IPsec

IPsec (IP Security) can provide security services such as data confidentiality, data integrity and data authentication at the IP layer. IPsec uses IKE (Internet Key Exchange) to handle negotiation of protocols and algorithms based on the user-specified policy, and to generate the encryption and authentication keys to be used by IPsec. IPsec can be used to protect one or more paths between a pair of hosts, between a pair of security gateways, or between a security gateway and a host.

■ PPTP

PPTP (Point-to-Point Tunneling Protocol) is a network protocol that enables the secure transfer of data from a remote client to a private enterprise server by creating a VPN across TCP/IP-based data networks. PPTP uses the username and password to validate users.

■ L2TP

L2TP (Layer 2 Tunneling Protocol) provides a way for a dialup user to make a virtual Point-to-Point Protocol (PPP) connection to an L2TP network server (LNS), which can be a security gateway. L2TP sends PPP frames through a tunnel between an L2TP access concentrator (LAC) and the LNS. Because of the lack of confidentiality inherent in the L2TP protocol, it is often implemented along with IPsec. L2TP uses the username and password to validate users.


■ OpenVPN

OpenVPN uses OpenSSL for encryption of UDP and TCP for traffic transmission. OpenVPN uses a client-server connection to provide secure communications between a server and a remote client over the internet. One of the most important steps in setting up OpenVPN is obtaining a certificate which is used for authentication. The SDN controller supports generating the certificate which can be downloaded as a file on your computer. With the certificate imported, the remote clients are checked out by the certificate and granted access to the LAN resources.

There are many variations of virtual private networks, with the majority based on two main models:

■ Site-to-Site VPN

A Site-to-Site VPN creates a connection between two networks at different geographic locations. Typically, headquarters set up Site-to-Site VPN with the subsidiary to provide the branch office with access to the headquarters' network.

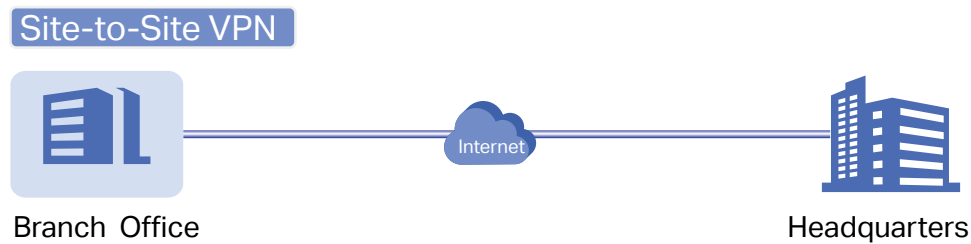

The gateway supports two types of Site-to-Site VPNs:

- Auto IPsec

The controller automatically creates an IPsec VPN tunnel between two sites on the same controller. The VPN connection is bidirectional. That is, creating an Auto IPsec VPN from site A to site B also provides connectivity from site B to site A, and nothing is needed to be configured on site B.

- Manual IPsec

You create an IPsec VPN tunnel between two peer routers over internet manually, from a local router to a remote router that supports IPsec. The gateway on this site is the local peer router.

■ Client-to-Site VPN

A Client-to-Site VPN creates a connection to the LAN from a remote host. It is useful for teleworkers and business travelers to access their central LAN from a remote location without compromising privacy and security.

The first step to build a Client-to-Site VPN connection is to determine the role of the gateways and which VPN tunneling protocol to use:


- VPN Server

The gateway on the central LAN works as a VPN server to provide a remote host with access to the local network. The gateway which functions as a VPN server can use L2TP, PPTP, IPsec, or OpenVPN as the tunneling protocol.

- VPN Client

Either the remote user's gateway or the remote user's laptop or PC works as the VPN client.

When the remote user's gateway works as the VPN client, the gateway helps create VPN tunnels between its connected hosts and the VPN server. The gateway which functions as a VPN client can use L2TP, PPTP, or OpenVPN as the tunneling protocol.

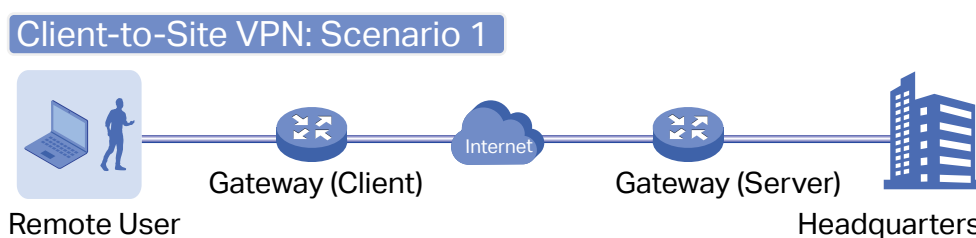

When the remote user's laptop or PC works as the VPN client, the laptop or PC uses a VPN client software program to create VPN tunnels between itself and the VPN server. The VPN client software program can use L2TP, PPTP, IPsec, or OpenVPN as the tunneling protocol.

Client-to-Site VPN: Scenario 2

**Note:**

In scenario 1, you need to configure VPN client and VPN server separately on the gateways, while remote hosts can access the local networks without running VPN client software.

In scenario 2, you need to configure VPN server on the gateway, and then configure the VPN client software program on the remote user's laptop or PC, while the remote user's gateway doesn't need any VPN configuration.

Here is the infographic to provide a quick overview of VPN solutions.




Create a VPN Policy



Select the purpose of the VPN

Site-to-Site VPN

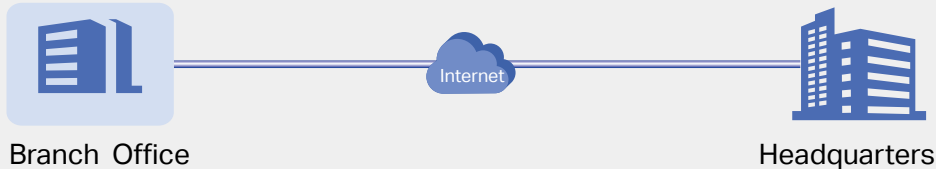



Auto IPsec VPN

The controller automatically creates an IPsec VPN tunnel between two sites on the same controller.

Manual IPsec VPN

You manually create an IPsec VPN tunnel between two peer routers over internet, from a local router to a remote router that supports IPsec.

Client-to-Site VPN

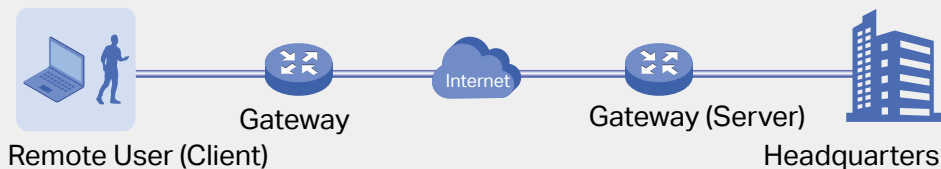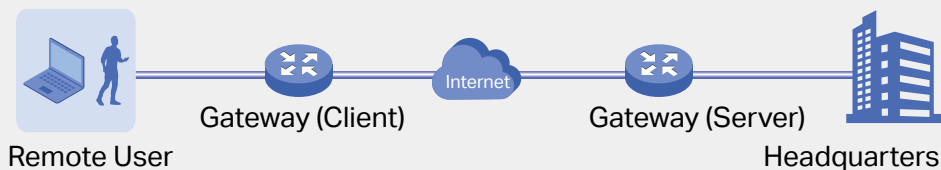

Select the role of the gateway and VPN tunneling protocol

VPN Server

L2TP

PPTP

IPsec

OpenVPN

VPN Client

L2TP

PPTP

IPsec (Only for VPN client software)

OpenVPN

9.2 Configure the Site-to-Site VPN

To complete the VPN configuration, follow these steps:

- 1) Create a new VPN policy and select the purpose of the VPN according to your needs. Select Site-to-Site if you want the network connected to another. Select Client-to-Site if you want some hosts connected to the network.
- 2) Select the VPN tunneling protocol and configure the VPN policy based on the protocol.

The gateway supports two types of Site-to-Site VPNs: [Auto IPsec](#) and [Manual IPsec](#).

Configuring Auto IPsec VPN

- 1. Launch the controller and access a site.
- 2. Go to [Network Config](#) > [VPN](#) > [VPN](#). Click [Create New VPN Policy](#) to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☒ Site-to-Site VPN ☐ Client-to-Site VPN

VPN Type

☒ Auto IPsec ☐ Manual IPsec

Remote Site

Please Select... ▾

- 3. Enter a name to identify the VPN policy and select the purpose as Site-to-Site VPN. Refer to the following table to configure the required parameters and click [Create](#).

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Site-to-Site VPN .
VPN Type	Select the VPN type as Auto IPsec . With Auto IPsec, the controller automatically creates an IPsec VPN tunnel between two sites on the same controller. The VPN connection is bidirectional. That is, creating an Auto IPsec VPN from site A to site B also provides connectivity from site B to site A, and nothing is needed to be configured on site B.
Remote Site	Select the site on the other end of the Auto IPsec VPN tunnel. Make sure that the selected remote site has an Omada managed gateway within the same controller.

Configuring Manual IPsec VPN

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [VPN](#). Click [Create New VPN Policy](#) to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☒ Site-to-Site VPN ☐ Client-to-Site VPN

VPN Type

☐ Auto IPsec ☒ Manual IPsec

Remote Gateway

Remote Subnets

.

.

.

/

⊕ Add Subnet

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default ×

Tenants ×

▼

 ⓘ

Pre-Shared Key

⌵

WAN

Please Select...

▼

⊕ Advanced Settings

Create

Cancel

3. Enter a name to identify the VPN policy and select the purpose as Site-to-Site VPN. Refer to the following table to configure the basic parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Site-to-Site VPN .
VPN Type	Select the VPN type as Manual IPsec .
Remote Gateway	Enter an IP address or a domain name as the gateway on the remote peer of the VPN tunnel.
Remote Subnets	Enter the IP address range of LAN on the remote peer of the VPN tunnel. Remote subnets should not be in the same network segment as the local LAN.
Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
Pre-Shared Key	Enter the pre-shared key(PSK). Both peer gateways must use the same pre-shared secret key for authentication. A pre-shared key is a string of characters that is used as an authentication key. Both peer gateways create a hash value based on the same pre-shared key and other information. The hash values are then exchanged and verified to authenticate the other party. The pre-shared keys should be long and random for security. Short or predictable pre-shared keys can be easily broken in brute-force attacks. To maintain a high level of security, administrators are recommended to update the pre-shared key periodically.
WAN	Select the WAN port on which the IPsec VPN tunnel is established.

- Click **Advanced Settings** to load the following page.

Phase-1 Settings

Key Exchange Version

☐ IKEv1 ☒ IKEv2 i

Proposal

SHA1 - AES256 - DH2 ▼

Negotiation Mode

☒ Initiator Mode ☐ Responder Mode

Local ID Type

☒ IP Address ☐ Name

Remote ID Type

☒ IP Address ☐ Name

SA Lifetime

28800 seconds (60-604800)

DPD

☒ Enable

DPD Interval

10 seconds (1-300)

Phase-2 Settings

Encapsulation Mode

☒ Tunnel Mode ☐ Transport Mode

Proposal

ESP - SHA1 - AES256 ▼

PFS

None ▼

SA Lifetime

28800 seconds (120-604800)

Create

Cancel

Advanced settings include Phase-1 settings and Phase-2 settings. Phase-1 is used to set up a secure encrypted channel which the two peers can negotiate Phase-2, and then establish the IKE Security Associations (IKE SA). Phase-2 is used to negotiate about a set of parameters that define what traffic can go through the VPN, and how to encrypt and authenticate the traffic, then establish the IPsec Security Associations (IPsec SA).

Refer to the following table to complete the configurations according to your actual needs and click **Create**.

For Phase-1 Settings:

Phase-1 Settings	The IKE version you select determines the available Phase-1 settings and defines the negotiation process. Both VPN gateways must be configured to use the same IKE version and Phase-1 settings.
Internet Key Exchange Version	Select the version of Internet Key Exchange (IKE) protocol which is used to set up security associations for IPsec. Both IKEv1 and IKEv2 are supported with gateways, but IKEv1 is available only when the VPN policy is applied to a single Remote Subnet and a single Local Network. Note that both peer gateways must be configured to use the same IKE version.
Proposal	Specify the proposal for IKE negotiation phase-1. An IKE proposal lists the encryption algorithm, authentication algorithm and Diffie-Hellman (DH) groups to be negotiated with the remote IPsec peer. Authentication algorithms verify the data integrity and authenticity of a message. Encryption algorithms protect the data from being read by a third-party. Diffie-Hellman (DH) groups determine the strength of the key used in the key exchange process. Note that both peer gateways must be configured to use the same Proposal.
Exchange Mode	Specify the IKE Exchange Mode when IKEv1 is selected. Main Mode: This mode provides identity protection and exchanges more information, which applies to scenarios with higher requirements for identity protection. Aggressive Mode: This mode establishes a faster connection but with lower security, which applies to scenarios with lower requirements for identity protection.
Negotiation Mode	Specify the IKE Negotiation Mode as Initiator Mode or Responder Mode. Initiator Mode: This mode means that the local device initiates a connection to the peer. Responder Mode: This mode means that the local device waits for the connection request initiated by the peer.
Local ID Type	Specify the type of Local ID which indicates the authentication identifier sent to the peer for IKE negotiation. IP Address: Select IP Address to use the IP address for authentication. Name: Select Name, and then enter the name in the Local ID field to use the name as the ID for authentication. Note that the type and value of Local ID should be the same as Remote ID given for the remote peer of the VPN tunnel.

Local ID	When the Local ID Type is configured as Name, enter a name for the local device as the ID in IKE negotiation. The name should be in the format of FQDN (Fully Qualified Domain Name).
Remote ID Type	Specify the type of Remote ID which indicates the authentication identifier received from the peer for IKE negotiation. IP Address: Select IP Address to use the IP address for authentication. Name: Select Name, and then enter the name in the Remote ID field to use the name as the ID for authentication. Note that the type and value of Remote ID should be the same as Local ID given for the remote peer of the VPN tunnel.
Remote ID	When the Remote ID Type is configured as Name, enter a name of the remote peer as the ID in IKE negotiation. The name should be in the format of FQDN (Fully Qualified Domain Name).
SA Lifetime	Specify ISAKMP SA (Security Association) Lifetime in IKE negotiation. If the SA lifetime expired, the related ISAKMP SA will be deleted.
DPD	Check the box to enable DPD (Dead Peer Detect) function. If enabled, the IKE endpoint can send a DPD request to the peer to inspect whether the IKE peer is alive.
DPD Interval	Specify the interval between sending DPD requests with DPD enabled. If the IKE endpoint receives a response from the peer during this interval, it considers the peer alive. If the IKE endpoint does not receive a response during the interval, it considers the peer dead and deletes the SA.
For Phase-2 Settings:	
Phase-2 Settings	The purpose of Phase 2 negotiations is to establish the Phase-2 SA (also called the IPsec SA). The IPsec SA is a set of traffic specifications that tell the device what traffic to send over the VPN, and how to encrypt and authenticate that traffic.
Encapsulation Mode	Specify the Encapsulation Mode as Tunnel Mode or Transport Mode. When both ends of the tunnel are hosts, either mode can be chosen. When at least one of the endpoints of a tunnel is a security gateway, such as a router or firewall, Tunnel Mode is recommended to ensure safety.
Proposal	Specify the proposal for IKE negotiation phase-2. An IPsec proposal lists the encryption algorithm, authentication algorithm and protocol to be negotiated with the remote IPsec peer. Note that both peer gateways must be configured to use the same Proposal.
PFS	Select the DH group to enable PFS (Perfect Forward Security) for IKE mode, then the key generated in phase-2 will be irrelevant with the key in phase-1, which enhance the network security. With None selected, it means PFS is disabled and the key in phase-2 will be generated based on the key in phase-1.
SA Lifetime	Specify IPsec SA (Security Association) Lifetime in IKE negotiation. If the SA lifetime expired, the related IPsec SA will be deleted.

9.3 Configure the Client-to-Site VPN

To complete the VPN configuration, follow these steps:

- 1) Create a new VPN policy and select the purpose of the VPN according to your needs. Select Site-to-Site if you want the network connected to another. Select Client-to-Site if you want some hosts connected to the network.
- 2) Select the VPN tunneling protocol and configure the VPN policy based on the protocol.

The gateway supports seven types of client-to-Site VPNs depending on the role of your gateway and the protocol that you used:

[Configuring the gateway as a VPN server using L2TP](#)

[Configuring the gateway as a VPN server using PPTP](#)

[Configuring the gateway as a VPN server using IPsec](#)

[Configuring the gateway as a VPN server using OpenVPN](#)

[Configuring the gateway as a VPN client using L2TP](#)

[Configuring the gateway as a VPN client using PPTP](#)

[Configuring the gateway as a VPN client using OpenVPN](#)

Configuring the gateway as a VPN server using L2TP

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [VPN](#). Click [Create New VPN Policy](#) to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Server - L2TP ▾

IPsec Encryption

☒ Encrypted ☐ Unencrypted ☐ Auto

Authentication Mode

☒ Local ☐ LDAP

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default ×

Tenants ×

▾

 ⓘ

Pre-Shared Key

⌵

WAN

Please Select... ▾

IP Pool Type

☒ IP Address/Mask ☐ IP Address Range

IP Pool

.

.

.

/

Primary DNS Server

.

.

.

 (Optional)

Secondary DNS Server

.

.

.

 (Optional)

Create

Cancel

3. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the required parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN.
VPN Type	Select the VPN type as VPN Server - L2TP.

IPsec Encryption	Specify whether to enable the encryption for the tunnel. Encrypted: Select Encrypted to encrypt the L2TP tunnel by IPsec (L2TP over IPsec). With Encrypted selected, enter the Pre-shared Key for IKE authentication. VPN server and VPN client must use the same pre-shared secret key for authentication. Unencrypted: With Unencrypted selected, the L2TP tunnel will not be encrypted by IPsec. Auto: With Auto selected, the L2TP server will determine whether to encrypt the tunnel according to the client's encryption settings. And enter the Pre-shared Key for IKE authentication. VPN server and VPN client must use the same pre-shared secret key for authentication.
Authentication Mode	Select the authentication mode: Local or LDAP.
Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
Pre-shared Key	Enter the pre-shared secret key when IPsec Encryption is selected as Encrypted and Auto. Both peer routers must use the same pre-shared secret key for authentication.
WAN	Select the WAN port on which the L2TP VPN tunnel is established. Each WAN port supports only one L2TP VPN tunnel when the gateway works as a L2TP server.
IP Pool Type	Specify the format of the IP pool.
IP Pool	If you selected IP Address/Mask type, enter the IP address and subnet mask to decide the range of the VPN IP pool. If you select IP Address Range type, enter the start and end IP addresses of the VPN IP pool.
Primary DNS Server	Enter the IP address of the primary DNS server provided by your ISP.
Secondary DNS Server	(Optional) Enter the IP address of the secondary DNS server, which provides redundancy in case the primary DNS server goes down.

4. Add the VPN users account to validate remote hosts. To create VPN users, refer to [9.4 Configure VPN Users](#).

Configuring the gateway as a VPN server using PPTP

1. Launch the controller and access a site. Go to **Network Config > VPN > VPN**. Click **Create New VPN Policy** to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Server - PPTP ▾

MPPE Encryption

☒ Encrypted ☐ Unencrypted ☐ Auto

Authentication Mode

☒ Local ☐ LDAP

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default × Tenants × ▾ ⓘ

WAN

Please Select... ▾

IP Pool Type

☒ IP Address/Mask ☐ IP Address Range

IP Pool

.

.

.

/

Primary DNS Server

.

.

.

(Optional)

Secondary DNS Server

.

.

.

(Optional)

Create

Cancel

2. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the required parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN.
VPN Type	Select the VPN type as VPN Server - PPTP.
MPPE Encryption	Specify whether to enable MPPE (Microsoft Point-to-Point Encryption) for the tunnel. Encrypted: With Encrypted selected, the PPTP tunnel will be encrypted by MPPE. Unencrypted: With Unencrypted selected, the PPTP tunnel will be not encrypted by MPPE.
Authentication Mode	Select the authentication mode: Local or LDAP.

Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
WAN	Select the WAN port on which the PPTP VPN tunnel is established. Each WAN port supports only one PPTP VPN tunnel when the gateway works as a PPTP server.
IP Pool Type	Specify the format of the IP pool.
IP Pool	If you selected IP Address/Mask type, enter the IP address and subnet mask to decide the range of the VPN IP pool. If you select IP Address Range type, enter the start and end IP addresses of the VPN IP pool.
Primary DNS Server	Enter the IP address of the primary DNS server provided by your ISP.
Secondary DNS Server	(Optional) Enter the IP address of the secondary DNS server, which provides redundancy in case the primary DNS server goes down.

3. Add the VPN users account to validate remote hosts. To create VPN users, refer to [9.4 Configure VPN Users](#).

Configuring the gateway as a VPN server using IPsec

1. Launch the controller and access a site.
2. Go to **Network Config > VPN > VPN**. Click **Create New VPN Policy** to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Server - IPsec ×

Remote Host

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default × Tenants × ▾ ⓘ

Pre-Shared Key

WAN

Please Select... ▾

IP Pool

. . . /

Primary DNS Server

. . . (Optional)

Secondary DNS Server

. . . (Optional)

+ Advanced Settings

Create

Cancel

3. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the basic parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN.
VPN Type	Select the VPN type as VPN Server - IPsec.
Remote Host	Enter an IP address or a domain name of the host on the remote peer of the VPN tunnel. 0.0.0.0 represents any IP address.
Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.

Pre-Shared Key	Enter the pre-shared key(PSK). Both peer gateways must use the same pre-shared secret key for authentication. A pre-shared key is a string of characters that is used as an authentication key. Both VPN peers create a hash value based on the same pre-shared key and other information. The hash values are then exchanged and verified to authenticate the other party. The pre-shared keys should be long and random for security. Short or predictable pre-shared keys can be easily broken in brute-force attacks. To maintain a high level of security, administrators are recommended to update the pre-shared key periodically.
WAN	Select the WAN port on which the IPsec VPN tunnel is established.
IP Pool	Enter the IP address and subnet mask to decide the range of the VPN IP pool. The VPN server will assign IP address to the remote host when the tunnel is established. You can specify any reasonable IP address that will not cause overlap with the IP address of the LAN on the local peer router.
Primary DNS Server	Enter the IP address of the primary DNS server provided by your ISP.
Secondary DNS Server	(Optional) Enter the IP address of the secondary DNS server, which provides redundancy in case the primary DNS server goes down.

4. Click Advanced Settings to load the following page.

Phase-1 Settings

Key Exchange Version
☐ IKEv1
☒ IKEv2
i

Proposal
SHA1 - AES256 - DH2

Negotiation Mode
☒ Initiator Mode
☐ Responder Mode

Local ID Type
☒ IP Address
☐ Name

Remote ID Type
☒ IP Address
☐ Name

SA Lifetime
28800
seconds (60-604800)

DPD
☒ Enable

DPD Interval
10
seconds (1-300)

Phase-2 Settings

Encapsulation Mode
☒ Tunnel Mode
☐ Transport Mode

Proposal
ESP - SHA1 - AES256

PFS
None

SA Lifetime
28800
seconds (120-604800)

Create Cancel

Advanced settings include Phase-1 settings and Phase-2 settings. Phase-1 is used to set up a secure encrypted channel which the two peers can negotiate Phase-2, and then establish the IKE Security Associations (IKE SA). Phase-2 is used to negotiate about a set of parameters that define what traffic can go through the VPN, and how to encrypt and authenticate the traffic, then establish the IPsec Security Associations (IPsec SA).

Refer to the following table to complete the configurations according to your actual needs and click **Create**.

For Phase-1 Settings:

Phase-1 Settings	The IKE version you select determines the available Phase-1 settings and defines the negotiation process. Both VPN gateways must be configured to use the same IKE version and Phase-1 settings.
Internet Key Exchange Version	Select the version of Internet Key Exchange (IKE) protocol which is used to set up security associations for IPsec. Both IKEv1 and IKEv2 are supported with gateways, but IKEv1 is available only when the VPN policy is applied to a single Remote Subnet and a single Local Network. Note that both VPN peers must be configured to use the same IKE version.
Proposal	Specify the proposal for IKE negotiation phase-1. An IKE proposal lists the encryption algorithm, authentication algorithm and Diffie-Hellman (DH) groups to be negotiated with the remote IPsec peer. Authentication algorithms verify the data integrity and authenticity of a message. Encryption algorithms protect the data from being read by a third-party. Diffie-Hellman (DH) groups determine the strength of the key used in the key exchange process. Note that both VPN peers must be configured to use the same Proposal.
Exchange Mode	Specify the IKE Exchange Mode when IKEv1 is selected. Main Mode: This mode provides identity protection and exchanges more information, which applies to scenarios with higher requirements for identity protection. Aggressive Mode: This mode establishes a faster connection but with lower security, which applies to scenarios with lower requirements for identity protection.
Negotiation Mode	Specify the IKE Negotiation Mode as Initiator Mode or Responder Mode. Initiator Mode: This mode means that the local device initiates a connection to the peer. Responder Mode: This mode means that the local device waits for the connection request initiated by the peer.
Local ID Type	Specify the type of Local ID which indicates the authentication identifier sent to the peer for IKE negotiation. IP Address: Select IP Address to use the IP address for authentication. Name: Select Name, and then enter the name in the Local ID field to use the name as the ID for authentication. Note that the type and value of Local ID should be the same as Remote ID given for the remote peer of the VPN tunnel.
Local ID	When the Local ID Type is configured as Name, enter a name for the local device as the ID in IKE negotiation. The name should be in the format of FQDN (Fully Qualified Domain Name).

Remote ID Type	Specify the type of Remote ID which indicates the authentication identifier received from the peer for IKE negotiation. IP Address: Select IP Address to use the IP address for authentication. Name: Select Name, and then enter the name in the Remote ID field to use the name as the ID for authentication. Note that the type and value of Remote ID should be the same as Local ID given for the remote peer of the VPN tunnel.
Remote ID	When the Remote ID Type is configured as Name, enter a name of the remote peer as the ID in IKE negotiation. The name should be in the format of FQDN (Fully Qualified Domain Name).
SA Lifetime	Specify ISAKMP SA (Security Association) Lifetime in IKE negotiation. If the SA lifetime expired, the related ISAKMP SA will be deleted.
DPD	Check the box to enable DPD (Dead Peer Detect) function. If enabled, the IKE endpoint can send a DPD request to the peer to inspect whether the IKE peer is alive.
DPD Interval	Specify the interval between sending DPD requests with DPD enabled. If the IKE endpoint receives a response from the peer during this interval, it considers the peer alive. If the IKE endpoint does not receive a response during the interval, it considers the peer dead and deletes the SA.
For Phase-2 Settings:	
Phase-2 Settings	The purpose of Phase 2 negotiations is to establish the Phase-2 SA (also called the IPsec SA). The IPsec SA is a set of traffic specifications that tell the device what traffic to send over the VPN, and how to encrypt and authenticate that traffic.
Encapsulation Mode	Specify the Encapsulation Mode as Tunnel Mode or Transport Mode. When both ends of the tunnel are hosts, either mode can be chosen. When at least one of the endpoints of a tunnel is a security gateway, such as a router or firewall, Tunnel Mode is recommended to ensure safety.
Proposal	Specify the proposal for IKE negotiation phase-2. An IPsec proposal lists the encryption algorithm, authentication algorithm and protocol to be negotiated with the remote IPsec peer. Note that both peer gateways must be configured to use the same Proposal.
PFS	Select the DH group to enable PFS (Perfect Forward Security) for IKE mode, then the key generated in phase-2 will be irrelevant with the key in phase-1, which enhance the network security. With None selected, it means PFS is disabled and the key in phase-2 will be generated based on the key in phase-1.
SA Lifetime	Specify IPsec SA (Security Association) Lifetime in IKE negotiation. If the SA lifetime expired, the related IPsec SA will be deleted.

Configuring the gateway as a VPN server using OpenVPN

1. Launch the controller and access a site.

2. Go to **Network Config > VPN > VPN**. Click **Create New VPN Policy** to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Server - OpenVPN ▾

Account Password

☐ Enable

Tunnel Mode

☒ Split ☐ Full

Service Port

1194 (1-65535)

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default × Tenants × ▾ ⓘ

WAN

Please Select... ▾

IP Pool

. . . /

Primary DNS Server

. . . (Optional)

Secondary DNS Server

. . . (Optional)

+ Advanced Settings

Create

Cancel

3. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the required parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN .
VPN Type	Select the VPN type as VPN Server - OpenVPN .
Account Password	Specify whether VPN clients need to enter a user account to access the VPN tunnel. When enabled, you need to create accounts on the VPN User page.
Tunnel Mode	Select the tunnel mode: Split or Full. Full tunneling uses the VPN for all your traffic, whereas split tunneling sends part of your traffic through a VPN and part of it through the open network. Full tunneling is more secure than split tunneling.
Service Port	Enter a VPN service port to which a VPN device connects.

Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
WAN	Select the WAN port on which the VPN tunnel is established. Each WAN port supports only one OpenVPN tunnel when the gateway works as a OpenVPN server.
IP Pool	Enter the IP address and subnet mask to decide the range of the VPN IP pool. The VPN server will assign IP address to the remote host when the tunnel is established. You can specify any reasonable IP address that will not cause overlap with the IP address of the LAN on the local peer router.
Primary DNS Server	Enter the IP address of the primary DNS server provided by your ISP.
Secondary DNS Server	(Optional) Enter the IP address of the secondary DNS server, which provides redundancy in case the primary DNS server goes down.
Change UDP Protocol to TCP	Enable this option so the OpenVPN protocol will switch from the default UDP protocol to the TCP protocol.

- After clicking **Create** to save the VPN policy, go to VPN Policy List and click the export icon in the Action column to export the OpenVPN file that ends in .ovpn which is to be used by the remote client. The exported OpenVPN file contains the certificate and configuration information.

NAME	ENABLED	PURPOSE	VPN TYPE	INTERFACE/IP	WAN	ACTION
Open_VPN		Client-to-Site VPN	OpenVPN(Server)	Default Tenants	LTE	  

Configuring the gateway as a VPN client using L2TP

- Launch the controller and access a site.
- Go to **Network Config > VPN > VPN**. Click **Create New VPN Policy** to load the following page.

Create New VPN Policy

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Client - L2TP

Working Mode

☒ NAT ☐ Routing

Username

Password

IPsec Encryption

☒ Encrypted ☐ Unencrypted ☐ Auto

Remote Server

Remote Subnets

.

.

.

/

+ Add Subnet

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default

Tenants

Pre-Shared Key

WAN

Please Select...

Create

Cancel

3. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the required parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN.
VPN Type	Select the VPN type as VPN Client - L2TP.

232

Working Mode	Specify the Working Mode as NAT or Routing. NAT: With NAT (Network Address Translation) mode selected, the L2TP client uses the assigned IP address as its source addresses of original IP header when forwarding L2TP packets. Routing: With Routing selected, the L2TP client uses its own IP address as its source addresses of original IP header when forwarding L2TP packets.
Username	Enter the username used for the VPN tunnel. This username should be the same as that of the L2TP server.
Password	Enter the password of user. This password should be the same as that of the L2TP server.
IPsec Encryption	Specify whether to enable the encryption for the tunnel. Encrypted: Select Encrypted to encrypt the L2TP tunnel by IPsec (L2TP over IPsec). With Encrypted selected, enter the Pre-shared Key for IKE authentication. VPN server and VPN client must use the same pre-shared secret key for authentication. Unencrypted: With Unencrypted selected, the L2TP tunnel will be not encrypted by IPsec.
Remote Server	Enter the IP address or domain name of the L2TP server.
Remote Subnets	Enter the IP address and subnet mask to specify the remote network. It's always the IP address range of LAN on the remote peer of the VPN tunnel.
Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
Pre-shared Key	Enter the pre-shared secret key when the L2TP tunnel is encrypted by IPsec. Both peer gateways must use the same pre-shared secret key for authentication.
WAN	Select the WAN port on which the VPN tunnel is established.

Configuring the gateway as a VPN client using PPTP

1. Launch the controller and access a site.
2. Go to **Network Config > VPN > VPN**. Click **Create New VPN Policy** to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Client - PPTP ×

Working Mode

☒ NAT ☐ Routing

Username

Password

 ⦿

MPPE Encryption

☒ Encrypted ☐ Unencrypted ☐ Auto

Remote Server

Remote Subnets

. . . /

⊕ Add Subnet

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default × Tenants × ▾ ⓘ

WAN

Please Select... ▾

Create

Cancel

3. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the required parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN.
VPN Type	Select the VPN type as VPN Client - PPTP.

Working Mode	Specify the Working Mode as NAT or Routing. NAT: With NAT (Network Address Translation) mode selected, the PPTP client uses the assigned IP address as its source addresses of original IP header when forwarding PPTP packets. Routing: With Routing selected, the PPTP client uses its own IP address as its source addresses of original IP header when forwarding PPTP packets.
Username	Enter the username used for the VPN tunnel. This username should be the same as that of the PPTP server.
Password	Enter the password of user. This password should be the same as that of the PPTP server.
MPPE Encryption	Specify whether to enable the encryption for the tunnel. Encrypted: Select Encrypted to encrypt the PPTP tunnel by MPPE. Unencrypted: With Unencrypted selected, the PPTP tunnel will be not encrypted by MPPE.
Remote Server	Enter the IP address or domain name of the PPTP server.
Remote Subnets	Enter the IP address and subnet mask to specify the remote network. It's always the IP address range of LAN on the remote peer of the VPN tunnel.
Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
WAN	Select the WAN port on which the VPN tunnel is established.

Configuring the gateway as a VPN client using OpenVPN

1. Launch the controller and access a site.
2. Go to **Network Config > VPN > VPN**. Click **Create New VPN Policy** to load the following page.

Create New VPN Policy ⓘ

Name

Status

☒ Enable

Purpose

☐ Site-to-Site VPN ☒ Client-to-Site VPN

VPN Type

VPN Client - OpenVPN ▾

Mode

☒ Certificate ☐ Certificate+Account

Remote Server

IP : (1-65535)

Local Network Type

☒ Network ☐ Custom IP

Local Networks

Default × Tenants × ▾ ⓘ

WAN

Please Select... ▾

Configuration

Import

3. Enter a name to identify the VPN policy and select the purpose as Client-to-Site VPN. Refer to the following table to configure the required parameters and click **Create**.

Name	Enter a name to identify the VPN policy.
Status	Click the checkbox to enable the VPN policy.
Purpose	Select the purpose for the VPN as Client-to-Site VPN .
VPN Type	Select the VPN type as VPN Client - OpenVPN .
Mode	Select the access mode according to VPN requirements. Certificate : Select this option if the VPN tunnel only requires the certificate. Certificate+Account : Select this option if the VPN tunnel requires the certificate and VPN user account. If selected, configure the following parameters: Username : Enter the username for the VPN tunnel. Password : Enter the password for the VPN tunnel.
Remote Server	Enter the IP address or domain name of the OpenVPN server.

Local Network Type	Specify whether to apply the VPN policy to specific local networks or IP addresses. Network: Specify the local networks of the VPN tunnel. The VPN policy will be only applied to the selected local networks. Custom IP: Specify the IP addresses of the VPN tunnel. The VPN policy will be only applied to the specified IP addresses.
WAN	Select the WAN port on which the VPN tunnel is established.
Configuration	Click the import icon to import the OpenVPN file that ends in .ovpn generated by the OpenVPN server. Only one file can be imported. If the certificate file and configuration file are generated singly by the OpenVPN server, combine two files and import the whole file.

9.4 Configure VPN Users

Overview

VPN User is used to configure and record your custom settings for VPN configurations, and it allows you to configure VPN users that can be used for multiple VPN servers. It saves you from setting the VPN users with the same configurations repeatedly when you want to apply the user in different VPN servers.

Configuration

To configure the VPN users, follow these steps:

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [VPN](#) > [VPN User](#). Click [Create New VPN User](#) to add a new entry of VPN User.

Create New VPN User ⓘ

Username ⓘ

Password ⓘ

VPN Type

L2TP/PPTP

VPN Server

Please Select...

Local IP Address

. . .

(Optional)

Mode

☒ Client ⓘ☐ Network Extension Mode ⓘ

Maximum Connections

3

(1-50)

3. Specify the parameters and click [Create](#).

Username	Enter the username used for the VPN tunnel. The client use the username for the validation before accessing the network.
Password	Enter the password of user. The client uses the password for the validation before accessing the network.
VPN Type	Select the type for the VPN tunnel.
VPN Server	Select the VPN Server to connect to.

Local IP Address	(Optional) Specify the local virtual IP address of the VPN server. Please avoid using the IP address in the DHCP range, which may cause IP confliction, you can enter the LAN IP of the router.
Mode	Select the Mode for the VPN user entry. Client: This mode allows the client to request for an IP address and the server supplies the IP addresses from the VPN IP Pool. Generally, it is used for the remote host to access the local network. Network Extension Mode: This mode allows clients from the configured subnet to connect to the server and obtain VPN services. Generally, it is used for site-to-site VPN.
Maximum Connections	In Client mode, set the maximum number of concurrent VPN connections with the same account.
Remote Subnets	In Network Extension mode, specify the subnet, and clients from specified subnet are allowed to connect to the server.

If you selected the L2TP/PPTP protocol, specify the following parameters:

VPN Server	Select the VPN server that the VPN user is applied to.
Local IP Address	(Optional) Specify the local IP address of the VPN tunnel.
Mode	Specify the connection mode for the VPN users. Client: This mode allows the client to request for an IP address and the server supplies the IP addresses from the VPN IP Pool. With this mode selected, set maximum number of concurrent VPN connections with the same account in Maximum Connections. Network Extension Mode: This mode allows only clients from the configured subnet to connect to the server and obtain VPN services. With this mode selected, specify the subnets in Remote Subnets.

If you selected the OpenVPN protocol, specify the following parameter:

VPN Server	Select the VPN server that the VPN user is applied to.
------------	--

To edit or delete the VPN users, click the icon in the Action column. You can further filter the entries based on the VPN Server.

9.5 Configure IPsec Failover

Overview

IPsec Failover is used to configure the backup group of the IPsec connection. When the primary connection in the group is interrupted, it will try to use the secondary connection to dial up to maintain the stability of the VPN network.

Configuration

- 1. Launch the controller and access a site.
- 2. Go to [Network Config](#) > [VPN](#) > [VPN](#) > [IPsec Failover](#). Click [Create New IPsec Failover](#) to add a new entry.

Create New IPsec Failover ⓘ

Group Name

Primary Tunnel:

ⓘ

No IPsec tunnel to form a failover group. [Go to add ->](#)

ⓘ

Secondary Tunnel:

ⓘ

No IPsec tunnel to form a failover group. [Go to add ->](#)

ⓘ

Automatic Failback

☐ Enable

Create

Cancel

Group Name	Enter a name to identify the IPsec Failover group.
Primary Tunnel	Specify the IPsec primary connection.
Secondary Tunnel	Specify the IPsec secondary connection.
Automatic Failback	Select this function to automatically switch back to the primary connection when it is reachable. When selected, specify the Gateway Failover Timeout time, then the system will query whether the primary connection is reachable within the time, and if yes, it will switch back to the primary connection.

9.6 Configure the SSL VPN

Overview

SSL VPN uses Secure Socket Layer (SSL) to ensure information safety and provides abundant services such as user management, resource management, user lockout, authentication and accounting.

SSL VPN uses username and password for authentication and login. A network administrator can assign different resources to different types of users, and meanwhile associate the users with multiple resources, making it easy to manage and limit the services the users can access through the VPN.

Configuration

■ SSL VPN Server

In SSL VPN Server, you can enable the feature and configure the SSL VPN settings.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [SSL VPN](#) > [SSL VPN Server](#). Enable [SSL VPN Server](#).

SSL VPN Server

SSL VPN Server

WAN

Virtual IP Pool

Primary DNS

Secondary DNS

Listen on Port

Authentication Type

Local Authentication

RADIUS Authentication

Username Lockout

IP Lockout

Idle Timeout

Full Mode

1194

(1-65535)

Enable

Enable

Enable

Enable

Apply

Cancel

Export Certificate

3. Configure the parameters according to your needs. Click [Apply](#).

WAN	Select the port for the SSL VPN server to listen on, and the VPN tunnel will take effect on the port.
Virtual IP Pool	Set a virtual IP Pool, and the SSL VPN server will assign an IP address to a connected client within the pool.
Primary/Secondary DNS	Specify the IP address of the DNS server. The clients will be informed of the DNS server, and it can help the clients resolve the domain name.
Listen on Port	Specify the port for the SSL VPN server to listen on. By default, it is 1194.
Authentication Type	Select the authentication for the clients: Local Authentication or RADIUS Authentication. If you selected RADIUS Authentication, configure the following parameters: User Group: Specify the default user group in radius authentication mode. When the VPN server cannot find the value of the CLASS attribute in the authentication success message, it will assign the default resource permissions according to the user group. RADIUS Server: Select a RADIUS server profile. Authentication Type: Select the authentication protocol for the RADIUS server. Max Requests: Specify the maximum number of requests sent when no response is received. Request Timeout: Specify the maximum interval for request timeout. After timeout, the request will be sent again. NAS IP: Specify the IP address for the router to communicate with the RADIUS server.
Username Lockout	When enabled, you can lock out a username in case of excessive login attempts. Max Login Attempts: Specify the maximum failed login attempts for a username. If the number of attempts reaches this amount, the username will be locked out. Lockout Duration: Specify how long the username will be locked out.
IP Lockout	When enabled, you can lock out an IP address in case of excessive login attempts. Max Login Attempts: Specify the maximum failed login attempts for a login IP. If the number of attempts reaches this amount, the login IP will be locked out. Lockout Duration: Specify how long the login IP will be locked out.
Idle Timeout	When enabled, the VPN tunnel will close automatically if there is no traffic for the specified amount of time.
Full Mode	When enable, all traffic will go through the SSL VPN tunnel. When disabled, only the resource-related traffic will go through the tunnel.

- Click **Export Certificate**, enter the WAN IP/Domain Name to access the VPN, then click **Export**. The VPN configuration file will be exported for clients to access the VPN.

Export Certificate ✕

 The SSL VPN certificate will use this WAN IP. Make sure the WAN IP/domain name is filled correctly.

WAN

WAN2

WAN IP/Domain Name

Export

Cancel

■ Resource Management

In Tunnel Resources, you can configure the resources the clients can access through the VPN tunnel, including IP range and domain name.

In Resource Group, you can add the multiple tunnel resources to a group for better management. By default, two resource groups are provided: Group_ALL (indicates all resources) and Group_LAN (indicates all LAN resources).

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [SSL VPN](#) > [Resource Management](#).
3. Click [Create New Tunnel Resource](#) to load the following page. Configure the parameters and click [Confirm](#).

Create New Tunnel Resource ✕

Name

Resource Type

IP Address ▼

IP/Mask

.

.

.

/

Protocol

ALL ▼

Confirm

Cancel

[Name](#)

Specify a name for the entry.

Resource Type	Select the type for the resources: IP Address or Domain Name. If you selected IP Address, configure the following parameters: IP/Mask: Specify IP range the clients can access. Protocol: Select the protocol type that the client can access in the IP range, and the router will filter illegal packets through firewall rules. By default, the value is ALL, and it means there is no restriction on the client. If you selected Domain Name, specify domain name the clients can access.
----------------------	---

- Click [Create New Resource Group](#) to load the following page. Configure the parameters and click [Confirm](#).

Create New Resource Group

×

Resource Group

Resources

Please Select... ▾

Confirm

Cancel

Resource Group	Specify a name for the resource group.
Resources	Select the resources for the group.

■ User Group

In User Group, you can add multiple users to a group for better management.

- Launch the controller and access a site.
- Go to [Network Config](#) > [VPN](#) > [SSL VPN](#) > [User Group](#).
- Click [Create New User Group](#) to load the following page. Configure the parameters and click [Confirm](#).

Create New User Group ✕

Group Name

Resource Group List

Please Select... ▼

Radius Attribute

(Optional)

Confirm

Cancel

Group Name	Specify a name for the user group.
Resource Group List	Select the resource group for the user group.
Radius Attribute	Only valid in radius authentication mode. It maps the user group with radius grouping information (which is carried by the CLASS attribute 25).

■ User List

In User List, you can view and configure all user settings of the SSL VPN.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [SSL VPN](#) > [User List](#).
3. Click [Create New User](#) to load the following page. Configure the parameters and click [Confirm](#).

Create New User

X

Username

Password

Password

Max Concurrent Users

(1-50)

Expiration Date

Select date

User Group

Status

Confirm

Cancel

Username	Specify the username a client used for login.
Password	Specify the password a client used for login.
Max Concurrent Users	Specify the maximum number of clients using the username for login concurrently. If the number reaches this amount, new login attempts will be rejected.
Expiration Date	Specify when the user account will expire.
User Group	Select which group the user belongs to. A user can only be added to one user group.
Status	Click the checkbox to enable this entry.

■ Locked Out User

In Locked Out User, you can view the currently locked out users, and add, delete or edit an entry.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [VPN](#) > [SSL VPN](#) > [Locked Out User](#).
3. Click [Add Locked Out User](#) to load the following page. Configure the parameters and click [Confirm](#).

Add Locked Out User ✕

Type

Username ▼

Username

(1-20 characters, using a combination of letters, digits and underscores)

Locked Out Duration

0h ▼

01m ▼

Confirm

Cancel

Type

Specify the locked out type.

If you selected **Username**, specify the username of a locked out user.

If you selected **IP Address**, specify the IP address of a locked out user.

Lockout Duration

Specify how long the entry will be locked out.

9.7 Configure the WireGuard VPN

Overview

WireGuard VPN is a secure, fast and modern VPN protocol. It is based on the UDP protocol and uses modern encryption algorithms to improve work efficiency.

■ **WireGuard**

- 1. Launch the controller and access a site.
- 2. Go to [Network Config > VPN > WireGuard](#).
- 3. Click [Create New WireGuard](#). Configure the parameters and click [Apply](#).

Create New Wireguard

Name

Status

☒ Enable

MTU

1420

(576-1440)

Listen Port

51820

(1-65535)

Local IP Address

Private Key

.....

Apply

Cancel

Name	Specify the name that identifies the WireGuard interface.
Status	Specify whether to enable the WireGuard interface.
MTU	Specify the MTU value of the WireGuard interface. The default value 1420 is recommended.
Listen Port	Specify the port number that the WireGuard interface listens to.
Local IP Address	Specify the IP address of the WireGuard interface.
Private Key	Specify the private key of the WireGuard interface. The value will be automatically generated on the device, and you can also modify it manually.

■ **Peers**

- 1. Launch the controller and access a site. Go to [Network Config > VPN > WireGuard > Peers](#).
- 2. Click [Create New Peer](#). Configure the parameters and click [Apply](#).

Create New Peer

Name

Status

☒ Enable

Interface

▼

Endpoint

IP Address

(Optional)

Endpoint Port

(Optional)

Allow Address

.

.

.

/

⊕

Add Subnet

Persistent Keepalive

25

(0-65535 second)

Comment

(0-128 characters)

Public Key

Preshared Key

(Optional)

Apply

Cancel

Name	Specify the name that identifies the peer.
Status	Specify whether to enable the peer.
Interface	Specify the WireGuard interface to which the peer belongs.
Endpoint	Specify the IP address of the peer. This parameters is required when the Router actively connects to other WireGurad Server.
Endpoint Port	Specify the port number of the peer. This parameters is required when the Router actively connects to other WireGurad Server.
Allowed Address	Specify the address segment that allows traffic to pass through. Generally, it is the same as the WireGuard VPN interface IP configured on the remote device.
Persistent Keepalive	Specify the tunnel keepalive packet interval.
Comment	Enter the description of the peer.
Public Key	Fill in the public key information exported from the remote device.
Preshared Key	Specify an optional shared key.

Chapter 10

Configure Network Transmission Settings

Transmission helps you control network traffic in multiple ways. You can add policies and rules to control transmission routes and limit the session and bandwidth.

This chapter guides you on how to configure network transmission settings with the SDN Controller. The chapter includes the following sections:

- [10. 1 Configure Routing Settings](#)
- [10. 2 Configure NAT Settings](#)
- [10. 3 Configure DHCP Reservation](#)
- [10. 4 Configure Bandwidth Control](#)
- [10. 5 Configure Session Limit](#)
- [10. 6 Configure Gateway QoS](#)
- [10. 7 Configure Switch QoS](#)
- [10. 8 Configure OUI Based VLAN](#)

10.1 Configure Routing Settings

Overview

- **Static Route**
Network traffic is oriented to a specific destination, and Static Route designates the next hop or interface where to forward the traffic.
- **Policy Routing**
Policy Routing designates which WAN port the router uses to forward the traffic based on the source, the destination, and the protocol of the traffic.

Configuration

- **Static Route**
 1. Launch the controller and access a site.
 2. Go to [Network Config](#) > [Transmission](#) > [Routing](#) > [Static Route](#).
 3. Click [Create New Route](#) to load the following page and configure the parameters.

Create New Route ⓘ

Name

Status

☒ Enable

Destination IP/Subnet

.

.

.

/

⊕ Add Subnet

Route Type

☒ Next Hop ☐ Interface

Next Hop

.

.

.

ⓘ

Metric

0

(0-15)

ⓘ Static routes are prioritized in the order of subnet mask length (longest prefix matching principle). If the subnet mask lengths are the same, Metric is used to determine the priority.

Create

Cancel

Name	Enter the name to identify the Static Route entry.
Status	Enable or disable the Static Route entry.
Destination IP/Subnet	Destination IP/Subnet identifies the network traffic which the Static Route entry controls. Specify the destination of the network traffic in the format of 192.168.0.1/24. You can click Add Subnet to specify multiple Destination IP/Subnets and click the Delete icon to delete them.

Route Type	Next Hop: With Next Hop selected, your devices forward the corresponding network traffic to a specific IP address. You need to specify the IP address as Next Hop. Interface: With Interface selected, your devices forward the corresponding network traffic through a specific interface. You need to specify the Interface according to your needs.
Metric	Define the priority of the Static Route entry. A smaller value means a higher priority. If multiple entries match the Destination IP/Subnet of the traffic, the entry of higher priority takes precedence. In general, you can simply keep the default value.

4. Click **Create**. The new Static Route entry is added to the table. You can click the Edit icon to edit the entry. You can click the Delete icon to delete the entry.

Search Static Route Entry							+ Create New Route
NAME	ENABLED	DESTINATION IP	TYPE	INTERFACE	NEXT HOP	METRIC	ACTION
test	☒	192.168.2.3 / 24	Next Hop	--	192.168.3.1	0	Edit Delete
Showing 1-1 of 1 records < 1 > 10 / page Go to page Go							

■ Policy Routing

1. Launch the controller and access a site.
2. Go to **Network Config > Transmission > Routing > Policy Routing**.

3. Click [Create New Routing](#) to load the following page and configure the parameters.

Create New Routing

Name

Status

☒ Enable

Protocols

Please Select...

WAN

Please Select...

Use the other WAN port if the current one is down

☒ Enable

Routing Legend

Source

Type

Network

☐ Default

0/1 Items

Destination

Type

IP Group

☐ IPGroup_Any

0/1 Items

+ Create

Create

Cancel

Name	Enter the name to identify the Policy Routing entry.
Status	Enable or disable the Policy Routing entry.
Protocols	Select the protocols of the traffic which the Policy Routing entry controls. The Policy Routing entry takes effect only when the traffic matches the criteria of the entry including the protocols.
WAN	Select the WAN port to forward the traffic through. If you want to forward the traffic through the other WAN port when the current WAN is down, enable Use the other WAN port if the current WAN is down .

Routing Legend

The Policy Routing entry takes effect only when the traffic using specified protocols matches the source and destination which are specified in the Routing Legend.

Select the type of the traffic source and destination.

Network: Select the network interfaces for the traffic source or destination.

IP Group: Select the IP Group for the traffic source or destination. You can click **+ Create** to create a new IP Group.

IP-Port Group: Select the IP-Port Group for the traffic source or destination. You can click **+ Create** to create a new IP-Port Group.

Location Group: Select the Location Group for the traffic destination. You can click **+ Create** to create a new Location Group.

Domain Group: Select the Domain Group for the traffic destination. You can click **+ Create** to create a new Domain Group.

4. Click **Create**. The new Policy Routing entry is added to the table. You can click the Edit icon to edit the entry. You can click the Delete to delete the entry.

Tip: Drag to re-order rows.

+ Create New Routing

NAME	ENABLED	PROTOCOL	SOURCE	DESTINATION	WAN	ACTION
test		All	Default	IPGroup_Any	WAN2	

10.2 Configure NAT Settings

Overview

■ Port Forwarding

You can configure Port Forwarding to allow internet users to access local hosts or use network services which are deployed in the LAN.

Port Forwarding helps establish network connections between a host on the internet and the other in the LAN by letting the traffic pass through the specific port of the gateway. Without Port Forwarding, hosts in the LAN are typically inaccessible from the internet for the sake of security.

■ ALG

ALG ensures that certain application-level protocols function appropriately through your gateway.

■ One-to-One NAT

One-to-One NAT will establish a correspondence between a private IP and a public IP, allowing access to the device with the private IP through the corresponding public IP.

■ Disable NAT

Disable NAT allows internal devices to obtain public IP addresses.

Configuration

■ Port Forwarding

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [NAT](#) > [Port Forwarding](#).

3. Click **Create New Rule** to load the following page and configure the parameters.

Create New Rule

Name

Status

☒ Enable

Source IP

☒ Any ☐ Limited IP Address

Interface

Please Select...

▼

WAN IP

Please Select...

▼

(Optional) ⓘ

DMZ

☐ Enable

Source Port

(1-65535. e.g. 80 or 80-100) ⓘ

Destination IP

. . .

Destination Port

(1-65535. e.g. 80 or 80-100) ⓘ

Protocol

☒ All ☐ TCP ☐ UDP

Create

Cancel

Name	Enter the name to identify the Port Forwarding rule.
Status	Enable or disable the Port Forwarding rule.
Source IP	Any: The rule applies to traffic from any source IP address. Limited IP Address: The rule only applies to traffic from specific IP addresses. With this option selected, specify the IP addresses and subnets according to your needs.
Interface	Select the interface which the rule applies to. Traffic which is received through the interface is forwarded according to the rule.
DMZ	With DMZ enabled, all the traffic is forwarded to the Destination IP in the LAN, port to port. You need to specify the Destination IP . With DMZ disabled, only the traffic which matches the Source Port and the Protocol is forwarded. The traffic is forwarded to the Destination Port of the Destination IP in the LAN. You need to specify the Source Port , Destination IP , Destination Port , and Protocol .
Source Port	The gateway uses the Source Port to receive the traffic from the internet. Only the traffic which matches the Source Port and the Protocol is forwarded.
Destination IP	The traffic is forwarded to the host of the Destination IP in the LAN.

Destination Port	The traffic is forwarded to the Destination Port of the host in the LAN.
Protocol	Network traffic is transmitted using either TCP or UDP protocol. Only the traffic which matches the Source Port and the Protocol is forwarded. If you want both TCP traffic and UDP traffic to be forwarded, select All .

4. Click **Create**. The new Port Forwarding entry is added to the table. You can click the Edit icon to edit the entry. You can click the Delete icon to delete the entry.

Search Port Forwarding Rule

Q

+ Create New Rule

NAME	ENABLED	SOURCE IP	INTERFACE	WAN IP	DMZ	SOURCE PORT	DESTINATION IP:PORT	PROTOCOL	ACTION
test		0.0.0.0/0	WAN2	--	--	85	192.168.2.31:90	All	

Showing 1-1 of 1 records

<

1

>

10 / page

Go to page

Go

■ **ALG**

1. Launch the controller and access a site.
2. Go to **Network Config > Transmission > NAT > ALG**.
3. Enable or disable certain types of ALG according to your needs and click **Apply**.

ALG ⓘ

FTP ALG

☒ Enable

H.323 ALG

☒ Enable

PPTP ALG

☒ Enable

SIP ALG

☒ Enable

IPsec ALG

☒ Enable

Apply

Cancel

FTP ALG	FTP ALG allows the FTP server and client to transfer data using the FTP protocol in one of the following scenarios: • The FTP server is in the LAN, while the FTP client is on the internet. • The FTP server is on the internet, while the FTP client is in the LAN. • The FTP server and FTP client are in different LANs.
H.323 ALG	H.323 ALG allows the IP phones and multimedia devices to set up connections using the H.323 protocol in one of the following scenarios: • One of the endpoints is in the LAN, while the other is on the internet. • The endpoints are in different LANs.

PPTP ALG	PPTP ALG allows the PPTP server and client to set up a PPTP VPN in one of the following scenarios: • The PPTP server is in the LAN, while the PPTP client is on the internet. • The PPTP server is on the internet, while the PPTP client is in the LAN. • The PPTP server and PPTP client are in different LANs.
SIP ALG	SIP ALG allows the IP phones and multimedia devices to set up connections using the SIP protocol in one of the following scenarios: • One of the endpoints is in the LAN, while the other is on the internet. • The endpoints are in different LANs.
IPsec ALG	IPsec ALG allows the IPsec endpoints to set up an IPsec VPN in one of the following scenarios: • One of the endpoints is in the LAN, while the other is on the internet. • The endpoints are in different LANs.

■ One-to-One NAT

1. Launch the controller and access a site.
2. Go to [Network Config > Transmission > NAT > One-to-One NAT](#).
3. Click [Create New Rule](#) to load the following page and configure the parameters.

Create New Rule

Name

Status

☒ Enable

Interface

Please Select... ▾

Original IP

.

.

.

Translated IP

.

.

.

DMZ Forwarding

☐ Enable

Description

(Optional)

Create

Cancel

Name	Enter the name to identify the one-to-one NAT rule.
Status	Enable or disable the one-to-one NAT rule.
Interface	Specify the effective interface for the rule only when the connection type is Static IP.

Original IP	Specify the original IP address for the rule, which means the device’s private IP. The original IP address cannot be the broadcast address, network segment or interface IP. With One-to-One NAT enabled, the original IP will map to the translated IP.
Translated IP	Specify the translated IP address for the rule, which means the public IP of device. The translated IP address cannot be the broadcast address, network segment or interface IP. With One-to-One NAT enabled, the original IP will map to the translated IP.
DMZ Forwarding	Choose to enable DMZ Forwarding. The packets transmitted to the translated IP address will be forwarded to the host with the original IP address if DMZ Forwarding is enabled.
Description	(Optional) Enter a description for identification.

4. Click **Create** to add the one-to-one NAT rule.

■ **Disable NAT**

- 1. Launch the controller and access a site.
- 2. Go to **Network Config > Transmission > NAT > Disable NAT**.
- 3. Click **Create New Rule** to load the following page and configure the parameters.

Create New Rule

Name

bbb

Interface

WAN2

LAN

Default

Description

333

(Optional)

Status

☒ Enable

Save

Cancel

Name	Enter a name to identify the rule.
Interface	Specify the effective interface for the rule.
LAN	Specify the effective LAN network for the rule.
Description	(Optional) Enter a description for identification.
Status	Enable or disable the rule.

4. Click **Create** to add the Disable NAT rule.

10.3 Configure DHCP Reservation

Overview

It is convenient for networks to use Dynamic IP addresses assigned by Dynamic Host Configuration Protocol (DHCP), however, for devices that need to be reliably accessed, it is ideal to set fixed IP addresses for them. DHCP Reservation allows you to reserve specific IP addresses for devices in your network, and centrally manage the IP addresses.

Configuration

- To manually add DHCP Reservation entries:
 1. Launch the controller and access a site.
 2. Go to [Network Config](#) > [Transmission](#) > [DHCP Reservation](#).
 3. Click [Create New DHCP Reservation Entry](#) and configure the parameters. Then click [Apply](#).

Create New DHCP Reservation Entry ⓘ

Network

MAC Address

- - - - -

IP Address

. . .

Description

(Optional)

Status

☒ Enable

-

Advanced DHCP Options

Option 60

(Optional) ⓘ

Option 66

(Optional) ⓘ

Option 138

. . .

(Optional) ⓘ

Apply

Cancel

Network	Select the network the DHCP reservation entry is used for.
MAC Address	Specify the MAC address of the device for which you want to reserve an IP address.
IP Address	Specify the fixed IP address for the device.
Description	Enter description for the entry for identification.

Status	Enable or disable the entry.
Advanced DHCP Options	Configure the advanced DHCP options if needed. Option 60: Enter the value for DHCP Option 60. DHCP clients use this field to optionally identify the vendor type and configuration of a DHCP client. Mostly it is used in the scenario where the APs apply for different IP addresses from different servers according to the needs. Option 66: Enter the value for DHCP Option 66. It specifies the TFTP server information and supports a single TFTP server IP address. Option 138: Enter the value for DHCP Option 138. It is used in discovering the devices by the system.

■ To import DHCP Reservation entries in batch:

1. Launch the controller and access a site.
2. Go to **Network Config > Transmission > DHCP Reservation**.
3. Click **Export** to export the template in csv format. Based on this template, you can add custom address reservation entries that need to be imported.
4. Click **Import** and import the customized template. You can download the template, then edit and upload it for batch import.

Import DHCP Reservation List ✕

Download the [template](#) and fill in your DHCP Reservation information. Then import the file.

Choose File **Browse**

Import **Cancel**

10.4 Configure Bandwidth Control

Overview

Bandwidth Control optimizes network performance by limiting the bandwidth of specific sources.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Bandwidth Control](#).
3. In [Bandwidth Control](#), enable Bandwidth Control globally and configure the parameters. Then click [Apply](#).

Bandwidth Control ⓘ

Bandwidth Control

☒

Threshold Control

☒ Enable Bandwidth Control when bandwidth usage reaches

80

%

SFP WAN/LAN1

Upstream Bandwidth

Kbps ▾

(100-1000000)

Downstream Bandwidth

Kbps ▾

(100-1000000)

WAN2

Upstream Bandwidth

Kbps ▾

(100-1000000)

Downstream Bandwidth

Kbps ▾

(100-1000000)

Apply

Threshold Control

With Threshold Control enabled, Bandwidth Control takes effect only when total bandwidth usage reaches the specified percentage. You need to specify the total Upstream Bandwidth and Downstream Bandwidth of the WAN ports. It's recommended to use the [Test Speed](#) tool to decide the actual Upstream Bandwidth and Downstream Bandwidth.

4. In [Bandwidth Control Rule List](#), click [Create New Rule](#) to load the following page and configure the parameters.

262

Create New Rule

Name

Status

☒ Enable

Source Type

☒ Network ☐ IP Group

Network

Please Select...

WAN

Please Select...

Upstream Bandwidth

Kbps

(100-9999999)

Downstream Bandwidth

Kbps

(100-9999999)

Mode

☒ Shared ☐ Individual

Create

Cancel

Name	Enter the name to identify the Bandwidth Control rule.
Status	Enable or disable the Bandwidth Control rule.
Source Type	Network: Limit the maximum bandwidth of specific LAN networks. With this option selected, select the networks, which you can customize in Wired Networks > LAN Networks . For detailed configuration, refer to the wired network configuration chapter in this guide. IP Group: Limit the maximum bandwidth of specific IP Groups. With this option selected, select the IP Groups, which you can customize in Profiles > Groups . For detailed configuration of IP groups, refer to the network profile configuration section in this guide.
WAN	Select the WAN port which the rule applies to.
Upstream Bandwidth	Specify the limit of Upstream Bandwidth, which the specific local hosts use to transmit traffic to the internet through the gateway.
Downstream Bandwidth	Specify the limit of Downstream Bandwidth, which the specific local hosts use to receive traffic from the internet through the gateway.
Mode	Specify the bandwidth control mode for the specific local hosts. Shared: The total bandwidth for all the local hosts is equal to the specified values. Individual: The bandwidth for each local host is equal to the specified values.

5. Click **Create**. The new Bandwidth Control rule is added to the list. You can click the Edit icon to edit the rule. You can click the Delete icon to delete the rule.

Bandwidth Control Rule List

Tip: Drag to re-order rows.

+ Create New Rule

NAME	ENABLED	SOURCE	WAN	UPSTREAM BANDWIDTH	DOWNSTREAM BANDWIDTH	MODE	ACTION
test	☒	Network: Default	WAN2	2000Kbps	4000Kbps	Shared	

10.5 Configure Session Limit

Overview

Session Limit optimizes network performance by limiting the maximum sessions of specific sources.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Session Limit](#).
3. In [Session Limit](#), enable Session Limit globally and click [Apply](#).

Session Limit

Session Limit 

Apply

4. In [Session Limit Rule List](#), click [Create New Rule](#) to load the following page and configure the parameters.

Create New Rule

Name

Status

☒ Enable

Source Type

☒ Network ☐ IP Group ☐ IP Address

Network

Please Select... 

Maximum Sessions



Name	Enter the name to identify the Session Limit rule.
Status	Enable or disable the Session Limit rule.
Source Type	Network: Limit the maximum sessions of specific LAN networks. With this option selected, select the networks, which you can customize in Wired Networks > LAN Networks. For detailed configuration, refer to the wired network configuration chapter in this guide. IP Group: Limit the maximum sessions of specific IP Groups. With this option selected, select the IP Groups, which you can customize in Profiles > Groups. For detailed configuration of IP groups, refer to the network profile configuration section in this guide.

Maximum Sessions

Enter the maximum sessions of the specific sources.

5. Click **Save**. The new Session Limit rule is added to the list. You can click the Edit icon to edit the rule. You can click the Delete icon to delete the rule.

Session Limit Rule List					+ Create New Rule
NAME	ENABLED	SOURCE	MAXIMUM SESSIONS	Action	
test	☒	Network Default	50000	Edit	Delete

Showing 1-1 of 1 records < 1 > 10 / page Go to page Go

10.6 Configure Gateway QoS

■ Gateway QoS Service

In Gateway QoS Service, you can define service entries that will appear as matching conditions for you to choose when configuring the rules of related modules like QoS. The default entries cannot be edited or deleted. You can add other entries if your service is not in the list.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Gateway QoS](#).
3. Click [Create New Gateway QoS Service](#).

Create New Gateway QoS Service

Service Name

Protocol

TCP

Source Port Range

-

(0-65535)

Destination Port Range

-

(0-65535)

Description

(Optional)

Apply

Cancel

Service Name	Enter a name for the service. Only letters, digits or underscores are allowed.
Protocol	Specify the protocol for the service. The system predefined protocols include TCP, UDP, TCP/UDP and ICMP. For other protocols, select the option Other.
Source Port Range	Specify the source port range for the service. Packets whose source port and destination port are both in the range are considered as the target packets.
Destination Port Range	Specify the destination port range for the service. Packets whose source port and destination port are both in the range are considered as the target packets.
Description	Enter a brief description for the service to facilitate your management.

■ Bandwidth Control

This page allows you to configure rules to limit various data flows. In this way, you can optimize the network performance by reasonably utilizing the bandwidth.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Gateway QoS](#) > [Bandwidth Control](#).
3. Click [Create New Rule](#).

Create New Rule

WAN Interface

▼

Status

☐ Enable

UDP Bandwidth Control

☐ Enable

Limited Bandwidth Ratio

0

%

Outbound TCP ACK Prioritize

☐ Enable

Direction

Both

▼

Inbound Bandwidth

1000000

Kbps

(100-1000000)

Outbound Bandwidth

1000000

Kbps

(100-1000000)



Class 1

25

%

Class 2

25

%

Class 3

25

%

Others

25

%

Create

Cancel

4. Configure the parameters and click **Apply**.

WAN Interface	Select the WAN port. You can configure the QoS rule for a WAN port only when the port is enabled.
Status	Enable or disable QoS for the current entry.
UDP Bandwidth Control	Check the box to enable UDP bandwidth control.
Limited Bandwidth Ratio	When UDP Bandwidth Control is enabled, specify the bandwidth ratio of UDP at each level of class1/2/3/other.
Outbound TCP ACK Prioritize	Check the box to prioritize outbound TCP ACK packets. This function ensures that traffic is not slowed down by remote hosts waiting for ACK packets before sending further traffic.
Direction	Specify the direction of the controlled traffic. "out" means control sending packets. "in" means receiving packets. "both" means both are controlled.

Inbound/Outbound Bandwidth	Enter the maximum threshold of the inbound/outbound bandwidth.
Class1/Class2/Class3/Others	Specify the proportion of the maximum bandwidth that Class1, Class2, Class3 and Others can occupy to limit the bandwidth usage of specific classification traffic.

■ **Class Rule**

This page allows you to add or delete class rules. Rules will be matched from top to bottom according to the rule sequence number. When the traffic matches a rule, it will be assigned to the corresponding class and will not continue to match down.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Gateway QoS](#) > [Class Rule](#).
3. Click [Create New Class Rule](#).

Create New Class Rule

Status

☒ Enable

IP Version

☒ IPv4 ☐ IPv6

Local Address

Remote Address

DSCP

Service Name

Qos Class

Create

Cancel

4. Configure the parameters and click [Apply](#).

Status	Check the box to enable the rule.
IP Version	Specify the protocol version: IPv4 or IPv6.
Local Address	Match the source IP address of the traffic. For IPv4 protocol, you can use the IP Group object configured in the Profiles > Groups module. For the IPv6 protocol, you can use the IPv6 Group object configured in the Profiles > Groups module.
Remote Address	Match the destination IP address of the traffic. For IPv4 protocol, you can use the IP Group object configured in the Profiles > Groups module. For the IPv6 protocol, you can use the IPv6 Group object configured in the Profiles > Groups module.

DSCP	Match the DSCP value of the traffic: BE, CS, AF, or EF.
Service Name	Match the port number of the traffic. Select the service type object defined in the Preference > Service Type module.
QoS Class	Select the category of traffic that meets the rule.

■ VoIP Prioritization

This page allows you to configure VoIP prioritization.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Gateway QoS](#) > [VoIP Prioritization](#).
3. Enable the first priority for VoIP SIP/RTP and enter the SIP UDP port. Then apply the settings.

VoIP Prioritization

Enable the First Priority for VoIP SIP/RTP

☒

SIP UDP Port

Apply

Cancel

Enable the First Priority for VoIP SIP/RTP	Check the box to enable prioritize VoIP traffic.
SIP UDP Port	Enter the UDP port ID of the VoIP traffic.

■ Tag Outbound Traffic

This page allows you to add a DSCP or Precedence value for traffic in different classes.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Gateway QoS](#) > [Tag Outbound Traffic](#).
3. Check the box for your desired class and select the DSCP or Precedence value.

Tag Outbound Traffic

Class 1

☐ Add DSCP or Precedence value

Class 2

☐ Add DSCP or Precedence value

Class 3

☐ Add DSCP or Precedence value

Others

☐ Add DSCP or Precedence value

Apply

Cancel

Class 1/2/3/Others	Check the box and select the DSCP or Precedence value for traffic.
--------------------	--

10.7 Configure Switch QoS

■ DSCP 802.1p Mapping

The DSCP 802.1p Mapping function is used to match the DSCP priority in different packets, then map them to the 802.1p priority. This rule has a lower priority than the VLAN Priority Mapping rule.

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Transmission](#) > [Switch QoS](#).
3. In [DSCP 802.1p Mapping](#), the system provides a default rule. You can also click [Create New Rule](#) to add a new rule.

Create New DSCP Priority

Name

DSCP Priority Config

☐ DSCP PRIORITY	802.1P PRIORITY	DSCP REMAP(0-63)
☐ 0	0	0
☐ 1	0	1
☐ 2	0	2
☐ 3	0	3
☐ 4	0	4
☐ 5	0	5
☐ 6	0	6
☐ 7	0	7
☐ 8	1	8
☐ 9	1	9

Showing 1-10 of 64 records < 1 2 3 4 5 6 7 > 10 /page

Create Cancel

4. Set different 802.1p mapping rules for different DSCP packets.

Name	Enter a name to identify the rule.
DSCP Priority	Displays the DSCP priority.
802.1p Priority	Specify the DSCP-to-802.1p mapping. The ingress packets are first mapped to 802.1p priority based on the DSCP-to-802.1p mappings, then to TC queues according to the 802.1p queue mappings.
DSCP Remap	Select the DSCP priority to which the original DSCP priority will be remapped.

■ 802.1p Queue Mapping

The 802.1p Queue Mapping function is used to classify the packets based on the value of 802.1p priority, then map them to different queues. IEEE 802.1p standard defines three bits in 802.1Q tag as PRI filed. The PRI values are called 802.1p priority and used to represent the priority of the layer 2 packets. This function requires packets with VLAN tags.

1. Launch the controller and access a site.

- 2. Go to **Network Config > Transmission > Switch QoS**.
- 3. In **802.1p Queue Mapping**, the system provides a default rule. You can also click **Create New Rule** to add a new rule.

Create New Queue Mapping

Name

Queue Mapping

802.1P PRIORITY	QUEUE	802.1P REMAP
0	TC-0	0
1	TC-1	1
2	TC-2	2
3	TC-3	3
4	TC-4	4
5	TC-5	5
6	TC-6	6
7	TC-7	7

Create

Cancel

- 4. Configure the mapping relationship between the 802.1p priority and the queue.

Name	Enter a name to identify the rule.
802.1p Priority	802.1p Priority: Displays the number of 802.1p priority. In QoS, 802.1p priority is used to represent class of service.
Queue	Select the TC queue for the desired 802.1p priority.
802.1p Remap	802.1p Remap is used to modify the 802.1p priority of the ingress packets. When the switch detects the 802.1p priority of the packets, it will modify the value of packets 802.1p priority according to the map. Here you can view and configure 802.1p Remap.

■ Queue Scheduler Profile

The Queue Scheduler Profile function is used to set the scheduler rule for the corresponding 802.1p queue.

- 1. Launch the controller and access a site.
- 2. Go to **Network Config > Transmission > Switch QoS**.
- 3. In **Queue Scheduler Profile**, the system provides a default rule. You can also click **Create New Rule** to add a new rule.

Create New Scheduler Config

Name

Scheduler Config

QUEUE TC-ID	SCHEDULER TYPE	QUEUE WEIGHT (1-127)
0	SP (Strict) ▼	
1	SP (Strict) ▼	
2	SP (Strict) ▼	
3	SP (Strict) ▼	
4	SP (Strict) ▼	
5	SP (Strict) ▼	
6	SP (Strict) ▼	
7	SP (Strict) ▼	

Create

Cancel

4. Configure scheduling rules for different queues.

Name	Enter a name to identify the rule.
Queue TC-id	Displays the ID number of priority Queue.
Scheduler Type	Select the type of scheduling used for the corresponding queue. When the network congestion occurs, the port will determine the forwarding sequence of the packets according to the type. Strict: In this mode, the switch will use SP (Strict Priority) to process the traffic in different queues. When congestion occurs, the traffic will be transmitted according to its queue priority strictly. The queue with higher priority will occupy the whole bandwidth. Packets in the queue with lower priority can be sent only when the queue with higher priority is empty. Weighted: In this mode, the switch will use WRR (Weighted Round Robin) to process the traffic in different queues. When congestion occurs, all the traffic will be transmitted, but the bandwidth that each traffic queue occupies will be allocated based on the queue weight. Note: If the two scheduler types are both applied to a port, the queues in Strict mode will take precedence.
Queue Weight	Specify the queue weight for the desired queue. This value can be set only in the Weighted mode.

10.8 Configure OUI Based VLAN

Overview

The OUI Based VLAN function can perform VLAN and priority division and processing on device data packets starting with specific MAC addresses based on OUIs.

Configuration

1. Launch the controller and access a site.
2. Go to **Network Config > Transmission > OUI Based VLAN**.
3. Click **Create New Switch Rule**.

Create New Switch Rule

Rule Name

Enable

☒

Port

☒ All Device Ports☐ Custom Ports

OUI Based VLAN List

+ Add

OUI PROFILE	VLAN ID	PRIORITY	ACTION
 No OUI Based VLAN have been configured.			

Apply

Cancel

- Specify the rule name and enable the function.
- Specify the effective ports. You can choose all device ports or specify some ports of some switches for the rule to take effect.
- In the [OUI Based VLAN List](#), Click **Add** to add an OUI Based VLAN.

Note: To ensure normal transmission of data, please add the VLAN ID set as OUI Based VLAN to the Untagged Networks of the LAN Profile to which the rule needs to be applied, and bind the Profile to the corresponding port.

Add OUI Based VLAN

To ensure normal transmission of data, please add the VLAN ID set as OUI Based VLAN to the Untagged Networks of the LAN Profile to which the rule needs to be applied, and bind the Profile to the corresponding port.

OUI Based VLAN 1

OUI Profile

Please Select...

Manage OUI Profile

VLAN ID

Please Select...

Manage LAN

Priority

Add OUI Based VLAN

Save

Cancel

OUI Profile	Specify the corresponding OUI Profile.
VLAN ID	Specify the corresponding OUI Based VLAN ID.
Priority	Specify the priority, and the corresponding data packet will be marked with this priority for transmission.

274

Chapter 11

Configure Network Profiles

Profiles section is used to configure and record your custom settings for site configurations. After creating the profiles, you can apply them to multiply configurations for different sites, saving you from repeatedly setting up the same information.

This chapter guides you on how to configure network profiles with the SDN Controller. The chapter includes the following sections:

- [11. 1 Create Groups](#)
- [11. 2 Create Time Range Profiles](#)
- [11. 3 Create Rate Limit Profiles](#)
- [11. 4 Create PPSK Profiles](#)
- [11. 5 Create RADIUS Profile Profiles](#)
- [11. 6 Create LDAP Profiles](#)
- [11. 7 Configure APN Profiles](#)

11.1 Create Groups


Overview

Groups section allows you to customize client groups based on IP, IP-Port, MAC Address, or Domain. You can set different rules for the groups profiles which can be shared and applied to ACL, Routing, NAT, etc. in site configuration.

Configuration

To configure the group profiles, follow these steps:

1. Launch the controller and access a site.
2. Go to [Network Config > Profile > Groups](#).
3. Click [Create New Group](#) to add a new group profile.

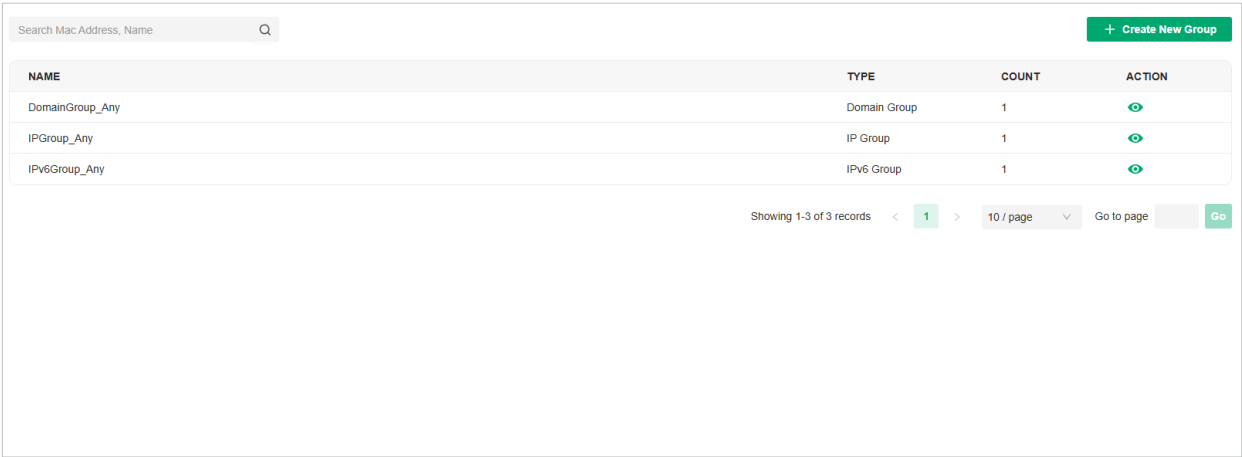

The screenshot shows a web interface for managing groups. At the top, there is a search bar labeled 'Search Mac Address, Name' and a '+ Create New Group' button. Below this is a table with the following data:

NAME	TYPE	COUNT	ACTION
DomainGroup_Any	Domain Group	1	
IPGroup_Any	IP Group	1	
IPv6Group_Any	IPv6 Group	1	

At the bottom of the table, there is a pagination bar showing 'Showing 1-3 of 3 records', a page number '1', a '10 / page' dropdown, a 'Go to page' input, and a 'Go' button.

4. Enter a name, select the type, and configure the corresponding parameters for the new group profile.
- **To create an IP group:**
Choose the [IP Group](#) type and specify IP subnets.
 - **To create an IPv6 group:**
Choose the [IPv6 Group](#) type and specify IPv6 addresses.
 - **To Create an IP-Port group:**
Choose the [IP-Port Group](#) type and specify the IP-Port type and ports, while it is optional to specify IP subnets. If you only specify ports without entering any IP subnets, it means the group contains the specified ports for all IP addresses.
 - **To create an IPv6-Port group:**
Choose the [IPv6-Port Group](#) type and specify the IP-Port type and ports, while it is optional to specify IPv6 addresses. If you only specify ports without entering any IPv6 addresses, it means the group contains the specified ports for all IPv6 addresses.

- **To configure a MAC group:**

Choose the **MAC Group** type and add MAC addresses in the MAC Address List.

- **To configure a location group:**

Choose the **Location Group** type and select locations. You can enter a description for identification.

- **To configure a domain group:**

Choose the **Domain Group** type and specify the domain names. You can specify up to 16 domain names for the group. The domain name can be complete, such as `www.baidu.com` and `www.twitter.com`; it can also contain wildcards, such as `*.google.com`, which will match domain names such as `www.google.com`, `pam.google.com` and `google.com` in special cases.

- **To configure an OUI profile group:**

Choose the **OUI Profile Group** type and add OUIs in the OUI List.

5. Click **Apply** to save the entry.

You can view and edit the list, and export the MAC group if needed. You can apply the customized profiles during site configuration.

NAME	TYPE	COUNT	ACTION
DomainGroup_Any	Domain Group	1	
IP Group_1	IP Group	1	 
IPv6Group_Any	IPv6 Group	1	
IPGroup_Any	IP Group	1	

11.2 Create Time Range Profiles

Overview

Time Range section allows you to customize time-related configurations. You can set different time range templates which can be shared and applied to wireless schedule, PoE schedule, etc. in site configuration.

Configuration

To configure the time range profiles, follow these steps:

1. Launch the controller and access a site.
2. Go to **Network Config > Profile > Time Range**.
3. Click **Create New Time Range** to add a new time range entry. By default, there is no entry in the list.

Create New Time Range

Name

Day Mode

☒ Every Day

☐ Weekday

☐ Weekend

☐ Customized

Every Day

08:00 am

06:00 pm

+

Add

Save

Cancel

4. Enter a Name for the new entry, select the Day Mode, and specify the time range. Click **+Add** to add a new time period.

Name Enter a name for the new entry, and it is a string with 1 to 64 ASCII symbols.

Day Mode

Select **Every Day**, **Weekday**, **Weekend**, or **Customized** first before specifying the time range for each day.

Every Day: You only need to set the time range once, and it will repeat every day.

Weekday: You only need to set the time range once, and it will repeat every weekday from Monday to Friday.

Weekend: You only need to set the time range once, and it will repeat every Saturday and Sunday.

Customized: You are able to set different time range for the chosen day(s) based on your needs. When a day is not chosen, the WiFi is open all day by default.

5. Save the entry. Now you can apply them to site configuration. Now you can apply the customized profiles during site configuration.

NAME	DAY MODE	TIME RANGE	ACTION
Time Range 1	Every Day	08:00 am-06:00 pm	 

Showing 1-1 of 1 records < 1 > 10 / page Go to page Go

11.3 Create Rate Limit Profiles

Overview

Rate Limit allows you to customize rate-related configurations. You can set different rate limit templates. They can be bound with wireless network to limit the upload/download rate of clients connected the SSID, and applied to specific types of Portal, such as Local User and Voucher. After creating the profiles, you can apply them to multiple configurations, saving you from repeatedly setting up the same information.

Configuration

To configure the rate limit profiles, follow these steps:

1. Launch the controller and access a site.
 2. Go to [Network Config > Profile > Rate Limit](#).
 3. By default, there is an entry with no limits, and it can not be deleted. You can click [Create New Rate Limit Profile](#) to add a new group entry.
- Create New Rate Limit Profile

The rate limit profile can be applied to settings of SSID, Client, and Portal (Hotspot > Local User and Hotspot > Voucher). When a client matches multiple rate limit rules, the rule with the minimum value will take effect.

Name

Download Limit ☒ Enable Kbps (1-10485760)

Upload Limit ☒ Enable Kbps (1-10485760)

[Apply](#) [Cancel](#)
4. Enter a name and specify the download/upload rate limit for the new entry. After saving the newly added entry, you can apply them to other configurations such as Portal and Wireless Settings.
- | | |
|----------------|--|
| Name | Enter a name to identify the created rate limit profile. |
| Download Limit | Enable the download limit, and specify the rate limit correspondingly in Kbps or Mbps. |
| Upload Limit | Enable the upload limit, and specify the rate limit correspondingly in Kbps or Mbps. |
5. Click [Apply](#) to save the entry. Now you can apply the customized profiles during site configuration.

11.4 Create PPSK Profiles

Overview

PPSK is a security solution for you to manage individual client devices without much complexity. With PPSK, each user is assigned with a unique passphrase for authentication. Also, it allows the binding of a passphrase and the device MAC address(es), and thus only the specified device can be authenticated using the passphrase. In PPSK, you can create a PPSK list and apply it to multiple wireless networks, saving you from repeatedly setting up the same information.

Configuration

To configure the PPSK profiles, follow these steps:

- 1. Launch the controller and access a site.
- 2. Go to **Network Config > Profile > PPSK**. Click **Create New PPSK Profile** to add a new PPSK profile .

Create New PPSK Profile

Name

PPSK List

Add

Import

Export

Delete All

NAME	PASSPHRASE	MAC ADDRESS	VLAN ASSIGNMENT	ACTION
No PPSK have been configured.				

Apply

Cancel

- 3. Enter a name for the new profile.
- 4. Add new entries to the PPSK profile.

- **Method 1: Add entries manually**

Click **Add** and select **Manually** for PPSK Generation. Configure the parameters.

Add New PPSK

PPSK Generation

Manually

Auto

PPSK 1

Name

Passphrase

Password

MAC Address

-

-

-

-

-

(Optional)

VLAN Assignment

(Optional, 1-4094)

Add New PPSK

Apply

Cancel

Name	Enter a name to identify the created PPSK.
Passphrase	Enter a passphrase, and the client will use the passphrase for authentication.
MAC Address	(Optional) Enter the MAC address of the device that can use the passphrase for authentication.
VLAN Assignment	(Optional) Enter the VLAN ID, and the client who uses the passphrase for authentication will be assigned to the specified VLAN.

Apply the settings. The new PPSK entry will be created.

- Method 2: Add entries automatically

Click **Add** and select **Auto** for PPSK Generation. Configure the parameters and apply the settings.

Add New PPSK

PPSK Generation

☐ Manually

☒ Auto

Number of PPSK

(1-1024)

PPSK Name Prefix

(1-60 characters)

Passphrase Length

(8-63)

VLAN Assignment

(Optional, 1-4094)

Apply


Cancel

Number of PPSK	Enter the number of PPSK entries to create.
PPSK Name Prefix	Enter the prefix of the names for the created PPSK entries.
Passphrase Length	Enter the passphrase length.
VLAN Assignment	(Optional) Enter the VLAN ID, and the client who uses the passphrase for authentication will be assigned to the specified VLAN.

Apply the settings. New PPSK entries will be created automatically.

- Method 3: Export and Import entries in batch

After creating PPSK entries, you can click **Export** to save them to a file locally, then access another site and click **Import** to import them in batches from the file.

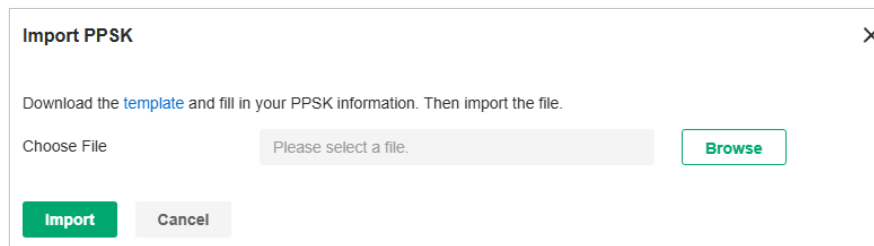

The image shows a dialog box titled "Import PPSK" with a close button (X) in the top right corner. Inside the dialog, there is a text instruction: "Download the [template](#) and fill in your PPSK information. Then import the file." Below this, there is a "Choose File" label followed by a text input field containing the placeholder text "Please select a file." To the right of the input field is a green "Browse" button. At the bottom left of the dialog are two buttons: a green "Import" button and a grey "Cancel" button.

5. Click **Apply** to save the entry. Now you can apply the customized profiles during site configuration.

11.5 Create RADIUS Profile Profiles

Overview

RADIUS (Remote Authentication Dial In User Service) is a client/server protocol that provides for the AAA (Authentication, Authorization, and Accounting) needs of modern IT environments.

In authentication services including 802.1X, Portal and MAC-Based Authentication, Omada devices operate as clients of RADIUS to pass user information to designated RADIUS servers. A RADIUS server maintains a database which stores the identity information of legal users. It authenticates users against the database when the users are requesting to access the network, and provides authorization and accounting services for them.

A RADIUS profile records your custom settings of a RADIUS server. After creating a RADIUS profile, you can apply it to multiple authentication policies like Portal and 802.1X, saving you from repeatedly entering the same information.

Configuration

■ Configure the Built-in RADIUS Profile (for on-premise controllers only)

- a. Launch the controller and access a site.
- b. Go to [Network Config](#) > [Profile](#) > [RADIUS Profile](#).
- c. An on-premise controller provides a Built-in RADIUS Profile. Click the edit icon of the profile, then add or import RADIUS users.

To add a new RADIUS user, click [Add New RADIUS User](#) and configure the parameters.

Create New RADIUS User

Authentication Type

☒ User Authentication ☐ MAC Authentication

Name

Password

Password

VLAN ID

(Optional, 1-4094)

Session-Timeout

Seconds

(Optional)

Rate Limit

☐

Traffic Limit

☐

Apply

Cancel

Authentication Type	Select the Authentication Type. User Authentication: Select this option and enter the user Name and Password for authentication. MAC Authentication: Select this option and enter the MAC Address for authentication.
VLAN ID	Enter a VLAN ID to assign VLANs to users.
Session-Timeout	Configure the authentication expiration time for users.
Rate Limit	When enabled, you can set limits for Uplink Rate and Downlink Rate of each client to balance bandwidth usage. This function applies to the portal service only.
Traffic Limit	When enabled, you can set limits for Uplink Traffic and Downlink Traffic of each client. This function applies to the portal service only.

To import RADIUS users in batches, click **Import**, download the template and fill in your Radius User information. Then import the file.

Import Radius User List

×

Download the [template](#) and fill in your Radius User information. Then import the file.

Choose File [Browse](#)

[Import](#) [Cancel](#)

■ Create New RADIUS Profile

- Launch the controller and access a site.
- Go to **Network Config > Profile > RADIUS Profile**.
- Click **Create New RADIUS Profile**. Configure the parameters and save the settings.

Create New RADIUS Profile

Name

VLAN Assignment

☐ Enable VLAN Assignment for Wireless Network

Authentication Server 1

Authentication Server IP/URL

Authentication Port

1812

(1-65535)

Authentication Password

Password

Add New Authentication Server

RADIUS Accounting

☐ Enable

Radius Proxy

☐ Enable

RADIUS CoA

☐ Enable

Save

Cancel

Name	Enter a name to identify the RADIUS profile.
VLAN Assignment	This feature allows the RADIUS server to place a wireless user into a specific VLAN based on the credentials supplied by the user. To use the feature, you should create the specific VLAN first. And the user-to-VLAN mappings must be already stored in the RADIUS server database. Note: 1. VLAN Assignment is not currently supported when a client is authenticated by Portal with External RADIUS Server or RADIUS Hotspot. 2. VLAN Assignment is applicable only when the device supports the feature. To make this feature work properly, it is recommended to upgrade your devices to the latest firmware version.
Authentication Server IP	Enter the IP address of the authentication server.
Authentication Port	Enter the UDP destination port on the authentication server for authentication requests.
Authentication Password	Enter the password that will be used to validate the communication between network devices and the RADIUS authentication server.
RADIUS Accounting	Click the checkbox to enable RADIUS Accounting to meet billing needs. This feature is only available for APs with Portal to account for wireless clients.

Interim Update	Click the checkbox to enable Interim Update. By default, the RADIUS accounting process needs only start and stop messages to the RADIUS accounting server. With Interim Update enabled, network devices will periodically send an Interim Update (a RADIUS Accounting Request packet containing an "interim-update" value) to the RADIUS server. An Interim Update updates the user's session duration and current data usage.
Interim Update Interval	Enter an appropriate interval between the updates of users' session duration and current data usage.
Accounting Server IP	Enter the IP address of the RADIUS accounting server.
Accounting Port	Enter the UDP destination port on the RADIUS server for accounting requests.
Accounting Password	Enter the password that will be used to validate the communication between network devices and the RADIUS accounting server.
Radius Proxy	With this option enabled, the Controller will act as a proxy to forward the device's authentication messages to the corresponding RADIUS server.
RADIUS CoA	If enabled, TP-Link devices will act as a RADIUS Dynamic Authorization Server and will respond to RADIUS Change-of-Authorization and Disconnect messages sent by the RADIUS servers. This option is only supported by EAP PPSK, EAP MAC-Based Authentication, and EAP WPA-Enterprise.
CoA Password	CoA password is used to authenticate CoA and Disconnect messages sent by the RADIUS servers. The password must be the same as the secret used by RADIUS servers to send the CoA and Disconnect messages.

11.6 Create LDAP Profiles

Overview

The Lightweight Directory Access Protocol (LDAP) is an industry standard protocol for maintaining and accessing directory information over a network. LDAP Authentication allows you to bind the device to an LDAP server and use that server to authenticate LAN clients. Google LDAP profile is designed for use with Google Workspace's Secure LDAP.

Configure a Common LDAP Profile

- 1. Launch the controller and access a site.
- 2. Go to [Network Config](#) > [Profile](#) > [LDAP Profile](#).
- 3. Click [Create New LDAP Profile](#) to add a new profile .

Create New LDAP Profile

Status

☐ Enable

Name

Bind Type

Simple Mode

Server Address

ldap://

Destination Port

389

Use SSL

☐ Enable

Common Name Identifier

Base Distinguished Name

Q

Apply

Cancel

- 4. Configure the parameters.

Status	Check the box to enable LDAP Authentication.
Name	Specify the profile name.
Bind Type	Select the LDAP Authentication mode: Anonymous Mode, Simple Mode, or Regular Mode.
Server Address	Enter the IP address of the LDAP server.
Destination Port	Enter the port ID of the LDAP server. By default, the port ID is 389 when SSL is disabled and 636 when SSL is enabled.
Use SSL	Determine whether to use SSL for LDAP communication.

Regular DN	Specify the distinguished name (DN) of the administrator account. This parameter is required in Regular mode.
Regular Password	Specify the password of the administrator account. This parameter is required in Regular mode.
Common Name Identifier	Specify the common name for user authentication. It is usually "cn". Determine based on the actual situation of the directory.
Base Distinguished Name	Specify the user identifier for user authentication. You can click the icon next to it to search and select from the LDAP directory tree.
Additional Filter	Specify the filter for user authentication. It is not supported in Simple Mode and is optional in other modes.
Group Distinguished Name	Specify the group identifier for user authentication. It is not supported in Simple Mode and is optional in other modes.

- Click **Apply** to save the profile. Now you can select the predefined entry of LDAP profile when configuring rules of related modules like LDAP Server.

Configure a Google LDAP Profile

- Download the Google Certificate.
 - Sign in to your Google Admin console.
 - Go to **Apps > LDAP**.
 - Select a client.
 - Click the Authentication card.
 - Click GENERATE NEW CERTIFICATES.
 - Download the certificate from the Certificates window.
- Launch the controller and access a site.
- Go to **Network Config > Profile > LDAP Profile > Google LDAP Profiles**.
- Click **Create Google LDAP Profile** to add a new profile .

Create Google LDAP Profile

Status

☐ Enable

Name

Bind Type

Simple Mode

▼

Server Address

ldaps://

Destination Port

636

Common Name Identifier

Base Distinguished Name

🔍

Google Certificate

Please select a file.

Browse

Create

Cancel

5. Configure the parameters.

Status	Check the box to enable LDAP Authentication.
Name	Specify the profile name.
Bind Type	Select the LDAP Authentication mode: Simple Mode or Regular Mode.
Server Address	Enter the IP address of the LDAP server.
Destination Port	Enter the port ID of the LDAP server. By default, the port ID is 636.
Common Name Identifier	Specify the common name for user authentication. It is usually "uid". Determine based on the actual situation of the directory.
Base Distinguished Name	Specify the user identifier for user authentication. You can click the icon next to it to search and select from the LDAP directory tree.
Google Certificate	Upload the Google certificate you downloaded.

6. Click **Apply** to save the profile. Now you can select the predefined entry of LDAP profile when configuring rules of related modules like LDAP Server.

11.7 Configure APN Profiles

Overview

APN is a network access technology required when using the SIM card to access the internet. It determines which access method the SIM card uses to access the internet.

Configuration

To configure the APN profiles, follow these steps:

- 1. Launch the controller and access a site.
- 2. Go to [Network Config > Profile > APN Profile](#). You can also go to [Network Config > Network Settings > Internet > LTE](#) if a LTE model has been adopted or pre-configured.
- 3. Click [Create New APN Profile](#) to add a new profile .

Create New APN Profile

Profile Name

PDP Type

IPv4

APN Type

Static

APN

i

Username

(Optional)

Password

Password

(Optional)

Authentication Type

None

Apply

Cancel

- 4. Configure the parameters.

Profile Name	Specify the name of the profile.
PDP Type	Select the PDP (Packet Data Protocol) type: IPv4, IPv6, or IPv4 & IPv6.
APN Type	Select the APN type: Static or Dynamic.
APN	When APN Type is Static, specify the APN (access point name) provided by your ISP.
Username	Enter the username provided by your ISP. This field is case-sensitive.
Password	Enter the password provided by your ISP. This field is case-sensitive.

Authentication Type	Some ISPs need a specific authentication type, please confirm it with your ISP or keep the default value. None: No authentication is required. PAP: Password Authentication Protocol. The protocol allows a device to establish authentication with a peer using a two-way handshake. Select this option if your ISP requires this authentication type. CHAP: Challenge Handshake Authentication Protocol. The protocol allows a device to establish authentication with a peer using a three-way handshake and periodically checking the peer's identity. Select this option if your ISP requires this authentication type.
Apply to SIM	(For models with dual SIM cards) Select the SIM card to which the APN profile will be applied.

5. Click **Apply** to save the profile. Now you can select the predefined entry of APN profile when configuring rules of related modules.

Chapter 12

Configure Network Security

Network Security is a portfolio of features designed to improve the usability and ensure the safety of your network and data. It implements policies and controls on multiple layers of defenses in the network.

This chapter guides you on how to configure network security with the SDN Controller. The chapter includes the following sections:

- [12.1 Configure ACL](#)
- [12.2 Configure URL Filtering](#)
- [12.3 Configure Application Control](#)
- [12.4 Configure IDS/IPS for Threat Management](#)
- [12.5 Configure the Firewall](#)
- [12.6 Configure Attack Defense](#)

12.1 Configure ACL

Overview

ACL (Access Control List) allows a network administrator to create rules to restrict access to network resources. ACL rules filter traffic based on specified criteria such as source IP addresses, destination IP addresses, and port numbers, and determine whether to forward the matched packets. These rules can be applied to specific clients or groups whose traffic passes through the gateway, switches and APs.

The system filters traffic against the rules in the list sequentially. The first match determines whether the packet is accepted or dropped, and other rules are not checked after the first match. Therefore, the order of the rules is critical. By default, the rules are prioritized by their created time. The rule created earlier is checked for a match with higher priority. To reorder the rules, select a rule and drag it to a new position. If no rules match, the device forwards the packet because of an implicit Permit All clause.

The system provides three types of ACL:

■ Gateway ACL

After Gateway ACLs are configured on the controller, they can be applied to the gateway to control traffic which is sourced from LAN ports and forwarded to the WAN ports.

You can set the Network, IP address, port number of a packet as packet-filtering criteria in the rule.

■ Switch ACL

After Switch ACLs are configured on the controller, they can be applied to the switch to control inbound and outbound traffic through switch ports.

You can set the Network, IP address, port number and MAC address of a packet as packet-filtering criteria in the rule.

■ EAP ACL

After EAP ACLs are configured on the controller, they can be applied to the APs to control traffic in wireless networks.

You can set the Network, IP address, port number and SSID of a packet as packet-filtering criteria in the rule.

Configuration

To complete the ACL configuration, follow these steps:

- 1) Create an ACL with the specified type.
- 2) Define packet-filtering criteria of the rule, including protocols, source, and destination, and determine whether to forward the matched packets.

■ Configuring Gateway ACL

1. Launch the controller and access a site.

2. Go to **Network Config > Security > ACL**. On Gateway ACL tab, click **Create New Rule** to load the following page.

Create New Rule

Description

Status

☒ Enable

Direction

Please Select...

Policy

☒ Deny ☐ Permit

Protocols

All

Rule ⓘ

Source

Type



Please Select the type

Deny

Destination

Type



Please Select the type

+ Advanced Settings

Create

Cancel

3. Define packet-filtering criteria of the rule, including protocols, source, and destination, and determine whether to forward the matched packets. Refer to the following table to configure the required parameters and click **Create**.

Description	Enter a description to identify the ACL.
Status	Click the checkbox to enable the ACL.
Direction	Select the direction of ACL application traffic. LAN->LAN: Control packet forwarding between LAN side devices. LAN->WAN: Control packet forwarding in the LAN-WAN direction. [SFP WAN/LAN1] IN / [WAN2] IN / [USB Modem] IN: Control packet coming in from a specific WAN port. The options vary by model.

Policy	Select the action to be taken when a packet matches the rule. Permit: Forward the matched packet. Deny: Discard the matched packet.
Protocols	Select one or more protocol types to which the rule applies from the drop-down list. The default is All, indicating that packets of all protocols will be matched. When you select one of TCP and UDP or both of them, you can set the IP address and port number of a packet as packet-filtering criteria in the rule.

From the Source drop-down list, choose one of these options to specify the source of the packets to which this ACL applies:

Network	Select the network you have created. If no networks have been created, you can select the default network (LAN), or go to Network Config > Network Settings > LAN to create one. The gateway will examine whether the packets are sourced from the selected network.
! Network	Select a network you have created and the settings will not applied to that network.
SSID	Select the SSID you have created. If no SSIDs have been created, go to Network Config > Network Settings > WLAN to create one. The system will examine whether the SSID of the packet is the SSID selected here.
IP Group	Select the IP Group you have created. If no IP Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The gateway will examine whether the source IP address of the packet is in the IP Group.
! IP Group	Select an IP group you have created and the settings will not applied to that IP group.
IP-Port Group	Select the IP-Port Group you have created. If no IP-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The gateway will examine whether the source IP address and port number of the packet are in the IP-Port Group.
! IP-Port Group	Select an IP-Port group you have created and the settings will not applied to that IP-Port group.
IPv6 Group	IPv6 Group: Select the IPv6 Group you have created. If no IPv6 Groups have been created, click + Create on this page or go to Network Config > Profile > Groups to create one. The system will examine whether the source IPv6 address of the packet is in the IPv6 Group.
! IPv6 Group	Select an IPv6 group you have created and the settings will not applied to that IPv6 group.
IPv6-Port Group	IPv6-Port Group: Select the IPv6-Port Group you have created. If no IPv6-Port Groups have been created, click + Create on this page or go to Network Config > Profile > Groups to create one. The system will examine whether the source IPv6 address and port number of the packet are in the IPv6-Port Group.
! IPv6-Port Group	Select an IPv6-Port group you have created and the settings will not applied to that IPv6-Port group.

Location	Select one or multiple locations from the list as the source address, and the system will judge whether the source IP of the data packet belongs to the selected locations.
Location Group	Select a location group you have created, and the system will judge whether the source IP of the data packet belongs to this location group. If no location group has been created, click the create button to create one, or go to Network Config > Profile > Groups to create one.

From the Destination drop-down list, choose one of these options to specify the destination of the packets to which this ACL applies:

IP Group	Select the IP Group you have created. If no IP Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The gateway will examine whether the destination IP address of the packet is in the IP Group.
! IP Group	Select an IP group you have created and the settings will not applied to that IP group.
IP-Port Group	Select the IP-Port Group you have created. If no IP-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The gateway will examine whether the destination IP address and port number of the packet are in the IP-Port Group.
! IP-Port Group	Select an IP-Port group you have created and the settings will not applied to that IP-Port group.
IPv6 Group	Select the IPv6 Group you have created. If no IPv6 Groups have been created, click + Create on this page or go to Network Config > Profile > Groups to create one. The system will examine whether the destination IPv6 address of the packet is in the IPv6 Group.
! IPv6 Group	Select an IPv6 group you have created and the settings will not applied to that IPv6 group.
IPv6-Port Group	Select the IPv6-Port Group you have created. If no IPv6-Port Groups have been created, click + Create on this page or go to Network Config > Profile > Groups to create one. The system will examine whether the destination IPv6 address and port number of the packet are in the IPv6-Port Group.
! IPv6-Port Group	Select an IPv6-Port group you have created and the settings will not applied to that IPv6-Port group.
Location	Select one or multiple locations from the list as the destination address, and the system will judge whether the destination IP of the data packet belongs to the selected locations.
Location Group	Select a location group you have created, and the system will judge whether the destination IP of the data packet belongs to this location group. If no location group has been created, click the create button to create one, or go to Network Config > Profile > Groups to create one.
Gateway Management Page	This option will allow/block LAN network devices to access the gateway management page.

Domain Group

Select a domain group you have created, and the system will judge whether the destination domain of the data packet belongs to this domain group. If no domain group has been created, click the create button to create one, or go to [Network Config > Profile > Groups](#) to create one.

Set the advanced settings according to your needs:

Time Range

Select the checkbox to enable time-based ACL. You can create a time range or select an existing time range for the ACL rule to take effect.

Bi-Directional

When **Direction** is **LAN->LAN**, you can enable this option to configure bi-directional traffic rule.

States Type

Determine the type of stateful ACL rule. It is recommended to use the default Auto type.

Auto (Match State New/Established/Related): Match the new, established, and related connection states.

Manual: If selected, you can manually specify the connection states to match.

Match State New: Match the connections of the initial state. For example, a SYN packet arrives in a TCP connection, or the router only receives traffic in one direction.

Match State Established: Match the connections that have been established. In other words, the firewall has seen the bidirectional communication of this connection.

Match State Invalid: Match the connections that do not behave as expected.

Match State Related: Match the associated sub-connections of a main connection, such as a connection to a FTP data channel.

■ Configuring Switch ACL

1. Launch the controller and access a site.
2. Go to [Network Config > Security > ACL](#). Under the Switch ACL tab, click [Create New Rule](#) to load the following page.

Create New Rule

Description

Status

☒ Enable

Policy

☒ Deny ☐ Permit

Protocols

All

Rule

Source

Type



Please Select the type

Deny

Destination

Type



Please Select the type

+ ACL Binding

+ Advanced Settings

Create

Cancel

3. Define packet-filtering criteria of the rule, including protocols, source, and destination, and determine whether to forward the matched packets. Refer to the following table to configure the required parameters.

Description	Enter a description to identify the ACL.
Status	Click the checkbox to enable the ACL.
Policy	Select the action to be taken when a packet matches the rule. Permit: Forward the matched packet. Deny: Discard the matched packet.

299

Protocols	Select one or more protocol types to which the rule applies from the drop-down list. The default is All, indicating that packets of all protocols will be matched. When you select one of TCP and UDP or both of them, you can set the IP address and port number of a packet as packet-filtering criteria in the rule.
Time Range	Select the checkbox to enable time-based ACL. You can create a time range or select an existing time range for the ACL rule to take effect.
Ethertype	Click the checkbox if you want the switch to check the ethertype of the packets, and configure the Ethertype based on needs.
Bi-Directional	Click the checkbox to enable the switch to create another symmetric ACL with the name "xxx_reverse", where "xxx" is the name of the current ACL. The two ACLs target at packets with the opposite direction of each other.

From the Source drop-down list, choose one of these options to specify the source of the packets to which this ACL applies:

Network	Select the network you have created. If no networks have been created, you can select the default network (LAN), or go to Network Config > Network Settings > LAN to create one. The switch will examine whether the packets are sourced from the selected network.
IP Group	Select the IP Group you have created. If no IP Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the source IP address of the packet is in the IP Group.
IP-Port Group	Select the IP-Port Group you have created. If no IP-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the source IP address and port number of the packet are in the IP-Port Group.
MAC Group	Select the MAC Group you have created. If no MAC Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the source MAC address of the packet is in the MAC Group.
IPv6 Group	Select the IPv6 Group you have created. If no IPv6 Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the source IP address of the packet is in the IPv6 Group.
IPv6-Port Group	Select the IPv6-Port Group you have created. If no IPv6-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the source IP address and port number of the packet are in the IPv6-Port Group.

From the Destination drop-down list, choose one of these options to specify the destination of the packets to which this ACL applies:

Network	Select the network you have created. If no networks have been created, you can select the default network (LAN), or go to Network Config > Network Settings > LAN to create one. The switch will examine whether the packets are forwarded to the selected network.
---------	---

IP Group	Select the IP Group you have created. If no IP Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the destination IP address of the packet is in the IP Group.
IP-Port Group	Select the IP-Port Group you have created. If no IP-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the destination IP address and port number of the packet are in the IP-Port Group.
MAC Group	Select the MAC Group you have created. If no MAC Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the destination MAC address of the packet is in the MAC Group.
IPv6 Group	Select the IPv6 Group you have created. If no IPv6 Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the destination IP address of the packet is in the IPv6 Group.
IPv6-Port Group	Select the IPv6-Port Group you have created. If no IPv6-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The switch will examine whether the destination IP address and port number of the packet are in the IPv6-Port Group.

4. Bind the switch ACL to a switch port or a VLAN and click [Create](#). Note that a switch ACL takes effect only after it is bound to a port or VLAN.

Binding Type

Specify whether to bind the ACL to ports or a VLAN.

Ports:

Select All Ports or Custom Ports as the interfaces to be bound with the ACL. With All ports selected, the rule is applied to all ports of the switch. With Custom ports selected, the rule is applied to the selected ports of the switch. Click the ports from the Device List to select the binding ports.

☐	DEVICE NAME	PORTS/LAGS	STATUS	MODEL	FIRMWARE VERSION
☐	 B0-19-21-7E-80-8A	Port 1 2 3 4 5 6 7 8 9 10 ☒ ☒ ☒ ☐ ☐ ☐ ☐ ☐ ☐ ☐	CONNECTED	SG2210MP	5.0.1 Build 2024 0418 Rel.51164

VLAN:

Select a VLAN and specify the switches as the interface to be bound with the ACL. If no VLANs have been created, you can select the default VLAN 1 (LAN), or go to Network Config > Network Settings > LAN to create one.

■ **Configuring EAP ACL**

1. Launch the controller and access a site.
2. Go to [Network Config > Security > ACL](#). Under the E tab, click [Create New Rule](#) to load the following page.

Create New Rule

Description

Status

☒ Enable

Policy

☒ Deny ☐ Permit

Protocols

All

Rule ⓘ

Source ⓘ

Type



Please Select the type

Destination

Type



Please Select the type

Deny

Create

Cancel

3. Define packet-filtering criteria of the rule, including protocols, source, and destination, and determine whether to forward the matched packets. Refer to the following table to configure the required parameters and click **Create**.

Description	Enter a description to identify the ACL.
Status	Click the checkbox to enable the ACL.
Policy	Select the action to be taken when a packet matches the rule. Permit: Forward the matched packet. Deny: Discard the matched packet.

Protocols	Select one or more protocol types to which the rule applies from the drop-down list. The default is All, indicating that packets of all protocols will be matched. When you select one of TCP and UDP or both of them, you can set the IP address and port number of a packet as packet-filtering criteria in the rule.
------------------	---

From the Source drop-down list, choose one of these options to specify the source of the packets to which this ACL applies:

Network	Select the network you have created. If no networks have been created, you can select the default network (LAN), or go to Network Config > Network Settings > LAN to create one. The AP will examine whether the packets are sourced from the selected network.
IP Group	Select the IP Group you have created. If no IP Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the source IP address of the packet is in the IP Group.
IP-Port Group	Select the IP-Port Group you have created. If no IP-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the source IP address and port number of the packet are in the IP-Port Group.
SSID	Select the SSID you have created. If no SSIDs have been created, go to Network Config > Network Settings > WLAN to create one. The AP will examine whether the SSID of the packet is the SSID selected here.
IPv6 Group	Select the IPv6 Group you have created. If no IPv6 Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the source IP address of the packet is in the IPv6 Group.
IPv6-Port Group	Select the IPv6-Port Group you have created. If no IPv6-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the source IP address and port number of the packet are in the IPv6-Port Group.

From the Destination drop-down list, choose one of these options to specify the destination of the packets to which this ACL applies:

Network	Select the network you have created. If no networks have been created, you can select the default network (LAN), or go to Network Config > Network Settings > LAN to create one. The AP will examine whether the packets are forwarded to the selected network.
IP Group	Select the IP Group you have created. If no IP Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the destination IP address of the packet is in the IP Group.
IP-Port Group	Select the IP-Port Group you have created. If no IP-Port Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the destination IP address and port number of the packet are in the IP-Port Group.
IPv6 Group	Select the IPv6 Group you have created. If no IPv6 Groups have been created, click +Create on this page or go to Network Config > Profile > Groups to create one. The AP will examine whether the destination IP address of the packet is in the IPv6 Group.

IPv6-Port Group

Select the IPv6-Port Group you have created. If no IPv6-Port Groups have been created, click **+Create** on this page or go to **Network Config > Profile > Groups** to create one. The AP will examine whether the destination IP address and port number of the packet are in the IPv6-Port Group.

12.2 Configure URL Filtering

Overview

URL Filtering allows a network administrator to create rules to block or allow certain websites, which protects it from web-based threats, and deny access to malicious websites.

In URL filtering, the system compares the URLs in HTTP, HTTPS and DNS requests against the lists of URLs that are defined in URL Filtering rules, and intercepts the requests that are directed at a blocked URLs. These rules can be applied to specific clients or groups whose traffic passes through the gateway and APs.

The system filters traffic against the rules in the list sequentially. The first match determines whether the packet is accepted or dropped, and other rules are not checked after the first match. Therefore, the order of the rules is critical. By default, the rules are prioritized based on the sequence they are created. The rule created earlier is checked for a match with a higher priority. To reorder the rules, select a rule and drag it to a new position. If no rules match, the device forwards the packet because of an implicit Permit All clause.

Note that URL Filtering rules take effects with a higher priority over ACL rules. That is, the system will process the URL Filtering rule first when the URL Filtering rule and ACL rules are configured at the same time.

Configuration

To complete the URL Filtering configuration, follow these steps:

- 1) Create a new URL Filtering rule with the specified type.
 - 2) Define filtering criteria of the rule, including source, and URLs, and determine whether to forward the matched packets.
- **Configuring Gateway Rules**
1. Launch the controller and access a site.
 2. Go to [Network Config](#) > [Security](#) > [URL Filtering](#).
 3. Under the Gateway Rules tab, configure the parameters.

General Config

Block Page

☒

Block Page Message

(Optional)

Safe Search

☐

Apply

Cancel

URL Filtering List

Tip: Drag :: to re-order rows.

+ Create New Rule

NAME	ENABLED	POLICY	SOURCE	MODE	FILTERING CONTENT	ACTION
No entry in the table.						

- Block Page

When enabled, users attempting to access blocked websites will be redirected to a specific page indicating that the website is blocked by access policy.
- Block Page Message

When a user tries to access a blocked URL, the block page message will display to tell why access is denied. This can effectively remind users to comply with network usage regulations.
- Safe Search

Check this option to enable Safe Search globally. This feature can filter search results to block inappropriate content. It is suitable for family and educational environments.

5. Click **Create New Rule** to load the following page.

Create New Rule

Name

Status

☒ Enable

Policy

☒ Deny ☐ Permit

Source Type

Network

Network

Please Select...

Time Schedule

☐ Enable

Mode

☒ URL Category ☐ Custom URLs

Content Filtering

☐ Family ☐ Work ☐ Education ☐ Public Network ☒ Custom

☒ 0 of 81 URL Categories Enabled

☐ Adult & Explicit Content ⓘ

☐ Lingerie ⓘ

☐ Sex Toys ⓘ

☐ Business & Finance ⓘ

☐ Bank ⓘ

☐ Real Estate ⓘ

☐ Mature Content ⓘ

☐ Sexual Content ⓘ

☐ Business ⓘ

☐ Nudity ⓘ

☐ Sexual Education ⓘ

☐ Financial Services Websites ⓘ

☐ Porn ⓘ

☐ Online Pay ⓘ

- Define filtering criteria of the rule, including source and URLs, and determine whether to forward the matched packets. Refer to the following table to configure the required parameters and click **Save**.

Name	Enter a name to identify the URL Filtering rule.
Status	Click the checkbox to enable the URL Filtering rule.
Policy	Select the action to be taken when a packet matches the rule. Deny: Discard the matched packet and the clients cannot access the URLs. Permit: Forward the matched packet and clients can access the URLs.
Source Type	Select the source of the packets to which this rule applies. Network: With Network selected, select the network you have created from the Network drop-down list. If no networks have been created, you can select the default network (LAN), or go to Network Config > Network Settings > LAN to create one. The gateway will filter the packets sourced from the selected network. IP Group: With IP Group selected, select the IP Group you have created from the IP Group drop-down list. If no IP Groups have been created, click +Create New IP Group on this page or go to Network Config > Profile > Groups to create one. The gateway will examine whether the source IP address of the packet is in the IP Group.
Time Schedule	Enable this option and set a time schedule if needed.
Mode	Choose a mode for the filtering content to match the URL. URL Category: Frequently used URLs such as news, entertainment, and shopping are divided into different categories. This mode is suitable for most common scenarios, but if you find that the required URLs are not in the filtering category, you can add the specific URLs in the custom URL mode. Custom URLs: Manually enter the URL you want to filter. This mode lets you precisely control content access.
Content Filtering	Select a preset scenario. Family: Suitable for homes Work: Suitable for offices. Education: Suitable for schools and educational institutions. Public Network: Suitable for public places. Custom: You can customize filtering rules according to the specific needs of different scenarios.

■ Configuring AP Rules

- Launch the controller and access a site.
- Go to [Network Config > Security > URL Filtering](#). On EAP Rules tab, click [Create New Rule](#) to load the following page.

Create New Rule

Name

Status

☒ Enable

Policy

☒ Deny ☐ Permit

Source Type

SSID

SSID

Please Select...

URL Path

www.google.com

www.youtube.com

1. Use the Enter key to divide different filtering contents.

2. The domain name which contains a wildcard (*) is supported, like *.google.com. One domain name with a wildcard (*) can match multiple subdomains.

Save

Cancel

3. Define filtering criteria of the rule, including source and URLs, and determine whether to forward the matched packets. Refer to the following table to configure the required parameters and click **Save**.

Name	Enter a name to identify the URL Filtering rule.
Status	Click the checkbox to enable the URL Filtering rule.
Policy	Select the action to be taken when a packet matches the rule. Deny: Discard the matched packet and the clients cannot access the URLs. Permit: Forward the matched packet and clients can access the URLs.
Source Type	Select the SSID of the packets to which this rule applies.
URL Path	Enter the URL address using up to 128 characters. URL address should be given in a valid format. The URL which contains a wildcard(*) is supported. One URL with a wildcard(*) can match mutiple subdomains. For example, with *.tp-link.com specified, community.tp-link.com will be matched.

12.3 Configure Application Control

Overview

DPI (Deep Packet Inspection) helps you identify, analyze, and control the traffic at the application layer in the network. DPI engine includes the latest application identification signatures to track which applications are using the most bandwidth. You can better manage and distribute network traffic usage through DPI.

Configuration

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Security](#) > [Application Control](#).
3. On the [Deep Packet Inspection](#) page, enable [Deep Packet Inspection](#) and [Logging Traffic](#), then apply the settings.

Deep Packet Inspection

Deep Packet Inspection

☒

Logging Traffic

☒ ⓘ

Apply

Cancel

Deep Packet Inspection	When enabled, the device will send the forwarded traffic to a professional local DPI engine for analysis, so as to judge and identify the type of traffic.
Logging Traffic	When enabled, the device will collect and save the results of traffic analysis. You can check the results on the Insights > Application Analytics page.

4. Apply the settings.
5. On the [Rules Management](#) page, click [Create New Rule](#). You can predefine one or more rules, and APP control strategy that can be referenced, and realize block or QoS actions for specified Apps within a specified time period.

Create New Rule

Rules Name

Schedule

Please select a Time Range entry.

Manage Time Range Entries

QoS

☐ Enable

Select Apps

Search Name

Q

	NAME	CATEGORY	DESCRIPTION	ACTION
☐	1-clickshare-com	Sharehosting	The application 1-clickshare-com was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	1-upload-com	Sharehosting	The application 1-upload-com was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	1-upload-to	Sharehosting	The application 1-upload-to was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	10upload-com	Sharehosting	The application 10upload-com was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	123VPN	Tunnel	123VPN is a free VPN application provided by Amplusnet SRL.	
☐	123upload	Sharehosting	The application 123upload was used for traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	123upload-pl	Sharehosting	The application 123upload-pl was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	139pan-com	Sharehosting	The application 139pan-com was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	163pan-com	Sharehosting	The application 163pan-com was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	
☐	1clickshare-net	Sharehosting	The application 1clickshare-net was used to classify traffic from the hoster with the same name. It was deprecated because the website is no longer reachable.	

Select 0 of 2085 items

Select All

Showing 1-10 of 2085 records

<

1

2

3

4

5

...

209

>

10 / page

Go to page

Go

Apply

Cancel

Rule Name Specify the name of the rule.

Schedule Specify the time period when the rule takes effect. You can create new time range according to your needs.

QoS Enable this option and select QoS Class to configure the QoS strategy if needed.

When enabled, the traffic will be limited according to the configuration. When disabled, the App will be blocked.

Select Apps Select the Apps for the rule.

6. On the **Application Filter** page, click **Create New Application Filter**. You can apply the defined rules and divide multiple rules into one filter set for easy management.

Create New Application Filter

Name

Description

Select Rules

+ Add

	RULES NAME	APP NUMBER	QOS STATUS	SCHEDULE	ACTION
	No entry in the table.				

Create

Cancel

Name Specify the name of the filter.

Description Enter a description for identification.

Select Rules Select the rules for the filter.

7. On the **Deep Packet Inspection** page, click **Create New Assign Restriction**. Select a network to apply a pre-defined filter.

Create New Assign Restriction

X


Network

Filter

ConfirmCancel

Network	Select a network to apply the filter.
Filter	Select a pre-defined filter.

8. Save the settings. You can view the results of traffic analysis on the **Insights > Application Analytics** page.

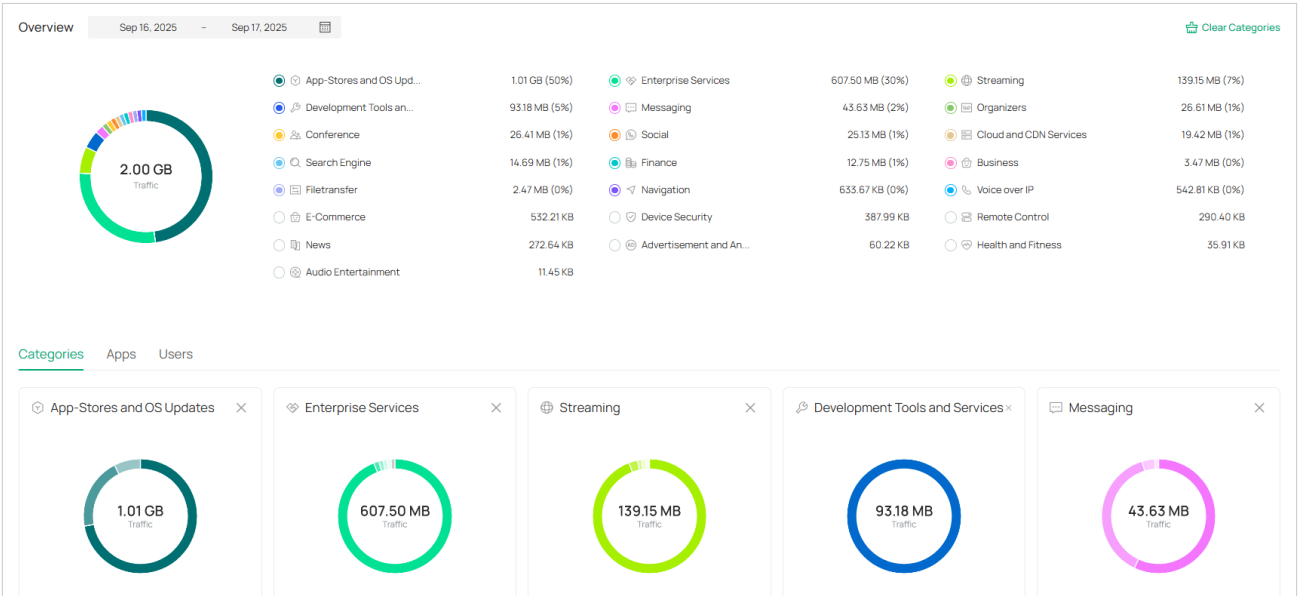

If you want to clear DPI data of a time period, go to the **Deep Packet Inspection** page, click the **Clear Data** button and specify the period.

12.4 Configure IDS/IPS for Threat Management

IDS/IPS is a security mechanism that detects intrusions based on attack characteristics. It can detect malware, Trojan horses, worms, ActiveX and other attacks to protect the network security of users.

Note: Using Intrusion Detection/Prevention may reduce maximum throughput speeds.

12.4.1 Configure IDS/IPS

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Security](#) > [IDS/IPS](#).
3. Enable [Intrusion Detection/Prevention](#) and configure the parameters.

IDS/IPS ⓘ

Intrusion Detection/Prevention

☒

Type

☒ Detect Only (IDS)

☐ Detect and Prevent (IPS)

⚠

Using Intrusion Detection/Prevention may reduce maximum throughput speeds.

GEO Enforcer

☐ Enable ⓘ

Security Level

Low

ⓘ

✓

5 of 12 Threat Categories Enabled.

Effective Time

☐ Enable

Apply

Cancel

Type	Specify the working mode. In IDS mode, the system will only report the threat log. In IPS mode, the system will block the corresponding connection for 300s after a threat is detected.
GEO Enforcer	Enable geographic location identification of threat logs.
Security Level	Choose the protection level. A higher protection level means more threat types are detected, while a lower protection level only detects some important threats. You can also customize the protection level.
Effective Time	Specify the effective time period of the IDS/IPS module.

4. Apply the settings.

When the system discovers a threat, the corresponding threat log will be displayed on the [Threat Management](#) page in the current site and the [Security](#) page in Global View.

12.4.2 Manage Threats in a Site

- 1. Launch the controller and access a site.
- 2. Go to [Network Config](#) > [Security](#) > [IDS/IPS](#) > [Threat Management](#).
- 3. Click a threat that the system discovered, then you can choose a specified response strategy for the corresponding attack IP: Block, Isolate Device, Signature Suppression, or Allow.

Threat Management

Search Threat Description, Classification, Cl...

Feb 05, 2025 - Mar 07, 2025

Unarchived Archived

Export Block Isolate Device Signature Suppression Allow

DATE TIME	SOURCE LOCATION	THREAT DESCRIPTION	SEVERITY	CATEGORY	CLASSIFICATION	CLASSIFICATION DESCRIPTION
☐ Mar 06, 2025 12:04:50 am	-	ET WORM W32/Rimecud wg bxt Checkin	Low	Worm	trojan-activity	A Network Trojan was Detected
☐ Mar 06, 2025 12:04:40 am	-	ET EXPLOIT Possible SolarWinds Orion API Local File Disclosure (SWNetPerfMon.db) (CVE-2020-10148)	Low	Exploit	web-application-attack	Web Application Attack
☐ Mar 06, 2025 12:04:30 am	-	ET P2P Bittorrent P2P Client User-Agent (BTSP)	Low	P2P	policy-violation	Potential Corporate Privacy Violation
☐ Mar 06, 2025 12:04:20 am	-	ET USER_AGENTS Suspicious User-Agent (HaxerMen)	Major	User Agents	bad-unknown	Potentially Bad Traffic
☐ Mar 06, 2025 12:04:10 am	-	ET DNS Query to a *.top domain - Likely Hostile	Major	DNS	bad-unknown	Potentially Bad Traffic

Showing 1-5 of 5 records < 1 > 10 /page Go to page Go

Block Drop traffic to/from the external IP address and the specific internal IP address.

If you block an entry, it will be added to the [Block List](#) at [Network Config](#) > [Security](#) > [IDS/IPS](#).

Isolate Device Drop traffic to/from the external IP address and any internal IP address.

Signature Suppression Mute the alerting on certain signatures. This will also disable blocking on traffic matching the designated suppression rule.

If you suppress the signature of an entry, it will be added to the [Signature Suppression](#) list at [Network Config](#) > [Security](#) > [IDS/IPS](#).

Allow Trust the IP address so that the traffic, depending on the direction selected, will not get blocked to or from the identified IP address.

If you allow an entry, it will be added to the [Allow List](#) at [Network Config](#) > [Security](#) > [IDS/IPS](#).

- 4. You can further check and edit processed entries at [Network Config](#) > [Security](#) > [IDS/IPS](#).

■ Block List

The Block List page displays all block entries added through the [Threat Management](#) page. You can choose to block all traffic of the source IP in the threat log, or block all traffic between the source IP and the destination IP in the threat log.

■ **Allow List**

On the Allow List page, you can add, view, and edit the exemption entries of IDS/IPS detection, so that the specified objects will no longer trigger threat logs.

Click [Create New Allow List](#) and configure the parameters.

Create New Allow List

Direction

Source

Track By

IP Address

IP Address

Submit

Cancel

Direction	Specify the location of the object (target) exempt from triggering the threat: source, destination, or both directions.
Track By	Specify the type of object (target) exempt from triggering the threat: IP address, Network, or Subnet.
IP Address/Network/ Subnet	Specify the value of the object.

■ **Signature Suppression**

The Signature Suppression page displays all the signature suppression entries added through the Threat Management page, and the objects with signature suppressed will no longer trigger specific threat logs.


12. 4. 3 **Manage Threats Globally**

The Security page allows you to manage threats that the controller discovered to ensure network security.

To manage threats globally, go to [Security](#) in Global view. You can manage threats in a list or map.

■ **Threat Management List**

In the [Threat Management List](#), you can check top threats by severity, locations of top threats, and unarchived and archived threats.

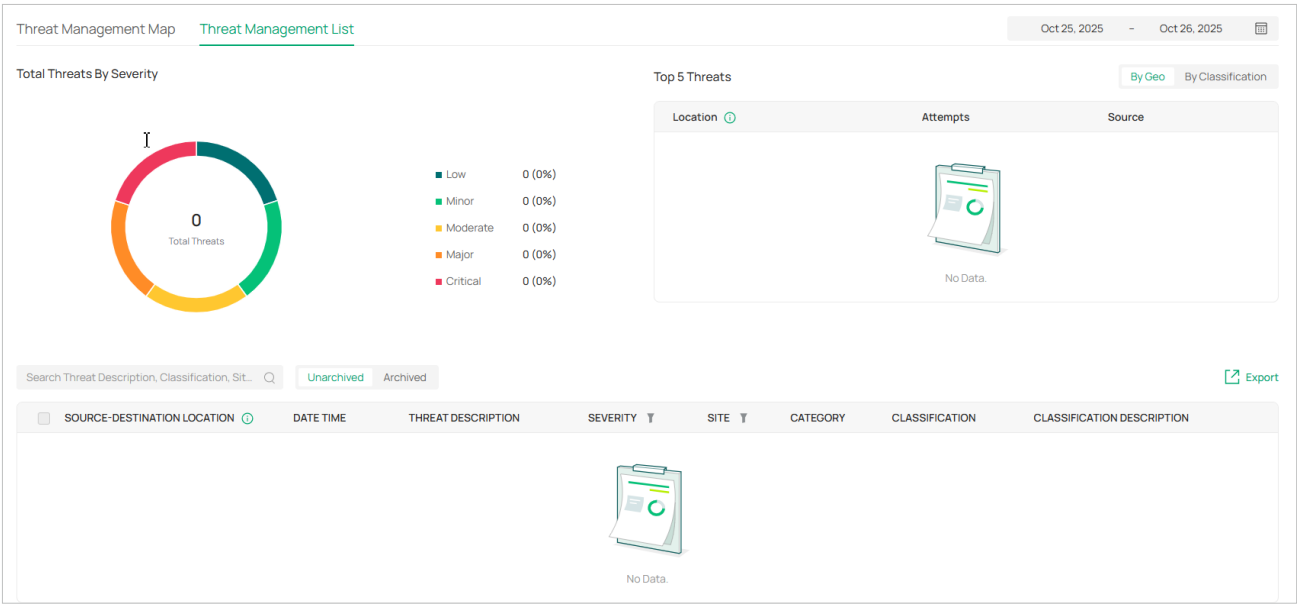

In the unarchived threat list, click an entry, then you can choose a specified response strategy for the corresponding attack IP: Block, Isolate Device, Signature Suppression, or Allow.


Block	Drop traffic to/from the external IP address and the specific internal IP address. If you block an entry, it will be added to the Block List at Network Config > Security > IDS/IPS.
Isolate Device	Drop traffic to/from the external IP address and any internal IP address.
Signature Suppression	Mute the alerting on certain signatures. This will also disable blocking on traffic matching the designated suppression rule. If you suppress the signature of an entry, it will be added to the Signature Suppression list at Network Config > Security > IDS/IPS.
Allow	Trust the IP address so that the traffic, depending on the direction selected, will not get blocked to or from the identified IP address. If you allow an entry, it will be added to the Allow List at Network Config > Security > IDS/IPS.

■ Threat Management Map

In the [Threat Management Map](#), you can view the threat sources and numbers of attacks that the system has discovered. You can click a number in the map to view attack details.

You can right-click a location to block its attack events and manage the Block Locations list.

If excessive attacks have been detected, you can choose specific severity levels to display.

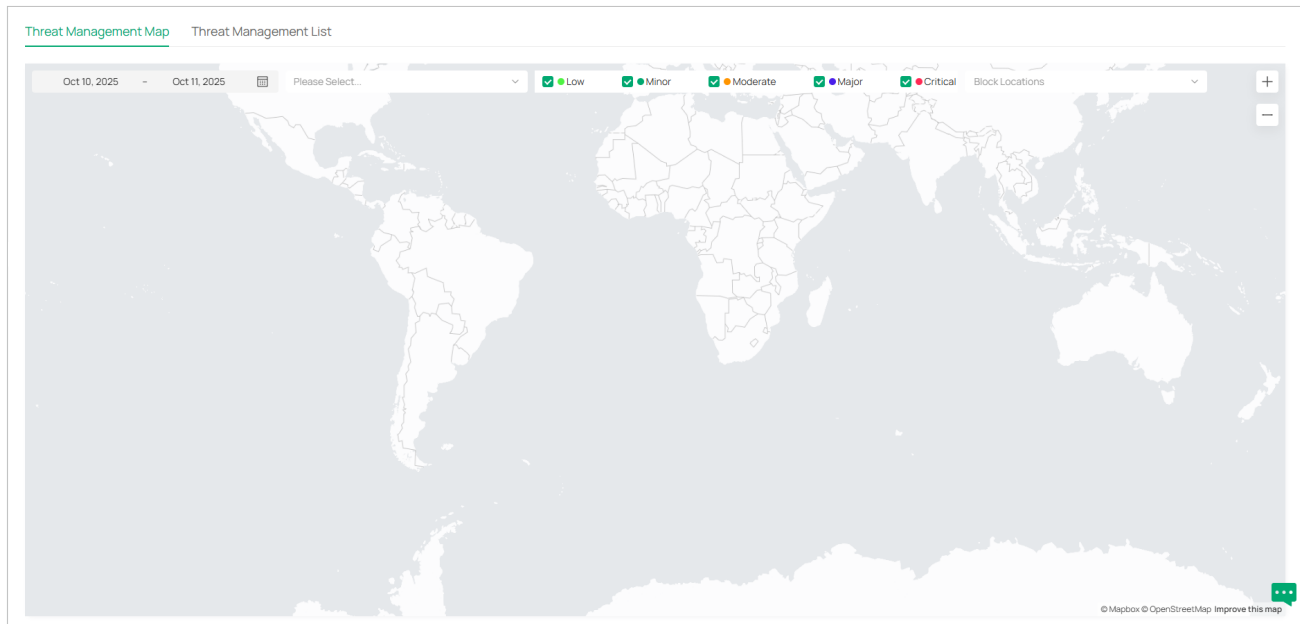

12.5 Configure the Firewall

Overview

Firewall is used to enhance the network security.

In State Timeouts, you can specify a number of timeouts for sessions including TCP, UDP, and ICMP connection. The packets will be forwarded within the specified timeout. When there is no response after the specified time, the session or status will be closed. State timeout will help close inactive sessions and thus avoid network malfunction.

In Firewall Options, you can further configure the gateway to prevent attacks like SYN flood attacks and broadcast ping.

Configuring State Timeouts

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Security](#) > [Firewall](#).
3. In the [State Timeouts](#), set the time limit for the different sessions.

State Timeouts ⓘ				
ICMP	30	Seconds	(1-2097151, default 30)	ⓘ
Other	600	Seconds	(1-2097151, default 600)	ⓘ
TCP Close	10	Seconds	(1-2097151, default 10)	ⓘ
TCP Close Wait	60	Seconds	(1-2097151, default 60)	ⓘ
TCP Established	7440	Seconds	(1-2097151, default 7440)	ⓘ
TCP FIN Wait	120	Seconds	(1-2097151, default 120)	ⓘ
TCP Last ACK	30	Seconds	(1-2097151, default 30)	ⓘ
TCP SYN Recv	60	Seconds	(1-2097151, default 60)	ⓘ
TCP SYN Sent	120	Seconds	(1-2097151, default 120)	ⓘ
TCP Time Wait	120	Seconds	(1-2097151, default 120)	ⓘ
UDP Other	60	Seconds	(1-2097151, default 60)	ⓘ
UDP Stream	180	Seconds	(1-2097151, default 180)	ⓘ

ICMP	The ICMP session will be closed if there is no response after the set time.
Other	The sessions for protocols excluding TCP, UDP, and ICMP will be closed if there is no response after the set time.

TCP Close	The TCP Close status will be closed if there is no response after the set time.
TCP Close Wait	The TCP Close Wait status will be closed if there is no response after the set time.
TCP Established	The TCP Established status will be closed if there is no response after the set time.
TCP FIN Wait	The TCP FIN Wait status will be closed if there is no response after the set time.
TCP Last ACK	The TCP Last ACK status will be closed if there is no response after the set time.
TCP SYN Recv	The TCP SYN (Synchronize) Recv status will be closed if there is no response after the set time.
TCP SYN Sent	The TCP SYN (Synchronize) Sent status will be closed if there is no response after the set time.
TCP Time Wait	The TCP Time Wait status will be closed if there is no response after the set time.
UDP Other	The UDP connections with traffic in only one direction will be stopped if there is no response after the set time.
UDP Stream	The UDP connections with bidirectional traffic will be stopped if there is no response after the set time.

Configuring Firewall Options

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Security](#) > [Firewall](#).
3. In the [Firewall Options](#), set the time limit for the different sessions.

Firewall Options ⓘ

Broadcast Ping

☐

ⓘ

Receive Redirects

☐

ⓘ

Send Redirects

☒

ⓘ

SYN Cookies

☒

ⓘ

Broadcast Ping	With it enabled, the gateway will reply to broadcast pings.
Receive Redirects	With it enabled, the gateway will accept ICMP redirects.

Send Redirects

With it enabled, the gateway will send ICMP redirects.

SYN Cookies

With it enabled, the SYN cookies will be used to resist SYN flood attacks that want to open ports on the gateway.

12.6 Configure Attack Defense

Overview

Attacks initiated by utilizing inherent bugs of communication protocols or improper network deployment have negative impacts on networks. In particular, attacks on a network device can cause the device or network paralysis.

With the Attack Defense feature, the gateway can identify and discard various attack packets in the network, and limit the packet receiving rate. In this way, the gateway can protect itself and the connected network against malicious attacks.

The gateway provides two types of Attack Defense:

■ Flood Defense

If an attacker sends a large number of fake packets to a target device, the target device is busy with these fake packets and cannot process normal services. Flood Defense detects flood packets in real time and limits the receiving rate of the packets to protect the device.

Flood attacks include TCP SYN flood attacks, UDP flood attacks, and ICMP flood attacks.

■ Packet Anomaly Defense

Anomalous packets are packets that do not conform to standards or contain errors that make them unsuitable for processing. Packet Anomaly Defense discards the illegal packets directly.

Configuring Flood Defense

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Security](#) > [Firewall](#) > [Attack Defense](#).
3. In the [Flood Defense](#), click the checkbox and set the corresponding limit of the rate at which specific packets are received.

Flood Defense ⓘ

☐ Multi-Connections TCP SYN Flood	10000	Pkt/s	(100-99999)
☐ Multi-Connections UDP Flood	12000	Pkt/s	(100-99999)
☐ Multi-Connections ICMP Flood	1500	Pkt/s	(100-99999)
☐ Stationary Source TCP SYN Flood	4000	Pkt/s	(100-99999)
☐ Stationary Source UDP Flood	6000	Pkt/s	(100-99999)
☐ Stationary Source ICMP Flood	600	Pkt/s	(100-99999)

Multi-Connections TCP SYN Flood	A TCP SYN flood attack occurs when the attacker sends the target system with a succession of SYN (synchronize) requests. When the system responds, the attacker does not complete the connections, thus leaving the connection half-open and flooding the system with SYN messages. No legitimate connections can then be made. With this feature enabled, the gateway limits the rate of receiving TCP SYN packets from all the clients to the specified rate.
Multi-Connections UDP Flood	A UDP flood attack occurs when the attacker sends a large number of UDP packets to a target host in a short time, the target host is busy with these UDP packets and cannot process normal services. With this feature enabled, the gateway limits the rate of receiving UDP packets from all the clients to the specified rate.
Multi-Connections ICMP Flood	If an attacker sends many ICMP Echo messages to the target device, the target device is busy with these Echo messages and cannot process other data packets. Therefore, normal services are affected. With this feature enabled, the system limits the rate of receiving ICMP packets from all the clients to the specified rate.
Stationary Source TCP SYN Flood	A TCP SYN flood attack occurs when the attacker sends the target system with a succession of SYN (synchronize) requests. When the system responds, the attacker does not complete the connections, thus leaving the connection half-open and flooding the system with SYN messages. No legitimate connections can then be made. With this feature enabled, the gateway limits the rate of receiving TCP SYN packets from a single client to the specified rate.
Stationary Source UDP Flood	A UDP flood attack occurs when the attacker sends a large number of UDP packets to a target host in a short time, the target host is busy with these UDP packets and cannot process normal services. With this feature enabled, the gateway limits the rate of receiving UDP packets from a single client to the specified rate.
Stationary Source ICMP Flood	If an attacker sends many ICMP Echo messages to the target device, the target device is busy with these Echo messages and cannot process other data packets. Therefore, normal services are affected. With this feature enabled, the system limits the rate of receiving ICMP packets from a single clients to the specified rate.

Configuring Packet Anomaly Defense

1. Launch the controller and access a site.
2. Go to [Network Config](#) > [Security](#) > [Firewall](#) > [Attack Defense](#).
3. In the [Packet Anomaly Defense](#), click the checkbox and set the corresponding limit of the rate at which specific packets are received.

Packet Anomaly Defense ⓘ

- ☒ Block TCP Scan (Stealth FIN/Xmas/Null)
- ☐ Block TCP Scan with RST
- ☒ Block Ping of Death
- ☐ Block Large Ping
- ☒ Block Ping from WAN
- ☒ Block ICMP Timestamp Request Remote Date Disclosure
- ☒ Block WinNuke Attack
- ☒ Block TCP Packets with SYN and FIN Bits Set
- ☒ Block TCP Packets with FIN Bit but No ACK Bit Set
- ☒ Block Packets with Specified Options
 - ☒ Security Option
 - ☒ Record Route Option
 - ☒ Stream Option
 - ☒ Timestamp Option
 - ☒ No Operation Option

Block TCP Scan (Stealth FIN/Xmas/Null)

With this option enabled, the gateway will block the anomalous packets in the following attack scenarios:

Stealth FIN Scan: The attacker sends the packet with its SYN field and the FIN field set to 1. The SYN field is used to request initial connection whereas the FIN field is used to request disconnection. Therefore, the packet of this type is illegal.

Xmas Scan: The attacker sends the illegal packet with its TCP index, FIN, URG and PSH field set to 1.

Null Scan: The attacker sends the illegal packet with its TCP index and all the control fields set to 0. During the TCP connection and data transmission, the packets with all control fields set to 0 are considered illegal.

Block TCP Scan with RST	With this option enabled, the gateway will respond to RST messages. It is disabled by default.
Block Ping of Death	With this option enabled, the gateway will block Ping of Death attack. Ping of Death attack means that the attacker sends abnormal ping packets which are smaller than 64 bytes or larger than 65535 bytes to cause system crash on the target computer.
Block Large Ping	With this option enabled, the router will block the ping packets which are larger than the specified value (1024 packets by default) to protect the system from Large Ping attack.
Block Ping from WAN	With this option enabled, the router will block the ICMP request from WAN.
Block ICMP Timestamp Request Remote Date Disclosure	With this option enabled, the device will block all ICMP Timestamp (Type 13) packets.
Block WinNuke Attack	With this option enabled, the router will block WinNuke attacks. WinNuke attack refers to a remote DoS (denial-of-service) attack that affects some Windows operating systems, such as the Windows 95. The attacker sends a string of OOB (Out of Band) data to the target computer on TCP port 137, 138 or 139, causing system crash or Blue Screen of Death.
Block TCP Packets with SYN and FIN Bits Set	With this option enabled, the router will filter the TCP packets with both SYN Bit and FIN Bit set.
Block TCP Packets with FIN Bit but No ACK Bit Set	With this option enabled, the router will filter the TCP packets with FIN Bit set but without ACK Bit set.
Block Packets with Specified Options	With this option enabled, the router will filter the packets with specified IP options including Security Option, Loose Source Route Option, Strict Source Route Option, Record Route Option, Stream Option, Timestamp Option, and No Operation Option. You can choose the options according to your needs.

Chapter 13

Configure Settings by Device Type

This chapter guides you on how to centrally configure device settings by device type, improving device performance and stability. The chapter includes the following sections:

- [13. 1 Configure Gateway Settings](#)
- [13. 2 Configure Switch Settings](#)
- [13. 3 Configure EAP Settings](#)


13.1 Configure Gateway Settings

13.1.1 Dynamic DNS

Overview

WAN IP Address of your gateway can change periodically because your ISP typically employs DHCP among other techniques. This is where Dynamic DNS comes in. Dynamic DNS assigns a fixed domain name to the WAN port of your gateway, which facilitates remote users to access your local network through WAN Port.

Let’s illustrate how Dynamic DNS works with the following figures.

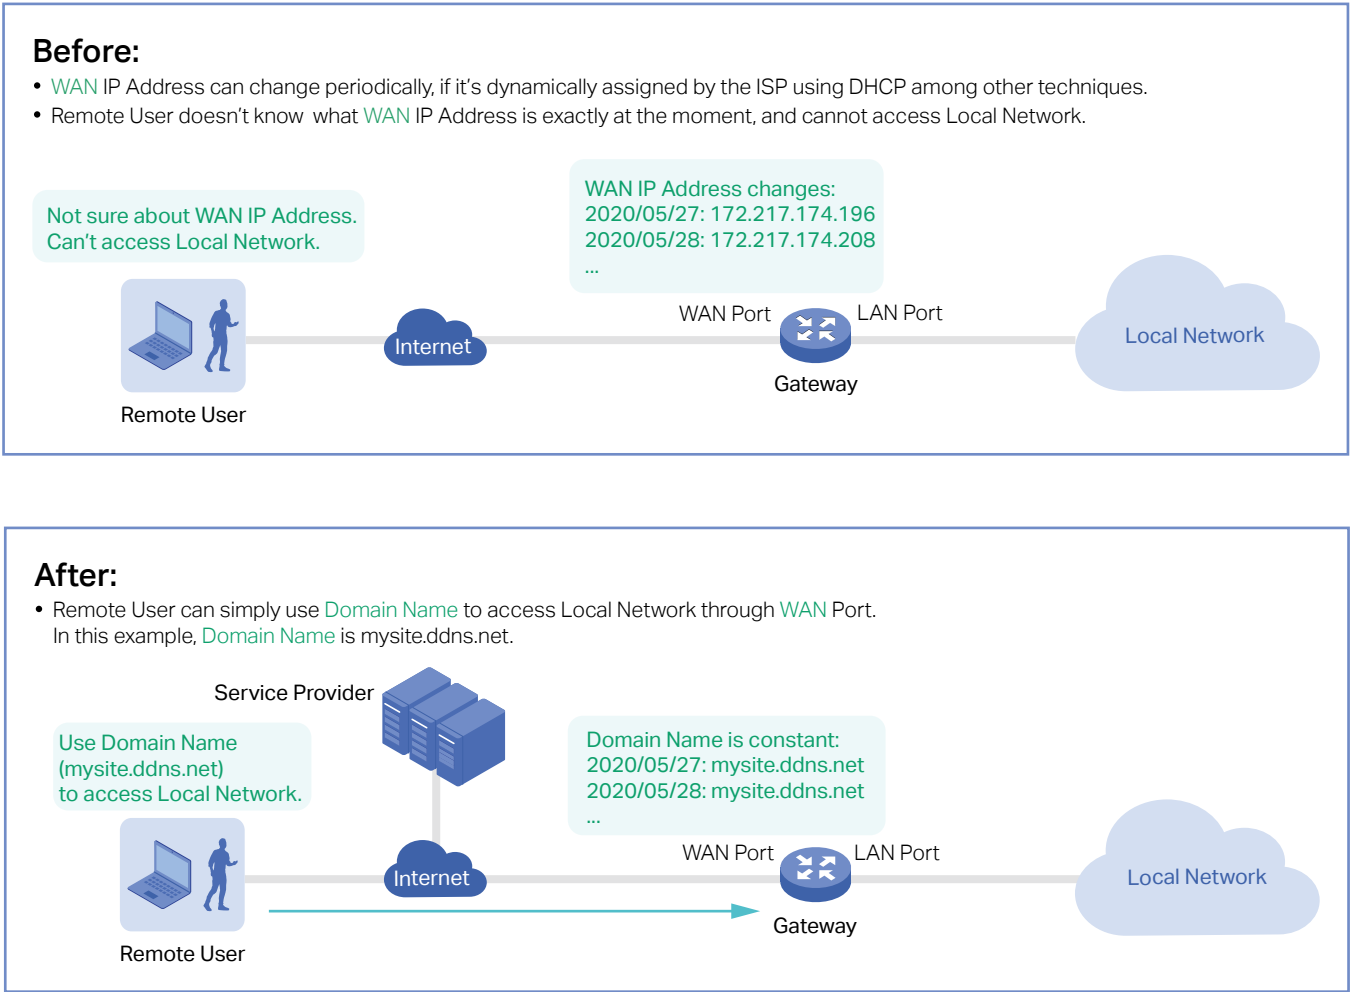


Prerequisite:

- Choose one [Service Provider](#) from the four that the controller supports, i.e. [DynDNS](#), [No-IP](#), [Peanuthull](#), [Comexe](#), [TP-Link Dynamic DNS](#).
- Register at your [Service Provider](#), then you get your [Username](#) and [Password](#).
- Get your [Domain Name](#) from your [Service Provider](#).

How Dynamic DNS works:

- 1 Gateway informs [Service Provider](#) of [WAN IP Address](#).
- 2 [Service Provider](#) binds [WAN IP Address](#) with [Domain Name](#) and keeps it updated as WAN IP Address changes.
- 3 Remote User requests for [WAN IP Address](#) by sending [Domain Name](#) to [Service Provider](#).
- 4 [Service Provider](#) replies with [WAN IP Address](#), which Remote User actually uses to access Local Network through [WAN Port](#).

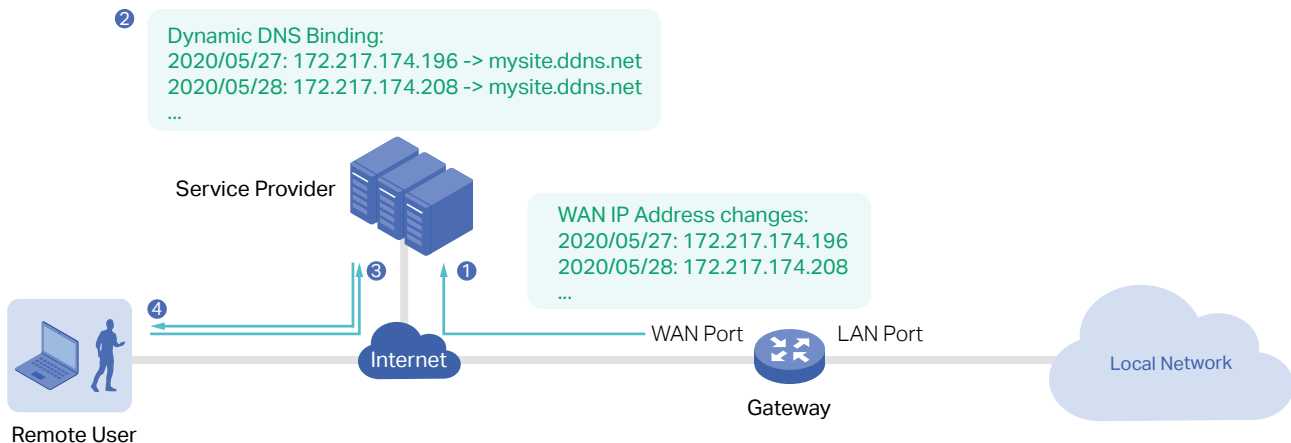

Configuration

1. Launch the controller and access a site.
2. Go to [Device Config](#) > [Gateway](#) > [DNS](#) > [Dynamic DNS](#).
3. Click [Create New Dynamic DNS Entry](#), to load the following page. Configure the parameters.

Create New Dynamic DNS Entry ⓘ

Service Provider

DynDNS

▼

Status

☒ Enable

Interface

▼

Username

Password

👁

Domain Name

Interval Mode

☒ Fixed ☐ Custom

Update Interval

▼

Go To Register

 ⓘ

Apply

Cancel

Service Provider	Select your service provider of Dynamic DNS. The Controller supports DynDNS, NO-IP, Peanuthull, Comexe and Custom.
Status	Enable or disable the Dynamic DNS entry.
Interface	Select the WAN Port which the Dynamic DNS entry applies to.
Username	Enter your username for the service provider. If you haven't registered at the service provider, click Go To Register .
Password	Enter your password for the service provider.
Domain Name	Enter the Domain Name which is provided by your service provider. Remote users can use the Domain Name to access your local network through WAN port.
Interval Mode	Choose to use fixed or custom interval.
Update Interval	Specify the update interval to report the changes of the WAN IP address for the DDNS service.
Update URL	Enter the URL provided by your DDNS service provider in format of "http://[USERNAME]:[PASSWORD]@api.cp.easydns.com/dyn/tomato.php?hostname=[DOMAIN]&myip=[IP]". The router will automatically update user information to the service provider.

4. Click **Create**. The new entry will be listed. You can check the Dynamic DNS status in the STATUS column.

SERVICE PROVIDER	INTERFACE	STATUS	USERNAME	DOMAIN NAME	IP	UPDATE INTERVAL	LAST UPDATED	ENABLED	ACTION
DynDNS	WAN2	disconnect	■@yopmail.net	■	■	1 hour	Oct 26, 2025 11:44:47	☒	🔗 🗑

13.1.2 DNS Proxy

Overview

DNS Proxy provides the LAN side clients with the DNS query service. It forwards the DNS request from the LAN side clients to the selected upstream DNS server and forwards the DNS reply accordingly.

DNSSEC (DNS Security Extensions), DoT (DNS over TLS), DoH (DNS over Https), and DNS Override are security options for DNS Proxy. DNSSEC will verify the integrity of DNS records, and DoT / DoH will encrypt the query. DNS Override lets you choose your preferred DNS servers.

All the options need an upstream DNS server that supports them.

Configuration

1. Launch the controller and access a site.
2. Go to **Device Config > Gateway > DNS > DNS Proxy**.
3. Enable **DNS Proxy** and configure the parameters, then save the settings.

DNS Proxy

DNS Proxy

☒ Enable

Proxy Type

☒ DNSSEC ☐ DoH ☐ DoT ☐ DNS Override

DNS Server

+

Add

Bogus DNS Reply

Pass

Save

Cancel

Proxy Type	Specify a security option to apply.
DNS Server	Specify the upstream DNS server which the DNS requests will be forwarded to. For DoT and DoH, the system provides some known public DNS servers that support these security options. For DoH, the upstream DNS servers are usually websites with https URLs. For DNSSEC and DoT, servers are usually IP address.
Bogus DNS Reply	This is an special option for DNSSEC. Choose to pass/drop the bogus reply if the integrity of DNS records failed to be verified (which means the DNS record may be modified and is not trustable).
Primary DNS Server	Specify the primary upstream DNS server.
Secondary DNS Server	Specify the secondary upstream DNS server.
Apply Network	Specify the effective LAN network to apply DNS Override.

13.1.3 DNS Cache

Overview

DNS caching further speeds up domain name translation/resolution by handling it for recently visited addresses before the request is sent to the internet. Even if your network can use a large number of public DNS servers for translation/resolution, it's still faster to have a local copy.

Configuration

1. Launch the controller and access a site.
2. Go to [Device Config](#) > [Gateway](#) > [DNS](#) > [DNS Cache](#).
3. Enable [DNS Cache](#) and set a TTL value according to your needs. Then save the settings.

DNS Cache

Enable DNS Cache

☒ Enable

TTL

seconds

(Optional, 1 - 86400)

Save

Cancel

TTL

Specify the time to live (TTL) value in seconds. When the life cycle of the DNS entry exceeds the TTL value, the DNS cache will be automatically cleared. The range is 1-86400. If it's not specified, the system will use the default TTL value of each DNS message.

4. Refresh the DNS Cache Table and check the DNS cache status. You can clear the cache information if necessary.

DNS Cache Table

IPv4IPv6

Refresh | Clear

DOMAIN NAME	IP ADDRESS	TTL
a.root-servers.net		4

13.1.4 MAC Filtering

Overview

MAC Filtering can drop or allow packets from certain devices passing through the router based on the MAC address of the devices. After the MAC filtering policy and MAC filtering list are configured, the router will apply the filter policy to the packets matching the MAC address, and thus limit network traffic and manage network access behaviors.

Configuration

1. Launch the controller and access a site.
2. Go to **Device Config > Gateway > MAC Filtering**.
3. Enable **MAC Filtering** and configure the parameters.

General

MAC Filtering

Type

Allow packets with the MAC addresses listed below and deny the rest

Deny packets with the MAC addresses listed below and allow the rest

Direction

ALL

Apply

Cancel

Type	Select the mode of MAC Filtering. Allow packets with the MAC addresses listed below and deny the rest: Select to allow packets with the listed MAC address to pass through the router, and packets with other MAC addresses will be dropped. Deny packets with the MAC addresses listed below and allow the rest: Select to drop packets with the listed MAC address, and packets with other MAC addresses will be allowed to pass through the router.
Direction	Select All when you want to apply the policy to traffic both from LAN to LAN and from LAN to WAN. Select LAN -> WAN when you want to apply the policy only to traffic from LAN to WAN.

4. Click **Add MAC Filtering** to add MAC addresses or groups to the list.

Add MAC Filtering

Name

Policy

MAC Group

MAC Address

MAC Group

Please Select...

Create

Cancel

Name	Specify the name for the entry.
Policy	Choose MAC Group and specify the MAC groups of devices, then the MAC filtering policy will be applied to traffic with the MAC groups. Choose MAC Address and specify the MAC addresses of devices, then the MAC filtering policy will be applied to traffic with the MAC addresses.

13. 1. 5 IP-MAC Binding

Overview

ARP (Address Resolution Protocol) is used to map IP addresses to the corresponding MAC addresses so that packets can be delivered to their destinations. However, if attackers send ARP spoofing packets with false IP address-to-MAC address mapping entries, the device will update the ARP table based on the false ARP packets and record wrong mapping entries, which results in a breakdown of normal communication.

Anti ARP Spoofing can protect the network from ARP spoofing attacks. It works based on the IP-MAC Binding. These entries record the correct one-to-one relationships between IP addresses and MAC addresses. When receiving an ARP packet, the gateway checks whether it matches any of the IP-MAC Binding entries. If not, the gateway will ignore the ARP packets. In this way, the gateway maintains the correct ARP table.

Configuration

1. Launch the controller and access a site.
2. Go to **Device Config > Gateway > IP-MAC Binding**.
3. Enable **ARP Spoofing Defense** and configure general settings. Click **Apply**.

General

ARP Spoofing Defense

☒ Enable

☒

Permit the packets matching the IP-MAC Binding entries only

☒

Send GARP packets when ARP attack is detected

Interface

Please Select...

Interval

1000ms

(1-10000)

Apply

Cancel

ARP Spoofing Defense	Check the box to globally enable ARP Spoofing Defense.
Permit the packets matching the IP-MAC Binding entries only	With this option enabled, when receiving a packet, the router will check whether the IP address, MAC address and receiving interface match any of the IP-MAC Binding entries. Only the matched packets will be forwarded. This feature can be enabled only when ARP Spoofing Defense is enabled.
Send GARP packets when ARP attack is detected	With this option enabled, the router will send GARP packets to the hosts if it detects ARP spoofing packets on the network. The GARP packets will inform the hosts of the correct ARP information, which is used to replace the wrong ARP information in the hosts. This feature can be enabled only when ARP Spoofing Defense is enabled.
Interface	Select the interface on which the entries will take effect.
Interval	Specify the time interval for sending GARP packets. The valid values are from 1 to 10000.

4. Click **Create New IP-MAC Binding Entry** and add an IP-MAC binding entry. Click **Apply**.

Create New IP-MAC Binding Entry

IP Address

MAC Address

Interface

Please Select...

Description

(Optional)

Export to DHCP Address Reservation

☒ Enable

Status

☒ Enable

Apply

Cancel

IP Address	Specify the IP address to be bound.
MAC Address	Specify the MAC address to be bound.
Interface	Select the interface on which the entries will take effect.
Description	Enter a description for identification.
Export to DHCP Address Reservation	When enabled, the newly created IP-MAC Binding entry will be synchronized to DHCP Reservation list
Status	Enable the entry. Only when the status is enabled will the entry take effect.

13. 1. 6 UPNP

Overview

UPnP (Universal Plug and Play) is essential for applications including multiplayer gaming, peer-to-peer connections, real-time communication (such as VoIP or telephone conference) and remote assistance, etc. With the help of UPnP, the traffic between the endpoints of these applications can freely pass the gateway, thus realizing seamless connections.

Configuration

1. Launch the controller and access a site.
2. Go to **Device Config > Gateway > UPnP**.
3. Enable UPnP globally and configure the parameters. Then click **Apply**.

UPnP ⓘ

UPnP

Interface

☐ USB Modem

☐ SFP WAN/LAN1

☐ WAN2

Networks

Please Select...

▼

Apply

Reset

Interface	Select the WAN port where UPnP takes effect.
Networks	Select the LAN interface where UPnP takes effect.

13.1.7 IPTV

Overview

IPTV includes two sections: IGMP and IPTV. In IGMP settings, you can enable IGMP proxy to detect multicast group membership information and thus the router is able to forward multicast packets based upon the information. IPTV settings allows you to enable Internet/IPTV/Phone service provided by your ISP.

Configuration

1. Launch the controller and access a site.
2. Go to [Device Config](#) > [Gateway](#) > [IPTV](#).
3. Enable [IGMP Proxy](#) and configure the parameters.

IGMP

IGMP Proxy

IGMP Version

v2

▼

IGMP Interface

WAN2

▼

IGMP Proxy	Enable IGMP Proxy. IGMP Proxy sends IGMP querier packets to the LAN ports to detect if there is any multicast member connected to the LAN ports.
IGMP Version	Select the IGMP version as V2 or V3. The default is IGMP V2.

IGMP Interface	Select the WAN port on which the IGMP Proxy takes effect.
----------------	---

- If you want to configure the IPTV settings, enable **IPTV** and choose the mode as Bridge or Custom according to your ISP. Then configure the corresponding parameters.

Note: The IPTV section will be hidden if your device is an earlier version that does not support this feature.

IPTV

IPTV

Mode

Bridge

Custom

WAN Port

LAN

WAN/LAN3

WAN/LAN4

WAN/LAN5

WAN/LAN6

Internet

Internet

Internet

Internet

IPTV	Enable IPTV feature.
Mode	Select the appropriate Mode according to your ISP. Bridge: Select this mode if your ISP requires no other parameters. Custom: Select this mode if your ISP provides necessary parameters, and configure the parameters according to the requirements of your ISP.
WAN Port	Select the WAN port on which the IPTV settings take effect.
Port Mode	Select the appropriate Port Mode of the LAN ports to determine which port is used to support Internet service, IPTV service, or IP Phone service.

5. Click **Save**.

13.2 Configure Switch Settings

13.2.1 Port Profile

Overview

The Switch Port Profile allows you to create port configuration profiles for fast, bulk configuration of switch port parameters.

Note: The port network configurations previously included in the Switch Port Profile have been removed. To configure these settings, please go to [Port Settings](#) or switch's [Properties Window](#) > [Manage Device](#) > [Ports](#).

Configuration

1. Launch the controller and access a site.
2. Go to [Device Config](#) > [Switch](#) > [Switch Ports](#) > [Port Profile](#).

Three port profiles are preconfigured on the controller: Default, Disable, and All. You can click the view icon to check the Disable profile, or click the edit icon to view and edit the Default or All profile.
3. If you want to create a profile, click [Add Profile](#) and configure the parameters.

← Add Profile

NAME

PoE

☒ Keep the Device's Settings

☐ Enable

☐ Disable

ⓘ Agile (Easy Managed) Switch does not support Voice Network, 802.1X Control, EEE, Loopback Control, LLDP-MED, DHCP L2 Relay nor the Trust Mode function. It only supports 32 networks.

802.1X Control

☐ Force Unauthorized

☐ Force Authorized

☒ Auto ⓘ

Port Isolation

☐ Enable ⓘ

Flow Control

☐ Enable

EEE

☐ Enable ⓘ

Multicast Fast Leave

☐ IGMP (IPv4)

☐ MLD (IPv6)

Loopback Control ⓘ

Spanning Tree

⊕ Spanning Tree Config ⓘ

Save

Reset

Name	Enter a name to identify the port profile.
PoE	Select the PoE mode for the ports. Keep the Device's Settings: PoE keep enabled or disabled according to the switches' settings. By default, the switches enable PoE on all PoE ports. Enable: Enable PoE on PoE ports. Disable: Disable PoE on PoE ports.

802.1X Control	Select 802.1X Control mode for the ports. To configure the 802.1X authentication globally, enter the site view and go to Network Config > Authentication > 802.1X. Auto: The port is unauthorized until the client is authenticated by the authentication server successfully. Force Authorized: The port remains in the authorized state, sends and receives normal traffic without 802.1X authentication of the client. Force Unauthorized: The port remains in the unauthorized state, ignoring all attempts by the client to authenticate. The switch cannot provide authentication services to the client through the port.
Port Isolation	Click the checkbox to enable Port Isolation. An isolated port cannot communicate directly with any other isolated ports, while the isolated port can send and receive traffic to non-isolated ports.
Flow Control	With this option enabled, when a device gets overloaded it will send a PAUSE frame to notify the peer device to stop sending data for a specified period of time, thus avoiding the packet loss caused by congestion.
EEE	Click the checkbox to enable EEE (Energy Efficient Ethernet) to allow power reduction.
Multicast Fast Leave	After selecting the corresponding protocol, the multicast fast leave feature can be enabled for the port. This allows the switch to immediately stop forwarding multicast traffic to a port when detecting that the last multicast receiver has left the group, improving network bandwidth utilization.
Loopback Control	Loopback refers to the routing of data streams back to their source in the network. You can disable loopback control for the network or choose a method to prevent loopback happening in your network. Off: Disable loopback control on the port. Loopback Detection Port Based: Loopback Detection Port Based helps detect loops that occur on a specific port. When a loop is detected on a port, the port will be blocked. Loopback Detection VLAN Based: Loopback Detection VLAN Based helps detect loops that occur on a specific VLAN. When a loop is detected on a VLAN, the current port will be removed from the VLAN. Spanning Tree: Select STP (Spanning Tree Protocol) to prevent loops in the network. STP helps block specific ports of the switches to build a loop-free topology and detect topology changes and automatically generate a new loop-free topology.

Spanning Tree Config

If you set **Loopback Control** to **Spanning Tree**, configure the following parameters:

Priority: Set the port priority. A smaller value indicates higher priority, reducing the likelihood of the port being blocked.

Path Cost: Enter the value of the external path cost and internal path cost. External Path Cost determines the root port selection (lowest cost path to the root bridge). Internal Path Cost is used in MSTP to select the root port within an IST (Internal Spanning Tree).

Edge Port: Select Enable to set the port as an edge port. Edge ports transition directly from blocking to forwarding during topology changes. Configure ports connected to end devices (e.g., PCs) as edge ports.

P2P Link: Select the status of the P2P (Point-to-Point) link to which the ports are connected. During the regeneration of the spanning tree, if the port of P2P link is elected as the root port or the designated port, it can transit its state to forwarding directly. By default, it is Auto.

- **Auto:** The switch automatically checks if the port is connected to a P2P link, then sets the status as Open or Closed.
- **Open(Force):** A port is set as the one that is connected to a P2P link. You should check the link first.
- **Close(Force):** A port is set as the one that is not connected to a P2P link. You should check the link first.

STP Security: STP Security prevents the loops caused by wrong configurations or BPDU attacks. It contains the following options:

- **Loop Protect:** Ports with Root/Alternate/Backup roles enter error-disabled blocking if no BPDUs are received. Automatically recovers when BPDUs resume. Enable this on Root/Alternate/Backup ports.
- **Root Protect:** Ports enter error-disabled blocking upon receiving superior BPDUs. Automatically recovers when superior BPDUs stop. Enable on Designated ports; avoid enabling on Root/Alternate/Backup ports (may cause device unmanageability).
- **TC Guard:** When enabled, ports do not flush MAC address tables upon receiving TC (Topology Change) notifications.
- **BPDU Protect:** Manually configured edge ports enter error-disabled blocking upon receiving BPDUs. Requires manual recovery. Enable on Edge Ports.
- **BPDU Filter:** When enabled, ports neither send nor process BPDUs, disabling loop prevention. Use only on network-edge ports with no loop risk. Enabling on Root/Alternate/Backup ports risks broadcast storms.
- **BPDU Forward:** BPDU Forward will take effect only when the Spanning Tree is disabled for the entire device.

LLDP-MED

Click the checkbox to enable LLDP-MED (Link Layer Discovery Protocol-Media Endpoint Discovery) for device discovery and auto-configuration of VoIP devices.

Bandwidth Control	Select the type of Bandwidth Control functions to control the traffic rate and traffic threshold on each port to ensure network performance. Off: Disable Bandwidth Control for the port. Rate Limit: Select Rate limit to limit the ingress/egress traffic rate on each port. With this function, the network bandwidth can be reasonably distributed and utilized. Storming Control: With this feature enabled, Omada switches can control the traffic rate or the percentage of total bandwidth used on each port, and set traffic thresholds to ensure network performance (the Kbps value entered must be a multiple of 64).
Ingress Rate Limit	When Rate Limit selected, click the checkbox and specify the upper rate limit for receiving packets on the port.
Egress Rate Limit	When Rate Limit selected, click the checkbox and specify the upper rate limit for sending packets on the port.
Rate Mode	Specifies the rate threshold measurement for storm control. Kbps: Sets an absolute rate threshold in kilobits per second. Ratio: Sets a relative threshold as a percentage of total bandwidth.
Broadcast Threshold	When Storming Control selected, click the checkbox and specify the upper rate limit for receiving broadcast frames. The broadcast traffic exceeding the limit will be processed according to the Action configurations.
Multicast Threshold	When Storming Control selected, click the checkbox and specify the upper rate limit for receiving multicast frames. The multicast traffic exceeding the limit will be processed according to the Action configurations.
Unknown Unicast Threshold	When Storming Control selected, click the checkbox and specify the upper rate limit for receiving unknown unicast frames. The traffic exceeding the limit will be processed according to the Action configurations.
Action	When Storming Control selected, select the action that the switch will take when the traffic exceeds its corresponding limit. Drop: The port will drop the subsequent frames when the traffic exceeds the limit. Shutdown: The port will be shutdown when the traffic exceeds the limit.
Recover Time	With Shutdown selected as the Action , specify the recover time, and the port will be opened after the specified time.
DHCP L2 Relay	Click the checkbox to enable DHCP L2 Relay for the network.
Format	Select the format of option 82 sub-option value field. Normal: The format of sub-option value field is TLV (type-length-value). Private: The format of sub-option value field is just value.

802.1p Priority	Specify the port-to-802.1p priority mapping for the desired port. The ingress packets are first mapped to 802.1p priority, then to TC queues according to the 802.1p queue mappings.
Trust Mode	Select the trusted priority mode for the desired port. The switch will process the ingress packets according to the trusted priority mode. Untrusted: In this mode, the packets will be processed according to the port priority configuration. Trust 802.1p: In this mode, the packets will be processed according to the 802.1p priority configuration. Trust DSCP: In this mode, the packets will be processed according to the DSCP priority configuration.

4. Click **Save**. The new port profile will be added to the profile list.

13.2.2 Port Settings

Overview

The Port Settings page allows you to monitor and manage the ports of all adopted switches in the Site.

Configuration

1. Launch the controller and access a site.
2. Go to **Device Config > Switch > Switch Ports > Port Settings**.
3. Switch between **Overview**, **PoE**, and **Counters** to view the general, PoE-related, and traffic-related information of the ports.
4. To configure a single port, click the edit icon of the port entry. To configure ports in batches, click the checkboxes and then click **Edit Selected**.

Note: When configuring ports in batches, only common configuration items can be configured and all settings are **Keep Existing** by default.

Port Settings

Port Profile

Search Switch, Name, Tag, Profile

OverviewPoECountersAllConnected

Select 1 of 86 items

PORT	SWITCH	NAME	CONNECTION
☒	1	3C-6A-1StackPort1	98-03-8E-9A-D0-08
☐	2	3C-6A-1StackPort2	-
☐	3	3C-6A-1StackPort3	-
☐	4	3C-6A-1StackPort4	-
☐	5	3C-6A-1StackPort5	-
☐	6	3C-6A-1StackPort6	-
☐	7	3C-6A-1StackPort7	-
☐	8	3C-6A-1StackPort8	-

Edit Port 1

Name

Port1

Port Labels

Please Select...

(Optional)

Native Network

Default(1)

Manage VLAN

Network Tags Setting

☒ Allow All☐ Block All☐ Custom

Tagged VLAN

98-03-8E-9A-D0-08+ 71 ...

(Optional)

Untagged VLAN

Default(1)

Voice Network

☐ Enable

Link Speed

☒ Auto☐ Manual

Profile

All

Manage Profiles

Profile Overrides

☐

Apply

Cancel

Name Specify the name of the port.

Port Labels Set a user-defined label for port identify.

Native Network Select the native network from all networks. The native network determines the Port VLAN Identifier (PVID) for switch ports. When a port receives an untagged frame, the switch inserts a VLAN tag to the frame based on the PVID, and forwards the frame in the native network. Each physical switch port can have multiple networks attached, but only one of them can be native.

Network Tags Setting Select a network communication mode for the port.

Allow All: The port will be automatically tag the configured VLANs. Any tagged traffic with a non existent VLAN ID will be dropped.

Block All: The port will be automatically block all VLAN traffic except for the Native Network(PVID). Any tagged traffic with a other VLAN ID will be dropped.

Custom: VLAN Management can be customized to either tag specific VLANs only.

If you select **Custom**, set the following parameters:

Tagged VLAN: Select the Tagged Networks. Frames sent out of a Tagged Network are kept with VLAN tags. Usually networks that connect the switch to network devices like routers and other switches, or VoIP devices like IP phones should be configured as Tagged Networks.

Untagged VLAN: Select the Untagged Networks. Frames that sent out of an Untagged Network are stripped of VLAN tags. Usually networks that connect the switch to endpoint devices like computers should be configured as Untagged Networks. Note that the native network is untagged.

Voice Network Enable this option and select a network that connects VoIP devices like IP phones as the Voice Network. The Voice Network feature configures IP Phones via the LLDP-MED protocol to ensure their transmitted packets carry a specific VLAN tag, directing voice traffic through the designated VLAN.

Enabling this feature will automatically activate LLDP-MED on the port.

Link Speed	Select the speed mode for the port. Auto: The port negotiates the speed and duplex automatically. Manual: Specify the speed and duplex from the drop-down list manually.
Profile	Set the switch port configuration file to quickly batch configure switch port parameters.
Profile Overrides	Click the checkbox to override the applied profile if needed. The parameters to be configured vary in Operation modes,

5. If you enable **Profile Overrides**, select an operation mode and configure the parameters.

- **Override the Applied Profile**

If you select **Switching** for Operation, configure the following parameters and click **Apply** to override the applied profile. To discard the modifications, click **Remove Overrides** and all profile configurations will become the same as the applied profile.

PoE Mode	(Only for PoE ports) Select the PoE (Power over Ethernet) mode for the port. Off: Disable PoE function on the PoE port. 802.3bt/at/af: Enable PoE function on the PoE port.
802.1X Control	Select 802.1X Control mode for the ports. To configure the 802.1X authentication globally, go to Network Config > Authentication > 802.1X . Auto: The port is unauthorized until the client is authenticated by the authentication server successfully. Force Authorized: The port remains in the authorized state, sends and receives normal traffic without 802.1X authentication of the client. Force Unauthorized: The port remains in the unauthorized state, and the client connected to the port cannot authenticate with any means. The switch cannot provide authentication services to the client through the port.
Port Isolation	Click the checkbox to enable Port Isolation. An isolated port cannot communicate directly with any other isolated ports, while the isolated port can send and receive traffic to non-isolated ports.
Flow Control	With this option enabled, when a device gets overloaded it will send a PAUSE frame to notify the peer device to stop sending data for a specified period of time, thus avoiding the packet loss caused by congestion.
EEE	Click the checkbox to enable EEE (Energy Efficient Ethernet) to allow power reduction.
Multicast Fast Leave	Select IGMP (IPv4) and/or MLD (IPv6) to allow the port to immediately stop forwarding multicast traffic to a client when it receives an IGMP and/or MLD Leave message, instead of waiting for the next group-specific query. This process improves network efficiency by saving bandwidth and resources, especially in networks with many hosts or frequent group departures.

Loopback Control

Loopback refers to the routing of data streams back to their source in the network. You can disable loopback control for the network or choose a method to prevent loopback happening in your network.

Off: Disable loopback control on the port.

Loopback Detection Port Based: Loopback Detection Port Based helps detect loops that occur on a specific port. When a loop is detected on a port, the port will be blocked.

Loopback Detection VLAN Based: Loopback Detection VLAN Based helps detect loops that occur on a specific VLAN. When a loop is detected on a VLAN, the current port will be removed from the VLAN.

Spanning Tree: Select STP (Spanning Tree Protocol) to prevent loops in the network. STP helps block specific ports of the switches to build a loop-free topology and detect topology changes and automatically generate a new loop-free topology. To make sure Spanning Tree takes effect on the port, go to the Config tab and enable Spanning Tree on the switch.

Spanning Tree Config

If you set **Loopback Control** to **Spanning Tree**, configure the following parameters:

Priority: Set the port priority. A smaller value indicates higher priority, reducing the likelihood of the port being blocked.

Path Cost: Enter the value of the external path cost and internal path cost. External Path Cost determines the root port selection (lowest cost path to the root bridge). Internal Path Cost is used in MSTP to select the root port within an IST (Internal Spanning Tree).

Edge Port: Select Enable to set the port as an edge port. Edge ports transition directly from blocking to forwarding during topology changes. Configure ports connected to end devices (e.g., PCs) as edge ports.

P2P Link: Select the status of the P2P (Point-to-Point) link to which the ports are connected. During the regeneration of the spanning tree, if the port of P2P link is elected as the root port or the designated port, it can transit its state to forwarding directly. By default, it is Auto.

- **Auto:** The switch automatically checks if the port is connected to a P2P link, then sets the status as Open or Closed.
- **Open(Force):** A port is set as the one that is connected to a P2P link. You should check the link first.
- **Close(Force):** A port is set as the one that is not connected to a P2P link. You should check the link first.

STP Security: STP Security prevents the loops caused by wrong configurations or BPDU attacks. It contains the following options:

- **Loop Protect:** Ports with Root/Alternate/Backup roles enter error-disabled blocking if no BPDUs are received. Automatically recovers when BPDUs resume. Enable this on Root/Alternate/Backup ports.
- **Root Protect:** Ports enter error-disabled blocking upon receiving superior BPDUs. Automatically recovers when superior BPDUs stop. Enable on Designated ports; avoid enabling on Root/Alternate/Backup ports (may cause device unmanageability).
- **TC Guard:** When enabled, ports do not flush MAC address tables upon receiving TC (Topology Change) notifications.
- **BPDU Protect:** Manually configured edge ports enter error-disabled blocking upon receiving BPDUs. Requires manual recovery. Enable on Edge Ports.
- **BPDU Filter:** When enabled, ports neither send nor process BPDUs, disabling loop prevention. Use only on network-edge ports with no loop risk. Enabling on Root/Alternate/Backup ports risks broadcast storms.
- **BPDU Forward:** BPDU Forward will take effect only when the Spanning Tree is disabled for the entire device.

LLDP-MED

Click the checkbox to enable LLDP-MED (Link Layer Discovery Protocol-Media Endpoint Discovery) for device discovery and auto-configuration of VoIP (Voice over Internet Protocol) devices.

Bandwidth Control	Select the type of Bandwidth Control functions to control the traffic rate and specify traffic threshold on each port to make good use of network bandwidth. Off: Disable Bandwidth Control for the port. Rate Limit: Select Rate limit to limit the ingress/egress traffic rate on each port. With this function, the network bandwidth can be reasonably distributed and utilized. Storming Control: With this feature enabled, Omada switches can control the traffic rate or the percentage of total bandwidth used on each port, and set traffic thresholds to ensure network performance (the Kbps value entered must be a multiple of 64).
Ingress Rate Limit	When Rate Limit selected, click the checkbox and specify the upper rate limit for receiving packets on the port.
Egress Rate Limit	When Rate Limit selected, click the checkbox and specify the upper rate limit for sending packets on the port.
Rate Mode	Specifies the rate threshold measurement for storm control. Kbps: Sets an absolute rate threshold in kilobits per second. Ratio: Sets a relative threshold as a percentage of total bandwidth.
Broadcast Threshold	When Storming Control selected, click the checkbox and specify the upper rate limit for receiving broadcast frames. The broadcast traffic exceeding the limit will be processed according to the Action configurations.
Multicast Threshold	When Storming Control selected, click the checkbox and specify the upper rate limit for receiving multicast frames. The multicast traffic exceeding the limit will be processed according to the Action configurations.
Unknown Unicast Threshold	When Storming Control selected, click the checkbox and specify the upper rate limit for receiving unknown unicast frames. The traffic exceeding the limit will be processed according to the Action configurations.
Action	When Storming Control selected, select the action that the switch will take when the traffic exceeds its corresponding limit. Drop: The port will drop the subsequent frames when the traffic exceeds the limit. Shutdown: The port will be shutdown when the traffic exceeds the limit.
Recover Time	With Shutdown selected as the Action , specify the recover time, and the port will be opened after the specified time.

DHCP L2 Relay	Click the checkbox to enable DHCP L2 Relay for the network, which takes the Layer 2 DHCP communications (Discover, Request, etc.) and forwards them to a specified IP address (your DHCP server). Format: Select the format of option 82 sub-option value field. • Normal: The format of sub-option value field is TLV (type-length-value). • Private: The format of sub-option value field is just value. Circuit ID: Omada switches preset a default Circuit ID in TLV (Type, Length, and Value) format. You can also customize it if needed. Remote ID: Omada switches preset a default Remote ID in TLV (Type, Length, and Value) format. You can also customize them if needed.
802.1p Priority	Specify the port-to-802.1p priority mapping for the desired port. The ingress packets are first mapped to 802.1p priority, then to TC queues according to the 802.1p queue mappings.
Trust Mode	Select the trusted priority mode for the desired port. The switch will process the ingress packets according to the trusted priority mode. Untrusted: In this mode, the packets will be processed according to the port priority configuration. Trust 802.1p: In this mode, the packets will be processed according to the 802.1p priority configuration. Trust DSCP: In this mode, the packets will be processed according to the DSCP priority configuration.
• Configure a Mirroring Port If you select Mirroring as Operation, the edited port can be configured as a mirroring port. Specify other ports as the mirrored port, and the switch sends a copy of traffics passing through the mirrored port to the mirroring port. You can use mirroring to analyze network traffic and troubleshoot network problems. To configure Mirroring, select the mirrored port or LAG, specify the following parameters, and click Apply. To discard the modifications, click Remove Overrides and all profile configurations become the same as the applied profile. Note: The mirroring ports and the member ports of LAG cannot be selected as mirrored ports.	
PoE Mode	(Only for PoE ports) Select the PoE mode for the port. Off: Disable PoE on the PoE port. 802.3bt/at/af: Enable PoE on the PoE port.
Flow Control	With this option enabled, when a device gets overloaded it will send a PAUSE frame to notify the peer device to stop sending data for a specified period of time, thus avoiding the packet loss caused by congestion.
EEE	Click the checkbox to enable EEE (Energy Efficient Ethernet) to allow power reduction.

Bandwidth Control	Bandwidth control optimizes network performance by limiting the bandwidth of specific sources. Off: Disable bandwidth control on the port. Rate Limit: Enable bandwidth control on the port, and you need to specify the ingress and/or egress rate limit.
Ingress Rate Limit	With Rate Limit selected, click the checkbox and specify the upper rate limit for receiving packets on the port. With this function, the network bandwidth can be reasonably distributed and utilized.
Egress Rate Limit	With Rate Limit selected, click the checkbox and specify the upper rate limit for sending packets on the port. With this function, the network bandwidth can be reasonably distributed and utilized.
802.1p Priority	Specify the port-to-802.1p priority mapping for the desired port. The ingress packets are first mapped to 802.1p priority, then to TC queues according to the 802.1p queue mappings.
Trust Mode	Select the trusted priority mode for the desired port. The switch will process the ingress packets according to the trusted priority mode. Untrusted: In this mode, the packets will be processed according to the port priority configuration. Trust 802.1p: In this mode, the packets will be processed according to the 802.1p priority configuration. Trust DSCP: In this mode, the packets will be processed according to the DSCP priority configuration.

• **Configure a LAG**

If you select **Aggregating** as Operation, you can aggregate multiple physical ports into a logical interface, which can increase link bandwidth and enhance the connection reliability.

Configuration Guidelines:

- Ensure that both ends of the aggregation link work in the same LAG mode. For example, if the local end works in LACP mode, the peer end should also be set as LACP mode.
- Ensure that devices on both ends of the aggregation link use the same number of physical ports with the same speed, duplex, jumbo and flow control mode.
- A port cannot be added to more than one LAG at the same time.
- LACP does not support half-duplex links.
- One static LAG supports up to eight member ports. All the member ports share the bandwidth evenly. If an active link fails, the other active links share the bandwidth evenly.
- One LACP LAG supports multiple member ports, but at most eight of them can work simultaneously, and the other member ports are backups. Using LACP protocol, the switches negotiate parameters and determine the working ports. When a working port fails, the backup port with the highest priority will replace the faulty port and start to forward data.
- The member port of an LAG follows the configuration of the LAG but not its own. Once removed, the LAG member will be configured as the default All profile and Switching operation.
- The port enabled with Port Security, Port Mirror, MAC Address Filtering or 802.1X cannot be added to an LAG, and the member port of an LAG cannot be enabled with these functions.

To configure a new LAG, select other ports to be added to the LAG, specify the LAG ID, and choose a LAG type. Click **Apply**. To discard the modifications, click **Remove Overrides** and all profile configurations become the same as the applied profile. For other parameters, configure them under the LAG tab.

LAG ID	Specify the LAG ID of the LAG. Note that the LAG ID should be unique. The valid value of the LAG ID is determined by the maximum number of LAGs supported by your switch. For example, if your switch supports up to 14 LAGs, the valid value ranges from 1 to 14.
Static LAG	In Static LAG mode, the member ports are added to the LAG manually.
Active LACP / Passive LACP	LACP extends the flexibility of the LAG configurations. In LACP, the switch uses LACPDU (Link Aggregation Control Protocol Data Unit) to negotiate the parameters with the peer end. In this way, the two ends select active ports and form the aggregation link. Active LACP: In this mode, the port will take the initiative to send LACPDU. Passive LACP: In this mode, the port will not send LACPDU before receiving the LACPDU from the peer end.

13.2.3 VRRP

Overview

VRRP or Virtual Routing Redundancy Protocol is a function on the switch that dynamically assigns responsibility for a virtual router to one of the VRRP routers on a LAN. The VRRP router that controls the IP address associated with a virtual router is called the Master and will forward packets sent to this IP address. This will allow any Virtual Router IP address on the LAN to be used as the default first hop router by end hosts.

Configuration

1. Launch the controller and access a site.
2. Go to [Device Config](#) > [Switch](#) > [VRRP](#).
3. Click [Create VRRP Rules](#). Configure the parameters.

VRRP Rules Config

VRRP Name

VRID

(1-255)

Device List

+ Add

☐	NAME	MAC	PRIORITY	INTERFACE	NETWORK	TRACKED INTERFACE	REDUCED PRIORITY	ACTION
No Data.								

Virtual IP

IPv4

+ Add

+ Optional Settings

Apply

Cancel

VRRP Name	Enter a name to identify the rule.
VRID	Enter the VRID to create a new VRRP. The VRID ranges from 1 to 255.

Device List	Click Add to select a switch and configure device VRRP. The switch you add will display in the Device List. Device Name: Name of the device. MAC: MAC address of the device. Priority: Priority associated with the VRRP. It ranges from 1 to 254. Interface: Interface ID associated with the VRRP. Network: Intersection of device network (IP/mask). Tracked Interface: Interface to be tracked. Reduced Priority: Priority to reduce if the associated interface is down.
Virtual IP	Add virtual IP addresses associated with the VRRP.

4. Expand and configure **Optional Settings** if needed.

Advertise Timer	Enter the advertise timer associated with the VRRP. It ranges from 1 to 255.
Preempt Mode	Select Enable or disable the preempt Mode from the pull-down list. If you select Enable, a backup router will preempt the master router if it has a priority greater than the master virtual router's priority. The Preempt Mode is enabled by default.
Delay Time	Enter the delay time associated with the VRRP. It ranges from 0 to 255.
Authentication	Select the type of Authentication for the Virtual Router from the pull-down list. The default is None. None: No authentication will be performed. Simple: Authentication will be performed using a text password. If you select this mode, enter the Key. MD5: Authentication of MD5 will be performed using a text password. If you select this mode, enter the Key.

5. Apply the settings.

13.3 Configure EAP Settings

13.3.1 EoGRE Tunnel

Overview

On this page, you can configure the EoGRE (Ethernet over GRE) Tunnel function of the EAP. Set the IP address to the gateway IP of the peer-end EoGRE Server. Ensure that the topology meets the point-to-point structure and that the two points are connected across Layer 3 wired connections. In this configuration, the following two conditions must be met to make the AP tunnel interface up:

- The function is enabled.
- There is a client connection.

Configuration

1. Launch the controller and access a site.
2. Go to [Device Config > EAP > EoGRE Tunnel](#).
3. Enable [EoGRE Tunnel](#) and configure the parameters.

EoGRE Tunnel

EoGRE Tunnel

Tunnel MTU

1500

Bytes

(850-1500)

Keep Interval

60

Seconds

(10-600)

Max Keepalive Skip Count

3

(3-10)

Primary Gateway IP Address

.

.

.

Secondary Gateway IP Address

.

.

.

(Optional)

Save

Cancel

Tunnel MTU	Specify the MTU (Maximum Transmission Unit) of the tunnel.
Keep Interval	Specify the time interval for the device to send Keepalive packets to confirm the link status.
Max Keepalive Skip Count	Specify the maximum number of times the keepalive message is not replied. If the number of times exceeds this value, the device will consider the peer to be offline.
Primary Gateway IP Address	Specify the Gateway IP address of the peer.
Secondary Gateway IP Address	Specify the secondary Gateway IP address of the peer. This field is optional.


13.3.2 Bluetooth Settings

Overview

Omada supports Bluetooth settings to provide IoT (Internet of Things) solutions compatible with the Omada EAP for applications in healthcare, nursing homes, and more.

The Bluetooth Advertising with iBeacon technology turns the Omada EAP into a Bluetooth beacon, enabling location features for iOS apps using the Apple Core Location API.

Bluetooth IoT utilizes the Omada EAP Bluetooth module to easily collect Bluetooth data from third-party beacons and sensors, seamlessly connecting to external IoT servers for improved applications.

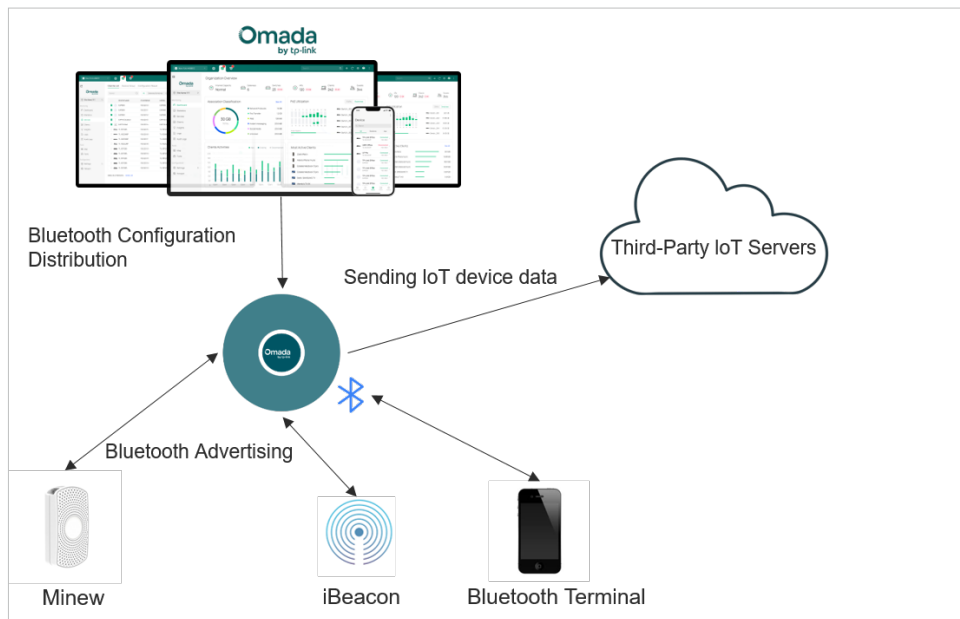

Configure IoT Transport Streams

IoT Transport Streams allow Bluetooth-enabled APs to scan BLE Advertising frames in its surrounding environment, collect the required BLE data, and then report the data to the designated third-party IoT server. IoT Transport Streams can be divided into two functions: BLE Periodic Telemetry and BLE Data Forwarding.

BLE Periodic Telemetry: The APs will parse the scanned BLE Advertising frames, extract the valid data, and save the data to their BLE device lists. They will populate BLE device list data into the messages at set intervals and report to the designated third-party IoT server.

BLE Data Forwarding: The APs will automatically forward the scanned BLE Advertising frames of the specified protocol. The forwarded data is the raw data received by the APs, which is forwarded in real time.

To configure IoT Transport Streams, follow the steps below:

1. Launch the controller and access a site.
2. Go to **Device Config > EAP > Bluetooth > IoT Transport Streams**.

3. Configure the **Aging Time** and click **Apply**.

General

Aging Time

30

Seconds

(30-86400)

Apply

Cancel

IoT Transport Streams

+ Create New Entry

☐	Name	Server Type	Status	ACTION
<input type="info"/>	No entry in the table.			

Note: This function is only effective for Bluetooth-enabled APs. For details, go to Devices > Configuration Result to check whether the configuration is applied to the corresponding APs.

Aging Time

Set the time in seconds, minutes, or hours to control the aging time of devices. If an AP does not receive the data sent by a device within the aging time, it will delete the device entry and no longer forward it to the IoT application server. If the AP receives the data sent by the device again, it will re-add the device entry and continue to report the Bluetooth data of the device.

4. Click **Create New Entry** to create a new IoT Transport Streams profile. Configure the parameters.

Create New Entry

Name

Server URL

Server Type

☒ HTTP

Status

☐

Device Class

☐ Minew ☐ iBeacon ☐ Eddystone

Reporting Interval

1

Seconds

(1-3600)

Report Device Counts Only

☐ Enable

BLE Periodic Telemetry

☒ Enable

BLE Data Forwarding

☐ Enable

Authentication

☒ Use Token

Access Token

Client ID

RSSI Reporting Format

Average

Filters

☐ Company Identifier ☐ Vendor ☐ Local Name ☐ Service UUID ☐ MAC OUI ☐ iBeacon UUID ☐ UUID ☐ URL

Apply

Cancel

Name

Enter the name of the profile.

Server URL	Enter the server address for IoT data reporting. Currently, the URL path with http as the prefix is supported.
Server Type	Specify the connection protocol with the IoT server. Currently, only the HTTP type is supported.
Status	Toggle on to enable this profile on Bluetooth-enabled APs.
Device Class	Specify the vendors and protocols. Currently, only iBeacon, Eddystone, and Minew protocols are supported. More protocols will be supported in the future.
Reporting Interval	Specify the interval period for the AP to report IoT data.
Report Device Counts Only	When enabled, the AP only reports the number of IoT devices.
BLE Periodic Telemetry	Toggle on if you want to enable the periodic reporting of the AP.
BLE Data Forwarding	Toggle on if you want to enable the transparent transmission of the AP data.
Authentication	Specify the authentication method. Currently, token authentication is supported.
Access Token	Specify the token used for identity authentication.
Client ID	Specify the ID used for identity authentication.
RSSI Reporting Format	Specify the signal strength reporting format. Currently, Average, Max, Last, Smooth, and Bulk are supported.
Filters	Specify the custom configuration items that control the AP to filter IoT devices. Currently, Company Identifier, Vendor, Local Name, Service UUID, MAC OUI, iBeacon UUID, UID, and URL are supported.

- Click **Apply**. The profile will be added and applied to Bluetooth-enabled APs. You can go to **Devices > Configuration Result** to check whether the configuration is applied to the corresponding APs.

Configure Bluetooth Advertising

The Bluetooth Advertising function allows Bluetooth-enabled APs to send out specific BLE broadcast frames according to the set configuration. Currently, it only supports broadcasting iBeacon frames, and more protocols will be supported in the future. There is a default rule in the initial interface, which can be turned off but cannot be deleted. You can also add Advertising rules and apply them to specific APs.

To configure Bluetooth Advertising, follow the steps below:

- Launch the controller and access a site.
- Go to **Device Config > EAP > Bluetooth > Bluetooth Advertising**.

3. Click **Create New Profile** to create a Bluetooth Advertising profile. Configure the parameters.

Create New Profile

Name

Status

☐ Enable

UUID Value In Advertising Packets

(32 hexadecimal digits)

Major Value In Advertising Packets

(4 hexadecimal digits)

Minor Value In Advertising Packets

(4 hexadecimal digits)

Advanced Settings

Transmit Power

0

RSSI Calibration Value

-65

dBm

(-97-0)

Advertising Interval

500

ms

(100-3000)

Device List

+ Add

DEVICE NAME	MODEL	MAC ADDRESS	STATUS	ACTION
No entry in the table.				

Create

Cancel

Name	Enter the name of the profile.
Status	Toggle on to enable this profile on Bluetooth-enabled APs.
UUID Value In Advertising Packets	Specify the Universally Unique Identifier (UUID) of the broadcast iBeacon device, which is the unique identifier of the universal device.
Major Value In Advertising Packets	Specify the major value of the broadcast iBeacon device, used to mark larger groups.
Minor Value In Advertising Packets	Specify the minor value of the broadcast iBeacon device, used to mark smaller groups.
Transmit Power	Choose the broadcast transmission power (dB). Currently supported: [-20, -18, -15, -12, -10, -9, -6, -5, -3, 0, 1, 2, 3, 4, 5, 14, 15, 16, 17, 18, 19, 20].
RSSI Calibration Value	Specify the RSSI calibration value (dB).
Advertising Interval	Specify the interval of advertising frames.
Device List	The default site-level entry does not have this configuration item. Only custom entries support the configuration of specific devices. Currently, a single device is supported to configure a Bluetooth Custom configuration entry for advertising.

4. Click **Create**. The profile will be added and applied to Bluetooth-enabled APs. You can go to **Devices > Configuration Result** to check whether the configuration is applied to the corresponding APs.

Chapter 14

Manage Network Devices

This chapter guides you on how to configure and monitor controller-managed devices, including gateways, switches and APs. You can configure the devices individually or in batches to modify the configurations of certain devices. The chapter includes the following sections:

- [14. 1 Manage the Device List](#)
- [14. 2 Manage the Gateway](#)
- [14. 3 Configure the Gateway](#)
- [14. 4 Manage the Switch](#)
- [14. 5 Configure the Switch](#)
- [14. 6 Manage the AP](#)
- [14. 7 Configure the AP](#)
- [14. 8 Manage the OLT](#)
- [14. 9 Configure the OLT](#)
- [14. 10 Create and Manage Stack Groups](#)
- [14. 11 Create and Manage Bridge Groups](#)

14.1 Manage the Device List

Overview

The Omada Controller provides 100% centralized management of Omada network devices, including gateways, switches, access points, OLTs, and more.

To manage network devices, go to **Devices > Device List** in Global View or Site View. In Global View, network devices of all sites will be listed; in Site view, network device of the current site will be listed.

You can manage the network devices in the list and manage each device in its Properties window and Device Management window.

For an easy monitoring of the devices, you can customize the column and filter the devices for a better overview of device information. Also, quick operations and Batch Edit are available for configurations.

Search Name, SN, MAC, IPv4, Model or Tag		All (10)	Gateway/Switches (3)	OLTs (1)	APs (6)	Export	Batch Action	+ Add Devices
DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION	UPTIME	ACTION		
98-03-	192.168.0.1	CONNECTED	ER7206 v2.20	2.2.0	3day(s) 4			
3C-6A-	192.168.0.104	CONNECTED	SG5428XMPP v1.0	1.20.1	4day(s) 7			
ES220GMP	192.168.0.2	DISCONNECTED	ES220GMP v1.0	1.0.2	-			
0C-EF-	192.168.0.7	CONNECTED	EAP683 UR(EU) v1.0	1.4.0	4day(s) 7			
10-27-	192.168.0.106	DISCONNECTED	EAP660 HD(US) v1.0	1.4.2	-			
123-	192.168.0.101	DISCONNECTED	EAP773(US) v1.0	1.1.3	-			
30-68- Client AP	192.168.0.2	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4	2day(s) 3			
30-68- Main AP	192.168.0.4	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4	2day(s) 3			
F0-09-	-	MANAGED BY OTHERS	EAP660 HD v2.0	-				
DS-P7001-16_9E6078	192.168.0.108	CONNECTED	DS-P7001-16 1.0	1.0.2	4day(s) 7			
Showing 1-10 of 10 records < 1 > 10 /page								

Monitor Connection Status

The Status column explains the connection status of devices.

PRECONFIGURED

The device is added via Manual Add or Import but has not been powered on. After the device is powered on, the controller will attempt to adopt the device automatically.

PENDING

The device is in Standalone Mode or with factory settings, and has not been adopted by the controller. To adopt the device, click the Adopt icon in the Action column, and the controller will use the default username and password to adopt it. When adopting, its status will change from Adopting, Provisioning, Configuring, to Connected eventually.

ISOLATED

(For APs in the mesh network) The AP once managed by the controller via a wireless connection now cannot reach the gateway. You can rebuild the mesh network by connecting it to a wireless device in the Connected status, then the isolated AP will turn into a connected one.

CONNECTED

The device has been adopted by the controller and you can manage it centrally. A connected device will turn into a pending one after you forget it.

MANAGED BY OTHERS	The device has already been managed by another controller. You can reset the device or provide the username and password to unbind it from another controller and adopt it in the current controller.
HEARTBEAT MISSED	A transition status between Connected and Disconnected. Once connected to the controller, the device will send inform packets to the controller in a regular interval to maintain the connection. If the controller does not receive its inform packets in 30 seconds, the device will turn into the Heartbeat Missed status. For a heartbeat-missed device, if the controller receives an inform packet from the device in 5 minutes, its status will become Connected again; otherwise, its status will become Disconnected.
DISCONNECTED	The connected device has lost connection with the controller for more than 5 minutes.
ADOPTED FAILED	The device has failed to be adopted.
	(For APs in the mesh network) When this icon appears with a status icon, it indicates the AP with mesh function and no wired connection is detected by the controller. You can connect it to an uplink AP through Mesh.
	When this icon appears with a status icon, it indicates the device in the Connected, Heartbeat Missed, Isolated, or Disconnected status is migrating. For more information, refer to the Migration section of this guide.

Customize the Column

To customize the columns, click the ellipsis icon next to **Action** and check the boxes of information type.

To change the list order, click the upside-down triangle icon next to the column head, which indicates the ascending or descending order.

Filter the Devices

Use the search box and tab bar above the table to filter the devices.

To search for devices, enter the text in the search box.

To filter the devices, a tab bar is above the table to filter the devices by device type. You can also filter the devices by their status by clicking the filter icon in the **Status** column.

Quick Operations

Click the icons in the table header or the **Action** column to quickly operate the device.

	Click to check if there is new firmware for the managed devices.
	(For pending devices) Click to adopt the device.

	(For connected switches and APs) Click this icon and the LEDs of the device will flash to indicate the device's location. The LEDs will keep flashing for 10 minutes, or you can click the  icon to stop the flashing.
	(For connected devices) Click to reboot the device.
	Click to upgrade the device's firmware version. This icon appears when the device has a new firmware version.
	Displays the current running configuration. Operators or Administrators or local user group members with execution rights for this command.

Batch Action

You can adopt devices in batches and configure the same type of devices in batches. Batch Config is available only for the devices in Preconfigured/Connected/Disconnected/Heartbeat Missed/Isolated status, while Batch Adopt is available for the devices in the Pending/Managed By Others status.

Search Name, SN, IP, Model or Tag

Q

All

Gateway/Switches

OLTs

APs

Export

Batch Action ^

DEVICE NAME	SERIAL NUMBER	MAC ADDRESS	IP ADDRESS	IPv6 ADDRESS
			192.168.0.1	--
			192.168.0.3	--
	--		192.168.0.2	--

Batch Config

Batch Adopt

To batch adopt devices, click [Batch Action](#) > [Batch Adopt](#), select devices, and click [Adopt](#). If the selected devices are all in the Pending status, the controller will adopt then with the default username and password. If not, enter the username and password manually to adopt the devices.

To batch configure devices, click [Batch Action](#) > [Batch Config](#), select devices, and click an action. You can batch configure device settings, perform custom upgrade, move them to a site, or forget them.

14.2 Manage the Gateway

Launch the controller and access a site. Go to [Devices](#) > [Device List](#). In the device list, click the gateway, then you can monitor and manage it in the Properties window and Device Management window.

14.2.1 Properties Window

The Properties window displays the device status, port status, connection information, and other device information.

Note: The available functions in the window may vary by device model and status.

DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION
IP Passthrough	192.168.254.1	DISCONNECTED	ER701-5G-Outdoor v1.0	1.0.0
Gateway	192.168.0.1	CONNECTED	ER7206 v2.20	2.2.0 4.2.8
5428-1 Stack	192.168.0.122	CONNECTED	SG5428XMPP v1.0	1.0.2
	192.168.0.8	CONNECTED	ES220GMP v1.0	1.0.1 1.0.20
	192.168.0.121	CONNECTED	SG5428XMPP v1.0	1.0.2 1.2.5
Core Switch	192.168.0.44	CONNECTED	SG3428 v2.30	2.30.8
PoE Switch	192.168.0.46	CONNECTED	SG3428MP v6.20	6.20.11
	192.168.0.4	CONNECTED	EAP683 UR(EU) v1.0	1.3.0 1.3.23
	192.168.0.15	CONNECTED	EAP772-Outdoor(US) v1.0	1.0.3 7.0.0
Main AP	192.168.0.2	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4 1.2.2

Showing 1-10 of

Gateway [CONNECTED](#) 8day(s) 6h 54m 42s

Used Port: 4/7

USB SFP 2 3 4 5 6

[Manage Device](#)

Overview Ports

Temperature 51°C CPU 0 Memory 30%

Connection [Device](#) [Client](#)

DOWNLINK DEVICE	PORT
5428-1	4
Core Switch	6

Info

Quick Operations

Click the icon and choose an operation to quickly operate the device.

Custom Upgrade	Click Browse and choose a file from your computer to upgrade the device. After upgraded, the device will reboot and be readopted by the controller.
Download Device Info	If the device has an abnormality, you can download the device information and provide it to our R&D personnel to analyze the problem. Note: Firmware updates are required for earlier devices to obtain complete information.
Move to Site	Select a site which the device will be moved to. After moving to another site, device configurations on the prior site will be replaced by that on the new site, and its traffic history will be cleared.
Force Provision	Click Force Provision to synchronize the configurations of the device with the controller. The device will lose connection temporarily, and be adopted to the controller again to get the configurations from the controller.
Forget This Device	Click Forget and then the device will be removed from the controller. Once forgotten, all configurations and history related to the device will be wiped out.

ISP Upgrade	(Only for 4G models)
Click Browse to select the ISP upgrade file and click Upgrade to upgrade the ISP information. You can download the latest ISP upgrade file from https://support.omadanetworks.com .	

Network Tools

Click the  icon and choose a network tool to analyze the network.

Network Check	Test the device connectivity via ping or traceroute.
Terminal	Open Terminal to execute CLI or Shell commands.

14. 2. 2 Device Management Window


Click [Manage Device](#) to open the Device Management window to view more device details and change device settings.

In the management window, you can click + and select one or more devices to open new management windows, click the  icon in the top left to minimize the windows to the  icon in the right side, and click the  icon to reopen the minimized windows.

You can also click each tab to monitor and manage the device. The tabs available may vary by model.


Overview

In [Overview](#), you can get an overview of the device, such as device status, link status, online time, current clients, and more.

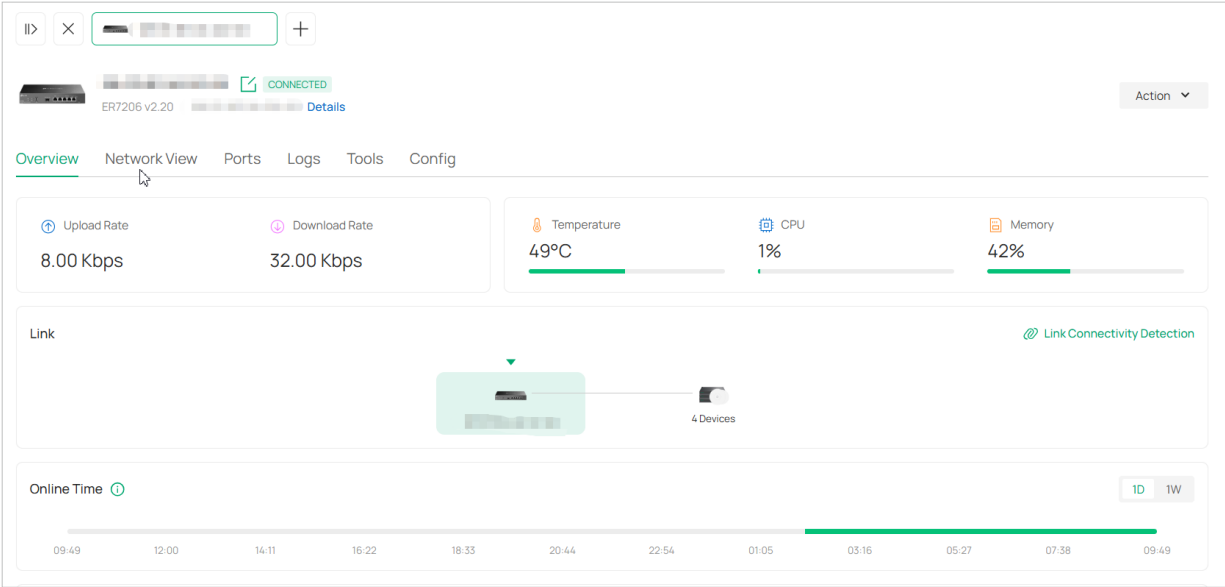


Network View

In **Network View**, you can check the network information of the device, such as configured networks, routing table, port forwarding status, and more.

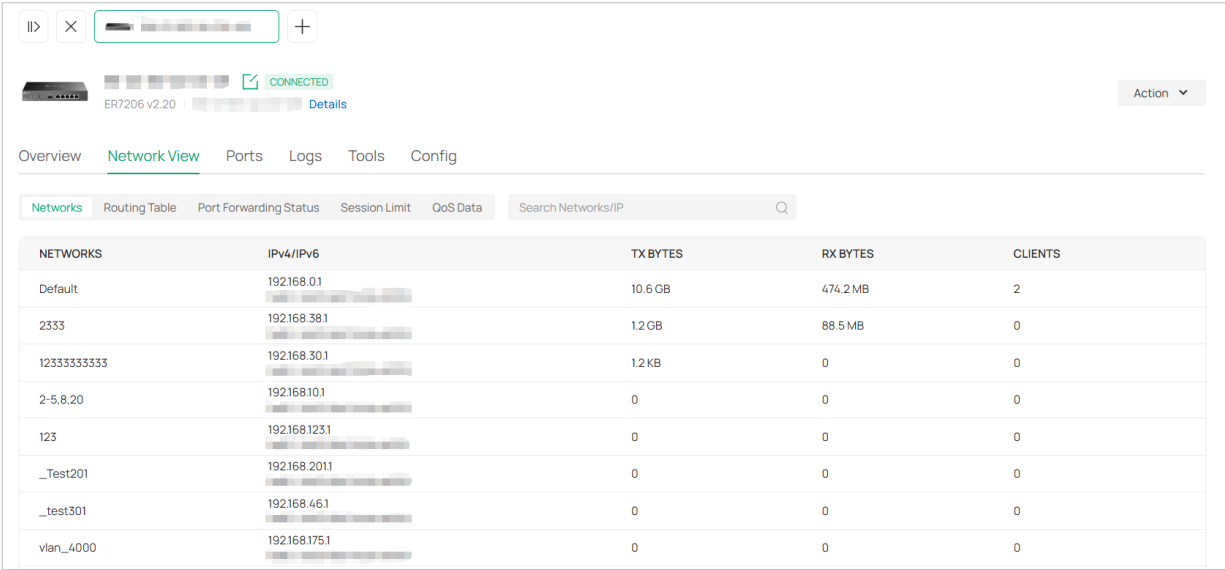

Ports

In **Ports**, you can view the port status and statistics and edit port settings.

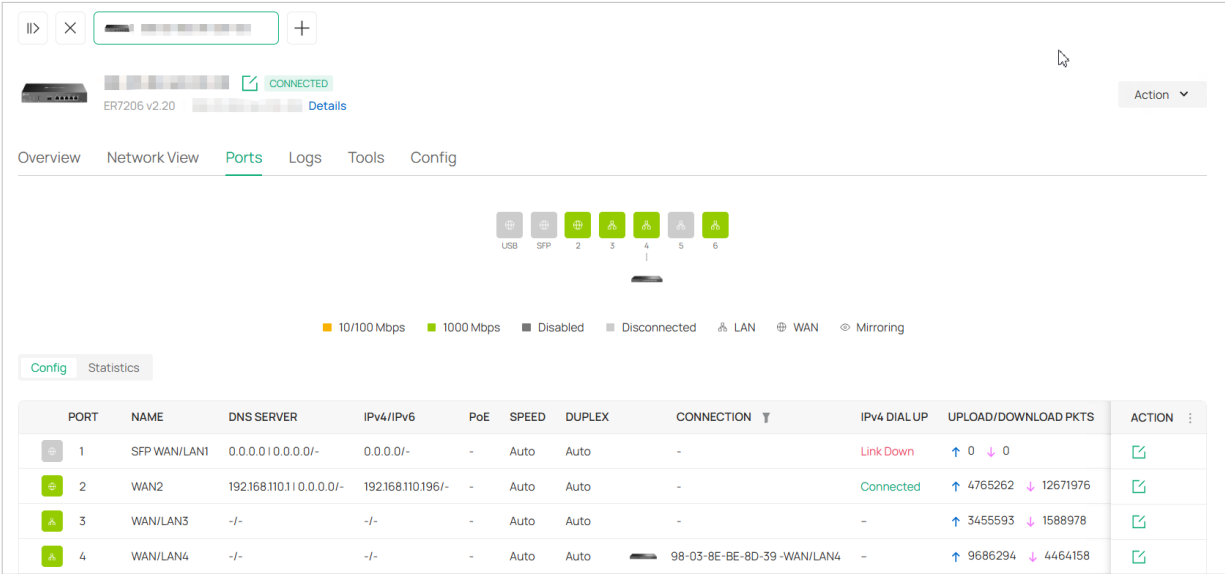


To configure a port, click the edit icon in the Action column. Port settings may vary by port type.

Status	Check the box to enable the port.
PoE Mode	Select the PoE mode: Off or 8.2.3at/af.
Link Speed	Select the speed mode for the port. Auto: The port negotiates the speed and duplex automatically. Manual: Specify the speed and duplex from the drop-down list manually.

Mirroring	Mirroring is used to analyze network traffic and troubleshoot network problems. With Mirroring configured, the gateway will send a copy of traffic passing through the specified mirrored ports to the current port. To use this function, enable this option to set the current port as the mirroring port, specify one or multiple mirrored ports, and specify the directions of the traffic to be mirrored in the Mirror Mode: Ingress and Egress: Both the incoming and outgoing packets through the mirrored ports will be copied to the mirroring port. Ingress: The packets received by the mirrored ports will be copied to the mirroring port. Egress: The packets sent by the mirrored ports will be copied to the mirroring port.
Native VLAN	Select the Port VLAN Identifier (PVID) for the port.
Flow Control	With this option enabled, when a device gets overloaded it will send a PAUSE frame to notify the peer device to stop sending data for a specified period of time, thus avoiding the packet loss caused by congestion.


Logs

In **Logs**, you can check the logs of the device, such as alerts, events, and configuration result.

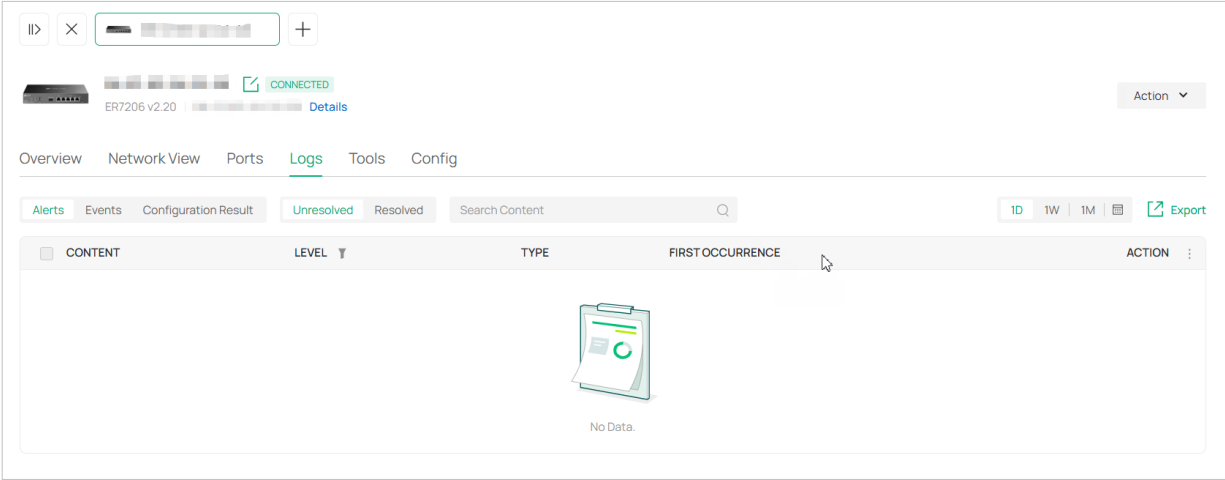

Tools


In **Tools**, you can use network tools to test the device connectivity and open Terminal to execute CLI or Shell commands.

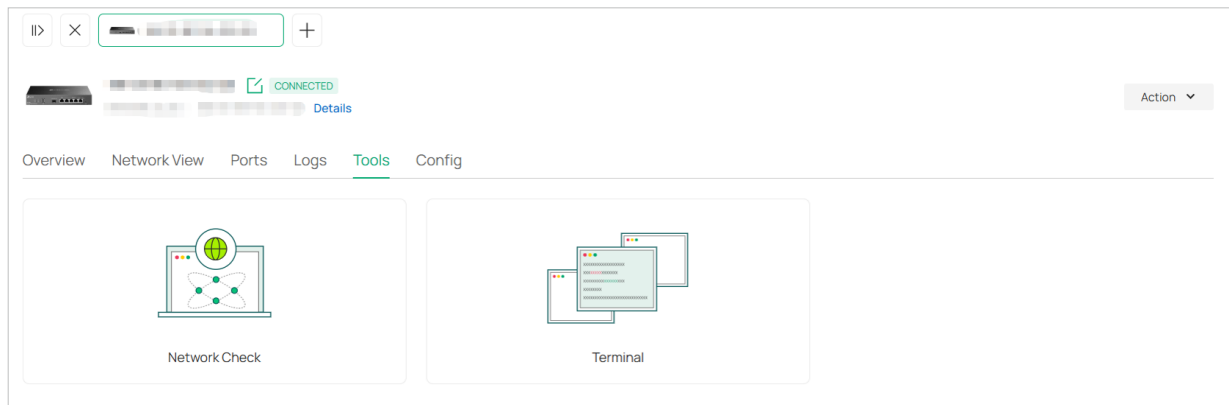

14.3 Configure the Gateway

Launch the controller and access a site. Go to [Devices](#) > [Device List](#). In the device list, click the gateway, click [Manage Device](#) and go to the [Config](#) page.

In [Config](#), you can edit device settings. Device settings may vary by model.

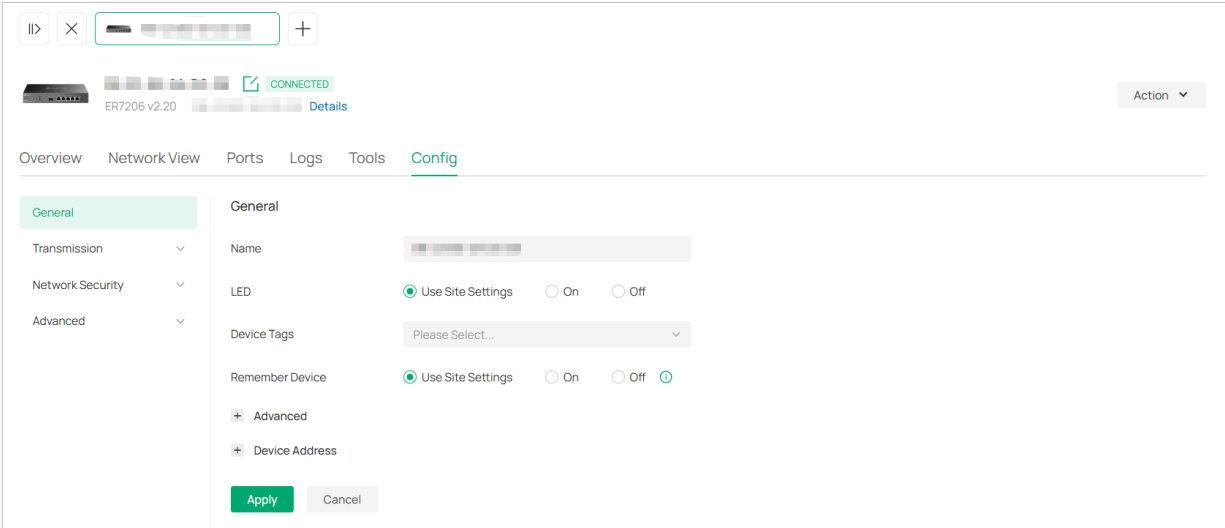

General Settings

Name	Specify a name of the device.
LED	Select the way that device's LEDs work. Use Site Settings : The device's LED will work following the settings of the site. On/Off : The device's LED will keep on/off.
Device Tags	Select a tag from the drop-down list or create a new tag to categorize the device.
Remember Device	With this function, the controller will remember this device. After device reset and power-on, the controller will automatically adopt the device if the controller can find it.
SNMP	Configure SNMP to write down the location and contact detail. You can also click Manage to jump to Network Config > General Settings > SNMP .
Device Address	Configure the address, longitude, and latitude according to where the site is located. These fields are optional.

Wireless Settings (Only for Wireless Gateways)

Status	If you disable the frequency band, the radio on it will turn off.
Wireless Mode	Specify the wireless mode of the band. Different bands have different available options. We recommend using the default value.

Channel Width	Specify the channel width of the band. Different bands have different available options. We recommend using the default value.
Channel	Specify the operation channel of the device to improve wireless performance. If you select Auto for the channel setting, the device scans available channels and selects the channel where the least amount of traffic is detected.
Tx Power	Specify the Tx Power (Transmit Power) in the 4 options: Low, Medium, High and Custom. The actual power of Low, Medium and High are based on the minimum transmit power (Min. Txpower) and maximum transmit power (Max. TxPower), which may vary in different countries and regions. Low: $\text{Min. TxPower} + (\text{Max. TxPower} - \text{Min. TxPower}) * 20\%$ (round off the value) Medium: $\text{Min. TxPower} + (\text{Max. TxPower} - \text{Min. TxPower}) * 60\%$ (round off the value) High: Max. TxPower Custom: Specify the value manually.
WLAN Group	Select a WLAN group to apply WLAN settings to the device.

In Wireless-Advanced, you can configure Load Balance and QoS to make better use of network resources. Load Balance can control the client number associated to the device, while QoS can optimize the performance when handling differentiated wireless traffics, including traditional IP data, VoIP (Voice-over Internet Protocol), and other types of audio, video, streaming media.

Select each band and configure the following parameters and features.

Max Associated Clients	Enable this function and specify the maximum number of connected clients. If the connected client reaches the maximum number, the device will disconnect those with weaker signals to make room for other clients requesting connections.
RSSI Threshold	Enable this function and enter the threshold of RSSI (Received Signal Strength Indication). If the client's signal strength is weaker than the threshold, the client will lose connection with the device.
Unscheduled Automatic Power Save Delivery	When enabled, this function can greatly improve the energy-saving capacity of clients.
OFDMA	(Only for AP supporting 802.11 ax or later standards) Enable this feature to enable multiple users to transmit data simultaneously, and it will greatly improves speed and efficiency. Note that the benefits of OFDMA can be fully enjoyed only when the clients support OFDMA.

SIM Configurations (Only for Gateways with SIM Card)

■ PIN Management

In PIN Management, you can view the SIM card used and its status.

■ Statistics

In Statistics, you can have a overview of the total/monthly statistics calculated according to the billing/counting method you set. You can click the edit icon to correct the statistics.

For SIM data settings, configure the following parameter:

Billing Method	Select the billing method, Total count or Monthly count. If you select the Monthly count, select a Start Date for each monthly count cycle. For example, 2nd indicates that the monthly count cycle is from the 2nd of this month to the 1st of the next month.
Data Limit	Specify whether to enable the data limit function. If turned on, the network will be disconnected when your data usage reaches the allowance.
Total Allowance/ Monthly Allowance	Enter the total/monthly allowance provided by your carrier. The device will automatically disconnect from the internet when your data usage reaches the allowance.
Data Limit Alert	Specify whether to enable the SMS alert of data limit. If turned on, the alert message will be sent when your data usage reaches the set allowance percentage or the set allowance.
Usage Alert	Set the usage alert percentage. The alert message will be sent when your data usage reaches the set allowance percentage.
Alert SMS Phone Number	Enter the phone number to receive the SMS alert message when your data usage reaches the set allowance percentage or the set allowance.
Send Test Message	Send a test SMS to confirm that the number can receive the SMS alert message.

For SIM message settings, configure the following parameter:

Counting Method	Select the counting method, Total count or Monthly count. If you select the Monthly count, select a Start Date for each monthly count cycle. For example, 2nd indicates that the monthly count cycle is from the 2nd of this month to the 1st of the next month.
SMS Quota Limit	Specify whether to enable the SMS quota limit function. If turned on, your device will be unable to send SMS messages when your SMS quantity reaches the allowance.
Total Allowance/ Monthly Allowance	Enter the total/monthly allowance provided by your carrier. Your device will be unable to send SMS messages when your SMS quantity reaches the allowance.

SMS Quota Alert	Specify whether to enable the SMS alert of SMS limit. If turned on, the alert message will be sent when your SMS quantity reaches the set allowance percentage. Note that the alert messages will also be counted in your SMS quantity.
Usage Alert	Set the usage alert percentage. The alert message will be sent when your SMS quantity reaches the set allowance percentage.
Alert SMS Phone Number	Enter the phone number to receive the SMS alert message when your SMS quantity reaches the set allowance percentage.
Send Test Message	Send a test SMS to confirm that the number can receive the SMS alert message.

■ SMS Message

SMS Inbox Message	Displays the messages you have received. You can click the Detail icon to view the SMS details.
SMS Outbox Message	Displays the messages you have successfully sent. You can click the Detail icon to view the SMS details, click Export to save outbox messages of specific time period locally, or click Create New Message to send a message.

■ SMS Settings

In [SMS Inbox/Outbox Policy](#), you can set policies related to receiving inboxes.

SMS Inbox/Outbox	Select the SMS Inbox/Outbox Policy. If SMS inbox/outbox is full, delete the oldest read SMS : When the inbox/outbox is full, delete the oldest read SMS to receive the new SMS. If SMS inbox/outbox is full, send e-mail alert to Administrator : When the inbox/outbox is full, send an email to the administrator, and does not receive the new SMS. To ensure email sending, please configure the Mail Server. If SMS inbox/outbox is full, forward new SMS with e-mail to Administrator : When the inbox/outbox is full, forward the new SMS to the administrator via email. To ensure email sending, please configure the Mail Server.
-------------------------	--

In [Mail Server](#), you can configure mail-related parameters. The SMS Inbox/Outbox Policy module will use the configuration information to send emails.

FROM	Enter the email address of the sender.
TO	Enter the email address of the receiver, which can be the same as or different from the sender's email address.
SMTP Server	Enter the domain name or IP address of the SMTP server.
SSL	When enabled, the data will be transmitted based on the SSL protocol.

SMTP Port	Enter the port used by the SMTP server according to the instructions of your email service provider.
Authentication	If the login of the mailbox requires a username and authorization code, enable this option and configure the following parameters: User Name: Enter your email address as the username. Authorization Code: Enter the authorization code that enables a third party to log into the mailbox according to the instructions of your email service provider. Note that the authorization code is not the mailbox's password.

In **Router Command**, you can send specific commands via SMS to interact with the router, and only specific users are allowed to perform these interactions.

Reboot On Message	This feature is used to reboot the router via SMS. Enable this feature and enter the router's Password/PIN. Then you can send a message starting with "LTE Router Reboot", followed by the router's Password/PIN (e.g. LTE Router Reboot 1234) to reboot the router.
Query Status On Message	This feature is used to get status information from the router via SMS. Enable this feature, enter the router's Password/PIN, and choose the query contents. Then you can send a message starting with "LTE Router Status", followed by the router's Password/PIN (e.g. LTE Router Status 1234) to get status information from the router.
Access Control List	This feature is used to configure the allow phone number list of the above functions. Enable this feature, select the international telephone area code, and enter the phone number. You can add one or more phone numbers, and only these phone numbers can interact with the router via SMS.

Transmission Settings

For configuration instructions, refer to [10 Configure Network Transmission Settings](#) in this guide.

Routing	You can configure the following routing functions for the device. Static Route: Network traffic is oriented to a specific destination, and Static Route designates the next hop or interface where to forward the traffic. Policy Routing: Policy Routing designates which WAN port the router uses to forward the traffic based on the source, the destination, and the protocol of the traffic.
---------	--

NAT	You can configure the following NAT functions for the device. Port Forwarding: Port Forwarding helps establish network connections between a host on the internet and the other in the LAN by letting the traffic pass through the specific port of the gateway. Without Port Forwarding, hosts in the LAN are typically inaccessible from the internet for the sake of security. ALG: ALG ensures that certain application-level protocols function appropriately through your gateway. One-to-One NAT: One-to-One NAT will establish a correspondence between a private IP and a public IP, allowing access to the device with the private IP through the corresponding public IP. Disable NAT: Disable NAT allows internal devices to obtain public IP addresses.
DHCP Reservation	DHCP Reservation allows you to reserve specific IP addresses for devices in your network, and centrally manage the IP addresses.
Bandwidth Control	Bandwidth Control optimizes network performance by limiting the bandwidth of specific sources.
Session Limit	Session Limit optimizes network performance by limiting the maximum sessions of specific sources.
Gateway QoS	Gateway QoS allows you to define service entries that will appear as matching conditions for you to choose when configuring the rules of related modules like QoS.

Network Security settings:

For configuration instructions, refer to [12 Configure Network Security](#) in this guide.

ACL	ACL (Access Control List) allows a network administrator to create rules to restrict access to network resources. ACL rules filter traffic based on specified criteria such as source IP addresses, destination IP addresses, and port numbers, and determine whether to forward the matched packets.
MAC Filtering	MAC Filter allows or blocks connections from wireless clients of specific MAC addresses.
URL Filtering	URL Filtering allows a network administrator to create rules to block or allow certain websites, which protects it from web-based threats, and deny access to malicious websites.
Application Control	DPI (Deep Packet Inspection) helps you identify, analyze, and control the traffic at the application layer in the network. DPI engine includes the latest application identification signatures to track which applications are using the most bandwidth. You can better manage and distribute network traffic usage through DPI.
IDS/IPS	IDS/IPS is a security mechanism that detects intrusions based on attack characteristics. It can detect malware, Trojan horses, worms, ActiveX and other attacks to protect the network security of users.
Firewall	Firewall is used to enhance the network security.

IP-MAC Binding

IP-MAC Binding records the correct one-to-one relationships between IP addresses and MAC addresses to protect the network from ARP spoofing attacks.

For instructions, refer to the IP-MAC Binding section in this guide.

Advanced Settings

General

You can configure the following advanced functions:

Hardware Offload: With this feature enabled, packet forwarding performance will be improved and CPU utilization will be reduced. Note that this feature cannot take effect if the QoS is enabled.

LLDP: LLDP (Link Layer Discovery Protocol) can help discover devices.

Echo Server: Echo Server is used to test the connectivity and monitor the latency of the network automatically or manually. If you click **Custom**, enter the IP address or hostname of your custom server.

DNS

You can configure the following DNS functions:

Dynamic DNS: Dynamic DNS assigns a fixed domain name to the WAN port of your gateway, which facilitates remote users to access your local network through WAN Port.

DNS Cache: DNS caching further speeds up domain name translation/resolution by handling it for recently visited addresses before the request is sent to the internet. Even if your network can use a large number of public DNS servers for translation/resolution, it's still faster to have a local copy.

DNS Proxy: DNS Proxy provides the LAN side clients with the DNS query service. It forwards the DNS request from the LAN side clients to the selected upstream DNS server and forwards the DNS reply accordingly.

For instructions, refer to the DNS section in this guide.

UPnP

UPnP (Universal Plug and Play) is essential for applications including multiplayer gaming, peer-to-peer connections, real-time communication (such as VoIP or telephone conference) and remote assistance, etc. With the help of UPnP, the traffic between the endpoints of these applications can freely pass the gateway, thus realizing seamless connections.

For instructions, refer to the UPnP section in this guide.

IPTV

IPTV includes two sections: IGMP and IPTV. In IGMP settings, you can enable IGMP proxy to detect multicast group membership information and thus the router is able to forward multicast packets based upon the information. IPTV settings allows you to enable Internet/IPTV/Phone service provided by your ISP.

For instructions, refer to the IPTV section in this guide.

For a wireless gateway, you can configure Load Balance and QoS to make better use of network resources. Load Balance can control the client number associated to the device, while QoS can optimize the performance when handling differentiated wireless traffics, including traditional IP data, VoIP (Voice-over Internet Protocol), and other types of audio, video, streaming media.

Select each band and configure the following parameters and features.

Max Associated Clients	Enable this function and specify the maximum number of connected clients. If the connected client reaches the maximum number, the device will disconnect those with weaker signals to make room for other clients requesting connections.
RSSI Threshold	Enable this function and enter the threshold of RSSI (Received Signal Strength Indication). If the client's signal strength is weaker than the threshold, the client will lose connection with the device.
Unscheduled Automatic Power Save Delivery	When enabled, this function can greatly improve the energy-saving capacity of clients.
OFDMA	(Only for AP supporting 802.11 ax or later standards) Enable this feature to enable multiple users to transmit data simultaneously, and it will greatly improves speed and efficiency. Note that the benefits of OFDMA can be fully enjoyed only when the clients support OFDMA.

14.4 Manage the Switch

Launch the controller and access a site. Go to [Devices > Device List](#). In the device list, click a switch, then you can monitor and manage it in the Properties window and Device Management window.

14.4.1 Properties Window

The Properties window displays the device status, port status, connection information, and other device information.

Note: The available functions in the window may vary by device model and status.

Device List Device Group Configuration Result

Search Name, SN, MAC, IPv4, Model or Tag

All (14) Gateway/Switches (7) OLTs (1) APs (6)

DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION
IP Passthrough	192.168.254.1	DISCONNECTED	ER701-5G-Outdoor v1.0	1.0.0
Gateway	192.168.0.1	CONNECTED	ER7206 v2.20	2.2.0
5428-1 Stack	192.168.0.122	CONNECTED	SG5428XMPP v1.0	1.0.2
	192.168.0.8	CONNECTED	ES220GMP v1.0	1.0.1
	192.168.0.121	CONNECTED	SG5428XMPP v1.0	1.0.2
Core Switch	192.168.0.44	CONNECTED	SG3428 v2.30	2.30.8
PoE Switch	192.168.0.46	CONNECTED	SG3428MP v6.20	6.20.11
	192.168.0.4	CONNECTED	EAP683 UR(EU) v1.0	1.3.0
	192.168.0.15	CONNECTED	EAP772-Outdoor(US) v1.0	1.0.3
Main AP	192.168.0.2	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4

PoE Switch

CONNECTED 8day(s) 23h 37m 4s

Used Port: 4/28

1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51 53 55 57 59 61 63 65 67 69 71 73 75 77 79 81 83 85 87 89 91 93 95 97 99 101 103 105 107 109 111 113 115 117 119 121 123 125 127 129 131 133 135 137 139 141 143 145 147 149 151 153 155 157 159 161 163 165 167 169 171 173 175 177 179 181 183 185 187 189 191 193 195 197 199 201 203 205 207 209 211 213 215 217 219 221 223 225 227 229 231 233 235 237 239 241 243 245 247 249 251 253 255 257 259 261 263 265 267 269 271 273 275 277 279 281 283 285 287 289 291 293 295 297 299 301 303 305 307 309 311 313 315 317 319 321 323 325 327 329 331 333 335 337 339 341 343 345 347 349 351 353 355 357 359 361 363 365 367 369 371 373 375 377 379 381 383 385 387 389 391 393 395 397 399 401 403 405 407 409 411 413 415 417 419 421 423 425 427 429 431 433 435 437 439 441 443 445 447 449 451 453 455 457 459 461 463 465 467 469 471 473 475 477 479 481 483 485 487 489 491 493 495 497 499 501 503 505 507 509 511 513 515 517 519 521 523 525 527 529 531 533 535 537 539 541 543 545 547 549 551 553 555 557 559 561 563 565 567 569 571 573 575 577 579 581 583 585 587 589 591 593 595 597 599 601 603 605 607 609 611 613 615 617 619 621 623 625 627 629 631 633 635 637 639 641 643 645 647 649 651 653 655 657 659 661 663 665 667 669 671 673 675 677 679 681 683 685 687 689 691 693 695 697 699 701 703 705 707 709 711 713 715 717 719 721 723 725 727 729 731 733 735 737 739 741 743 745 747 749 751 753 755 757 759 761 763 765 767 769 771 773 775 777 779 781 783 785 787 789 791 793 795 797 799 801 803 805 807 809 811 813 815 817 819 821 823 825 827 829 831 833 835 837 839 841 843 845 847 849 851 853 855 857 859 861 863 865 867 869 871 873 875 877 879 881 883 885 887 889 891 893 895 897 899 901 903 905 907 909 911 913 915 917 919 921 923 925 927 929 931 933 935 937 939 941 943 945 947 949 951 953 955 957 959 961 963 965 967 969 971 973 975 977 979 981 983 985 987 989 991 993 995 997 999 1001 1003 1005 1007 1009 1011 1013 1015 1017 1019 1021 1023 1025 1027 1029 1031 1033 1035 1037 1039 1041 1043 1045 1047 1049 1051 1053 1055 1057 1059 1061 1063 1065 1067 1069 1071 1073 1075 1077 1079 1081 1083 1085 1087 1089 1091 1093 1095 1097 1099 1101 1103 1105 1107 1109 1111 1113 1115 1117 1119 1121 1123 1125 1127 1129 1131 1133 1135 1137 1139 1141 1143 1145 1147 1149 1151 1153 1155 1157 1159 1161 1163 1165 1167 1169 1171 1173 1175 1177 1179 1181 1183 1185 1187 1189 1191 1193 1195 1197 1199 1201 1203 1205 1207 1209 1211 1213 1215 1217 1219 1221 1223 1225 1227 1229 1231 1233 1235 1237 1239 1241 1243 1245 1247 1249 1251 1253 1255 1257 1259 1261 1263 1265 1267 1269 1271 1273 1275 1277 1279 1281 1283 1285 1287 1289 1291 1293 1295 1297 1299 1301 1303 1305 1307 1309 1311 1313 1315 1317 1319 1321 1323 1325 1327 1329 1331 1333 1335 1337 1339 1341 1343 1345 1347 1349 1351 1353 1355 1357 1359 1361 1363 1365 1367 1369 1371 1373 1375 1377 1379 1381 1383 1385 1387 1389 1391 1393 1395 1397 1399 1401 1403 1405 1407 1409 1411 1413 1415 1417 1419 1421 1423 1425 1427 1429 1431 1433 1435 1437 1439 1441 1443 1445 1447 1449 1451 1453 1455 1457 1459 1461 1463 1465 1467 1469 1471 1473 1475 1477 1479 1481 1483 1485 1487 1489 1491 1493 1495 1497 1499 1501 1503 1505 1507 1509 1511 1513 1515 1517 1519 1521 1523 1525 1527 1529 1531 1533 1535 1537 1539 1541 1543 1545 1547 1549 1551 1553 1555 1557 1559 1561 1563 1565 1567 1569 1571 1573 1575 1577 1579 1581 1583 1585 1587 1589 1591 1593 1595 1597 1599 1601 1603 1605 1607 1609 1611 1613 1615 1617 1619 1621 1623 1625 1627 1629 1631 1633 1635 1637 1639 1641 1643 1645 1647 1649 1651 1653 1655 1657 1659 1661 1663 1665 1667 1669 1671 1673 1675 1677 1679 1681 1683 1685 1687 1689 1691 1693 1695 1697 1699 1701 1703 1705 1707 1709 1711 1713 1715 1717 1719 1721 1723 1725 1727 1729 1731 1733 1735 1737 1739 1741 1743 1745 1747 1749 1751 1753 1755 1757 1759 1761 1763 1765 1767 1769 1771 1773 1775 1777 1779 1781 1783 1785 1787 1789 1791 1793 1795 1797 1799 1801 1803 1805 1807 1809 1811 1813 1815 1817 1819 1821 1823 1825 1827 1829 1831 1833 1835 1837 1839 1841 1843 1845 1847 1849 1851 1853 1855 1857 1859 1861 1863 1865 1867 1869 1871 1873 1875 1877 1879 1881 1883 1885 1887 1889 1891 1893 1895 1897 1899 1901 1903 1905 1907 1909 1911 1913 1915 1917 1919 1921 1923 1925 1927 1929 1931 1933 1935 1937 1939 1941 1943 1945 1947 1949 1951 1953 1955 1957 1959 1961 1963 1965 1967 1969 1971 1973 1975 1977 1979 1981 1983 1985 1987 1989 1991 1993 1995 1997 1999 2001 2003 2005 2007 2009 2011 2013 2015 2017 2019 2021 2023 2025 2027 2029 2031 2033 2035 2037 2039 2041 2043 2045 2047 2049 2051 2053 2055 2057 2059 2061 2063 2065 2067 2069 2071 2073 2075 2077 2079 2081 2083 2085 2087 2089 2091 2093 2095 2097 2099 2101 2103 2105 2107 2109 2111 2113 2115 2117 2119 2121 2123 2125 2127 2129 2131 2133 2135 2137 2139 2141 2143 2145 2147 2149 2151 2153 2155 2157 2159 2161 2163 2165 2167 2169 2171 2173 2175 2177 2179 2181 2183 2185 2187 2189 2191 2193 2195 2197 2199 2201 2203 2205 2207 2209 2211 2213 2215 2217 2219 2221 2223 2225 2227 2229 2231 2233 2235 2237 2239 2241 2243 2245 2247 2249 2251 2253 2255 2257 2259 2261 2263 2265 2267 2269 2271 2273 2275 2277 2279 2281 2283 2285 2287 2289 2291 2293 2295 2297 2299 2301 2303 2305 2307 2309 2311 2313 2315 2317 2319 2321 2323 2325 2327 2329 2331 2333 2335 2337 2339 2341 2343 2345 2347 2349 2351 2353 2355 2357 2359 2361 2363 2365 2367 2369 2371 2373 2375 2377 2379 2381 2383 2385 2387 2389 2391 2393 2395 2397 2399 2401 2403 2405 2407 2409 2411 2413 2415 2417 2419 2421 2423 2425 2427 2429 2431 2433 2435 2437 2439 2441 2443 2445 2447 2449 2451 2453 2455 2457 2459 2461 2463 2465 2467 2469 2471 2473 2475 2477 2479 2481 2483 2485 2487 2489 2491 2493 2495 2497 2499 2501 2503 2505 2507 2509 2511 2513 2515 2517 2519 2521 2523 2525 2527 2529 2531 2533 2535 2537 2539 2541 2543 2545 2547 2549 2551 2553 2555 2557 2559 2561 2563 2565 2567 2569 2571 2573 2575 2577 2579 2581 2583 2585 2587 2589 2591 2593 2595 2597 2599 2601 2603 2605 2607 2609 2611 2613 2615 2617 2619 2621 2623 2625 2627 2629 2631 2633 2635 2637 2639 2641 2643 2645 2647 2649 2651 2653 2655 2657 2659 2661 2663 2665 2667 2669 2671 2673 2675 2677 2679 2681 2683 2685 2687 2689 2691 2693 2695 2697 2699 2701 2703 2705 2707 2709 2711 2713 2715 2717 2719 2721 2723 2725 2727 2729 2731 2733 2735 2737 2739 2741 2743 2745 2747 2749 2751 2753 2755 2757 2759 2761 2763 2765 2767 2769 2771 2773 2775 2777 2779 2781 2783 2785 2787 2789 2791 2793 2795 2797 2799 2801 2803 2805 2807 2809 2811 2813 2815 2817 2819 2821 2823 2825 2827 2829 2831 2833 2835 2837 2839 2841 2843 2845 2847 2849 2851 2853 2855 2857 2859 2861 2863 2865 2867 2869 2871 2873 2875 2877 2879 2881 2883 2885 2887 2889 2891 2893 2895 2897 2899 2901 2903 2905 2907 2909 2911 2913 2915 2917 2919 2921 2923 2925 2927 2929 2931 2933 2935 2937 2939 2941 2943 2945 2947 2949 2951 2953 2955 2957 2959 2961 2963 2965 2967 2969 2971 2973 2975 2977 2979 2981 2983 2985 2987 2989 2991 2993 2995 2997 2999 3001 3003 3005 3007 3009 3011 3013 3015 3017 3019 3021 3023 3025 3027 3029 3031 3033 3035 3037 3039 3041 3043 3045 3047 3049 3051 3053 3055 3057 3059 3061 3063 3065 3067 3069 3071 3073 3075 3077 3079 3081 3083 3085 3087 3089 3091 3093 3095 3097 3099 3101 3103 3105 3107 3109 3111 3113 3115 3117 3119 3121 3123 3125 3127 3129 3131 3133 3135 3137 3139 3141 3143 3145 3147 3149 3151 3153 3155 3157 3159 3161 3163 3165 3167 3169 3171 3173 3175 3177 3179 3181 3183 3185 3187 3189 3191 3193 3195 3197 3199 3201 3203 3205 3207 3209 3211 3213 3215 3217 3219 3221 3223 3225 3227 3229 3231 3233 3235 3237 3239 3241 3243 3245 3247 3249 3251 3253 3255 3257 3259 3261 3263 3265 3267 3269 3271 3273 3275 3277 3279 3281 3283 3285 3287 3289 3291 3293 3295 3297 3299 3301 3303 3305 3307 3309 3311 3313 3315 3317 3319 3321 3323 3325 3327 3329 3331 3333 3335 3337 3339 3341 3343 3345 3347 3349 3351 3353 3355 3357 3359 3361 3363 3365 3367 3369 3371 3373 3375 3377 3379 3381 3383 3385 3387 3389 3391 3393 3395 3397 3399 3401 3403 3405 3407 3409 3411 3413 3415 3417 3419 3421 3423 3425 3427 3429 3431 3433 3435 3437 3439 3441 3443 3445 3447 3449 3451 3453 3455 3457 3459 3461 3463 3465 3467 3469 3471 3473 3475 3477 3479 3481 3483 3485 3487 3489 3491 3493 3495 3497 3499 3501 3503 3505 3507 3509 3511 3513 3515 3517 3519 3521 3523 3525 3527 3529 3531 3533 3535 3537 3539 3541 3543 3545 3547 3549 3551 3553 3555 3557 3559 3561 3563 3565 3567 3569 3571 3573 3575 3577 3579 3581 3583 3585 3587 3589 3591 3593 3595 3597 3599 3601 3603 3605 3607 3609 3611 3613 3615 3617 3619 3621 3623 3625 3627 3629 3631 3633 3635 3637 3639 3641 3643 3645 3647 3649 3651 3653 3655 3657 3659 3661 3663 3665 3667 3669 3671 3673 3675 3677 3679 3681 3683 3685 3687 3689 3691 3693 3695 3697 3699 3701 3703 3705 3707 3709 3711 3713 3715 3717 3719 3721 3723 3725 3727 3729 3731 3733 3735 3737 3739 3741 3743 3745 3747 3749 3751 3753 3755 3757 3759 3761 3763 3765 3767 3769 3771 3773 3775 3777 3779 3781 3783 3785 3787 3789 3791 3793 3795 3797 3799 3801 3803 3805 3807 3809 3811 3813 3815 3817 3819 3821 3823 3825 3827 3829 3831 3833 3835 3837 3839 3841 3843 3845 3847 3849 3851 3853 3855 3857 3859 3861 3863 3865 3867 3869 3871 3873 3875 3877 3879 3881 3883 3885 3887 3889 3891 3893 3895 3897 3899 3901 3903 3905 3907 3909 3911 3913 3915 3917 3919 3921 3923 3925 3927 3929 3931 3933 3935 3937 3939 3941 3943 3945 3947 3949 3951 3953 3955 3957 3959 3961 3963 3965 3967 3969 3971 3973 3975 3977 3979 3981 3983 3985 3987 3989 3991 3993 3995 3997 3999 4001 4003 4005 4007 4009 4011 4013 4015 4017 4019 4021 4023 4025 4027 4029 4031 4033 4035 4037 4039 4041 4043 4045 4047 4049 4051 4053 4055 4057 4059 4061 4063 4065 4067 4069 4071 4073 4075 4077 4079 4081 4083 4085 4087 4089 4091 4093 4095 4097 4099 4101 4103 4105 4107 4109 4111 4113 4115 4117 4119 4121 4123 4125 4127 4129 4131 4133 4135 4137 4139 4141 4143 4145 4147 4149 4151 4153 4155 4157 4159 4161 4163 4165 4167 4169 4171 4173 4175 4177 4179 4181 4183 4185 4187 4189 4191 4193 4195 4197 4199 4201 4203 4205 4207 4209 4211 4213 4215 4217 4219 4221 4223 4225 4227 4229 4231 4233 4235 4237 4239 4241 4243 4245 4247 4249 4251 4253 4255 4257 4259 4261 4263 4265 4267 4269 4271 4273 4275 4277 4279 4281 4283 4285 4287 4289 4291 4293 4295 4297 4299 4301 4303 4305 4307 4309 4311 4313 4315 4317 4319 4321 4323 4325 4327 4329 4331 4333 4335 4337 4339 4341 4343 4345 4347 4349 4351 4353 4355 4357 4359 4361 4363 4365 4367 4369 4371 4373 4375 4377 4379 4381 4383 4385 4387 4389 4391 4393 4395 4397 4399 4401 4403 4405 4407 4409 4411 4413 4415 4417 4419 4421 4423 4425 4427 4429 4431 4433 4435 4437 4439 4441 4443 4445 4447 4449 4451 4453 4455 4457 4459 4461 4463 4465 4467 4469 4471 4473 4475 4477 4479 4481 4483 4485 4487 4489 4491 4493 4495 4497 4499 4501 4503 4505 4507 4509 4511 4513 4515 4517 4519 4521 4523 4525 4527 4529 4531 4533 4535 4537 4539 4541 4543 4545 4547 4549 4551 4553 4555 4557 4559 4561 4563 4565 4567 4569 4571 4573 4575 4577 4579 4581 4583 4585 4587 4589 4591 4593 4595 4597 4599 4601 4603 4605 4607 4609 4611 4613 4615 4617 4619 4621 4623 4625 4627 4629 4631 4633 4635 4637 4639 4641 4643 4645 4647 4649 4651 4653 4655 4657 4659 4661 4663 4665 4667 4669 4671 4673 4675 4677 4679 4681 4683 4685 4687 4689 4691 4693 4695 4697 4699 4701 4703 4705 4707 4709 4711 4713 4715 4717 4719 4

Force Provision	Click Force Provision to synchronize the configurations of the device with the controller. The device will lose connection temporarily, and be adopted to the controller again to get the configurations from the controller.
Forget This Device	Click Forget and then the device will be removed from the controller. Once forgotten, all configurations and history related to the device will be wiped out.

Network Tools

Click the  icon and choose a network tool to analyze the network.

Network Check	Test the device connectivity via ping or traceroute.
Terminal	Open Terminal to execute CLI or Shell commands.
Cable Test	Perform cable test to check cable issues.

14.4.2 Device Management Window


Click **Manage Device** to open the Device Management window to view more device details and change device settings.

In the management window, you can click + and select one or more devices to open new management windows, click the  icon in the top left to minimize the windows to the  icon in the right side, and click the  icon to reopen the minimized windows.

You can also click each tab to monitor and manage the device. The tabs available may vary by model.


Overview

In **Overview**, you can get an overview of the device, such as device status, link status, online time, current clients, and more.

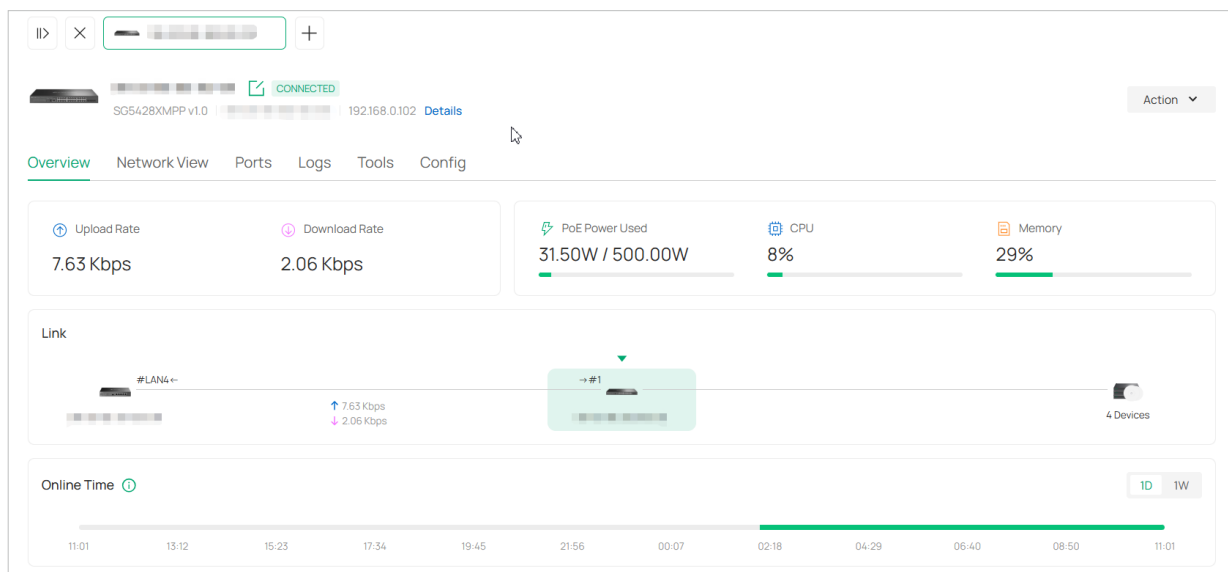


Network View

In [Network View](#), you can check the network information of the device, such as routing table and OSPF neighbor table.

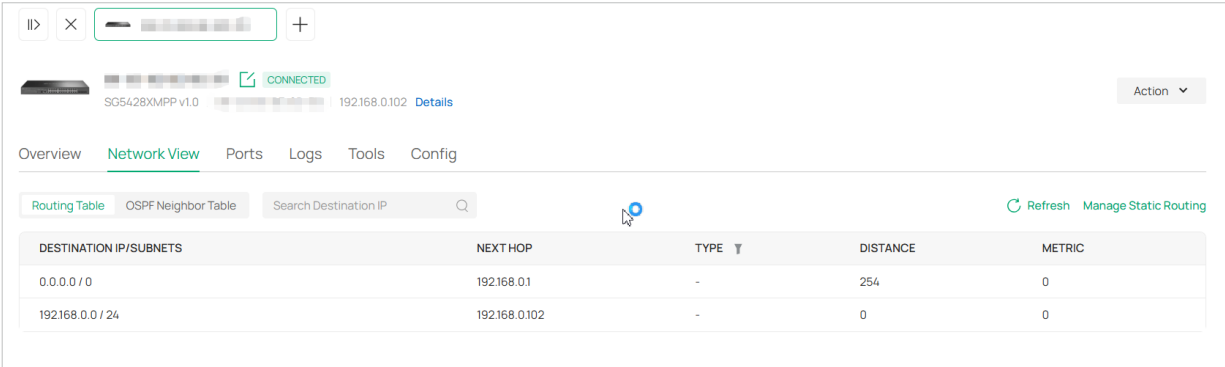

Ports


In [Ports](#), you can view the port status and statistics and edit port settings.

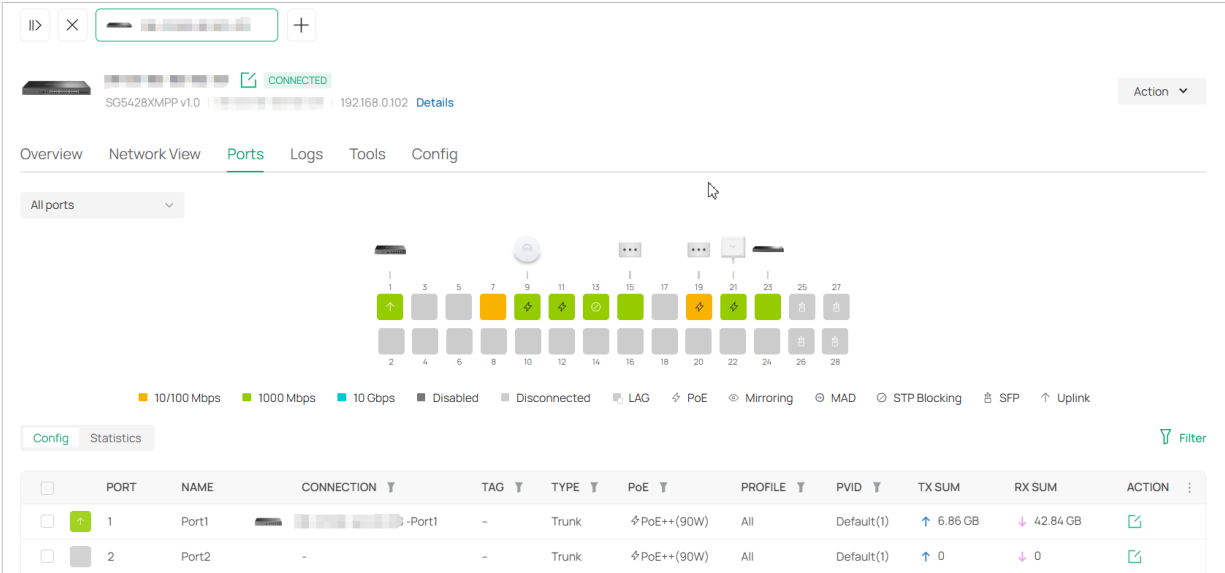

To configure a port, click the edit icon in the Action column. Port settings may vary by port type. For configuration instructions, refer to [13. 2. 2 Port Settings](#).


Logs

In [Logs](#), you can check the logs of the device, such as alerts, events, and configuration result.

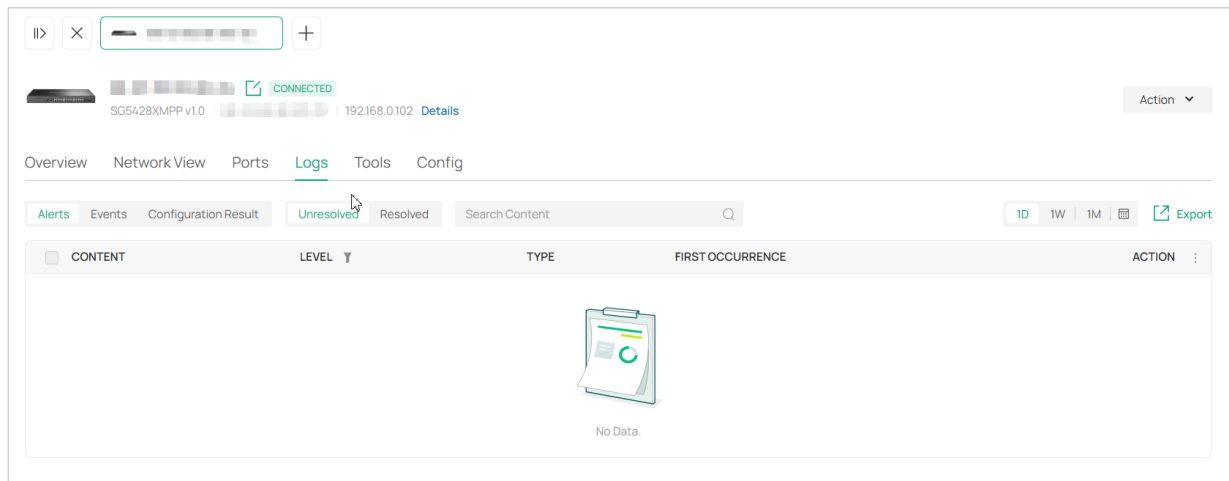

Tools


In **Tools**, you can use network tools to test the device connectivity, Open Terminal to execute CLI or Shell commands, and perform cable test to check cable issues.

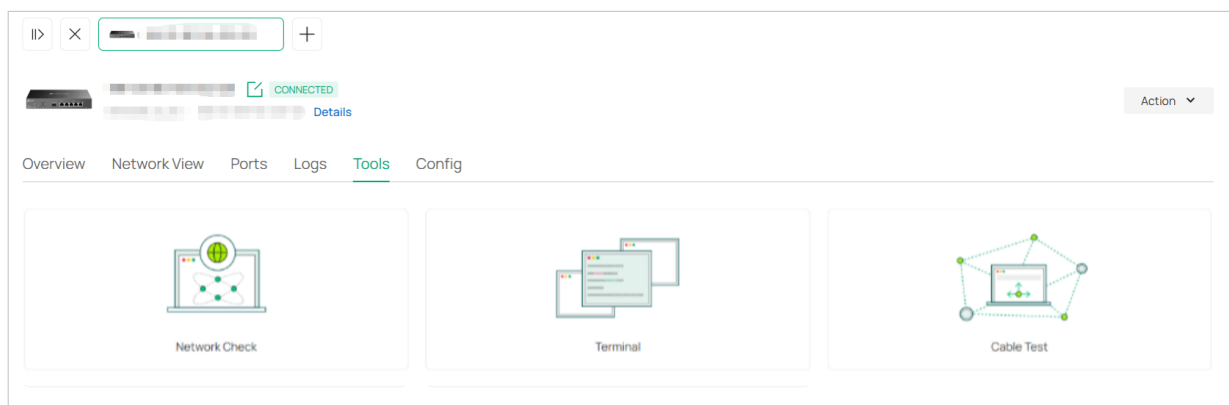

14.5 Configure the Switch

Launch the controller and access a site. Go to [Devices > Device List](#). In the device list, click a switch, click [Manage Device](#) and go to the [Config](#) page.

In [Config](#), you can edit device settings. Device settings may vary by model.

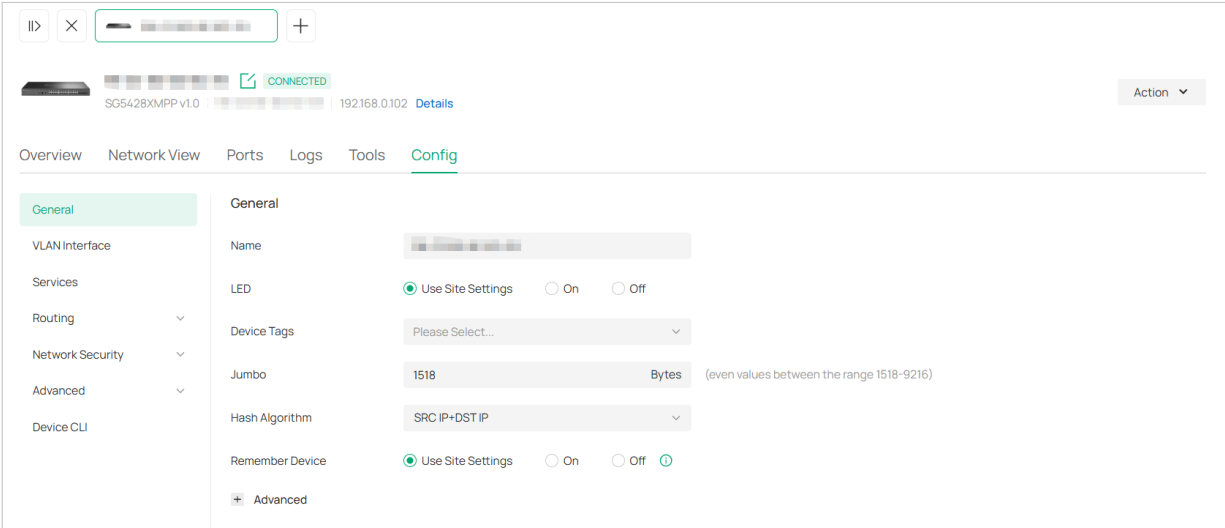

General Settings

Name	Specify a name of the device.
LED	Select the way that device's LEDs work. Use Site Settings: The device's LED will work following the settings of the site. On/Off: The device's LED will keep on/off.
Device Tags	Select a tag from the drop-down list or create a new tag to categorize the device.
Jumbo	Configure the size of jumbo frames. By default, it is 1518 bytes. Generally, the MTU (Maximum Transmission Unit) size of a normal frame is 1518 bytes. If you want the switch supports to transmit frames of which the MTU size is greater than 1518 bytes, you can configure the MTU size manually here.

Hash Algorithm	Select the Hash Algorithm, based on which the switch can choose the port to forward the received packets. In this way, different data flows are forwarded on different physical links to implement load balancing. SRC MAC: The computation is based on the source MAC addresses of the packets. DST MAC: The computation is based on the destination MAC addresses of the packets. SRC MAC+DST MAC: The computation is based on the source and destination MAC addresses of the packets. SRC IP: The computation is based on the source IP addresses of the packets. DST IP: The computation is based on the destination IP addresses of the packets. SRC IP+DST IP: The computation is based on the source and destination IP addresses of the packets.
Remember Device	With this function, the controller will remember this device. After device reset and power-on, the controller will automatically adopt the device if the controller can find it.
SNMP	Configure SNMP to write down the Location and Contact detail. You can also click Manage to jump to Network Config > General Settings > SNMP .
Device Address	Configure the address, longitude, and latitude according to where the site is located. These fields are optional.
Management VLAN	Display the name of the current Management VLAN. To configure the Management VLAN, go to Config > VLAN Interface. Note that the controller will fail to manage your devices with wrong Management VLAN configurations. If you are not sure about your network conditions and the potential impact of any configurations, we recommend that you keep the default configurations. Refer to the Management VLAN Configuration Guide before you configure this feature.

VLAN Interface Settings

Management VLAN	Click the checkbox if you want to use the VLAN interface as Management VLAN. Note that the controller will fail to manage your devices with wrong Management VLAN configurations. If you are not sure about your network conditions and the potential impact of any configurations, we recommend that you keep the default configurations. Refer to the Management VLAN Configuration Guide before you configure this feature.
------------------------	---

IP Address Mode (when Management VLAN enabled)	Select a mode for the interface to obtain its IP address, and the VLAN will communicate with other networks including VLANs with the IP address. Static: Assign an IP address to the interface manually, specify the IP Address and Subnet Mask for the interface. When the VLAN interface is set as the Management VLAN, it is optional for you to specify the Default Gateway and Primary/Secondary DNS for the interface. DHCP: Assign an IP address to the interface through a DHCP server. When you want to let device use a fixed IP address, enable Use Fixed IP Address and specify the Network and IP Address based on needs. When the VLAN interface is set as the Management VLAN, you can further enable Fallback IP Address, and specify the Fallback IP Address, Fallback IP Mask, and Fallback Gateway (optional). If the VLAN interface fails to get an IP address from the DHCP server, the fallback IP address will be used for the interface.
DHCP Option 12	When DHCP is selected as the IP Address Mode, you can specify the hostname of the DHCP client in the field. The DHCP client will use option 12 to tell the DHCP server their hostname.
DHCP Mode	Select a mode for the clients in the VLAN to obtain their IP address. None: Do not use DHCP to assign IP addresses. DHCP Server: Assign an IP address to the clients through a DHCP server. When DHCP Server is selected, you can specify the DHCP Range, and the IP addresses in the range can be assigned to the clients in the VLAN. Also, it is optional for you to specify the DHCP Option 138, Primary/Secondary DNS, Default Gateway, and Lease Time. DHCP Option 138 informs the DHCP client of the controller's IP address when the client sends a request to the DHCP server, and specify Option 138 as the controller's IP address here. Lease Time decides how long the client can use the assigned IP address. You can also click Custom Option and specify the DHCP Option code, type and value to add other DHCP Options. DHCP Relay: It allows clients in the VLAN to obtain IP addresses from a DHCP server on different subnet. When DHCP Relay is selected, specify the IP address of the DHCP server in Server Address.
IPv6	Enable this option if you want to set up an IPv6 interface.
IPv6 Mode	Select the IPv6 mode. Dynamic IP (SLAAC/DHCPv6): In this mode, determine whether to Get Dynamic DNS or use the specified DNS addresses. Static: In this mode, set the IP address, prefix length, gateway, and DNS server for the static address.
DNS Address	Select whether to get the DNS address dynamically from your ISP or designate the DNS address manually. Get Dynamic DNS: The DNS address will be automatically assigned by the ISP. Use the Following DNS Addresses: Enter the DNS address provided by the ISP.

Services Settings

Loopback Detection	When enabled, the switch checks the network regularly to detect the loopback. Note that Loopback Detection and Spanning Tree are not available at the same time.
Spanning Tree	Select a mode for Spanning tree. This feature is available only when Loopback Detection is disabled. Off: Disable Spanning Tree on the switch. STP: Enable STP (Spanning Tree Protocol) to prevent loops in the network. STP helps to block specific ports of the switches to build a loop-free topology and detect topology changes and automatically generate a new loop-free topology. RSTP: Enable RSTP (Rapid Spanning Tree Protocol) to prevent loops in the network. RSTP provides the same features as STP with faster spanning tree convergence. MSTP: Enable MSTP (Multiple Spanning Tree Protocol) to prevent loops in the network. MSTP is the extension of STP and RSTP.
CIST Priority	Specify the CIST priority for the switch. It determines the root bridge election in the spanning tree. A smaller value indicates higher priority, and the switch with the highest priority will be elected as the root bridge.
Hello Time	Specify the interval for sending BPDUs to detect link failures. It works with Max Age to monitor link status and maintain the spanning tree.
Max Age	Specify the aging time of BPDU (Bridge Protocol Data Unit) packets, which refers to the maximum duration a switch will wait to regenerate a new spanning tree if no BPDUs are received.
Forward Delay	When a link failure triggers spanning tree recalculation, the new configuration messages generated from the recalculation cannot propagate throughout the network immediately. After a delay of twice the Forward Delay interval, this latency ensures that new configuration messages have fully propagated across the network, thus preventing the formation of temporary loops.
Tx Hold Count	Specify the maximum number of BPDU that can be sent in a second.
Max Hops	BPDUs are discarded when their hop count reaches zero. This value controls the scale of the spanning tree in an MST region. Switches decrement the hop count by 1 before forwarding BPDUs.
QoS	Select the QoS rules. DSCP 802.1p Mapping: Select the rule for DSCP 802.1p Mapping. The DSCP 802.1p Mapping function is used to match the DSCP priority in different packets, then map them to the 802.1p priority. This rule has a lower priority than the VLAN Priority Mapping rule. 802.1p Queue Mapping: Select the rule for 802.1p Queue Mapping. The 802.1p Queue Mapping function is used to classify the packets based on the value of 802.1p priority, then map them to different queues. Queue Scheduler Profile: Select the Queue Scheduler profile. The Queue Scheduler Profile function is used to set the scheduler rule for the corresponding 802.1p queue.

Routing Settings

Static Route	Network traffic is oriented to a specific destination, and Static Route designates the next hop or interface where to forward the traffic. For configuration instructions, refer to Routing section in this guide.
OSPF	The OSPF protocol (Open Shortest Path First) is a link-state-based dynamic routing protocol that uses Dijkstra's SPF (shortest path first) algorithm to calculate routes within a single AS (autonomous system). OSPF establishes a link state database by advertising the state of network interfaces between routers, and generates shortest path trees. Other OSPF routers in the area use these shortest paths to construct routes.

In OSPF Process, you can add an OSPF process and configure the following parameters:

Process ID	Enter a number between 1 and 65535 to identify the OSPF process locally on the router.
Router ID	Specify the identity of the router. The selection priority order is manually configured interface, loopback interface, then physical interface.
Static	Check the box to enable static route. With this option selected, configure the following parameters: Metric: Specify the path cost when importing external routes. Metric Type: Specify the cost calculation type. Type 1 calculates internal cost and external cost. Type 2 calculates external cost only. The default value is type 2.
Connected	Check the box to enable direct route.
Area	Configure the OSPF areas.

In OSPF Interface, you can add an OSPF interface and configure the following parameters:

VLAN ID	Specify the ID of the VLAN.
Cost	Specify the interface overhead.
Network Type	Specify the network type of the OSPF interface.
Hello Interval	Specify the interval between Hello packets sent on the interface.
Dead Interval	Set the number of seconds after the last device hello packet was seen before its neighbors declare the OSPF router to be down.
Authentication Type	Specify the interface area verification method. None: No authentication. Simple: Simple authentication mode. The key is transmitted with clear texts. With this option selected, specify the Simple Key for authentication. MD5: MD5 authentication mode. The key and key ID are transmitted through MD5 encryption. With this option selected, specify the MD5 Key ID and MD5 Key for authentication.

Network Security Settings

ACL

ACL (Access Control List) allows a network administrator to create rules to restrict access to network resources. ACL rules filter traffic based on specified criteria such as source IP addresses, destination IP addresses, and port numbers, and determine whether to forward the matched packets.

For configuration instructions, refer to the ACL section in this guide.

Advanced Settings

OUI Based VLAN

The OUI Based VLAN function can perform VLAN and priority division and processing on device data packets starting with specific MAC addresses based on OUIs.

For configuration instructions, refer to the OUI Based VLAN section in this guide.

Device CLI Settings

Device CLI

Device CLI enables batch configuration of specific devices via command lines.

Device CLI supports variables. You can use the %x% format to define a variable x, and then set different values for different switches. When the Controller applies the Device CLI configuration to switches, it will automatically modify the variable %x% to the values you set.

For configuration instructions, refer to the CLI Configuration section in this guide.


14.6 Manage the AP

Launch the controller and access a site. Go to [Devices > Device List](#). In the device list, click an AP, then you can monitor and manage it in the Properties window and Device Management window.

14.6.1 Properties Window

The Properties window displays the device status, connection information, radios information, and other device information.

Note: The available functions in the window may vary by device model and status.

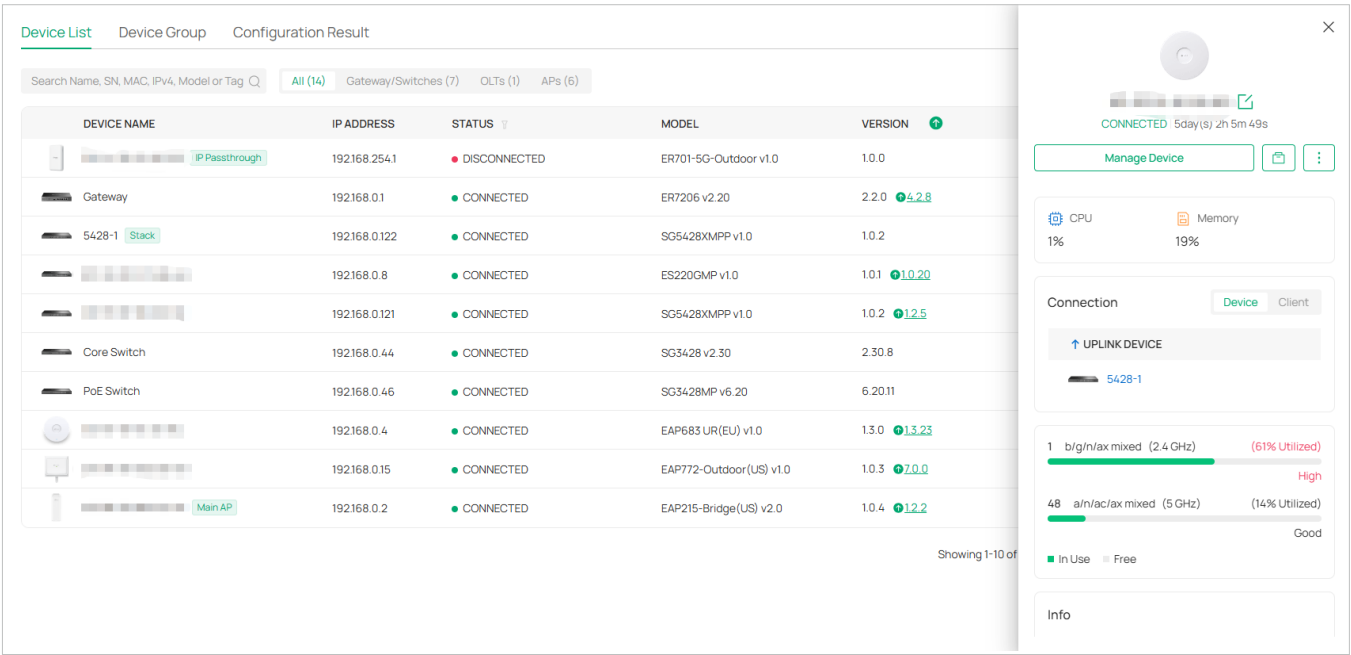

Quick Operations

Click the icon and choose an operation to quickly operate the device.

Custom Upgrade	Click Browse and choose a file from your computer to upgrade the device. After upgraded, the device will reboot and be readopted by the controller.
Copy Configuration	Select another device at the current site to copy its configurations. Note: Only devices of the same model as the current device will be displayed.
Download Device Info	If the device has an abnormality, you can download the device information and provide it to our R&D personnel to analyze the problem. Note: Firmware updates are required for earlier devices to obtain complete information.
Move to Site	Select a site which the device will be moved to. After moving to another site, device configurations on the prior site will be replaced by that on the new site, and its traffic history will be cleared.

Force Provision	Click Force Provision to synchronize the configurations of the device with the controller. The device will lose connection temporarily, and be adopted to the controller again to get the configurations from the controller.
IntelliRecover	(Only for the EAP directly connected to the PoE switch) Click to enable the IntelliRecover function for the device so that it can be added to the IntelliRecover monitoring list. IntelliRecover can help you monitor the status of PoE devices, automatically repairing abnormal devices.
Forget This Device	Click Forget and then the device will be removed from the controller. Once forgotten, all configurations and history related to the device will be wiped out.

Network Tools

Click the  icon and choose a network tool to analyze the network.

Network Check	Test the device connectivity via ping or traceroute.
Packet Capture	Capture packets for network troubleshooting.
Terminal	Open Terminal to execute CLI or Shell commands.
Link Speed Test	(Only for Bridge APs supporting link speed test and already form a bridge group) Click to test the link speed between the Main AP and Client AP.

14.6.2 Device Management Window


Click **Manage Device** to open the Device Management window to view more device details and change device settings.

In the management window, you can click + and select one or more devices to open new management windows, click the  icon in the top left to minimize the windows to the  icon in the right side, and click the  icon to reopen the minimized windows.

You can also click each tab to monitor and manage the device. The tabs available may vary by model.


Overview

In **Overview**, you can get an overview of the device, such as device status, link status, online time, current clients, and more.

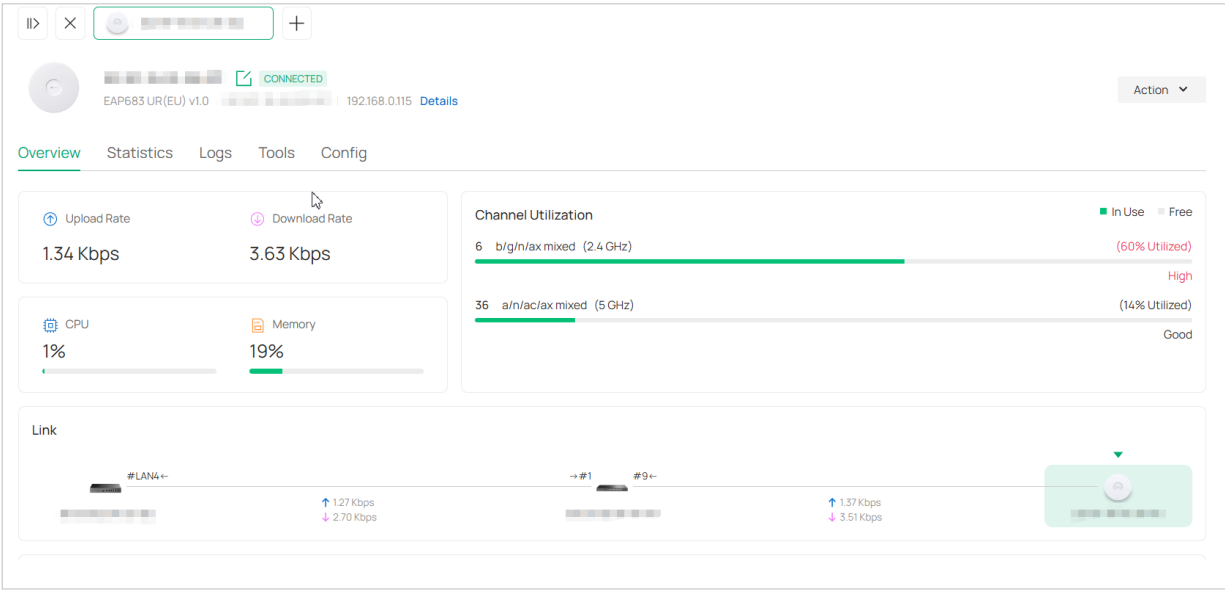


Statistics

In **Statistics**, you can check the traffic statistics of the device. You can also perform RF Scanning, interface detection, and/or spectral analysis if the device firmware supports these functions.

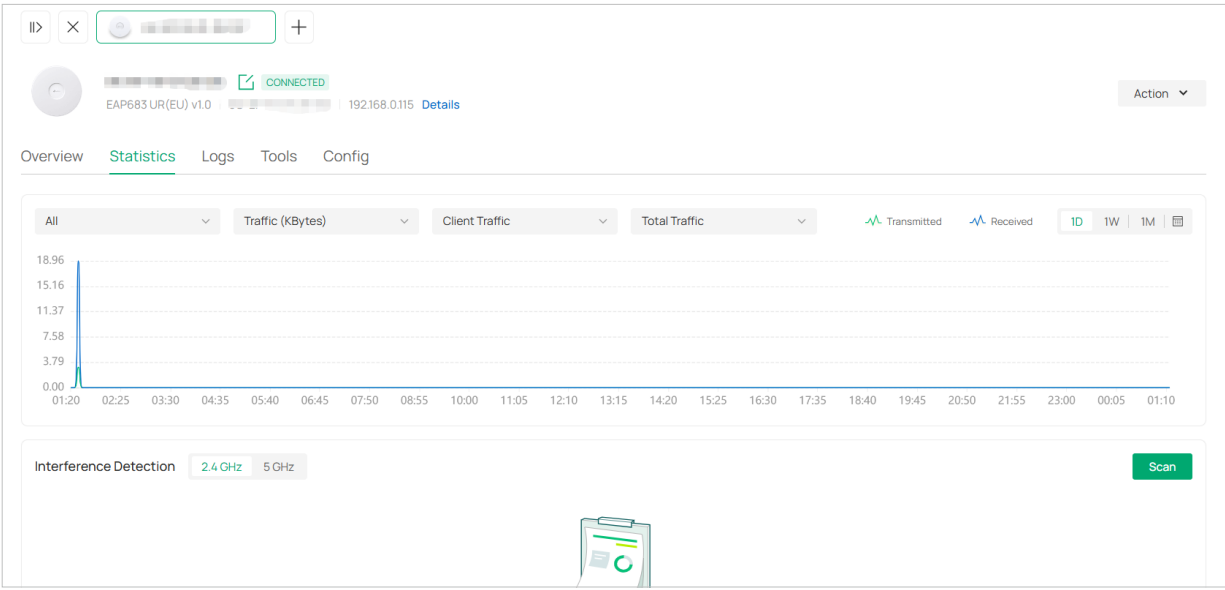


Logs

In **Logs**, you can check the logs of the device, such as alerts, events, and configuration result.

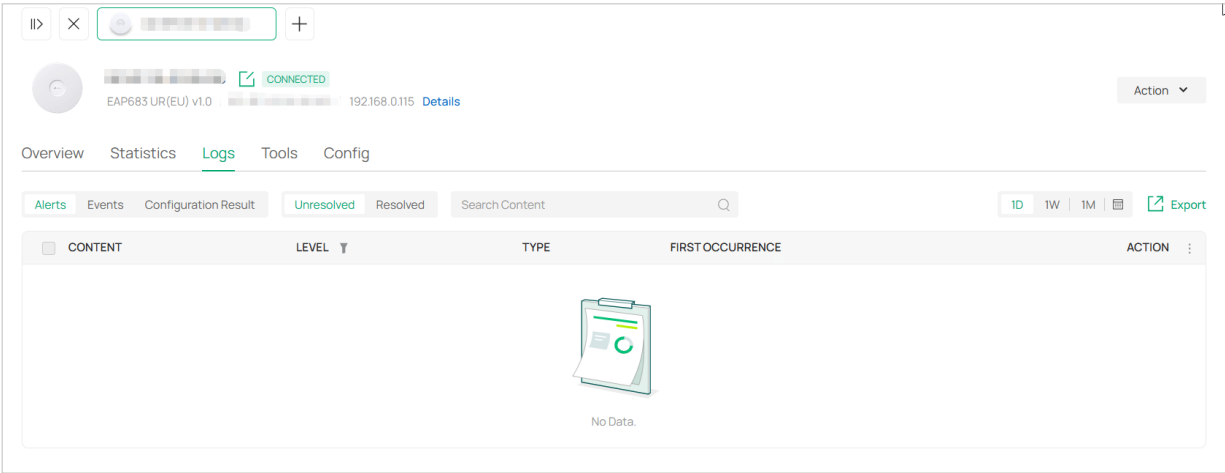

Ports (Only for APs with multiple LAN ports)

In **Ports**, you can view the port status and statistics and edit port settings.

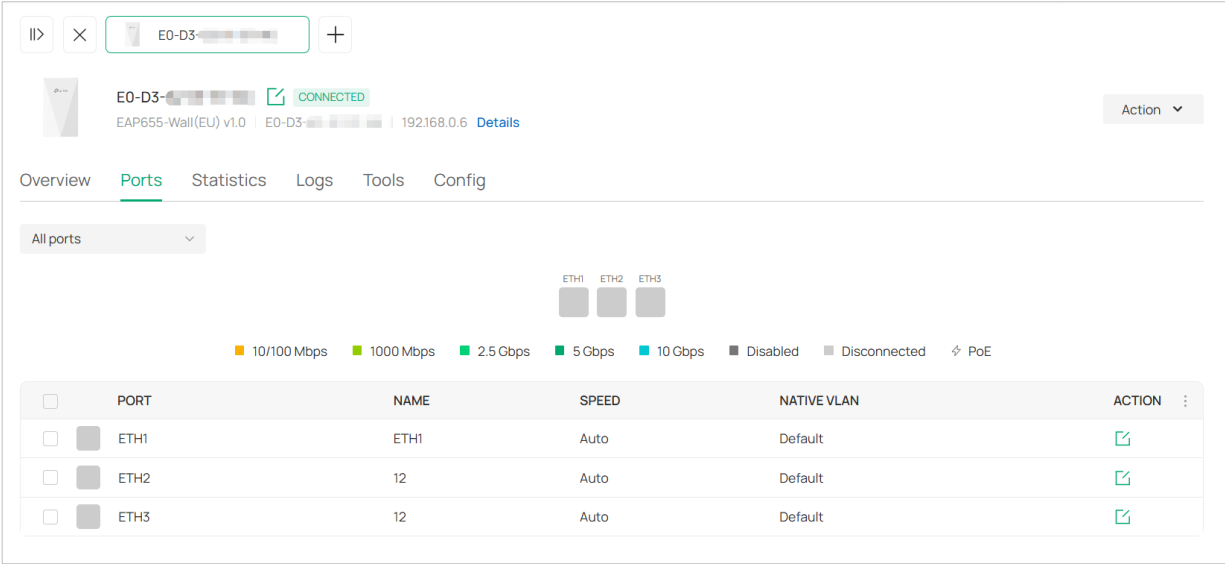

To configure a port, click the edit icon in the Action column. Port settings may vary by port type.

Name	Specify the name of the port.
Status	Click the box to enable or disable the port.
VLAN	Configure the uplink port VLAN corresponding to the SSID. Default: Using untagged transmission. Custom: Enter the PVID (Port VLAN Identifier). When a port receives an untagged frame, the AP inserts a VLAN tag to the frame based on the PVID before forwarding it.
PoE Out	(Only for APs with the PoE out port) Enable this function to supply power to the connected device on this port.

Mesh (Only for pending/connected/isolated devices supporting Mesh)

Mesh is used to establish a wireless network or expand a wired network through wireless connection on 5 GHz radio band. In practical application, it can help users to conveniently deploy APs without requiring Ethernet cable. After mesh network establishes, the APs can be configured and managed in the controller in the same way as wired APs. Meanwhile, because of the ability to self-organize and self-configure, mesh also can efficiently reduce the configuration.


Note that only certain AP models support Mesh, and the APs should be in the same site to establish a Mesh network.

To understand how mesh can be used, the following terms used in the Controller will be introduced:

Root AP	The AP is managed by the Controller with a wired data connection that can be configured to relay data to and from mesh APs (downlink AP).
Isolated AP	When the AP which has been managed by the Controller before connects to the network wirelessly and cannot reach the gateway, it goes into the Isolated state.
Mesh AP	An isolated AP will become a mesh AP after establishing a wireless connection to the AP with network access.
Uplink AP/Downlink AP	Among mesh APs, the AP that offers the wireless connection for other APs is called uplink AP. A Root AP or an intermediate AP can be the uplink AP. And the AP that connects to the uplink AP is called downlink AP. An uplink AP can offer direct wireless connection for 4 downlink APs at most.
Wireless Uplink	The action that a downlink AP connects to the uplink AP.
Hops	In a deployment that uses a root AP and more than one level of wireless uplink with intermediate APs, the uplink tiers can be referred to by root, first hop, second hop and so on. The hops should be no more than 3.

A common mesh network is shown as below. Only the root AP is connected by an Ethernet cable, while other APs have no wired data connection. Mesh allows the isolated APs to communicate with pre-configured root AP on the network. Once powered up, factory default or unadopted APs can detect the

AP in range and make itself available for adoption in the controller.

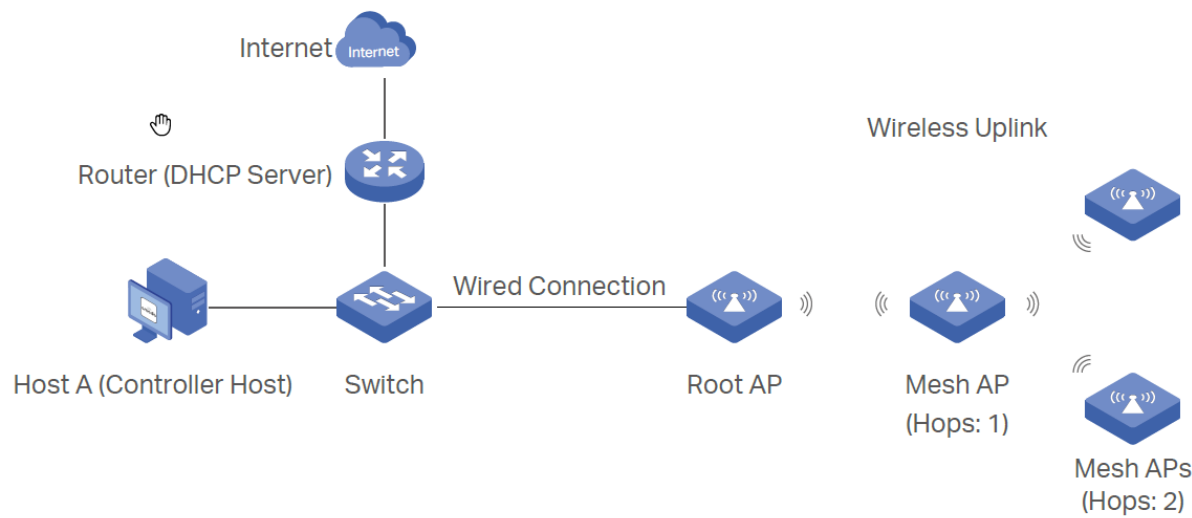


After all the APs are adopted, a mesh network is established. The APs connected to the network via wireless connection also can broadcast SSIDs and relay network traffic to and from the network through the uplink AP.

To build a mesh network, follow the steps below:

- 1) Enable Mesh function.
- 2) Adopt the Root AP.
- 3) Set up wireless uplink by adopting APs in Pending (Wireless) or Isolated status.

- 1. Go to [Network Config](#) > [General Settings](#) > [Site Settings](#) > [Wireless Features](#) and make sure Mesh is enabled.

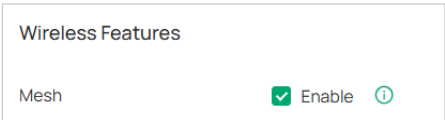

- 2. Go to [Devices](#) to make sure that the Root AP has been adopted by the controller. The status of the Root AP is Connected.

Search Name, SN, IP, Model or Tag						Export	Batch Action
All Gateway/Switches OLTs APs							
DEVICE NAME	IP ADDRESS	STATUS	MODEL	VER	ACTION		
ER605 v1.0	192.168.0.1	CONNECTED	ER605 v1.0	1.3.	⏻		
TL-SG2428P v1.0	192.168.0.3	CONNECTED	TL-SG2428P v1.0	1.1.	📶 ⏻ ⬆️ ⬇️		
EAP235-Wall(US) v1.0	192.168.0.2	CONNECTED	EAP235-Wall(US) v1.0	3.2.	📶 ⏻		

- 3. Install the AP that will uplink the Root AP wirelessly. Make sure the intended location is within the range of Root AP. The APs that is waiting for Wireless Uplink includes two cases: factory default APs and APs that has been managed by the controller before. Go to [Devices](#) to adopt an AP in

Pending (Wireless) status or link an isolated AP.

DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION	UPTIME	ACTION
	-	PENDING	EAP772 v2.0	-		
	-	MANAGED BY OTHERS	EAP772 v2.0	-		
	-	MANAGED BY OTHERS	EAP690E HD v1.0	-		
	192.168.137.109	CONNECTED	EAP225(EU) v3.0	5.0.0	20h 11m 35s	 
	192.168.137.116	CONNECTED	EAP625GP-Wall(US) v1.0	1.0.0	20day(s) 19h 52m 5s	 
	192.168.137.172	CONNECTED	EAP650-Outdoor(EU) v1.0	1.2.0	8m 42s	 

- 1) For the factory default AP, after powering on the device, the AP will be in Pending (Wireless) status. Go to [Devices](#), click [Add Devices](#), choose [Auto Find](#), then click the adopt icon in the Action column to adopt the AP.
- 2) For the AP that has been managed by the Controller before and cannot reach the gateway, it goes into Isolated status in the [Devices](#) list when it is discovered by controller again. Click the adopt icon in the Action column to connect the Uplink AP.

Once mesh network has been established, the AP can be managed by the controller in the same way as a wired AP.

To view mesh info, click the mesh AP in the device list, click [Manage Device](#), and go to the [Mesh](#) page.

In [Mesh](#), if the selected AP is an uplink AP, this page lists all downlink APs connected to the AP.

Details Clients [Mesh](#) Config Statistics


Downlinks

Name	Signal
	-37 dBm

Showing 1-1 of 1 records < 1 >

If the selected AP is a downlink AP, this page lists all available uplink APs and their channel, signal strength, hop, and the number of downlink APs. You can click [Rescan](#) to search the available uplink APs

and refresh the list, and click [Link](#) to connect the uplink AP and build up a mesh network.

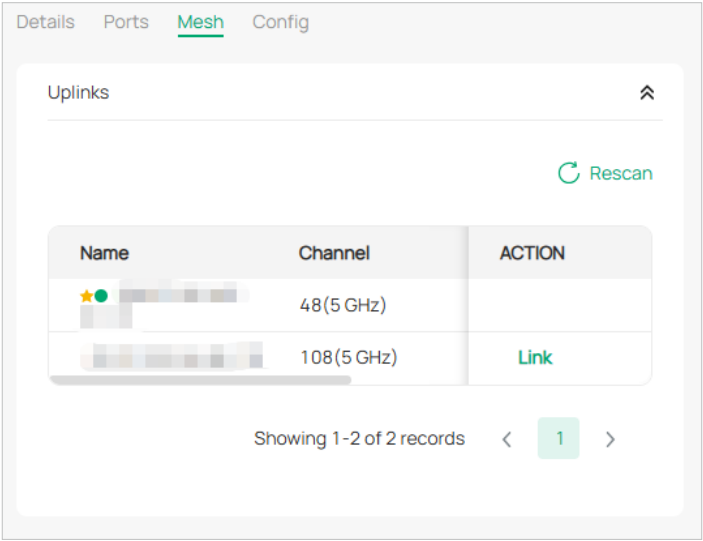


Tips:

- You can manually select the priority uplink AP that you want to connect in the uplink AP list. To build a mesh network with better performance, we recommend that you select the uplink AP with the strongest signal, least hop and least downlink AP.
- Auto Failover is enabled by default in [Site Settings](#), and it allows the controller automatically select an uplink AP for the isolated AP to establish Wireless Uplink. And the controller will automatically select a new uplink AP for the mesh APs when the original uplink fails.

Tools


In [Tools](#), you can use network tools to test the device connectivity or Open Terminal to execute CLI or Shell commands.

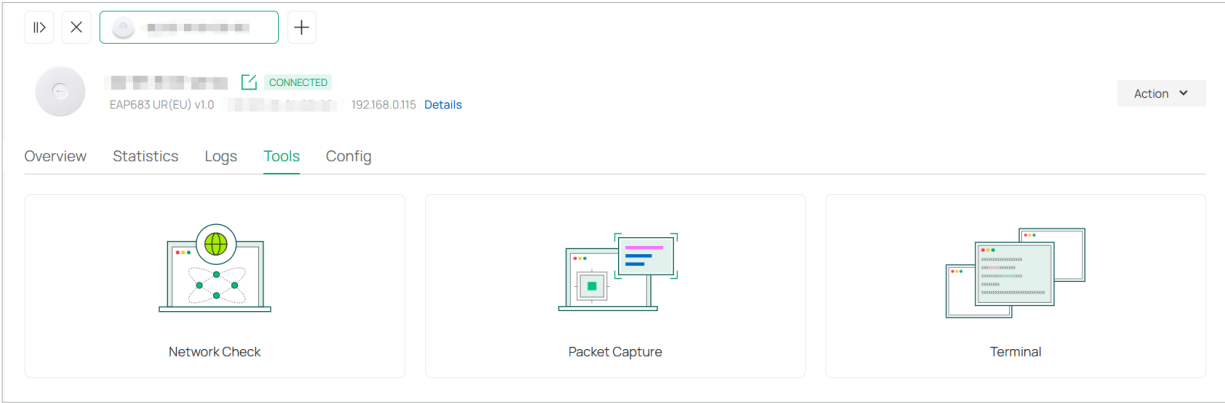

14.7 Configure the AP

Launch the controller and access a site. Go to **Devices > Device List**. In the device list, click an AP, click **Manage Device** and go to the **Config** page.

In **Config**, you can edit device settings. Device settings may vary by model.

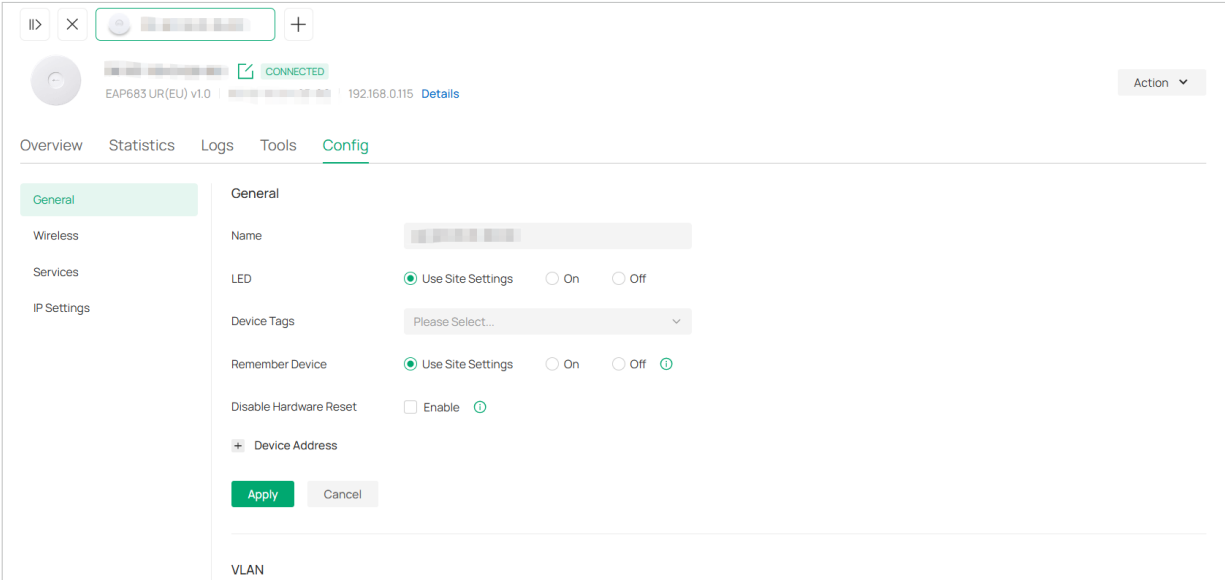

General Settings

Name	Specify a name of the device.
LED	Select the way that device’s LEDs work. Use Site Settings: The device’s LED will work following the settings of the site. On/Off: The device’s LED will keep on/off.
Wi-Fi Control	(Only for Certain APs) Enable Wi-Fi Control, and it will take effect only when the LED feature is enabled. After enabling Wi-Fi Control, you can press the LED button on the AP to turn on/off the Wi-Fi and LED at the same time.
Device Tags	Select a tag from the drop-down list or create a new tag to categorize the device.
Remember Device	With this function, the controller will remember this device. After device reset and power-on, the controller will automatically adopt the device if the controller can find it.
Device Address	GPS Enable: (Only for models with the with GPS chip) When enabled, the device can actively obtain GPS data and update its location. Address/Longitude/Latitude: Configure the parameters according to where the site is located. These fields are optional.

Management VLAN	Specify the VLAN ID of the management VLAN. Only the hosts in the Management VLAN can log in to the AP via the Ethernet port. This provides a safer method to manage the AP. Note that the controller will fail to manage your devices with wrong Management VLAN configurations. If you are not sure about your network conditions and the potential impact of any configurations, we recommend that you keep the default configurations. Refer to the Management VLAN Configuration Guide before you configure this feature.
------------------------	--

Wireless Settings

■ Radios

In Radios, you can control how and what type of radio signals the AP emits. Select each frequency band and configure the parameters. Different models support different bands.

AFC	(For Wi-Fi 7 APs of US version) Enable this feature to use the 6GHz band. The AFC (Automated Frequency Coordination) feature adjusts the transmission power of the 6 GHz band according to your geographic location to meet regulatory requirements.
Installation Type	(For Indoor/Outdoor Wi-Fi 7 APs of EU version) Choose the installation mode of the device. Default Mode: In this mode, the device will adjust the Indoor/Outdoor mode of the 5GHz/6GHz band according to local regulations. This mode is recommended. Indoor Mode / Outdoor Mode: If selected, the device will adjust 5GHz/6GHz channel power bandwidth parameters for indoor / outdoor usage.
Status	If you disable the frequency band, the radio on it will turn off.
Wireless Mode	Specify the wireless mode of the band. Different bands have different available options. We recommend using the default value.
Channel Width	Specify the channel width of the band. Different bands have different available options. We recommend using the default value.
Channel	Specify the operation channel of the device to improve wireless performance. If you select Auto for the channel setting, the device scans available channels and selects the channel where the least amount of traffic is detected.
Channel Range	(Only for certain models) Specify the channel range of the device to improve wireless performance.

Tx Power

Specify the Tx Power (Transmit Power) in the 4 options: Low, Medium, High and Custom. The actual power of Low, Medium and High are based on the minimum transmit power (Min. TxPower) and maximum transmit power (Max. TxPower), which may vary in different countries and regions.

Low: $\text{Min. TxPower} + (\text{Max. TxPower} - \text{Min. TxPower}) * 20\%$ (round off the value)

Medium: $\text{Min. TxPower} + (\text{Max. TxPower} - \text{Min. TxPower}) * 60\%$ (round off the value)

High: Max. TxPower

Custom: Specify the value manually.

■ WLANs

In WLANs, you can apply the WLAN group to the AP and specify a different SSID name and password to override the SSID in the WLAN group. After that, clients can only see the new SSID and use the new password to access the network.

To create or edit WLAN groups, refer to [7.1 Set Up Basic Wireless Networks](#).

To override the SSID in a WLAN group, select the WLAN group, click the SSID, then click the edit icon in the Overrides column. Set the parameters.

SSID Override

Enable or disable SSID Override on the AP. If enabled, specify the new SSID and password to override the current one.

Note: If the SSID is enabled with 11os PPSK, the override function will make the SSID unavailable!

VLAN Override

Enable or disable VLAN Override on the AP. If enabled, enter a VLAN ID to override the current one.

■ Advanced

In Advanced, you can configure Load Balance and QoS to make better use of network resources. Load Balance can control the client number associated to the device, while QoS can optimize the performance when handling differentiated wireless traffics, including traditional IP data, VoIP (Voice-over Internet Protocol), and other types of audio, video, streaming media.

Select each band and configure the following parameters and features.

Max Associated Clients

Enable this function and specify the maximum number of connected clients. If the connected client reaches the maximum number, the device will disconnect those with weaker signals to make room for other clients requesting connections.

RSSI Threshold

Enable this function and enter the threshold of RSSI (Received Signal Strength Indication). If the client's signal strength is weaker than the threshold, the client will lose connection with the device.

Unscheduled Automatic Power Save Delivery

When enabled, this function can greatly improve the energy-saving capacity of clients.

OFDMA

(Only for AP supporting 802.11 ax or later standards) Enable this feature to enable multiple users to transmit data simultaneously, and it will greatly improves speed and efficiency. Note that the benefits of OFDMA can be fully enjoyed only when the clients support OFDMA.

Services Settings

SNMP

(Only for configuring a single device) Configure SNMP to write down the [Location](#) and [Contact](#) detail. You can also click [Manage](#) to jump to [Settings > Services > SNMP](#).

Loopback Control

(Only for EAPs with multiple LAN ports)

Loopback refers to the routing of data streams back to their source in the network. You can disable loopback control for the network or enable [Loopback Detection](#) to help detect loops that occur on a specific port. When a loop is detected on a port, the port will be blocked.

Layer-3 Accessibility

With this feature enabled, devices from a different subnet can access controller-managed devices.

LLDP

LLDP (Link Layer Discovery Protocol) can help discover devices.

Trunk Settings (Only for certain models)

The trunk function can bundle multiple Ethernet links into a logical link to increase bandwidth and improve network reliability.

To use the trunk function, enable this function and select the trunk algorithm mode.

Mode

Select the trunk algorithm mode. Based on the selected algorithm mode, the AP determines which physical port is used to send out the received packet.

SRC MAC+DST MAC: The AP determines the outgoing port based on both the source and destination MAC addresses of the packet.

DST MAC: The AP determines the outgoing port based on the destination MAC address of the packet.

SRC MAC: The AP determines the outgoing port based on the source MAC address of the packet.

Power Saving Settings (Only for Certain Models)

Trigger by Time

With this option enabled, you can specify the start and end time to enable power saving every day within the time period.

Trigger by Band

With this option enabled, you can specify the bands and idle duration to enable power saving when there are no connections for the specified duration on the bands.

Smart Antenna (Only for Certain Models)

Smart Antenna

Turn on this function to improve Wi-Fi performance for user-heavy scenarios through antenna array and intelligent algorithm. This helps overcome obstacles and signal interference.

IP Settings

IPv4 Mode

Select an IP mode and configure the parameters for the device.

DHCP: In this mode, make sure there is a DHCP server in the network and then the device will obtain dynamic IP address from the DHCP server automatically. If you want to let the device use a fixed IP address, you can enable [Use Fixed IP Address](#), and set the network and IP address based on needs. Also, you can set a fallback IP address to hold an IP address in reserve for the situation in which the device fails to get a dynamic IP address. Enable [Fallback IP Address](#) and then set the IP address, IP mask and gateway.

Static: In this mode, set the IP address, IP mask, gateway, and DNS server for the static address.

IPv6

Enable this option if you want to set up an IPv6 address.

IPv6 Mode

Select the IPv6 mode.

Dynamic IP (SLAAC/DHCPv6): In this mode, determine whether to Get Dynamic DNS or use the specified DNS addresses.

Static: In this mode, set the IP address, prefix length, gateway, and DNS server for the static address.

Bridge Settings (Only for Bridge APs)

Bridge SSID / Password

Set the Bridge SSID and password of the AP. APs with the same Bridge SSID and password will form a Bridge network.


14.8 Manage the OLT

Launch the controller and access a site. Go to [Devices > Device List](#). In the device list, click an OLT, then you can monitor and manage it in the Properties window and Device Management window.

14.8.1 Properties Window

The Properties window displays the device status, port status, and other device information.

Note: The available functions in the window may vary by device model and status.

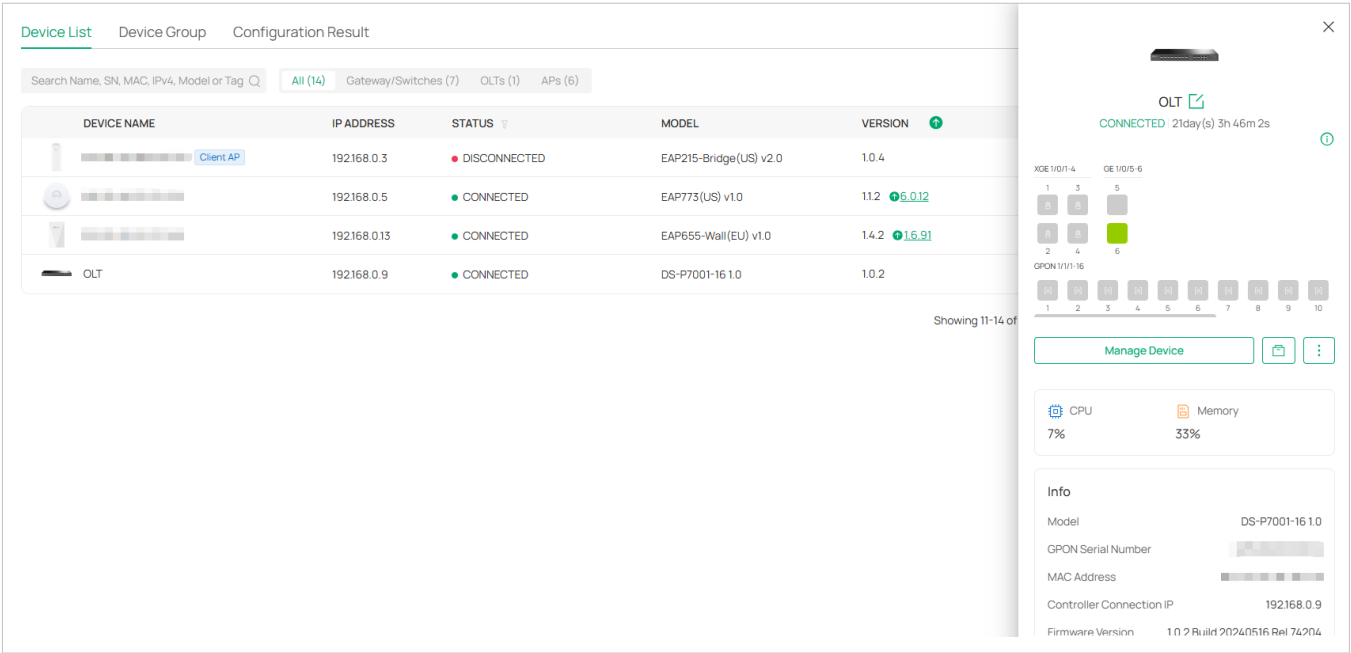

Quick Operations

Click the icon and choose an operation to quickly operate the device.

Custom Upgrade	Click Browse and choose a file from your computer to upgrade the device. After upgraded, the device will reboot and be readopted by the controller.
Move to Site	Select a site which the device will be moved to. After moving to another site, device configurations on the prior site will be replaced by that on the new site, and its traffic history will be cleared.
Forget This Device	Click Forget and then the device will be removed from the controller. Once forgotten, all configurations and history related to the device will be wiped out.

Network Tools

Click the icon and choose a network tool to analyze the network.

Network Check	Test the device connectivity via ping or traceroute.
---------------	--

14.8.2 Device Management Window


Click **Manage Device** to open the Device Management window to view more device details and change device settings.

In the management window, you can click + and select one or more devices to open new management windows, click the  icon in the top left to minimize the windows to the  icon in the right side, and click the  icon to reopen the minimized windows.

You can also click each tab to monitor and manage the device. The tabs available may vary by model.


Overview

In **Overview**, you can get an overview of the device, such as device status, link status, online time, downlink GPON APs, and more.

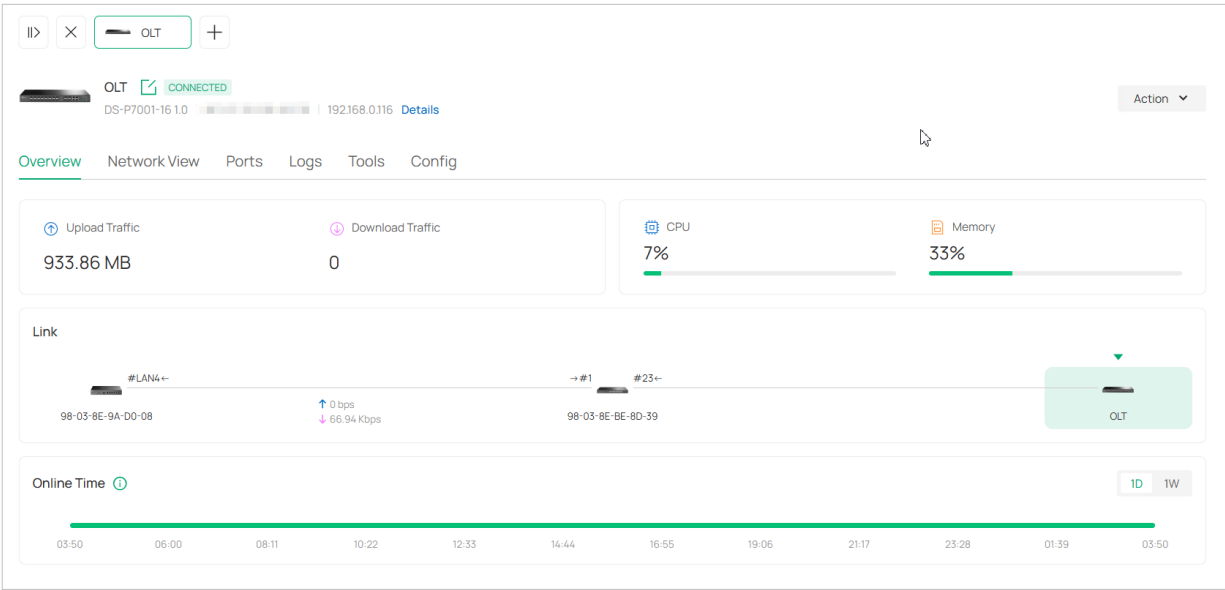


Network View

In **Network View**, you can check the network information of the device, such as routing table and ARP table.

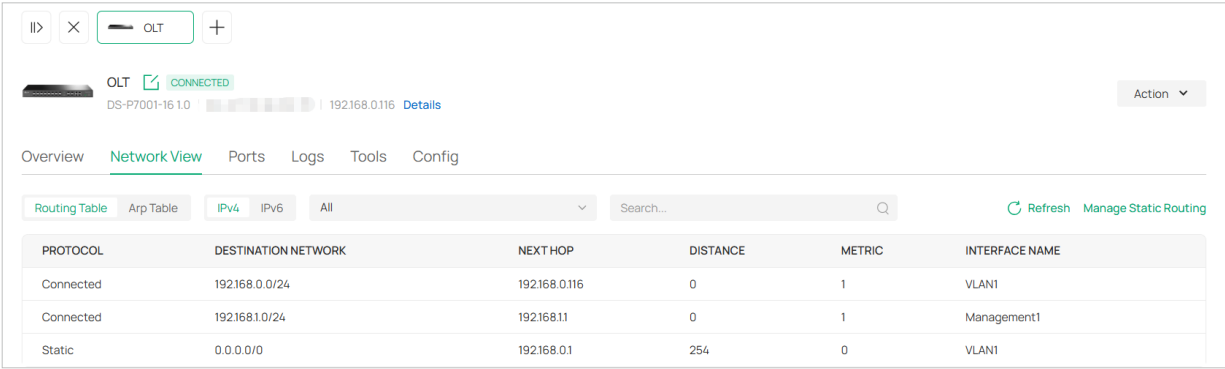


Ports

In **Ports**, you can view the port status and statistics.

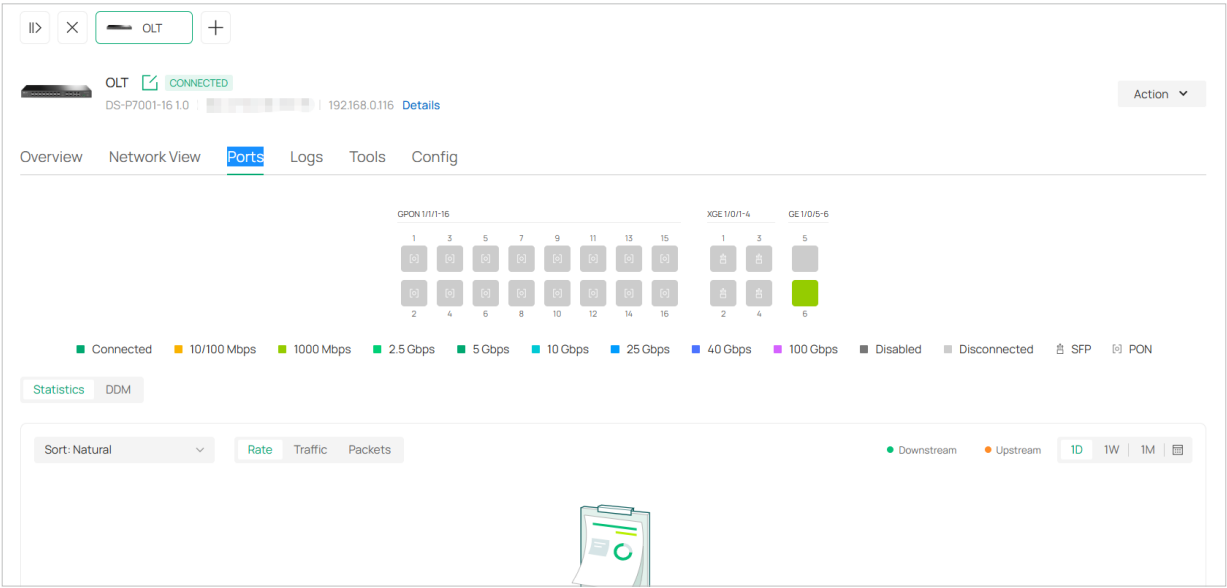


Logs

In **Logs**, you can check the logs of the device, such as alerts and events.

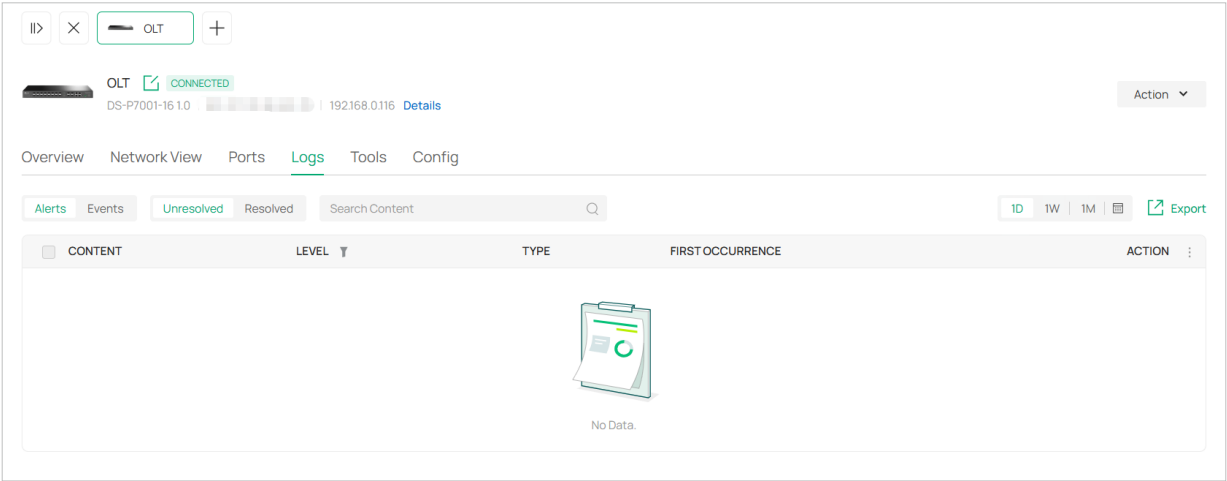

Tools

In **Tools**, you can use the network tool to test the device connectivity.

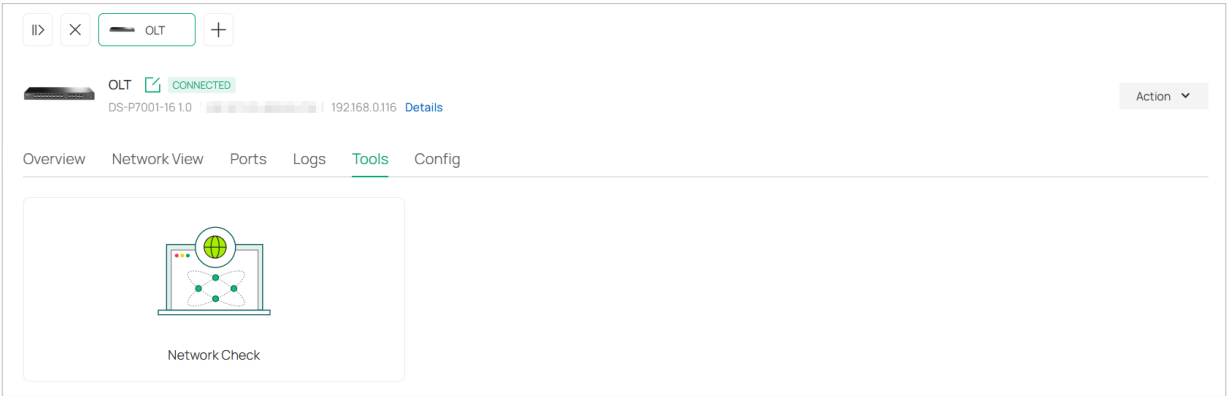

14.9 Configure the OLT

Launch the controller and access a site. Go to [Devices](#) > [Device List](#). In the device list, click an OLT, click [Manage Device](#) and go to the [Config](#) page.

In [Config](#), you can edit device settings. Device settings may vary by model.

For configuration instructions, refer to the user guide of your OLT model.

The screenshot shows the configuration page for an OLT device. At the top, there is a header bar with a back button, a close button, a tab labeled 'OLT', and an add button. Below the header, the device name 'OLT' is displayed with a 'CONNECTED' status indicator and a 'Details' link. The main content area is divided into two sections: a left sidebar with a list of configuration categories (General, Interface, PON, L2 Feature, L3 Feature, Multicast, QoS, Security, Maintenance, System) and a right pane for the 'General' configuration. The 'General' pane contains fields for 'Name' (set to 'OLT'), 'Device Tags' (a dropdown menu), and 'Device Address' (with a plus icon). At the bottom of the 'General' pane are 'Apply' and 'Cancel' buttons.

14. 10 Create and Manage Stack Groups

14. 10. 1 Introduction to Stack

Stack is a device virtualization technology that connects two and above switches supporting stack features via Ethernet cables through their stack ports, which logically virtualize them to one device as a whole to forward data in the network. Through this feature, switches can be stacked to improve reliability, expand port numbers, increase bandwidth, simplify networking, and etc.


In a stack system, the switches can be categorized mainly into two roles:

- Master Switch

A stack system has only one master switch. It manages and controls devices in the whole stack system.

- Member Switch

A stack system may have one or several member switches. They only forward data as standby devices of the master switch. When the master switch fails, a member switch will be re-elected as the new master switch.

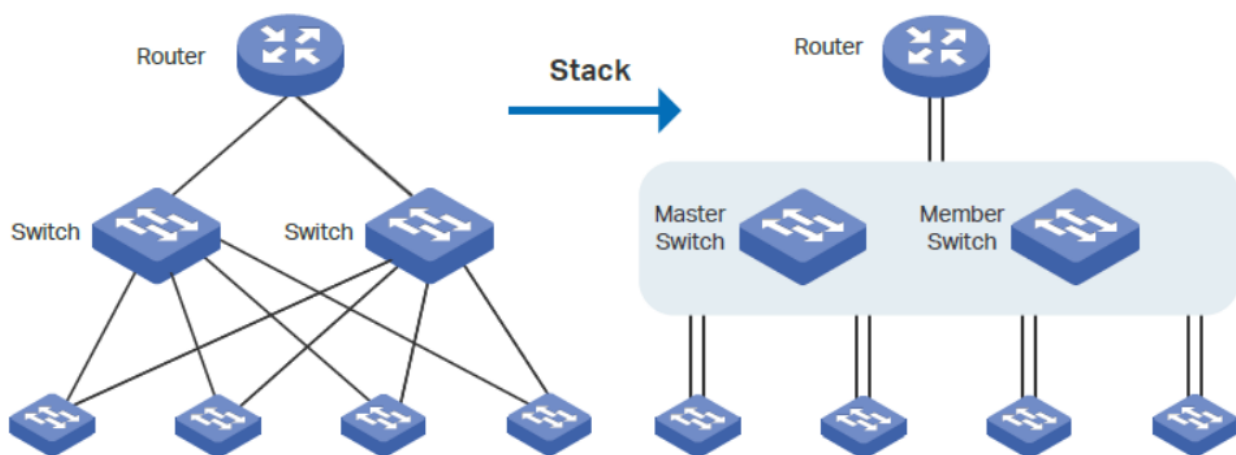

14. 10. 2 Create a Stack Group

1. Launch the controller and access a site.
2. Go to [Devices](#) > [Device Group](#) > [Stack Group](#).

3. Click **Create New Stack**. Configure the parameters.

Create New Stack Group

Stack Name

MAC Delay

Select Member (0/1)

☐	DEVICE NAME	STATUS	MODEL	UNIT	PRIORITY (1-255)	CONFIG STACK PORT GROUP ⓘ
☐	   	CONNECTED	SG5428XMPP v1.0	Unit2	-	Port 25 26 27 28

Add

Cancel

Stack Name Enter a name to identify the stack group.

Select Member Select the switches to be stacked, and configure the following parameters:

Unit: Specify the unit ID of the switch. Each switch in the stack has a unique unit ID for device management.

Priority: Specify the stack priority of the switch. The higher the stack priority, the more likely the switch is to be elected as the Master Switch. A smaller value means a higher priority.

Config Stack Port Group: Click the port to be stacked and choose the group ID. A port can join only one group.

Note: To change the stacking mode of a port, please link down it first. After a port is switched to stacking mode, it can no longer be used as a service port.

4. Apply the settings. Now you can connect the stack ports configured with the same group ID via Ethernet cables to stack the switches.

- Note:**
- Do not connect a stack port to a non-stack port. Otherwise, device operation may be affected.
 - Connect stack ports only when they are set to the same group ID.

14. 10. 3 Configure and Monitor the Stack Group

The stack group logically virtualizes switches to one device as a whole. You can configure and monitor stack groups in a similar way as configuring and monitoring switches. For details, refer to [14. 4 Manage the Switch](#).


14. 11 Create and Manage Bridge Groups

14. 11. 1 Introduction to Bridge

Outdoor Bridge easily builds point-to-point and point-to-multi-point long range wireless connections. In practical application, it can help users to conveniently deploy APs over long range.

In a bridge system, the APs can be categorized mainly into two roles:

- Main AP
The Main AP connects to your gateway/router for network access. A bridge system generally has only one Main AP.
- Client AP
Client APs connect to the Main AP via wireless bridge. A bridge system may have one or several Client APs.

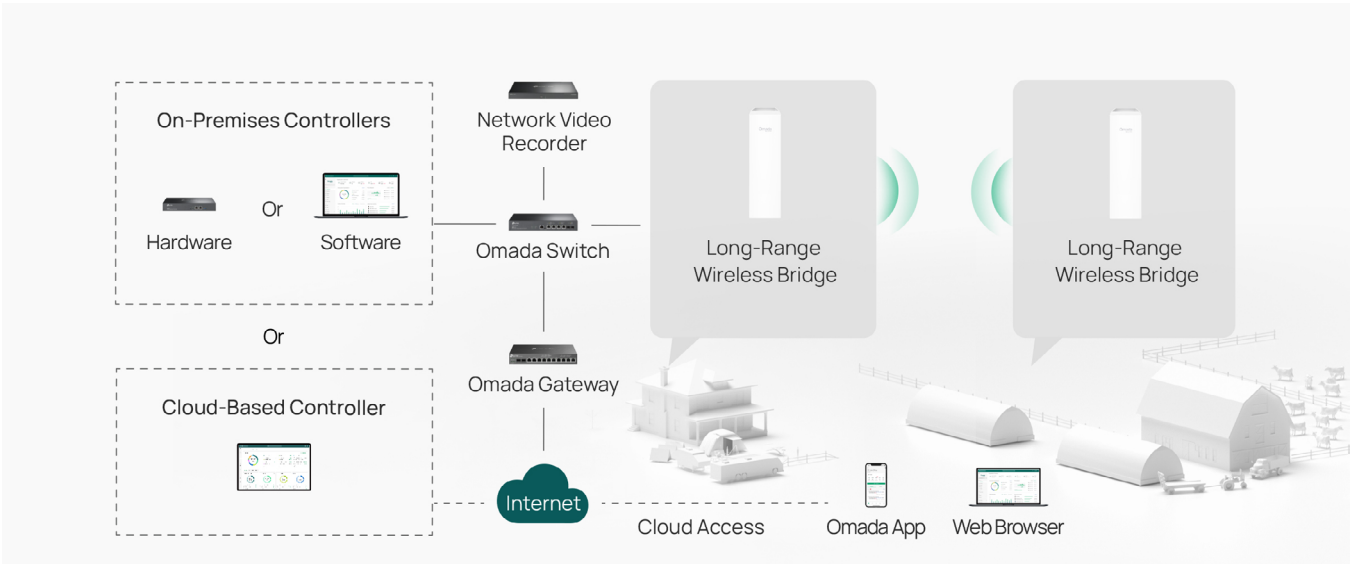

14. 11. 2 Create a Bridge Group

1. Obtain bridge APs and set up a bridge network by referring to the relevant AP Installation Guide.
2. Launch your controller and access a site.
3. Go to **Devices > Device Group > Bridge Group**. The controller will detect the bridge APs and show them in the Grouped list.

Search Name, SN, MAC, IPv4, Model or Tag

Stack Group

Bridge Group

GPON Group

Grouped

Ungrouped

Export

Batch Action

+ Add Devices

	DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION		ACTION
	30-68- MainAP	192.168.0.4	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4 1.2.2	2	
	30-68- Client AP	192.168.0.2	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4 1.2.2	2	

Showing 1-2 of 2 records

1

10 /page

If you have ungrouped bridge APs, locate the AP in the Ungrouped list and click the Adopt icon to adopt it.

Search Name, SN, MAC, IPv4, Model or Tag

Stack Group

Bridge Group

GPON Group

Grouped

Ungrouped

Batch Action

+ Add Devices

DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION	UPTIME	ACTION
	192.168.0.2	MANAGED BY OTHERS	EAP115-Bridge(US) v3.0	1.0.0	2day(s)	

Showing 1-1 of 1 records

<

1

>

10 / page

14. 11. 3 Configure and Monitor the Bridge Group

In the grouped bridge group list, you can configure and monitor the APs in the group.

Search Name, SN, MAC, IPv4, Model or Tag

Stack Group

Bridge Group

GPON Group

Grouped

Ungrouped

Export

Batch Action

+ Add Devices

	DEVICE NAME	IP ADDRESS	STATUS	MODEL	VERSION		ACTION
	30-68- Main AP	192.168.0.4	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4 1.2.2	2	
	30-68- Client AP	192.168.0.2	CONNECTED	EAP215-Bridge(US) v2.0	1.0.4 1.2.2	2	

Showing 1-2 of 2 records

< 1 >

10 /page



(For connected switches and APs) Click this icon and the LEDs of the device will flash to indicate the device’s location. The LEDs will keep flashing for 10 minutes, or you can click the icon to stop the flashing.



(For connected devices) Click to reboot the device.



Click to upgrade the device’s firmware version. This icon appears when the device has a new firmware version.



(Only for the Main AP)
Click to change the AP’s role to a Client AP.



(Only for the Main AP)
Click to move the APs in the current bridge group to another site.

Note: Bridge APs only support the Move to Site function on the Bridge Group page.

Click the AP in the bridge group, then you can configure and monitor it in a similar way as configuring and monitoring a common AP. For details, refer to [14. 6 Manage the AP](#).

14. 12 View the Configuration Result

The Configuration Result page displays abnormal configuration results for devices excluding the OLT. If a device's configuration is entirely successful, it will not be displayed.

Launch the controller and access a site, then go to [Devices](#) > [Configuration Result](#).

The OLT does not support Configuration Result query currently. You can go to the OLT configuration page to check its configurations.

All (1)

Gateway/Switches (0)

APs (1)

Failed (1)

Preconfigure (6)

Incompatible (6)

Expand

OC-EF

OC-EF

< 1 >

UI Configuration

Search Feature

FEATURE	ACTION	TIME	FAILURE CAUSES
Digit Map	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
QoS - 5 GHz	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
Scheduler Associated (6)	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
Radios - 2.4 GHz	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
IP Group (1)	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
IPv6 Group (1)	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
Scheduler List (1)	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)
ETH POE Out (3)	Apply	Sep 17, 2025 16:32:59	Device response timed out. (ErrorCode: ap_-6)

You can switch tabs based on the device type (All Devices, Gateway/Switches, and APs) or configuration result (Failed, Preconfigured, and Incompatible).

- **Failed:** The configuration is not delivered. For the failure cause of device response timeout, force provision the configuration or restart the device. For other failure causes, check the failed configuration, correct and save it, then deliver it to the device. If the problem still exists, contact our technical support.
- **Preconfigured:** The configuration may not be delivered because the device is offline. If your device is in connected state, force provision configuration or restart the device. If the problem still exists, contact our technical support. (This status does not affect the management and use of the device.)
- **Incompatible:** The configuration is not supported by the current device's firmware.

You can click [Expand](#) on the right to search by Device Name and MAC Address.

Click on a device in the device list on the left to display its detailed configuration and failure causes.

Chapter 15

Manage Clients

This chapter guides you on how to monitor and manage the clients using the Clients page and the Hotspot system. This chapter includes the following sections:

- [15. 1 Manage Clients](#)
- [15. 2 Manage Client Authentication in Hotspot](#)

15.1 Manage Clients

The Clients page offers a straight-forward way to manage and monitor clients. It displays wired and wireless clients in the chosen site and their general information.

To manage clients, go to the [Clients](#) page in Site View.

15.1.1 Manage the Client List

You can manage clients in the client list. You can switch pages based on the client status (Online, Offline, Blocked, and All).

OnlineOfflineBlockedAll

4Online Clients

1Office

3Other

Search Name, IP or MAC

All (4)Wireless (0)Wired (4)IPCs/NVRs

Batch ConfigFilter

CLIENT NAME	IP ADDRESS	AUTHENTICATION TYPE	STATUS	SSID	NETWORK	AP/PORT	UPLOAD RATE	DOWNLOAD RATE	ACTION
TL-MR110-Outdoor	192.168.0.18	-	CONNECTED	-	Default		-	3.45 Kbps	
DESKTOP-QUCCJ7L	192.168.0.100	-	CONNECTED	-	Default		-	5.96 Kbps	
	-	-	CONNECTED	-	test		-	72 bps	
MikroTik	192.168.0.113	-	CONNECTED	-	Default		-	-	

Monitor Connection Status

The Status column explains the connection status of clients.

PENDING	The client has not passed the authentication and it is not connected to the internet.
AUTHORIZED	The client has been authorized and is connected to the internet.
CONNECTED	The client is connected to internet via non-portal network.
AUTHENTICATION-FREE	The client does not need to be authorized and it is connected to the internet.
DISCONNECTED BLOCKED	The client is blocked.

Customize the Column

To customize the columns, click the ellipsis icon next to [Action](#) and check the boxes of information type.

To change the list order, click the upside-down triangle icon next to the column head, which indicates the ascending or descending order.

When this icon  appears in the Wireless Connection column, it indicates the client is in the power-saving mode.

Filter the Clients

Use the search box and tab bar above the table to filter clients.

To search for clients, enter the text in the search box.

To filter clients, a tab bar is above the table to filter the clients by client type. You can also filter clients by their status, connected SSID, network, AP/port by clicking the filter icons in the table header.

Quick Operations

For quick operations on a single client, click the icons in the Action column. The available icons vary according to the client status and connection type.

	Click to block the client in the chosen site.
	Click to forget the client in the chosen site.
	(With portal authentication enabled) Click to manually authorize the client that has not passed the portal authentication.
	(With portal authentication enabled) Click to unauthorize the client that has passed the portal authentication.
	(For wireless clients) Click to reconnect the wireless client to the wireless network.

Batch Config

You can configure clients in batches. Click **Batch Config**, select clients, and click **Done**. Then you can configure settings for the selected clients in batch.

15. 1. 2 Manage a Client

In the client list, click a client, then you can monitor and manage it in the Properties window and Client Management window.

Properties Window

The Properties window displays the basic information of the client. You can click the edit icon to edit the client name and information.

OnlineOfflineBlockedAll

5Online Clients

1Office

4Other

Search Name, IP or MAC

All (5)Wireless (0)Wired (5)IPCs/NVRs

	CLIENT NAME	IP ADDRESS	AUTHENTICATION TYPE	STATUS	SSID	NETWORK	AP/PORT
...	TL-MR110-Outdoor	192.168.0.18	-	CONNECTED	-	Default	
...		-	-	CONNECTED	-	Default	
	DESKTOP-QUGCJ7L	192.168.0.100	-	CONNECTED	-	Default	
...		-	-	CONNECTED	-	test	
...	MikroTik	192.168.0.113	-	CONNECTED	-	Default	

CONNECTED

Manage Client

Uplink Switch

Port

15

Network

test

Uptime

2day(s) 23h 35m 55s

Download Rate

72 bps

Pkts/Bytes

↑ 262670 / 51.38 MB
↓ 12087 / 3.41 MB

VLAN

1234

Info

MAC Address

Type

Unknown

■ Quick Operations

Click the  icon and choose an operation to quickly operate the client.

Block	Click to block the client from accessing the site network.
Forget	Click to remove the client from the site network. Once forgotten, client settings will be wiped out.
Reconnect	(For wireless clients) Click to reconnect the wireless client to the wireless network.
Authorize	(With portal authentication enabled) Click to manually authorize the client that has not passed the portal authentication.
IntelliRecover	(Only for the client directly connected to the PoE switch) Click to enable the IntelliRecover function for the client so that it can be added to the IntelliRecover monitoring list. IntelliRecover can help you monitor the status of PoE devices, automatically repairing abnormal devices.

■ Network Tools

Click the  icon and choose a network tool to analyze the network.

Network Check	Test the network connectivity via ping or traceroute.
---------------	---

Client Management Window


Click **Manage Client** to open the Client Management window to view more client details and change client settings.

In the management window, you can click + and select one or more clients to open new management windows, click the  icon in the top left to minimize the windows to the  icon in the right side, and click the  icon to reopen the minimized windows.

You can also click each tab to monitor and manage the client.


■ Overview

In **Overview**, you can get an overview of the client, such as link status, online time, and more.

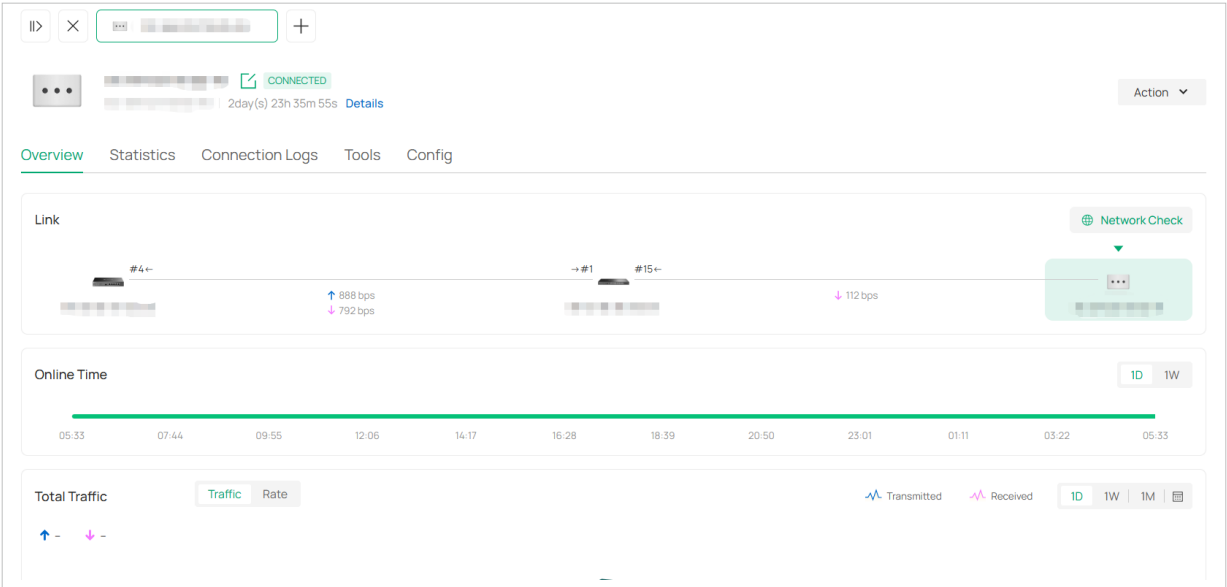


Statistics

In **Statistics**, you can check the DPI traffic statistics of the client.

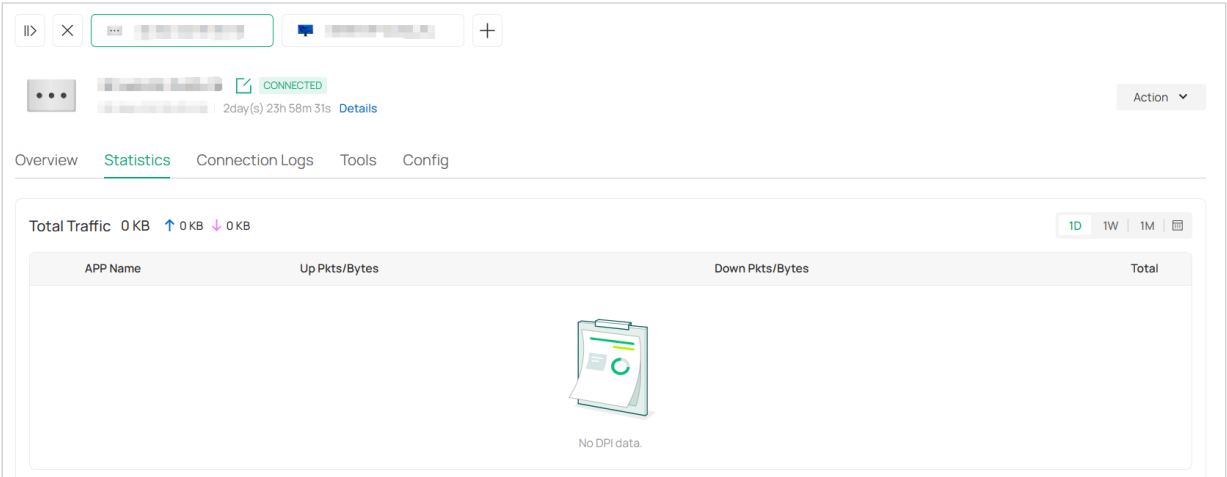


Connection Logs

In **Connection Logs**, you can check the connection logs of the client, such as association, roaming, disconnection, and more.

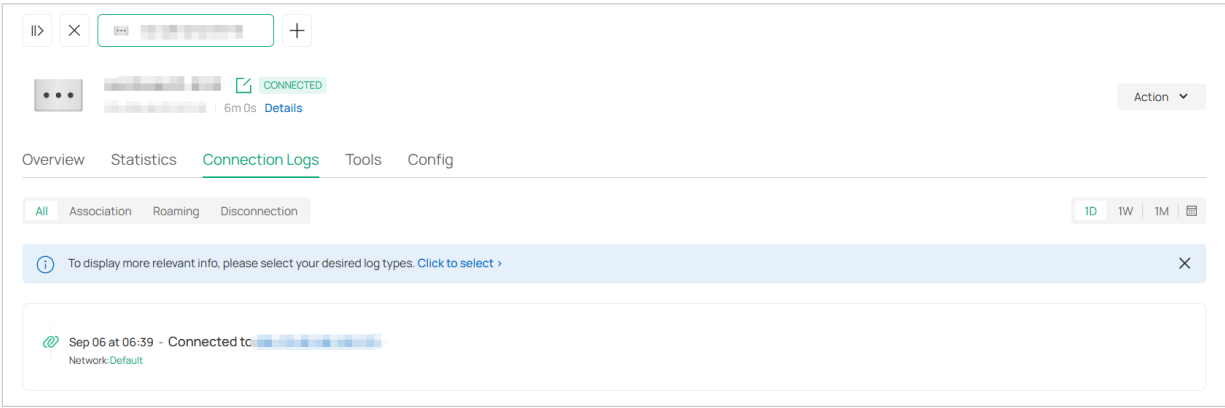


Tools

In **Tools**, you can use the network tool to test the network connectivity.

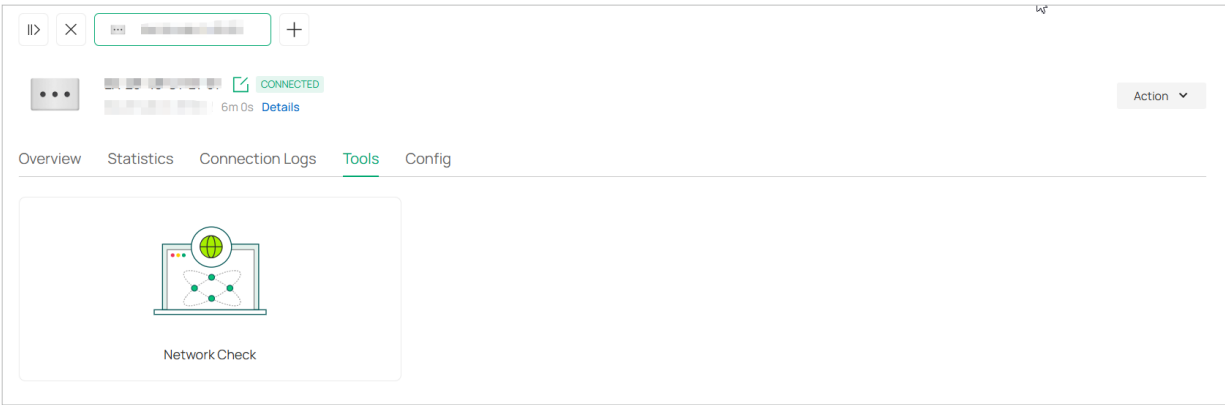

Config

In **Config**, you can edit client settings.

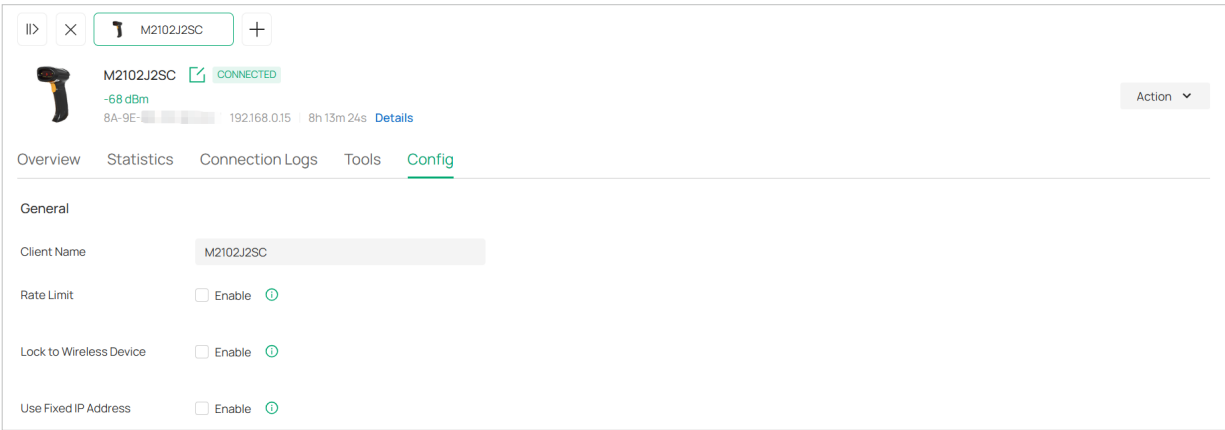

Client Name

Specify the client’s name to better identify different clients, and the name is used as the client’s username in the table on the Clients page.

Rate Limit	Enable this function if you want to limit the download and upload rate of each client to balance bandwidth usage. When enabled, select an existing rate limit profile, create a new rate limit profile or customize the rate limit. Custom: Specify the Download Limit and Upload Limit based on needs. Note: Rate Limit on this page is only available for the clients connected to the EAPs. To limit the rate of the clients connected to the gateway or switch, go to the Bandwidth Control page.
Lock to Wireless Device	When enabled, you can lock the device to a specific wireless device for stable connection. To use this function, ensure your device is using the device MAC rather than a random MAC. Otherwise, the function may not take effect. Only 11ac and above products support this function.
Use Fixed IP Address	Click the checkbox to configure a fixed IP address for the client. With this function enabled, select a network and specify an IP address for the client. Note: A gateway is required for this function. Otherwise, you cannot set a fixed IP address for the client.

15.2 Manage Client Authentication in Hotspot

Hotspot is a portal management system for centrally monitoring and managing the clients authorized by portal authentication. The following tabs are provided in the system for a easy and direct management.


Dashboard	Monitor portal authorizations at a glance through different visualizations.
Authorized Clients	View the records of the connected and expired portal clients.
Vouchers	Create vouchers for Portal authentication, and view and manage the related information.
Local Users	Create local user accounts for Portal authentication, view their information, and manage them.
Form Auth Data	Customize your survey contents and publish it to collect data.
Operators	Create operator accounts for Hotspot management, view their information, and manage them.

To access the system, click **Hotspot** in the sidebar of the **Site** interface.

15.2.1 Dashboard

In the dashboard, you can monitor portal authorizations at a glance through different visualizations.

To open the dashboard, launch the controller and access a site, click **Hotspot** in the sidebar, then click **Dashboard**. Specify the time period to view portal authorization histories.

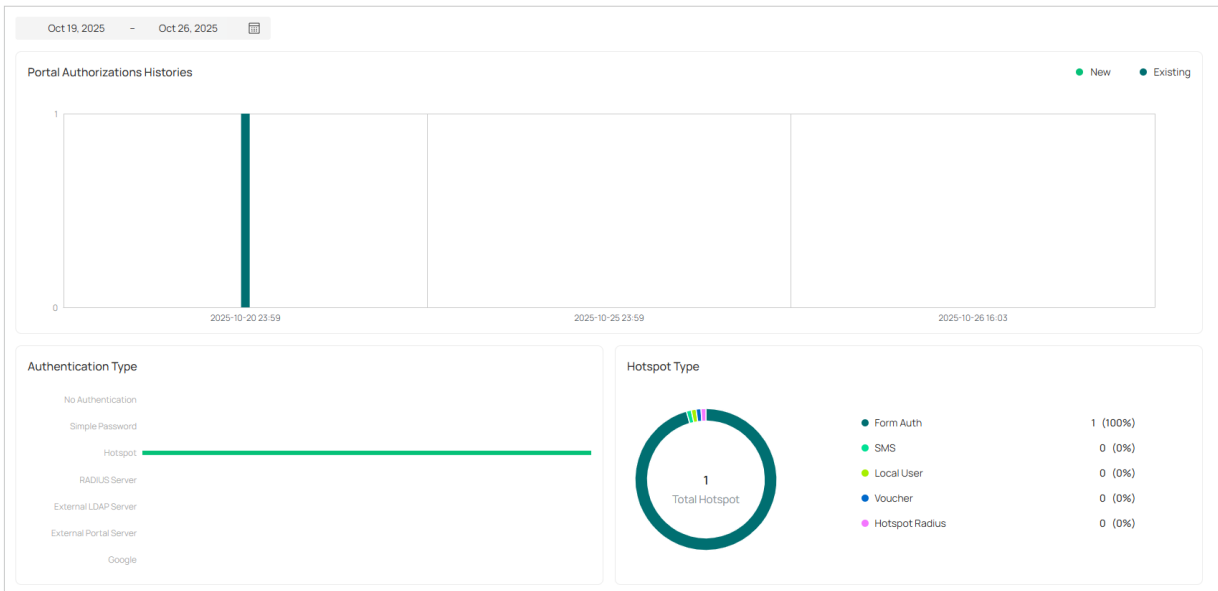

15.2.2 Authorized Clients

The Authorized Clients tab is used to view and manage the clients authorized by portal system, including the expired clients and the clients within the valid period.

To open the list of Authorized Clients, launch the controller and access a site, click **Hotspot** in the sidebar, then click **Authorized Clients**. You can search certain clients using the search box, view their detailed information in the table, and manage them using the action column.

Search Name, MAC, SSID/Network or Authorized By

Name	MAC ADDRESS	SSID/NETWORK	AUTHORIZED BY	DOWNLOAD	UPLOAD	START TIME	STATUS	EXPIRATION TIME	ACTION
NOH-AN01		YYYYHHNNNN	Local User - 1	4.06MB	331.16KB	Mar 07, 2025 12:03:27 pm	valid	Mar 08, 2025 12:09:03 pm	

Showing 1-1 of 1 records

1

10 /page

Go to page

GO



Click to extend the valid period of the authorized client. You can choose the preset time length or set a customized period based on needs.



Click to disconnect the authorized client(s). If you disconnect an authorized client, the client needs to be re-authenticated for the next connection.



Click to delete the expired client from the list.

15.2.3 Vouchers

The Vouchers tab is used to create vouchers and manage unused voucher codes. With voucher configured and codes created, you can distribute the voucher codes generated by the controller to clients for them to access the network via portal authentication.

Create vouchers

Follow the steps below to create vouchers for authentication:

1. Launch the controller and access a site, click **Hotspot** in the sidebar, then click **Vouchers > Voucher Groups**.
2. Click **Create Vouchers Group** on the upper-right.
3. Configure general voucher settings and click **Save**.

Vouchers Group Name

Portal Privilege

☒ All (Including all newly created portals)

☐ Portal

Code Length

6

(6-10)

Code Format

Number

x

Amount

10

(1-5000)

Portal Logout

☒ Allow clients to log out of the portal by accessing a URL (portal.tplink.net/portal/logout by default)

i

Type

☒ Limited Usage Counts

1

(1-999)

i

☐ Limited Online Users

☐ Unlimited For Usage

Voucher Validity

Fixed Dates

Voucher Effective Time

2025-Nov-18

📅

Voucher Expiration Time

2026-Nov-18

📅

Vouchers take effect at 2025-Nov-18 and expire at 2026-Nov-18. Voucher Effective Time and Voucher Expiration Time will depend on the time zone set by the Controller.

Duration Type

☒ Voucher Duration ⓘ

☐ Client Duration ⓘ

Timing

☒ By Time ⓘ

☐ By Usage ⓘ

Duration

8 Hours

ⓘ The voucher will be effective for 8 Hours since authentication.

ⓘ Download Limit, Upload Limit, and Traffic Limit on this page are only available for wireless clients connected to the SSIDs with Portal authentication enabled. To limit the rate of wired clients connected to the switch and gateway, go to the Settings-Transmission-Bandwidth Control page.

Rate Limit

Default

Traffic Limit

☐ Enable ⓘ

Unit Price

AUD

(Optional)

Description

(Optional)

Vouchers Group Name	Enter a name to identify the group.
Portal Privilege	All: The vouchers will take effect for all voucher type portals, including newly created ones. Portal: Select the portal for which the vouchers will take effect.
Code Length	Specify the length of the code(s) from 6 to 10 digits.
Code Format	Choose whether the voucher code is generated by numbers, letters, or a mixture.
Amount	Specify the number of voucher codes you want to create.
Portal Logout	Check the box to allow guests to log out of the portal by accessing a URL (portal.tplink.net/portal/logout by default). You can change the default URL by editing portal.logout.domain in the omada.properties file. Note: Some devices may require firmware update to support Portal Logout.
Type	Select a type to limit the usage counts or the number of authorized users of a voucher code. Limited Usage Counts: The voucher code can only be used for a limited number of times within its valid period. Limited Online Users: The voucher code can be used for an unlimited number of times within its valid period, but only a limited number of wireless clients can access the network with this voucher code at the same time. Unlimited For Usage: The voucher code can be used for an unlimited number of times within its valid period.
Voucher Validity	Specify the validity of vouchers in the group: Permanent: Vouchers will be valid permanently. Fixed Dates: Vouchers will be valid during the start and end dates you specify. Scheduled: Vouchers will be valid according to the schedule you set.

Duration Type	Specify whether to limit the voucher duration or client duration. Voucher Duration: Configure the duration for the voucher. Clients can use the voucher for the specified time duration (e.g., 8 hours after the first use). After reaching the voucher duration, the voucher will expire whether used or not. Client Duration: Configure the duration for the client. The client can use vouchers for the specified time duration (e.g., 8 hours after the first use). After reaching the client duration, the client will expire and cannot use the vouchers to access the network.
Timing	By time: The voucher code takes effect within a fixed period of time after authentication. By Usage: The voucher code takes effect according to the actual time used by the client.
Duration	Select the valid period for the voucher code(s).
Rate Limit	Select an existing rate limit profile, create a new rate limit profile or customize the rate limit for the voucher codes. Custom: Specify the download/upload rate limit based on needs. Download/Upload Limit: Click the checkbox and specify the rate limit for download/upload for wireless clients using the voucher code(s). The value of the download and upload rate can be set in Kbps or Mbps. Note: Rate Limit on this page are only available for wireless clients connected to the SSIDs with Portal authentication enabled. To limit the rate of wired clients connected to the switch and gateway, go to Network Config > Transmission > Bandwidth Control.
Traffic Limit	Click the checkbox and specify the daily/weekly/monthly/total traffic limit for the voucher, and the value of the traffic limit can be set in MB or GB. Once the limited is reached, the client(s) can no longer access the network using the voucher. Note: Traffic Limit on this page are only available for wireless clients connected to the SSIDs with Portal authentication enabled. To limit the rate of wired clients connected to the switch and gateway, go to Network Config > Transmission > Bandwidth Control.
Unit Price (Optional)	Set the amount and currency type for the voucher (for statistical purposes only).
Description (Optional)	Enter notes for the created voucher code(s), and the input description is displayed in the voucher list under the voucher tab.

4. Configure voucher pattern settings, preview it, then click **Save**.

Logo/Title

☒ Logo ☐ Title ☐ Disabled

Upload Logo

Browse

Logo Size

SmallMediumLarge

SSID & Network

☐ Enable

Duration

☐ Enable

Limit Counts

☐ Enable

Print Comments

(Optional)

Position

☒ Left ☐ Right ☐ Center

Preview

383378

Omada

00:00-23:59 every day

Logo/Title

Choose whether to display a logo or title on the vouchers.

Logo: Upload a logo and adjust its size to display the logo on the vouchers.

Title: Enter a title and adjust its size to display the title on the vouchers.

Disabled: No logo or title will be displayed on the vouchers.

SSID & Network

Enable this option and select the SSID or network to display if needed.

Duration

Enable this option to display the voucher validity duration if needed.

Limit Counts

Enable this option to display the voucher limit counts if needed.

Print Comments

Enter print comments if needed and the comments will be printed when you print the created voucher codes.

Position

Choose the position to display the voucher code.

5. The voucher group is generated.

Start date		—	End date			Printing Language	English	▼	Currency	AUD	▼
☐	GROUP NAME	CREATED TIME	CREATOR	USED/TOTAL AMOUNT	UNIT PRICE	TOTAL PRICE	DURATION	ACTION			⋮
☐	Group 1	Feb 11, 2025 07:13:24 pm	cloudtest@protonmail.com	0 / 10	--	--	Voucher - 8h				



The voucher code can be used for an unlimited number of times within its valid period, but only a limited number of wireless clients can access the internet with this voucher code at the same time. The number on the right shows the limited number of users.



The voucher code can only be used for a limited number of times within its valid period. The number on the right shows the limited number of authentication times.

You can click the Details icon in the Action column to view the voucher codes. If you want to change the voucher pattern settings, click [Edit Voucher](#).

1111

Created Time

Nov 18, 2025 02:04:53

Creator

controller_cloud_uat_test@yopmail.com

Portal

All portals

Portal Logout

Enabled

Description

-

910665

0-0-00-23:59:59 every day

Omada

Network

Statistics

10

Total Vouchers

0

Total Amount

Search Code

Q

All (10)

Unused (10)

In-use (0)

Expired (0)

Clear All Expired Vouchers

Print All Unused Vouchers

Print Selected Vouchers

Delete

☐	CODE	STATUS	REMAINING TRAFFIC	DOWNLOAD LIMIT	UPLOAD LIMIT	USED TIME	LEFT TIME	ACTION
☐	910665	Unused	-	-	-	0	8h	
☐	080764	Unused	-	-	-	0	8h	
☐	668831	Unused	-	-	-	0	8h	
☐	483022	Unused	-	-	-	0	8h	
☐	685863	Unused	-	-	-	0	8h	
☐	826305	Unused	-	-	-	0	8h	
☐	822186	Unused	-	-	-	0	8h	
☐	430298	Unused	-	-	-	0	8h	
☐	960443	Unused	-	-	-	0	8h	
☐	752403	Unused	-	-	-	0	8h	

Select 0 of 10 items

Select All

Showing 1-10 of 10 records

<

1

>

10 /page

6. Print the vouchers. Click  to print a single voucher, or click checkboxes of vouchers and click [Print Selected Vouchers](#) to print the selected vouchers. And you can click [Print All Unused Vouchers](#) to print all unused vouchers.

082439

Omada

2025-10-26 -- 2026-10-26

885191

Omada

2025-10-26 -- 2026-10-26

864806

Omada

2025-10-26 -- 2026-10-26

732768

Omada

2025-10-26 -- 2026-10-26

504143

Omada

2025-10-26 -- 2026-10-26

697108

Omada

2025-10-26 -- 2026-10-26

548549

Omada

2025-10-26 -- 2026-10-26

938362

Omada

2025-10-26 -- 2026-10-26

529473


Omada

215420

Omada

7. Distribute the vouchers to clients, and then they can use the codes to pass authentication. If a voucher code expires, it will be automatically removed from the list.
8. To delete certain vouchers manually, click the trash bin icon to delete a single voucher, or [Delete](#) to delete multiple voucher codes at a time.

9. On the **Vouchers** > **Statistic** page, you can view the historical statistical data of vouchers.

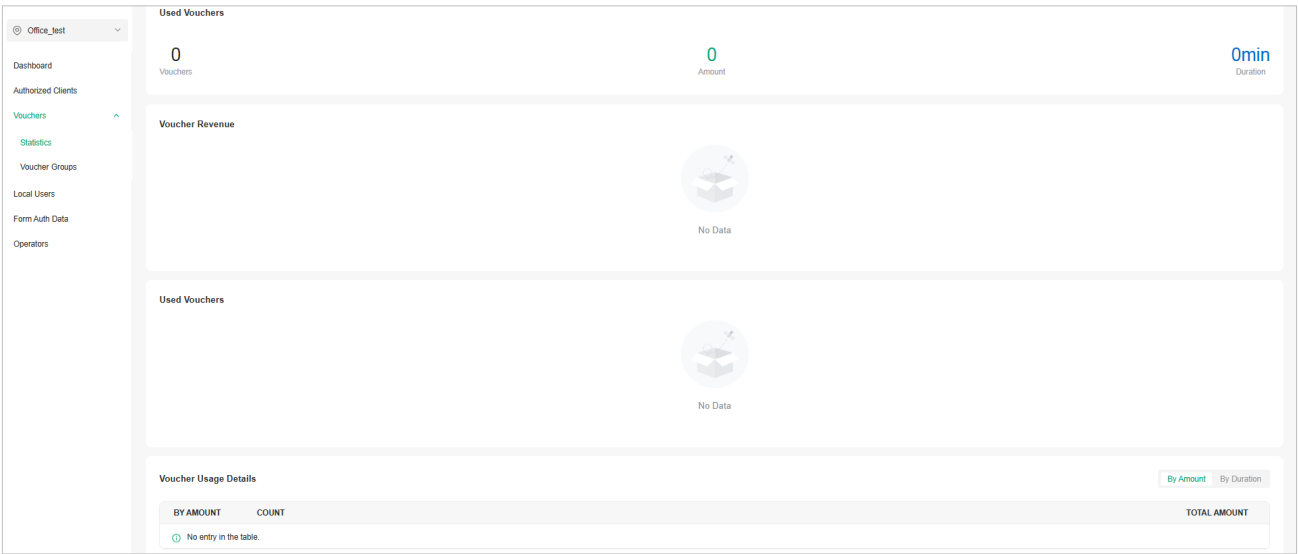

15.2.4 Local Users

The Local Users tab is used to create user accounts for authentication. With the Local User configured, clients are required to enter the username and password to pass the authentication. You can create multiple accounts and assign them to different users.

Create Local Users

There are two ways to create local user accounts: create accounts on the page and import from a file. To create local user accounts, follow the steps below.

1. Launch the controller and access a site, click **Hotspot** in the sidebar, then click **Local Users**.
2. Create Local User accounts through either of the following ways.

■ Create Local User accounts

Click **+Create User** on the upper-right, and the following window pops up. Configure the following parameters and click **Save**.

Create User

Portal

Please Select...

Username

Password

Status

☒ Enable

Portal Logout

☒ Allow clients to log out of the portal by accessing a URL (portal.tplink.net/portal/logout by default) ⓘ

Authentication Timeout

Dec 31, 2025

In Pacific Time (US & Canada)

MAC Address Binding Type

No Binding

Maximum Users

1

(1-2048)

Name

(Optional)

Telephone

(Optional, For example: +17704505791)

Download Limit, Upload Limit, and Traffic Limit on this page are only available for wireless clients connected to the SSIDs with Portal authentication enabled.To limit the rate of wired clients connected to the switch and gateway, go to the Settings-Transmission-Bandwidth Control page.

Rate Limit

Default

Traffic Limit

☐ Enable ⓘ

Save

Cancel

Portal	Select the portal for which the local users will take effect.
Username	Specify the username. The username should be different from the existing ones, and it is not editable once it is created.
Password	Specify the password. Local users are required to enter the username and password to pass authentication and access the network.
Status	When the status is enabled, it means the user account is valid. You can disabled the user account, and enable it later when needed.
Portal Logout	Check the box to allow guests to log out of the portal by accessing a URL (portal.tplink.net/portal/logout by default). You can change the default URL by editing portal.logout.domain in the omada.properties file. Note: Some devices may require firmware update to support Portal Logout.
Authentication Timeout	Specify the authentication timeout for local users. After timeout, the users need to log in again on the authentication page to access the network.

MAC Address Binding Type	There are three types of MAC binding: No Binding, Static Binding and Dynamic Binding. No Binding: No MAC address is bound to the local user account. Static Binding: Bind a MAC address to this user account manually. Then only the user with the this MAC address can use the username and password to pass the authentication. Dynamic Binding: The MAC address of the first user that passes the authentication will be bound to this account. Then only this user can use the username and password to pass the authentication.
Maximum Users	Specify the maximum number of users that can use this account to pass the authentication.
Name (optional)	Specify a name for identification.
Telephone (optional)	Specify a telephone number for identification.
Rate Limit	Select an existing rate limit profile, create a new rate limit profile or customize the rate limit for the local users. Custom: Specify the Download Limit and Upload Limit based on needs.
Traffic Limit	Click the checkbox and specify the daily/weekly/monthly/total traffic limit for the local user account, and the value of the traffic limit can be set in MB or GB. Once the limited is reached, the user(s) can no longer access the network using this account. Note: Traffic Limit on this page are only available for wireless clients connected to the SSIDs with Portal authentication enabled. To limit the rate of wired clients connected to the switch and gateway, go to the Settings > Transmission > Bandwidth Control.

■ Create Local User accounts from files

Click [Import Users](#) on the upper-right, and the following window pops up. Select a file in the format of CVS or Excel, and click [Import](#). To see required parameters and corresponding explanation, refer to [Create Local User accounts](#). Note that the imported file will override the current user data.

Import Users

Portal

Please Select...

i

Choose File

Please select a file.

Browse

Only CSV ,XLS and XLSX file types are supported.
Username conflicting data will be overridden.

import

Cancel

Portal	Select the portal to which the local users will be imported.
--------	--

3. The local user account(s) will be created and displayed in the module. You can view the information of the created local users, search certain accounts through the name, and use icons for management.

Search Name or Username

Q

Import Users

Export Users

+ Create User

USERNAME	ENABLED	EXPIRATION TIME	MAXIMUM USERS	DOWNLOAD	UPLOAD	TRAFFIC	ACTION
user1		Dec 31, 2025 11:59:59 pm	1	--	--	--	
user2		Dec 31, 2025 11:59:59 pm	1	--	--	--	

Showing 1-2 of 2 records

<1>

10 /page

Go to page

GO

Import Users	Click to add local user(s) from files in the format of CVS or Excel. It is recommended when you need to create local users in batches. Select the portals based on needs, and the local users will be imported to the chosen portal. Note that the imported file will override the current user data.
Export Users	Click to export the local user(s) to files in the format of CVS or Excel. Select the portals based on needs, and the local users of the chosen portal will be exported.
	Click to edit the parameters for the local user.
	Click to delete the local user.

15.2.5 Form Auth Data

The Form Auth Data tab is used to create and manage surveys. You can customize your survey contents and publish it to collect data.

Create Surveys

To create surveys, follow the steps below.

1. Launch the controller and access a site, click **Hotspot** in the sidebar, then click **Form Auth Data**.
2. Click **Create New Survey** and the following window pops up.

3. Specify the survey name and duration, then customize the contents.
4. Preview and save the settings or publish the survey.
5. The surveys are created and displayed in the table. You can use icons for management and click the ellipse icon for more management options.

FORM AUTH NAME	PORTAL	CREATED TIME	RESPONSES	ACTION
Survey1 Unpublished	Not in Use	Feb 11, 2025 09:47:11 pm	0	

15.2.6 Operators

The Operators tab is used to manage and create operator accounts that can only be used to remotely log in to the Hotspot system and manage vouchers and local users for specified sites. The operators have no privileges to create operator accounts, which offers convenience and ensures security for client authentication.

Create Operators

To create operator accounts, follow the steps below.

1. Launch the controller and access a site, click **Hotspot** in the sidebar, then click **Operators**.

- Click **Create Operator** on the lower-left, and the following window pops up.

Create Operator

Username

Password

Role

Admin

Description

(Optional)

Site Privileges

Please Select...

Save

Cancel

- Specify the username, password, and role for the operator account. Admin role has read and write permissions, while Viewer role has read-only permissions.
- (Optional) Enter a description for identification.
- Select sites from the drop-down list of **Site Privileges**. Click **Save**.
- The operator accounts are created and displayed in the table. You can view the information of the create operator accounts on the page, search certain accounts through the name and notes, and use icons for management.

USERNAME	PASSWORD	ROLE	SITE PRIVILEGES	NOTES	ACTION
User1		Admin	test	-	 

- Then you can use an operator account to log in to the Hotspot system:

■ **For software controller**

Visit the URL **https://Controller Host's IP Address:8043/ControllerID/login/#hotspot** (for example: **https://192.168.0.174:8043/4d4ede7983bb983545d017c628feaa3d/login/#hotspot**), and use the operator account to enter the Hotspot system.

■ **For hardware controller**

Visit the URL **https://Controller Host's IP Address:443/ControllerID/login/#hotspot** (for example: **https://192.168.0.174:443/4d4ede7983bb983545d017c628feaa3d/login/#hotspot**), and use the operator account to enter the Hotspot system.

■ **For cloud-based controller**

Visit the URL **https://URL of the controller/ControllerID/login/#hotspot**, and use the operator account to enter the Hotspot system.

Chapter 16

Manage Accounts

This chapter gives an introduction to different user levels of controller accounts and guides you on how to create and manage them. It includes the following sections:

- [16. 1 Introduction to User Accounts](#)
- [16. 2 Create and Manage Roles](#)
- [16. 3 Create and Manage Local User Accounts](#)
- [16. 4 Create and Manage Cloud User Accounts](#)
- [16. 5 Manage User Accounts Across Controllers](#)

16.1 Introduction to User Accounts

The SDN Controller offers multiple levels of access available for users: **Owner**, **Super Admin**, **Admin**, and **Viewer**. You can also create new account roles and customize their permissions to access different features.

Since the controller can be accessed both locally and via cloud access, users can be further grouped into local users and cloud users.

Multi-level administrative account presents a hierarchy of permissions for different levels of access to the controller as required. This approach ensures security and gives convenience for management.

Moreover, in the user accounts list of the Owner/Super Admin, all accounts it created will be displayed. The accounts created by each administrator will be hidden by default, making the interface more systematic and to the point.

■ Owner

The Owner has access to all features.

The account who first launches the controller will be the Owner (used to be recognized as Main Admin in earlier controller versions). It cannot be changed and deleted.

■ Super Admin

The Super Admin can manage all the other roles (except Owner) and the privileges of most features.

■ Admin

Admins have no permission to some modules, mainly including cloud access, migration, auto-backup and global view logs. They have read-only permission to some modules, such as global view license management and custom account roles.

Admins can be created and deleted by the Owner/Super Admin and Admins.

■ Viewer

Viewers can view the status and settings of the network, and change the settings in Hotspot Manager.

The entrance to Account page is hidden for viewers, and they can be created or deleted by the administrators.

■ Custom roles

Custom roles can be configured to access different features.

They can be created or deleted only by the Owner/Super Admin.

Note:

Please upgrade Omada APP to version 4.6 or later, otherwise you may not be able to log in with the accounts bound with customized roles.

16.2 Create and Manage Roles

1. Launch the controller and access the Global View.
2. Go to **Accounts > Role**. The SDN Controller offers four levels of default roles: **Owner**, **Super Admin**, **Admin**, and **Viewer**.
3. If you want to create a custom role, click **Add New Role**.
4. Specify the role type name and customize the permissions for the role. Click **Create**.

← Add New Role

Role Type Name

Global

Dashboard Page Modify View Only Block

Site Template Page Modify View Only Block

Devices Page Modify View Only Block

Logs & Audit Logs Pages Modify View Only Block

Firmware Page Modify View Only Block

Security Page Modify View Only Block

SD-WAN Page Modify View Only Block

User Page Modify View Only Block

Role Page Modify View Only Block

SAML User Page Modify View Only Block

SAML User Group Page Modify View Only Block

Webhooks Page Modify View Only Block

Site

Dashboard Page Modify View Only Block

Devices Page Modify View Only Block

Clients Page Modify View Only Block

Insights-Application Analytics Page View Only Block

Insights-reports Page Modify View Only Block

Logs & Audit Logs Pages Modify View Only Block

Map Page Modify View Only Block

Network Tools Page Modify View Only Block

IntelliRecover Page Modify View Only Block

Network Config Page Modify View Only Block

Device Config Page Modify View Only Block

Hotspot Modify View Only Block

Create Cancel

5. The new role will be displayed in the role list.

ROLE	SOURCE	ACTION
Owner	Default	
Super Admin	Default	
Admin	Default	
Viewer	Default	
role_1	Controller	

If you want to edit/delete a custom role, click the Edit/Delete icon in the ACTION column.

16.3 Create and Manage Local User Accounts

By default, the SDN Controller automatically sets up a local user with the role called Owner as the primary administrator. The username and password of the Owner are the same as that of the controller account by default. The Owner cannot be deleted, and it can create, edit, and delete other levels of user accounts.

16.3.1 Edit the Owner Account

To view basic information and edit the Owner account, follow these steps:

1. Launch the controller and access the Global View.
2. Go to [Accounts > User](#).
3. Click the Edit icon in the ACTION column and enter your current password to view or change your account.
4. Check and edit the account information. Click [Save](#).

Basic Information

Role

Owner

TP-Link ID

Site Privileges

All Sites

Edit User

Alert Emails

☐ Enable ⓘ

Alert Emails

Check the box if you want the current user to receive emails about alerts of the privileged sites.

16.3.2 Create and Manage Other Local Accounts

To create and manage a local user account, follow these steps:

1. Launch the controller and access the Global View.
2. Go to [Accounts > User](#). Click [Add New User](#).

3. Select **Local User** for the administrator type. Specify the parameters and click **Create**.

Add New User

Administrator Type

☒ Local User☐ Cloud User

Valid Period

☒ Permanent☐ Temporary

Username

Password

Role

Manage Role

Site Privileges

☒ All sites (including newly created sites)☐ Specific sites

Email

(Optional)

Alert/Event Emails

☐ Enable

Create

Cancel

Valid Period	Set the validity period of the user. Permanent: The user account will have permissions permanently unless modified or deleted. Temporary: The user account will have permissions only in the period you set.
Username	Specify the username. The username should be different from the existing ones.
Password	Specify the password.
Role	Select a role for the created user account. Super Admin: This role can manage all the other roles (except Owner) and the privileges of most features. Admin: This role has permissions to adopt and/or manage devices of the sites chosen in the site privileges, edit itself, create/edit/delete viewer accounts in its privileged sites. However, it cannot delete itself or edit/delete Owner/Super Admin. Viewer: This role can view the information of the sites chosen in the site privileges. It can only edit itself. Custom roles: If you have created custom roles, they will be displayed in the list. To create custom roles, refer to 16. 2 Create and Manage Roles.
Site Privileges	Assign the site permissions to the created local user. All sites (including newly created sites): The created user has device permissions in all sites, including all new-created sites. Specific sites: The created user has device permission in the sites that are selected. Select the sites by checking the box before them.
Email (optional)	Enter an email address for receiving alert emails.

Alert/Event Emails

Check the box if you want the created user to receive emails about alerts and events of the privileged sites.


16.4 Create and Manage Cloud User Accounts

A Cloud-Based Controller enables cloud access by default and automatically sets up the cloud Owner. An on-premise controllers automatically sets up the cloud Owner if you have enabled cloud access and bound the controller account with a TP-Link ID in the quick setup. The username and password is the same as that of the TP-Link ID. The cloud Owner is cannot be deleted, and it can create, edit, and delete other levels of user accounts.

16.4.1 Set Up the Cloud Owner Account

For an on-premise controller, if you have not enabled the cloud access and bound the controller with a TP-Link ID in quick setup, you can follow the steps below to set up the cloud Owner:

1. Launch the controller and access the Global View.
2. Go to **Settings** > **Cloud Access** to enable Cloud Access and bind your TP-Link ID.

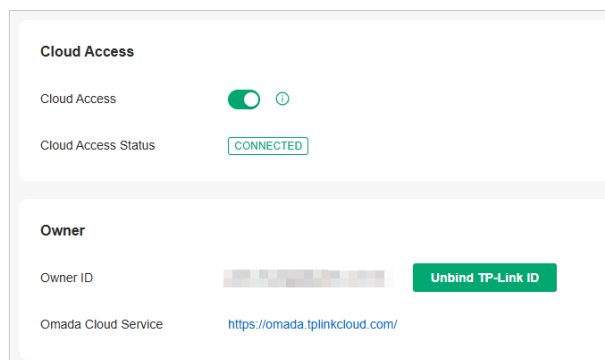

3. Go to **Accounts** > **User**. A cloud Owner with the same username as the TP-Link ID will be automatically created. The Cloud Owner cannot be deleted. You can log in with the cloud Owner when the cloud access is enabled.

16.4.2 Create and Manage Other Cloud Accounts

To create and manage cloud user account, follow these steps:

1. Launch the controller and access the Global View.
2. Go to **Accounts** > **User**. Click **Add New User**.

3. Select **Cloud User** for the administrator type. Specify the parameters and click **Invite**.

Add New User

Administrator Type

☐ Local User

☒ Cloud User

Valid Period

☒ Permanent

☐ Temporary

TP-Link ID

Role

Manage Role

Site Privileges

☒ All sites (including newly created sites)

☐ Specific sites

Alert/Event Emails

☐ Enable

Invite

Cancel

Valid Period	Set the validity period of the user. Permanent: The user account will have permissions permanently unless modified or deleted. Temporary: The user account will have permissions only in the period you set.
TP-Link ID	Enter an email address of the created cloud user, and then an invitation email will be sent to the email address. If the email address has already been registered as a TP-Link ID, it will become a valid cloud user after accepting the invitation. If the email address has not been registered, it will receive an invitation email for registration. After finishing registration, it will automatically becomes a valid cloud user.
Role	Select a role for the created cloud user. Super Admin: This role can manage all the other roles (except Owner) and the privileges of most features. Admin: This role has permissions to adopt and/or manage devices of the sites chosen in the site privileges, edit itself, create/edit/delete viewer accounts in its privileged sites. However, it cannot delete itself or edit/delete Owner/Super Admin and other Admin accounts. Viewer: This role can view the information of the sites chosen in the site privileges. It can only edit itself. Custom roles: If you have created custom roles, they will be displayed in the list. To create custom roles, refer to 16. 2 Create and Manage Roles.
Site Privileges	Assign the site permissions to the created local user. All sites (including newly created sites): The created user has device permissions in all sites, including all new-created sites. Specific sites: The created user has device permission in the sites that are selected. Select the sites by checking the box before them.

Alert/Event Emails

Check the box if you want the created user to receive emails about alerts and events of the privileged sites.

16.5 Manage User Accounts Across Controllers

Overview

If you have multiple controller, Account Manager allows you to centrally manage user accounts across controllers, assign users, enforce permissions, and streamline onboarding through Cloud Portal.

To use Account Manager, ensure your controllers meet the following requirements:

Controller Type: Omada On-Premises Networking Controllers only.

Version Required: v5.15.20 or later.

Status: Controllers must be online.


Cloud Access: Must be enabled.

Notes:

- For MSP Controllers, permissions are applied at the MSP level.
- Account Manager currently supports Full Management (Super Admin) and View Only (Viewer) permissions.

Configuration

1. Launch a web browser and visit <https://omada.tplinkcloud.com>. Enter your TP-Link ID and password to log in. If you do not have a TP-Link ID, create a TP-Link ID first.
2. Go to [Account Manager](#). The user accounts of all controllers managed by the current TP-Link ID will be listed. The organization column displays the status of organization invitation: yellow text indicates that the user has been invited but not yet agreed, and gray text indicates that the user has agreed to join.

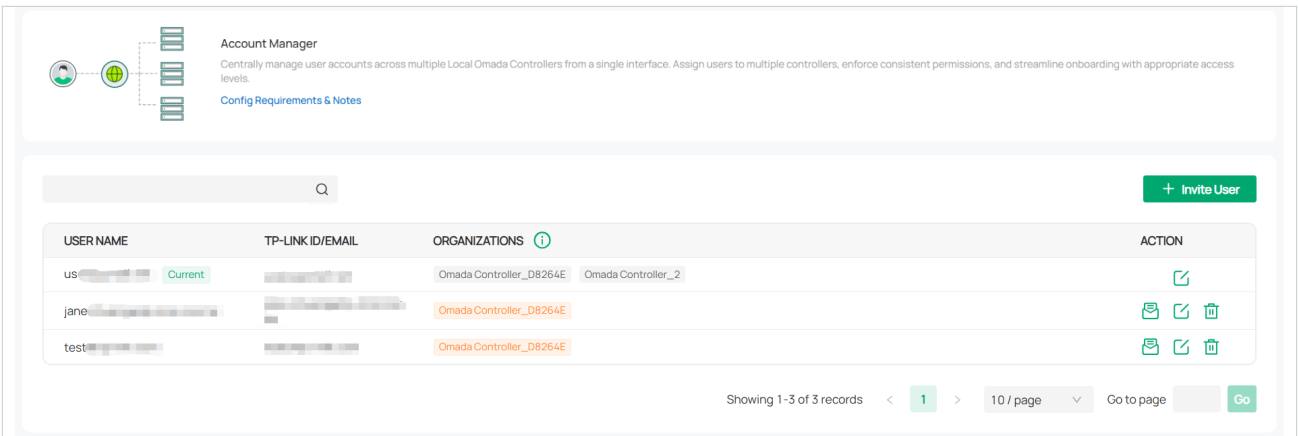

3. If you want to invite a user to help manage a controller organization, click [Invite User](#) and configure the parameters.

← Invite User

TP-Link ID

Privileges

Select Organizations

Please Select... ▾

Organization Specific

☐ ⓘ

Organization

Role

Full Management ▾

Alert Emails

☐ ⓘ

Save

Cancel

TP-Link ID	Enter the TP-Link ID of the user you want to invite. If the email address has already been registered as a TP-Link ID, it will become a valid cloud user after accepting the invitation. If the email address has not been registered, it will receive an invitation email for registration. After finishing registration, it will automatically becomes a valid cloud user.
Select Organizations	Select one or multiple controller organization that the invited user can manage.
Organization Specific	Enable this option if you selected multiple controller organizations and want to configure the roles and alert settings for them separately.
Role	Set the permissions for the user: Full Management (Super Admin) or Viewer (View Only).
Alert Emails	With Alert Emails enabled, the organization will send the user emails about alerts.

Chapter 17

Monitor and Maintain the Network

This chapter guides you on how to monitor and maintain the network to ensure the stability and security of network operations. This chapter includes the following sections:


- [17. 1 Monitor the Network with Dashboard](#)
- [17. 2 Monitor the Network with Map](#)
- [17. 3 Monitor the Network with Insights](#)
- [17. 4 Monitor the Network with Logs](#)
- [17. 5 Maintain the Network with Tools](#)
- [17. 6 Maintain PoE Devices with IntelliRecover](#)

17.1 Monitor the Network with Dashboard

Dashboard is designed for a quick real-time monitor of the site network. It is divided into four sections: Overview, Topology, Clients, and Traffic


17.1.1 Overview

The Overview page allows you to know your network status at a glance with visualized data charts, including ISP load status and pending alerts, network overview, top clients, top apps, internet and Wi-Fi activities, and AP density. You can specify the time period of data to display by using the time control in the upper right corner.

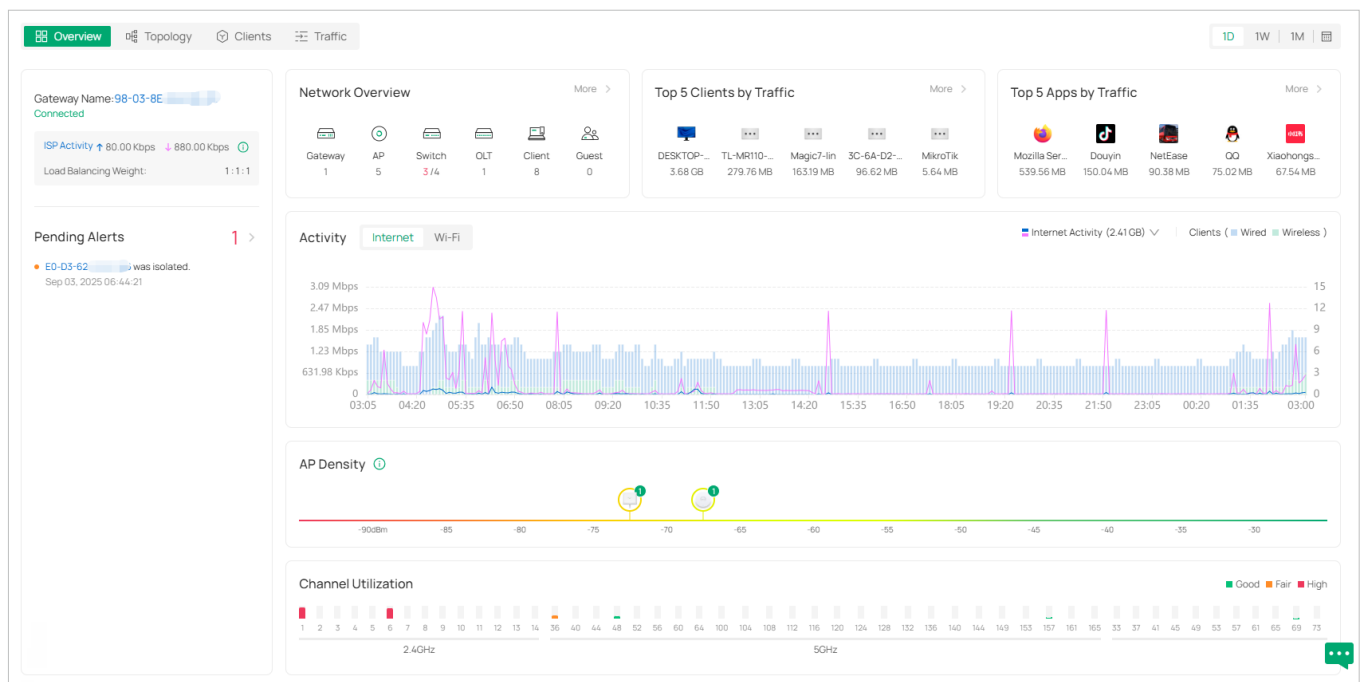

17.1.2 Topology

The Topology page displays the topology diagram. You can view the network devices and clients and check the network connections.

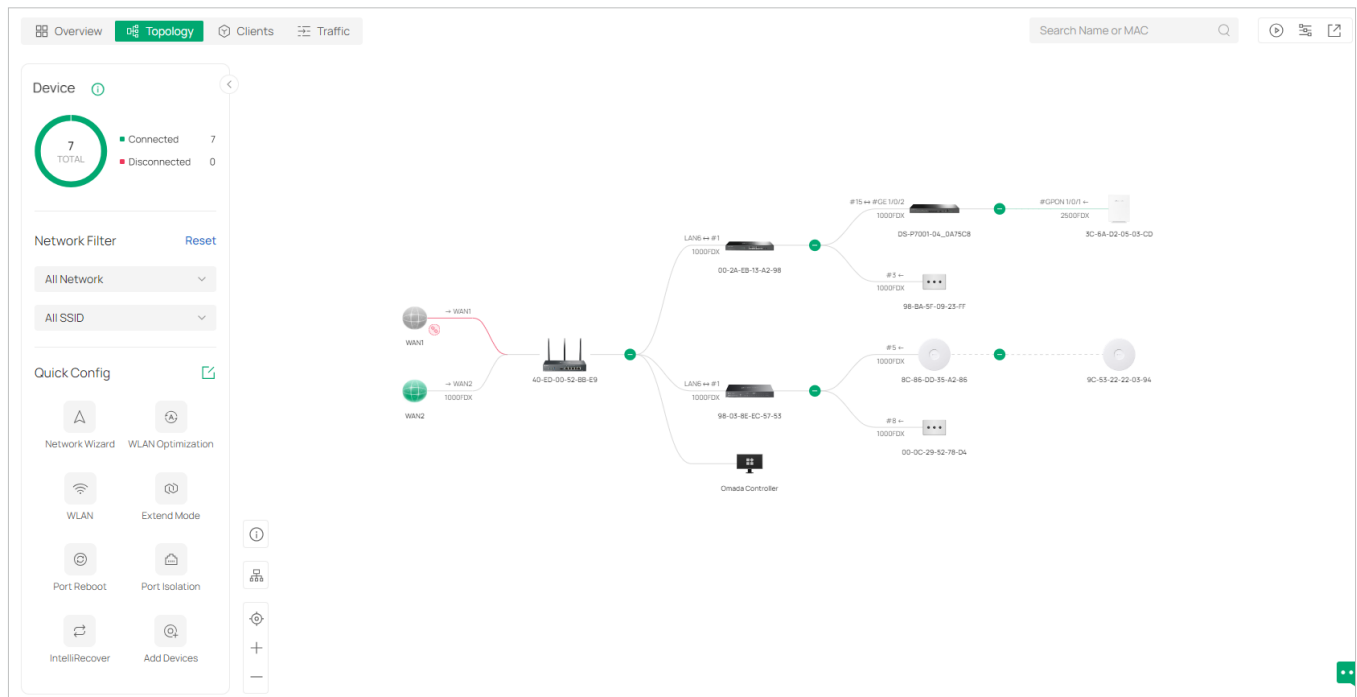

In the diagram, you can:

- Click the - icon to fold the branches.
- Click the icon of the client group to view clients connected to the same device.
- Hover the mouse over the device icon to view the device information.
- Click a device or client to open its Properties window for monitoring and management.


The control icons at the lower left corner of the diagram allow you to adjust the size of the topology, change the horizontal/vertical orientation of the topology, and view the legends.

The control icons in the upper right allow you to search for nodes in the map for quick locating, view the communication rate, filter the information/devices/terminals to display, and export the topology diagram. If the site does not have an Omada gateway, you can manually select the root node of a specific topology to correct the topology connectivity.

The left-side panel of the Topology page provides the device statistics chart, Network Filter, and Quick Config.


In **Network Filter**, you can filter the LAN and wireless network to display.

In **Quick Config**, you can click a configuration icon to quickly configure your network. To customize this section, you can click the edit icon and select the configuration icons to display.

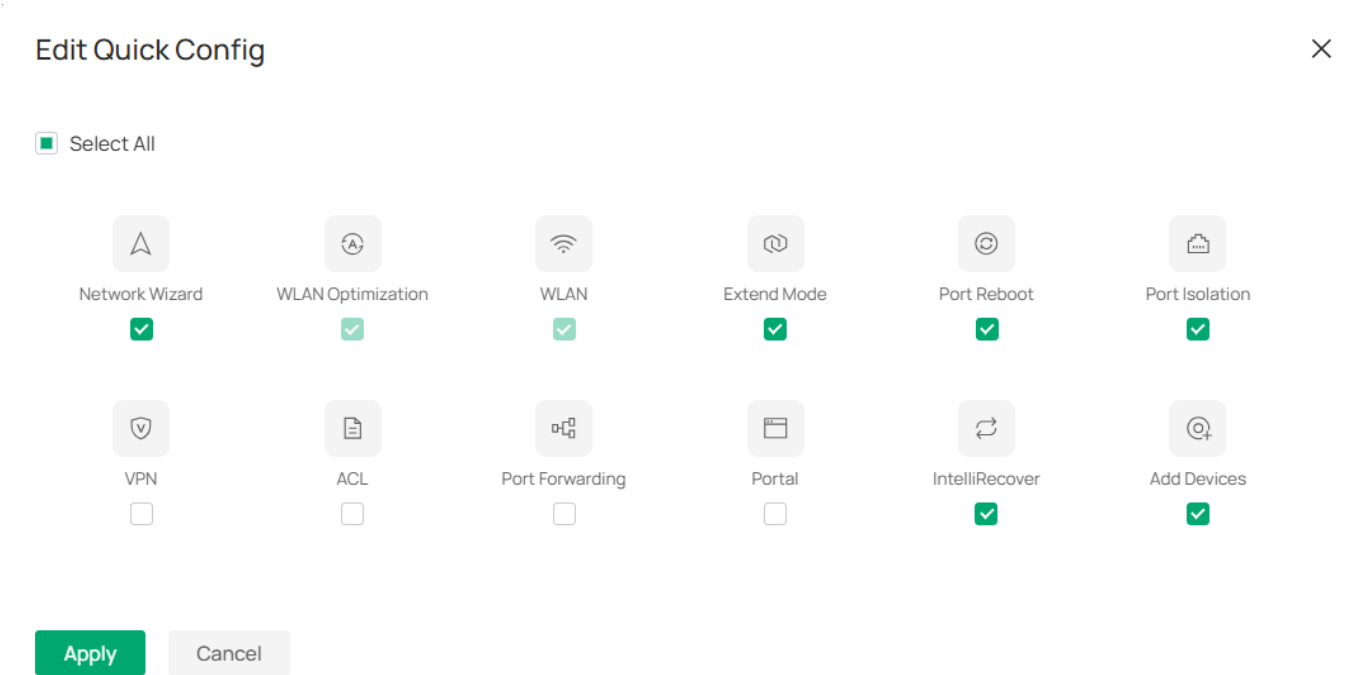

■ Network Wizard

In Network Wizard, you can quickly set up a guest wireless network with default settings or a custom network by manually setting network parameters.

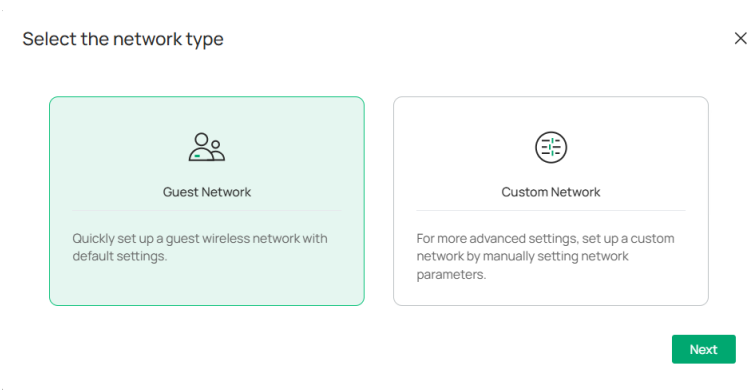

■ WLAN

In WLAN, you can quickly create an SSID and set up a basic wireless network.

Quick Add SSID

×

Select WLAN Group

Default

ⓘ

Network Name (SSID)

Device Type

☒ EAP

☐ Gateway

Band

☐ 2.4 GHz

☐ 5 GHz

☐ 6 GHz

ⓘ

Note: The number of SSIDs on 2.4 GHz, 5 GHz, 6 GHz is up to limit.

Guest Network

☐ Enable

ⓘ

Security

WPA-Personal

⌵

Password

Password

🔒

Apply

Cancel

■ Extend Mode

In Extend Mode, you can quickly extend network cable transmission for switch ports. With this feature enabled, the Link Speed/Duplex will be downgraded to 10 Mbps/Auto and the Flow Control feature will be disabled.

Extend Mode

×

ⓘ Extend mode is used to extend network cable transmission. With this feature enabled, the Link Speed/Duplex will be downgraded to 10 Mbps/Auto and the Flow Control feature will be disabled.

Search Name

🔍

☐	NAME	SELECT PORTS TO ENABLE EXTEND MODE	STATUS
☐	 SW#1-RF	1 3 5 7 9 11 13 15 17 19 21 23 25 27 2 4 6 8 10 12 14 16 18 20 22 24 26 28	● DISCONNECTED
☐	 	1 3 5 7 9 11 13 15 17 19 2 4 6 8 10 12 14 16 18 20	● DISCONNECTED
☐	 	1 3 5 7 9 11 13 15 17 19 21 23 25 27 2 4 6 8 10 12 14 16 18 20 22 24 26 28	● CONNECTED

Apply

Cancel

- Port Reboot

In Port Reboot, you can quickly reboot the powered devices that are connected to the switch ports.

Port Reboot

Port Reboot

Port Reboot is used to reboot the powered devices that are connected to the ports.

Search Name

NAME	SELECT PORTS TO ENABLE PORT REBOOT	STATUS
		CONNECTED

Select 0 of 1 items

Showing 1-1 of 1 records | 1 | 10 /page

Apply Cancel

- Port Isolation

In Port Isolation, you can quickly isolate the selected ports so that the ports cannot communicate with any other isolated port.

Port Isolation

X

i

With this feature enabled, this port becomes an isolated port and cannot communicate with any other isolated port. Please configure this feature carefully.

Search Name

Q

☐	NAME	SELECT PORTS TO ENABLE PORT ISOLATION	STATUS
☐	SW#1-RF	13 1 3 5 7 9 11 15 17 19 21 23 25 27 2 4 6 8 10 12 14 16 18 20 22 24 26 28	DISCONNECTED
☐		13 1 3 5 7 9 11 15 17 19 21 23 25 27 2 4 6 8 10 12 14 16 18 20 22 24 26 28	DISCONNECTED


- Others

Other Quick Config functions, including WLAN Optimization, VPN, ACL, Port Forwarding, Portal, and IntelliRecover, will guide you to the configuration page. Refer to the corresponding chapter in this

manual for detailed guidance.


17.1.3 Clients

The Clients page displays visualized data charts of client information, including client quantity, distribution, top clients, and association activities.

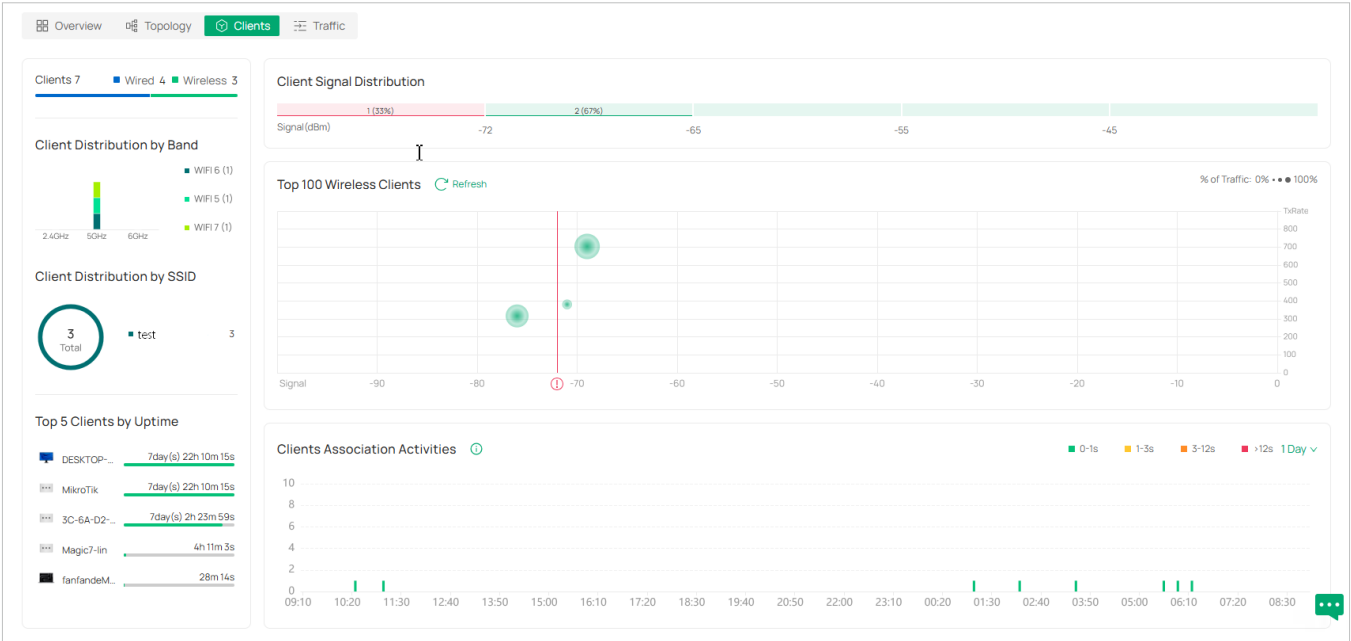

17.1.4 Traffic

The Traffic page displays visualized data charts of network traffic. You can click the tab to check the traffic statistics, top applications, and top clients. You can specify the time period of data to display by using the time control in the upper right corner.

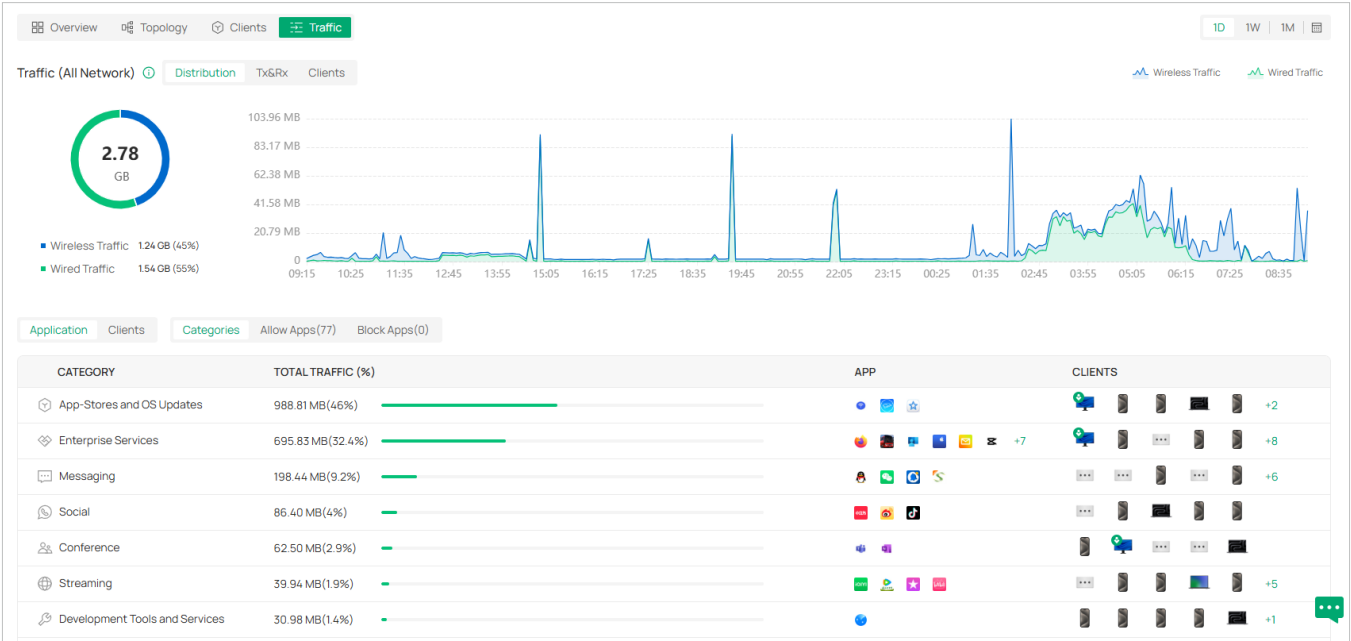


17.2 Monitor the Network with Map

With the Map function, you can customizes a visual representation of your network in [Heat Map](#) and visually display the geographic location of each device and site in [Device Map](#) and [Site Map](#).

17.2.1 Heat Map

Go to [Map > Heat Map](#), and a default map is shown as below. You can upload your local map images and add devices and different types of walls to customize a visual representation of your network.

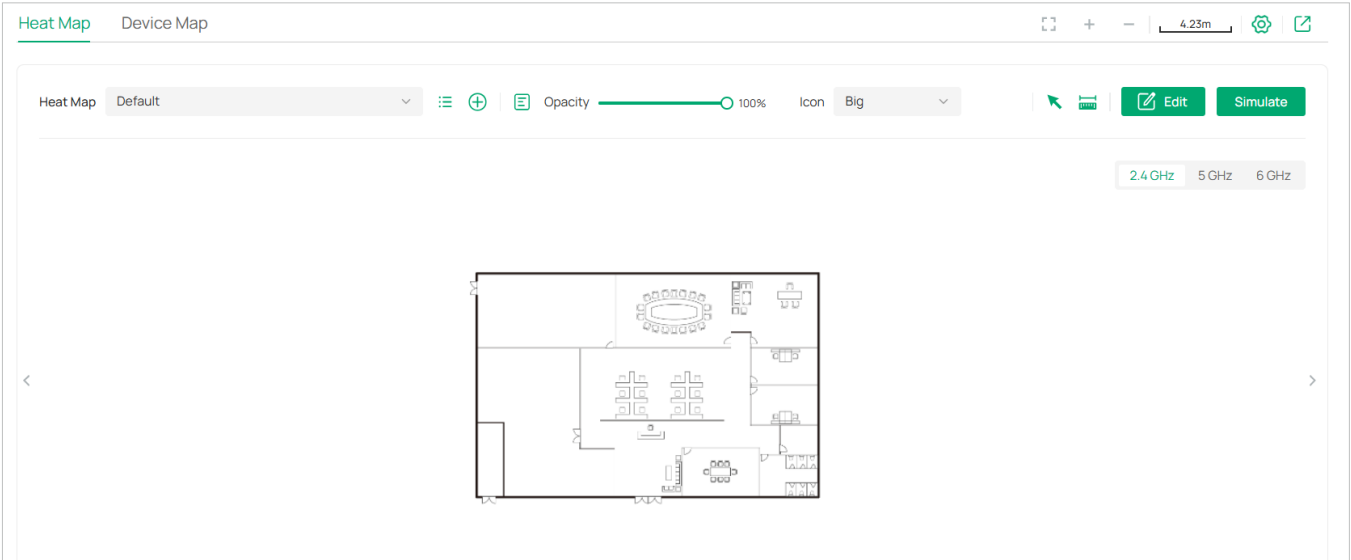

Click the following icons to add, edit, and select the map. After selecting a map, click and drag in the devices from the [Devices](#) list to place it on the map according to the actual locations.

	Click to select a map from the drop-down list to place the devices.
	Click to edit maps in the pop-up window.
	Click the edit icon to edit the description and layout of the map.
	Click the delete icon to delete the map.
	Click to add a map. In the pop-up window, enter the description, select the layout, and upload an image in the .jpg, .jpeg, .gif, .png, .bmp, .tiff format.
	Adjust the opacity of the map.
	Click to select the icon size displayed on the map.
	Click to use the selection tool to select the elements including walls and devices on the map.
	Click to use the measurement tool. Draw a line on the map to measure the actual distance according to the map scale.

 Edit	Click to edit the elements including walls and devices on the map.
Simulate	Click to simulate the network heat map. Note: It is required to click Simulate to generate a new heat map after editing elements on the map.
	Click to fit the map to the web page.
	Click to zoom in the map.
	Click to zoom out the map.
	Click to set the map scale. Draw a line on the map by clicking and dragging, and then define the distance of the line.
	Click to set the default height of the added devices and the information displayed on the map.
	Click to export the network coverage report.

Configuration

To generate a visual representation and heat map of your network, follow these steps:

- 1) Add a map and configure the general parameters for the map.
- 2) Add devices and walls, and configure the parameters.
- 3) View simulation results.

Step 1: Add Map

1. Go to **Map > Heat Map** and click  to add a new map. Then click **Add**.

Add Map

1. Provide a description for the map and browse for an image on your computer

2. The imported image should be less than 8M.

3. The image file name cannot contain characters [?^.*+\${}()]

Description

Layout

☒ Indoors

☐ Outdoors

Open-Plan Space (Office, Factory, etc.)

*.jpg, *.jpeg, *.gif, *.png, *.bmp, *.tiff, *.dxf

Browse

Add

Cancel

Description	Enter a description for the map.
Layout	Select the general layout of the map, which will make the simulation more accurate and the upload the map in the .jpg, .jpeg, .gif, .png, .bmp, .tiff, .dxf format. Tip: You can upload a CAD (.dxf) file, and the controller will automatically identify the walls in the layout.

2. Click the scale icon on the upper right to set a map scale. Draw a line on the map by clicking and dragging, and then define the distance of the line.

Set Map Scale

Enter the actual distance of the line to create a map scale.

Unit

☒ m

☐ ft

Distance

10

m

Confirm

Set Again

3. Click the settings icon to set the default height of the added devices and the information displayed on the map. Then click **Confirm**.

Settings ✕

Default Height Display Information

Ceiling Mounting

2.8m

(0-50, default 2.8)

Desktop

1m

(0-50, default 1)

Wall Plate Mounting

0.3m

(0-50, default 0.3)

Wall Mounting

2.6m

(0-50, default 2.6)

Outdoors

10m

(0-200, default 10)

Client Device

1m

(0-50, default 1)

Confirm

Cancel

Settings ✕

Default Height Display Information

Display Information

☒ Devices Name

☐ MAC

☐ IP

☐ Status

☒ Model

☐ Version

☐ Uptime

☐ Clients

☐ Traffic

☐ Channel

☐ Transmission Power

☐ Height

Default Height


Specify the default height for devices. You can change the height for individual device later.

Display Information

Select the information you want to see on the map.


Step 2: Add Devices and Walls

1. Click the Edit icon to enter the editing status of the map.
2. Click the Add Wireless Devices icon on the upper left, and the list of adopted devices and virtual devices will appear. Drag the devices to the desired place on the map.

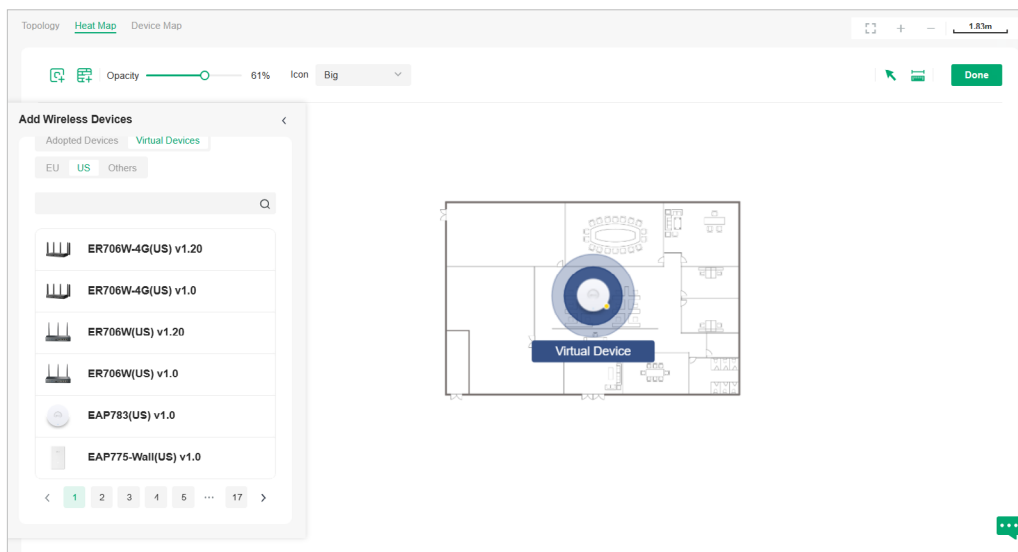

3. Click the Add Wall icon on the upper left. Select a type of wall/obstacle area and then start drawing on the map. Left click to start and right click / hit Enter to end.

You can also edit the details parameters of the walls and obstacles, delete, and add walls. Adding correct obstacles will increase the accuracy of simulation results.

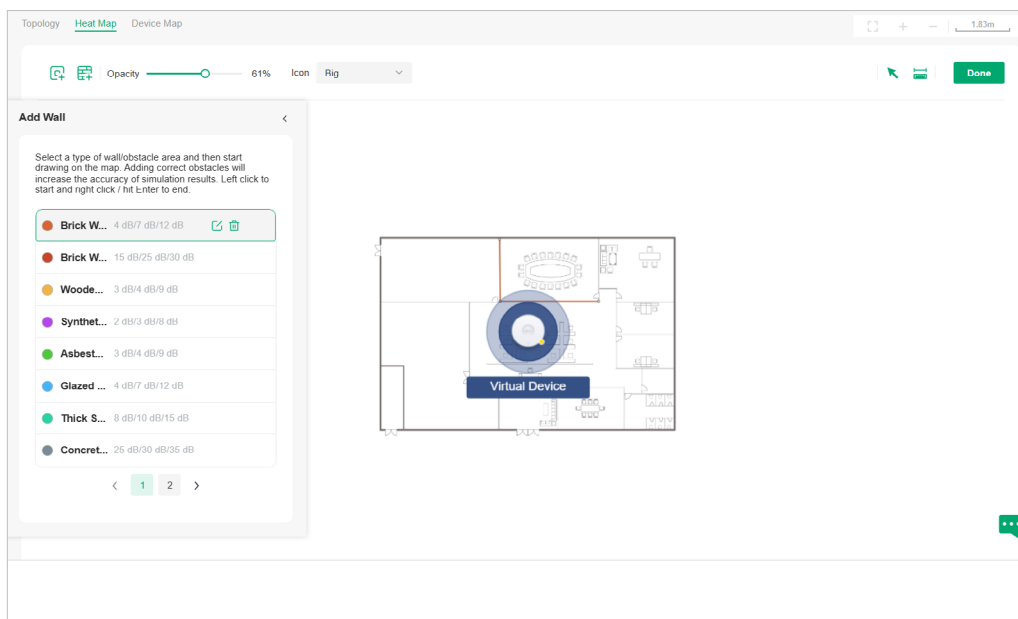

4. Click the Done icon to exit the editing status of the map.

Step 3: View and Export Results

It is required to click **Simulate** to generate a new heat map after editing elements on the map.

1. Click the Simulate icon to generate the heat map. You can adjust the receiver sensitivity, show signal strength, and view the simulation results according to your needs.



Show Signal Strength ☐

Enable the feature, and you can move the cursor to view the signal strength of a specific location.

Show Simulation ☒

Enable or disable the display of simulation results on the map.

2.4 GHz

5 GHz-1

5 GHz-2

6 GHz

Select 2.4GHz or 5GHz to view the simulation results of the band.

Click and follow the instruction to specify an area to view the signal strength and the corresponding percentage.


Adjust the receiver sensitivity, and the new settings will take effect after refreshing the simulation.

2. (Optional) If you want to export a network coverage report, click the Export icon on the upper right to export a report in .docx format.

17.2.2 Device Map


Prerequisite

A valid Mapbox API Access Token is required to use the Device Map function.
Visit <https://www.mapbox.com>, register an account, and obtain the default token on the account page.

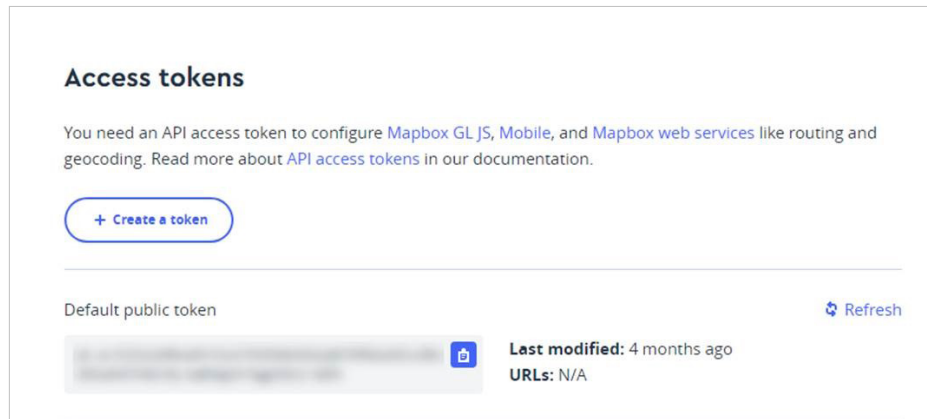

Configuration

1. Launch the controller and access a site. Go to **Map > Device Map**.
2. Click **Bind API Access Token**, enter the Mapbox API Access Token you obtained, then click **Apply**.

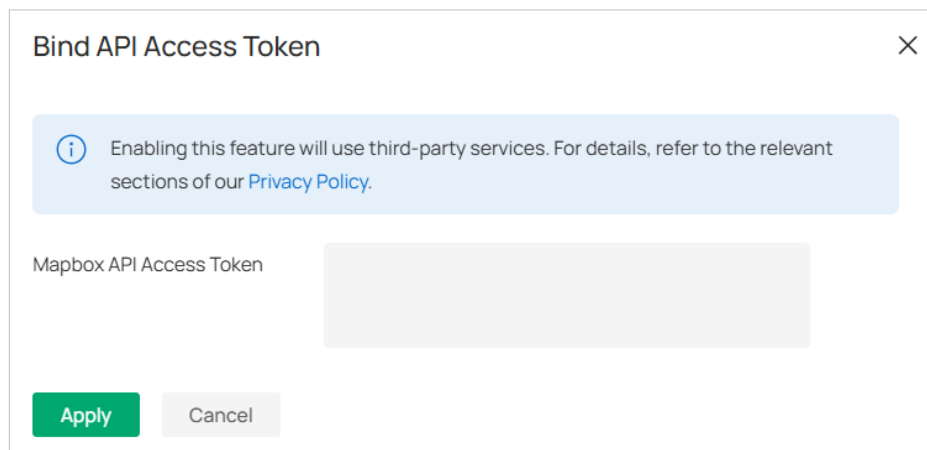

3. Use the map to manage your devices.



Unplaced Device List

Display a list of sites that are not marked on the map. You can drag and drop a site to add it to the map.

Search bar

Select a category and enter the keyword to search for a site or address.



Click to change or unbind the Mapbox API Access Token.




Zoom in and zoom out the map.




Locate to current location.

Right-click a device icon to edit location or remove it from the map.



Click a device icon to view device info and edit settings.

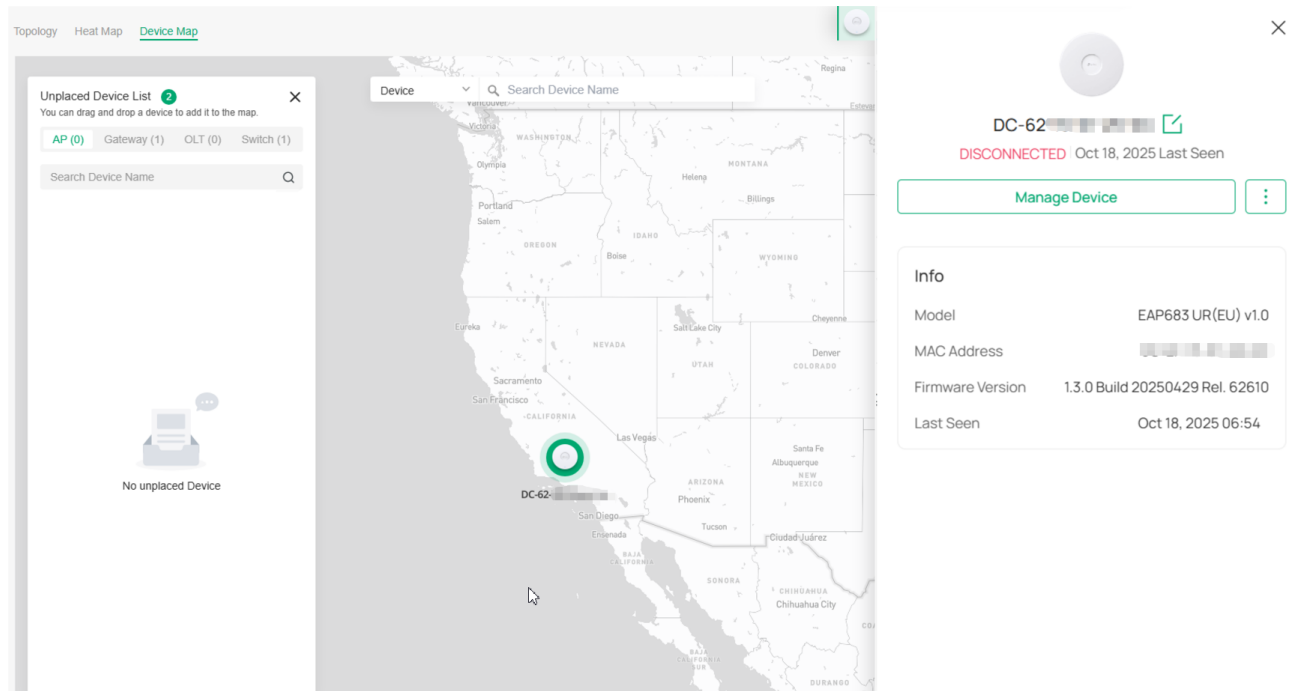


17.2.3 Site Map

Prerequisite

A valid Mapbox API Access Token is required to use the Site Map function.

Visit <https://www.mapbox.com>, register an account, and obtain the default token on the account page.

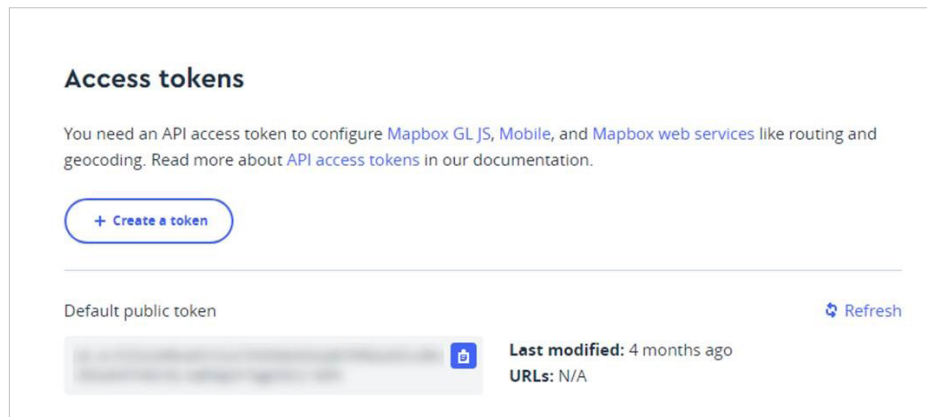

Configuration

1. Launch the controller and access the Global View. Go to **Dashboard > Site Map**.
2. Click **Bind API Access Token**, enter the Mapbox API Access Token you obtained, select the sites that can share the token, then click **Apply**.

Bind API Access Token

X

Mapbox API Access Token

Select the sites that can share the Mapbox Maps API Access Token.

Site Privileges

All sites (including newly created sites)

Specific sites


Choose Sites

None

Apply


Cancel

3. Use the map to manage your sites.

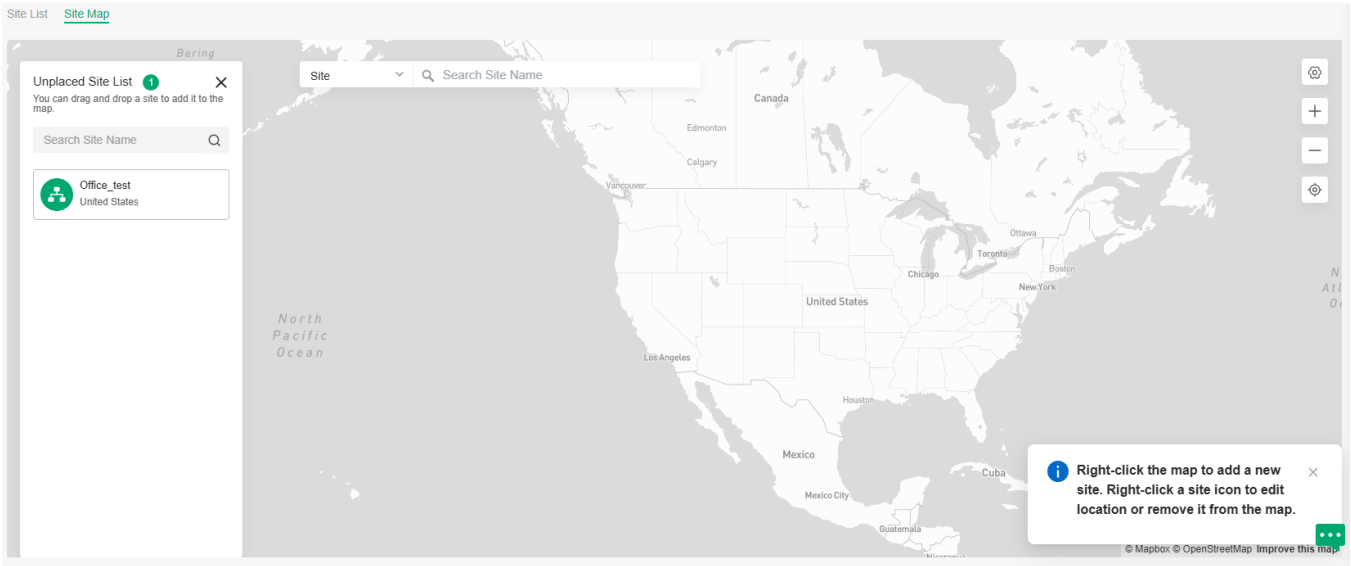


Unplaced Site List	Display a list of sites that are not marked on the map. You can drag and drop a site to add it to the map.
Search bar	Select a category and enter the keyword to search for a site or address.
	Click to change or unbind the Mapbox API Access Token.
	Zoom in and zoom out the map.
	Locate to current location.


Right-click the map to add a new site.

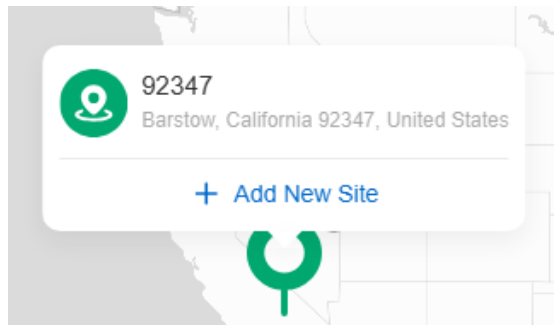

Right-click a site icon to edit location or remove it from the map.

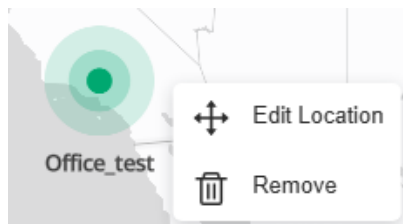

Click a site to view site info, and click Launch to access the site.

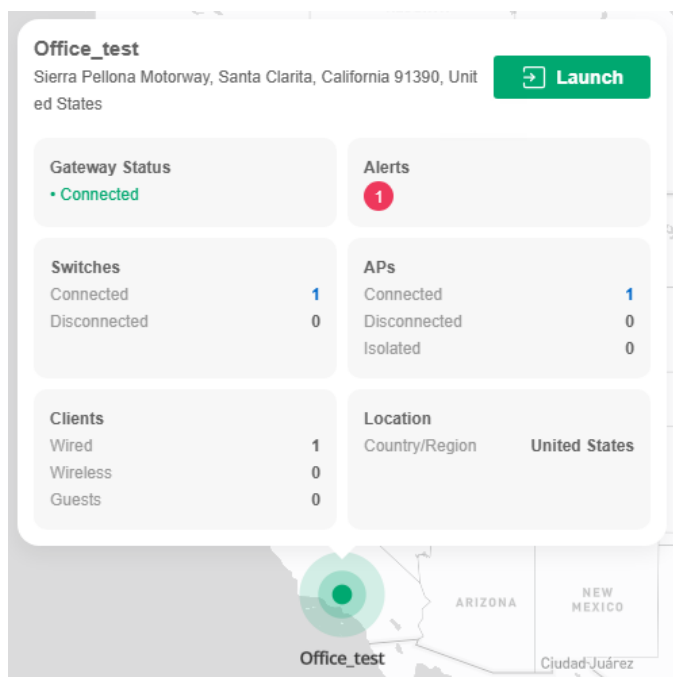


17.3 Monitor the Network with Insights

17.3.1 Reports

Network Report shows the statistics of various network indicators and their changes over time, helping network administrators to intuitively and comprehensively understand the current and historical operating status of their network. Thus, it facilitates network administrators to decide whether the controller and devices needs to be upgraded and optimized. It also provides network administrators and SI with data support for reporting network conditions.

In Site View, go to **Insights > Reports**, then you can view the connection data of the devices in the topology and the statistics of various network indicators and their changes over time.

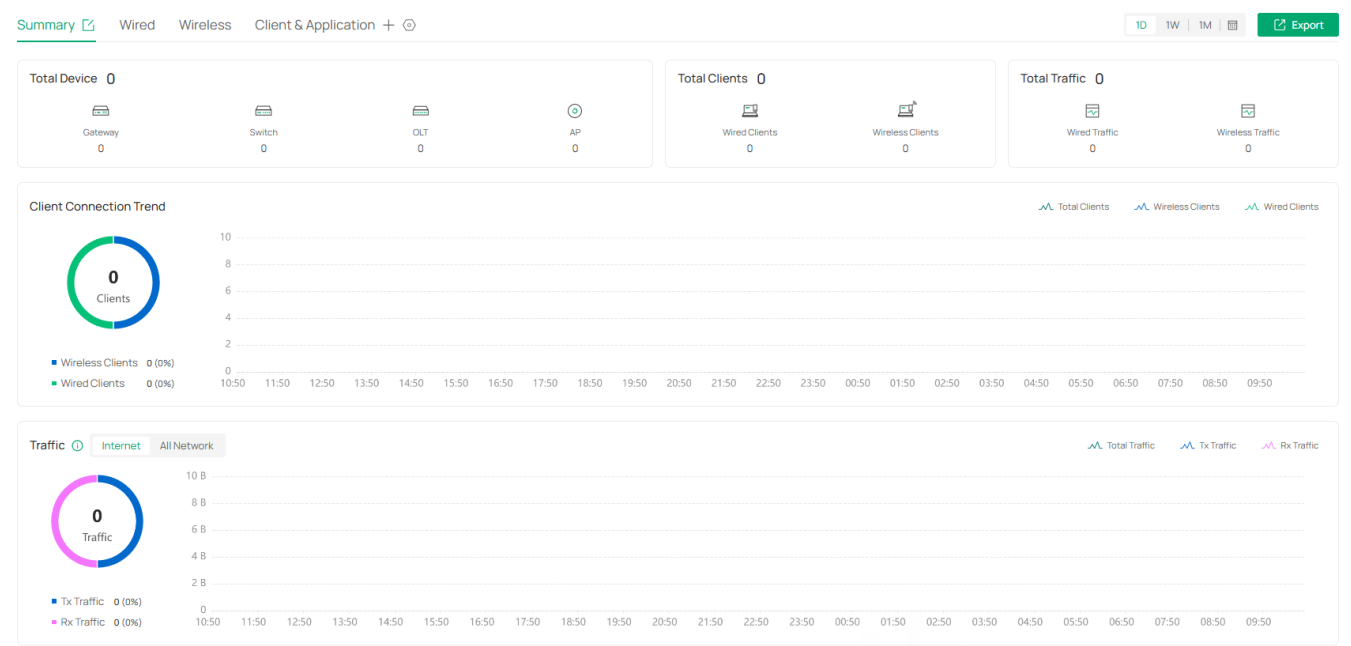

Click the tabs on the top to view the statistics of specific section of the network.

Summary	Display the statistics summary of the whole network. You can click the edit icon next to the tab name to customize the statistics to display.
Wired	Display the wired statistics of the whole network, including data related to gateway, switches, and wired traffic. You can click the edit icon next to the tab name to customize the statistics to display.
Wireless	Display the wireless statistics of the whole network, including data related to APs and wireless traffic. You can click the edit icon next to the tab name to customize the statistics to display.
Client & Application	Display the statistics of clients and applications in the network. You can click the edit icon next to the tab name to customize the statistics to display.

Behind the tabs, you can click the + icon to add new tabs and click the setting icon to configure tab settings.


In the upper right, you can click the time control to specify the time period of data to display and click **Export** to save the network report.

Note: For Linux system, please install Chromium before exporting the network report and make sure you can run Chromium as root.

17.3.2 Application Analytics

You can view detailed traffic information if you have adopted a gateway that supports DPI and enabled DPI in Application Control.

In Site View, go to **Insights > Application Analytics**, then you can monitor the network traffic at the application layer.

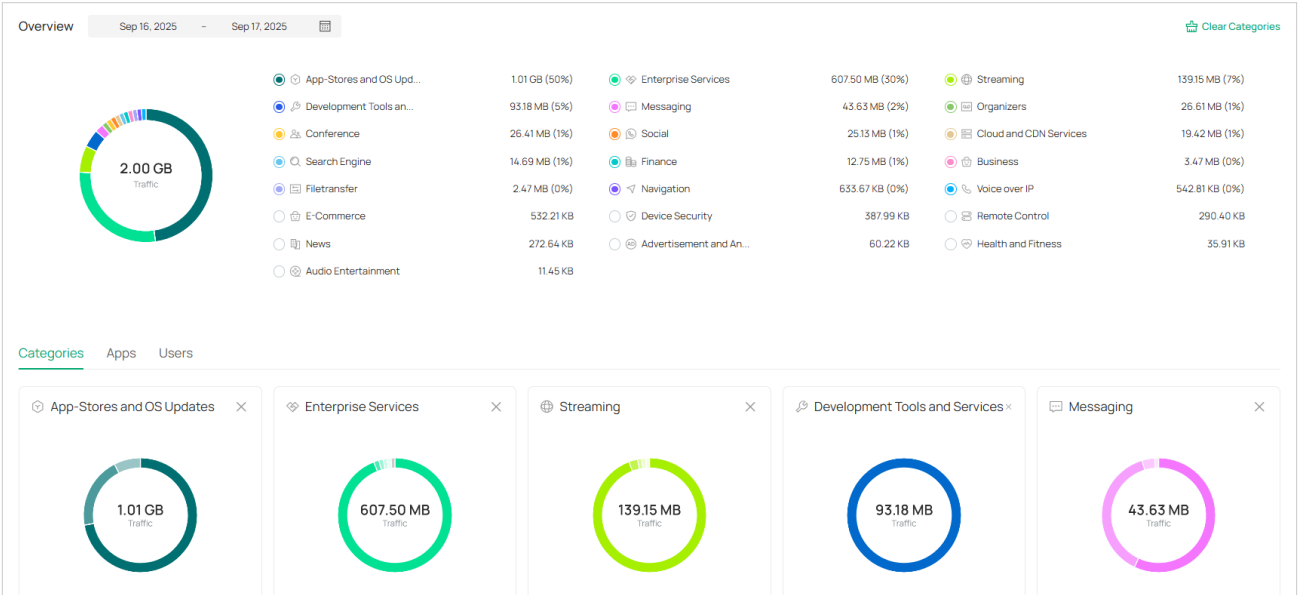

17.4 Monitor the Network with Logs

The controller uses logs to record the activities of the system, devices, users and administrators, which provides powerful supports to monitor operations and diagnose anomalies.

All logs can be classified from the following four aspects.

- **Occurred Hierarchies**
Two categories in occurred hierarchies are Controller and Site, which indicate the log activities happened, respectively, at the controller level and in the certain site. Only Main Administrators can view the logs happened at the controller level.
- **Notifications**
Two categories in notifications are Event and Alert, and you can classify the logs into them by yourself.
- **Severities**
Four levels in alert severities are Critical, Error, Warning, and Info, whose influences are ranked from high to low.
- **Contents**
Four types in contents are Operation, System, Device, and Client, which indicate the log contents relating to.

17.4.1 Manage Alerts

Alerts are the logs that need to be noticed and archived specially.

To configure logs as Alerts, click the [Setting](#) icon in the upper right and go to [Alerts > Notifications Settings](#). All the logs configured as Alerts are listed under the Alerts tab for you to search, filter, and archive.

Alerts

Events

Audit Logs

Setting

Unresolved (1)

Resolved (106)

All (1)

System (0)

Device (1)

Export

Filter

☐ TYPE	LEVEL	CONTENT	LATEST OCCURRENCE	ACTION
☐ Physical Port Connection	Info	98-03-8E : The physical connection status of [WAN/LAN6] was down.	Sep 15, 2025 07:36:10	

Export	Click to export the logs in .CSV or .XLSX format.
Filter	Click the filter the logs to display.
	Click to change the view mode for a better overview.
	: Displays the logs in a table.
	: Displays the logs in graphs.

Unresolved (2)Resolved (6)	Click the tab to filter the unresolved and resolved logs. You can click the Resolved icon or Batch Resolved to resolve a single log and all, respectively.
All (2)System (0)Device (2)	Click All to display all types of logs. Click System or Device to display the corresponding type of logs only.
Batch Resolved	Click to resolve the logs in batches.
Batch Delete	Click to delete the logs in batches.
	Click to resolve the log entry.
	Click to delete the log entry. Once deleted the logs cannot be recovered.

17.4.2 Manage Events

Events are the logs of state or activity changes within the system.

To configure logs as Events, click the **Setting** icon in the upper right and go to **Events > Notifications Settings**. All the logs configured as Events are listed under the Events tab for you to search and filter.

Alerts

Events

Audit Logs

Setting

All (8147)

System (0)

Device (6645)

Client (1502)

Export

Filter

☐	TYPE	CONTENT	TIME	ACTION
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.135 for the 00-FF-00-XXXXXX	Sep 17, 2025 12:04:29	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.136 for the 00-FF-00-XXXXXX	Sep 17, 2025 12:04:21	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.100 for the CC-28-AA-XXXXXX	Sep 17, 2025 12:01:03	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.135 for the 00-FF-00-XXXXXX	Sep 17, 2025 11:59:27	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.136 for the 00-FF-00-XXXXXX	Sep 17, 2025 11:59:19	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.38.2 for the E0-D3-60-XXXXXX	Sep 17, 2025 11:58:58	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.135 for the 00-FF-00-XXXXXX	Sep 17, 2025 11:54:25	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.136 for the 00-FF-00-XXXXXX	Sep 17, 2025 11:54:17	
☐	Client Offline (Wired)	EA-29-4E-XXXXXX went offline from network "Default" on 98-03-8E-XXXXXX (connected time: 11m connected, traffic: 0Bytes).	Sep 17, 2025 11:54:05	
☐	Gateway DHCP Server Module Information	DHCP Server allocated IP address 192.168.0.115 for the 0C-EF-10-XXXXXX	Sep 17, 2025 11:53:26	

Feb 05, 2025 – Feb 12, 2025	Filter the logs based on Start Time.
	Click the selector to open the calendar. Click a specific date twice in the calendar to display the logs on the day. To display the logs during a time range, click the start date and end date in the calendar.
All (59)System (0)Device (59)Client (0)	All/System/Device/Client: Click All to display all types of logs. Click System or Device or Client to display the corresponding type of logs only.
Export	Click to export the logs in .CSV or .XLSX format.

Filter	Click the filter the logs to display.
Batch Delete	Click to delete the logs in batches.
	Click to delete the corresponding event logs.

17.4.3 Manage Audit Logs

Audit log records information about which accounts have accessed the system or site, and what operations they have performed during a given period of time.

AlertsEventsAudit Logs

Search Operation

Date

AllSuccessfulFailed

AllErrorWarningInfo

Export

TIME	OPERATOR	CATEGORY	STATUS	OPERATION	ACTION
Sep 17, 2025 09:45:58		Network Settings	Successful	Lan Network 98-03-8E- edited successfully.	
Sep 17, 2025 09:29:01		Devices	Successful	Main ap: 00-FF-00 , client ap: 00-FF-00 succee...	
Sep 17, 2025 09:22:09		Devices	Successful	Main ap: 00-FF-00 client ap: 00-FF-00 succee...	
Sep 17, 2025 09:08:37		Clients	Successful	Magic7-lin blocked successfully.	
Sep 17, 2025 08:28:57		Clients	Successful	3A-D6-AE unblocked successfully.	
Sep 17, 2025 08:26:46		Clients	Successful	3A-D6-AE blocked successfully.	
Sep 17, 2025 08:22:13		Clients	Successful	3A-D6-AE configured successfully.	
Sep 17, 2025 08:21:42		Clients	Successful	The clients configured successfully in batch.	
Sep 17, 2025 08:19:05		Clients	Successful	The clients configured successfully in batch.	
Sep 17, 2025 07:13:11		Clients	Successful	iPhone reconnected successfully.	

Showing 1-10 of 67 records < 1 2 3 4 5 6 7 > 10 /page

- If you want to export audit logs:**
Check the boxes to select entries, click **Export** in the upper right corner, and specify the file type to download.

17.4.4 Configure Alert/Event Notifications

To configure alert/event notifications, follow the steps below:

Step 1: Enable Mail Server

Launch the controller and access the Global View. Go to **Settings > Server Settings** to enable Mail Server. For detailed configuration, refer to [4.5.1 Mail Server](#).

Step 2: Enable Alert/Event Emails in Accounts

In Global View, go to **Accounts > User** and configure Alert/Event Emails for the desired user accounts to receive the emails. Click **Add New Account** to create an account or click the Edit icon to edit an account. Enter the email address in **Email** and enable **Alert/Event Emails**. Save the settings.

Add New User

Administrator Type ☒ Local User ☐ Cloud User

Valid Period ☒ Permanent ☐ Temporary

Username

Password

Role [Manage Role](#)

Site Privileges ☒ All sites (including newly created sites) ☐ Specific sites

Email (Optional)

Alert/Event Emails ☐ Enable

[Create](#) [Cancel](#)

Step 3: Enable Notification in Site

1. Launch the controller and access a site.
2. Go to [Logs](#), click the [Setting](#) icon in the upper right, then go to the [Alerts](#) or [Events](#) page.
3. Check the activity logs classified by the content and specify their notification categories as Alert or Event for the current site. Enable Email notification and/or Webhook notification for the logs if needed.

[Alerts](#) [Events](#) [Audit Logs](#) [Advanced](#)

Notifications Settings

Notification Recipients [Manage Recipients](#)

Aggregate Alert Emails ☐ Send similar alerts within the specified time period in one email.

Webhook ☐

Content Settings

[System \(5\)](#) [Device \(58\)](#) [Reset to Default](#)

TYPE	☒ ENABLE	LEVEL	☒ EMAIL NOTIFICATION	☐ WEBHOOK NOTIFICATION
DST configuration error.	☒ Enable	Error	☒ Enable	☐ Enable
IntelliRecover - Reboot Recovery Initiated	☒ Enable	Info	☐ Enable	☐ Enable
IntelliRecover - Reboot Recovery Failed	☒ Enable	Error	☐ Enable	☐ Enable

[Save](#) [Cancel](#)

Alerts

Events

Audit Logs

Advanced

Notifications Settings

Notification Recipients

Please Select...

Manage Recipients

Aggregate Event Emails

☐ Send similar alerts within the specified time period in one email.

Webhook

☐

Content Settings

System (18)

Device (34)

Client (16)

Reset to Default

TYPE	ENABLE	EMAIL NOTIFICATION	WEBHOOK NOTIFICATION
Site Logs Sent to Log Server	☐ Enable	-	☐ Enable
Sending Site Logs to Log Server Failed	☒ Enable	-	☐ Enable
Logs Mailed Automatically	☒ Enable	-	☐ Enable

Save

Cancel

Notification Recipients	Specify the recipients to receive alert/event notifications.
Aggregate Alert Emails/ Aggregate Event Emails	Enable this option and specify the time period. Similar alerts within the specified time period will be collected and sent in one email.
Webhook	Enable Webhook and choose a Webhook for the active push function of alerts/ events.
Reset to Default	Click to reset all notification configurations in the current site to the default.
System Device System Device Client	Click the tabs to display the configurations of corresponding log types.
Enable	Check the box to specify an activity log as alert/event log.
Email Notification	Check the box to enable Email notification. The controller will send emails to notify the administrators and viewers of the site's logs once generated.
Webhook Notification	Check the box to enable Webhook notification. The controller will push alerts/ events once generated.

4. Save the settings.

17. 4. 5 Configure Audit Log Notifications

To configure audit log notifications, follow the steps below:

Step 1: Create Webhooks

Launch the controller and access the Global View. Go to [Settings > Platform Integration > Webhooks](#) and create webhooks. For detailed configuration, refer to [4. 7. 2 Webhooks](#).

Step 2: Enable Webhook for Audit Logs

1. Launch the controller and access a site.
2. Go to [Logs](#), click the [Setting](#) icon in the upper right, then go to the [Audit Logs](#) page.
3. Enable [Webhook](#) and choose webhooks.
4. Specify which categories will be sent to the corresponding log server via Webhook.

Webhook

☒ Enable

Choose Webhook

Please Select... Manage Webhook

Category

Select All

☐ Application Analytics

☐ Authentication

☐ Clients

☐ Dashboard

☐ Devices ⓘ

☐ EAP ⓘ

☐ Gateway ⓘ

☐ General Settings

☐ Hotspot Manager

☐ IntelliRecover

☐ Log

☐ Map

☐ Network Settings

☐ Profiles

☐ Report

☐ Security

☐ Switch ⓘ

☐ Tools

☐ Transmission

☐ VPN

Save

Cancel

5. Save the settings.

17. 4. 6 Configure Remote Logging

With Remote Logging configured, the Controller will send the system logs to the specified log server once it is generated.

To configure Remote Logging, follow the steps below:

1. Launch the controller and access a site.
2. Go to [Logs](#), click the [Setting](#) icon in the upper right, then go to the [Advanced](#) page.
3. Enable [Remote Logging](#) and configure the parameters.

Remote Logging

Remote Logging ⓘ

☒ Enable

Syslog Server IP/Hostname

Syslog Server Port

514 (1-65535)

More Detail Logs ⓘ

☐ Enable

Apply

Cancel

Syslog Server IP/
Hostname

Enter the IP address or hostname of the log server.

Syslog Server Port	Enter the port of the server.
More Detail Logs	With the feature enabled, the logs of AP clients and switch system will be sent to the Syslog Server.

17.5 Maintain the Network with Tools

The controller provides many tools for you to analyze your network:

- **Network Check**
Test the device connectivity via ping, traceroute, or DNSLookup.
- **Packet Capture**
Capture packets for network troubleshooting.
- **Terminal**
Open Terminal to execute CLI or Shell commands.
- **Cable Test**
Perform cable test to check the cable issues.
- **Interference Detection**
Scan for interference in the environment and obtain channel occupancy information.

Note:
Firmware updates are required for earlier devices to support these tools.

17.5.1 Network Check

1. Launch the controller and access a site.
2. Go to **Network Tools > Network Check**.
3. Configure the test parameters.

Network Check

Device Type

EAP

Test

Ping

Sources

Please Select...

Destination Type

Domain/IP Address

Domain/IP Address

Advanced Test Settings

Packet Size

32

(10-2000)

Count

4

(1-100)

Devices which are already running commands shall not execute newly added commands. Output history of device with buffer space issues shall be automatically cleared.

Run

Device Type Select the device type to perform a test.

Test

Choose a tool to test the device connectivity.

Ping: Tests the connectivity between the specified sources and destination, and measures the round-trip time.

Traceroute: Displays the route (path) the specified sources have passed to reach the specified destination, and measures transit delays of packets across an Internet Protocol network.

DNSLookup: Helps find DNS records of a domain name.

ARP Table: Helps check the ARP table of the device.

Sources

Select one or multiple devices to perform a test.

Destination Type

Select the destination type and specify the destination to test. The options vary with the test type.

For the **Ping** test, you can specify the **Domain/IP Address** or **Client**. **Client** is available only when an AP device performs the ping test.

For the **Traceroute** test, you can specify the **Domain/IP Address**.

For the **DNSLookup** test, you can specify the **Domain**.

Advanced Test Settings

(Only for the Ping test)

Packet Size: Specify the size of ping packets.

Count: Specify the number of ping packets.

Note:

- Devices which are already running commands shall not execute newly added commands.
- Output history of device with buffer space issues shall be automatically cleared.

4. Click **Run** to perform the test. You can view the test result in the **Device Output** section.

The screenshot shows the 'Device Output' interface. On the left, there is a 'Device List' with a single device selected. The main area displays the output for a ping test performed on device 192.168.0.1. The output text is as follows:

```
Output for the device: 192.168.0.1
PING 192.168.0.1, (192.168.0.1) 32 data bytes.
Reply from 192.168.0.1: bytes=32  ttl=63  icmp_seq=0  time=0.940ms
Reply from 192.168.0.1: bytes=32  ttl=63  icmp_seq=1  time=0.940ms
Reply from 192.168.0.1: bytes=32  ttl=63  icmp_seq=2  time=0.940ms
Reply from 192.168.0.1: bytes=32  ttl=63  icmp_seq=3  time=0.940ms
--- ping statistic 192.168.0.1 ---
Packets: Sent=4, Received=4, Lost=0 (0.0% loss)
Round-trip min/avg/max = 0.940/0.940/0.940 ms
```

At the top right of the output area, there are icons for Search, Email, Download, and Zoom. A 'Clear' button is located at the top right of the output text area.

You can click the Email/Download/Zoom icons above the test result field to email the test logs to a mailbox, download the test logs locally, or zoom in/out the display area.

17.5.2 Packet Capture

1. Launch the controller and access a site.
2. Go to **Network Tools > Packet Capture**.

3. Configure the parameters for packet capture.

Device Type

EAP

Sources

00-FF-00

Interface Type

☒ Wired ☐ Wireless

Select Port

LAN Port

Capture Mode

☒ Local ☐ Stream

Duration

seconds (1-300)

Single Packet Size

1000

Bytes (68-1000)

Packet Capture Filters

☐

1

1. Packet size cannot exceed 10 MB.
2. The file will be kept for 10 minutes only and can only be downloaded three times.
3. Warning: Configuring other SSIDs in the same band during packet capture may cause abnormal packet capture results.

Start Packet Capture

Download .pcap Files

Device Type	Select the device type to capture packets.
Sources	Select one or multiple devices to capture packets.
Interface Type	Select the interface type to capture packets. Wired: If selected, select the Port to capture packets and select the Capture Mode. Wireless: If selected, select Band and SSID / Interface to capture packets. Note: The following configurations will affect packet capturing on a wireless interface : • If a certain band is turned off, packets on the SSIDs of the corresponding band will not be captured. • If a WLAN schedule is configured, packets outside the schedule will not be captured. • If a certain SSID is turned off, packets on the SSID will not be captured.
Capture Mode	Select a mode to capture packets: Local: The device executes the packet capture locally. The captured packets are packaged and stored in the internal directory of the device. You can download the file from the controller web page. Stream: The device does not save the packet capture files to the device's internal storage, thereby avoiding memory consumption. Packets captured by the device can be displayed in real-time using packet capture tools such as Wireshark, enabling real-time viewing and analysis of the captured packets.
Duration	Specify the duration for packet capture.
Single Packet Size	Specify the size of a single captured packet. It cannot exceed 1 MB.

Packet Capture Filters

(Optional) Enter the filters to capture packets. Supported filters include:
host, src, dst, tcp port, tcp src port, tcp dst port, udp port, udp src port, udp dst port,
ether host, ether src, ether dst

Combination of operators "and", "or", "(" and ")" is supported between multiple filter items. For example:

(src 192.168.0.1 and tcp port 80) or (src 192.168.0.1 and tcp port 90)

(src 192.168.0.1 and tcp src port 80) or (dst 192.168.0.1 and tcp dst port 90)

ether src A0:00:00:04:C5:84 and ether dst A0:00:00:04:C5:85

Note:

host: host address, src: source, dst: destination, ether: ethernet address (MAC address)

4. Click **Start Packet Capture** to capture packets. After packets are captured, you can click **Download .pcap Files** to download them.

Note: The file will be kept for 10 minutes only and can only be downloaded three times.

17.5.3 Terminal

- 1. Launch the controller and access a site.
- 1. Go to **Network Tools > Terminal**.
- 2. Configure the parameters.

Remote Control Terminal Session

Device Type

EAP

Sources

Please Select...

Open Terminal

- Device Type

Select the device type to run CLI or Shell commands.
- Sources

Select one or multiple devices to test.

3. Click **Open Terminal**. Now you can run CLI or Shell commands.

Sessions

Search Sessions

Device List

Output for the device: 192.168.0.1

Clear

BusyBox v1.29.2 (2024-01-02 17:17:16 PST) built-in shell (ash)
Enter 'help' for a list of built-in commands.
/bin \$

You can click the Email/Download/Zoom icons above the test result field to email the test logs to a mailbox, download the test logs locally, or zoom in/out the display area.

17.5.4 Cable Test

1. Launch the controller and access a site.
2. Go to **Network Tools > Cable Test**.
3. Configure the parameters.

Device

Please Select Device

Select Port

Select All


Please Select Device

Device	Select the device in the pop-up window to run the cable test.
Select Port	Select the port of the device to run the cable test.

4. After running the cable test, you can check the diagnostic process and results below.

Diagnostic Process


No Diagnostic Process

Diagnosis Result

PORT	STATUS	CABLE LENGTH(m)	DIAGNOSIS RESULT	UPDATE TIME
 No Data.				

17.5.5 Interference Detection

Interference Detection is used to scan for interference in the environment and obtain channel occupancy information. After the scan is complete, it generates scan results that include channel utilization information and Wi-Fi interference source information.

There are two ways to configure the interference detection function: one for a single device and the other for multiple devices.

Method 1: Configure Interference Detection for Multiple Devices

Note: After the scan is complete, a scan result entry will be generated and retained as a historical record that can be exported.

1. Launch the controller and access a site.
2. Go to **Network Tools > Interference Detection**.
3. Click the **Interference Detection** button.
4. In the pop-up window, select the devices to scan, and click **Scan Now** to start scanning.

Select APs

Search Name, Mac or IP

☐	DEVICE NAME	STATUS	IP ADDRESS	MAC ADDRESS	MODEL	VERSION
☒	00-FF-00-	CONNECTED	192.168.0.136	00-FF-00-	EAP115-Bridge	3.0
☒	00-FF-00-	CONNECTED	192.168.0.135	00-FF-00-	EAP115-Bridge	3.0
☐	0C-EF-15-	CONNECTED	192.168.0.115	0C-EF-15-	EAP683 UR	1.0
☐	20-36-26-	CONNECTED	192.168.0.104	20-36-26-	EAP772-Outdoor	1.0
☐	A8-29-48-	CONNECTED	192.168.0.112	A8-29-48-	EAP773	1.0
☐	E0-D3-62-	CONNECTED	192.168.0.18	E0-D3-62-	EAP655-Wall	1.0

Select 2 of 6 items

Select All

Showing 1-6 of 6 records

1

10 /page

Scan Now

Cancel

The **Interference Detection** page will display the detection records. You can click the Export icon of a record to export it if needed.

Detection Records

Aug 20, 2025 - Sep 19, 2025

TIME	DEVICE QUANTITY	DEVICE LIST	ACTION
Aug 21, 2025 06:48:20	1	0C-EF-15-	
Sep 19, 2025 08:57:51	2	00-FF-00- 00-FF-0C-	
Sep 19, 2025 09:01:18	6	00-FF-00- 00-FF-00- 0C-EF-15- + 3...	


Note: Up to 10 interference detection records can be saved.

5. Click the Detail icon of a record to view the detailed results.
You can select **All AP** to view all device results or select a specific device to view its result. Click the band to view each band’s result.

Method 2: Configure Interference Detection for a Single Device

Note: After the scan is complete, a scan result entry will be generated and overwrite the old entry, and the historical scan results will not be retained.

1. Launch the controller and access a site.
2. Go to **Devices > Device List**, click the target AP, and click **Manage Device**.
3. Go to **Statistics > Interference Detection**. Click **Scan** to start scanning.

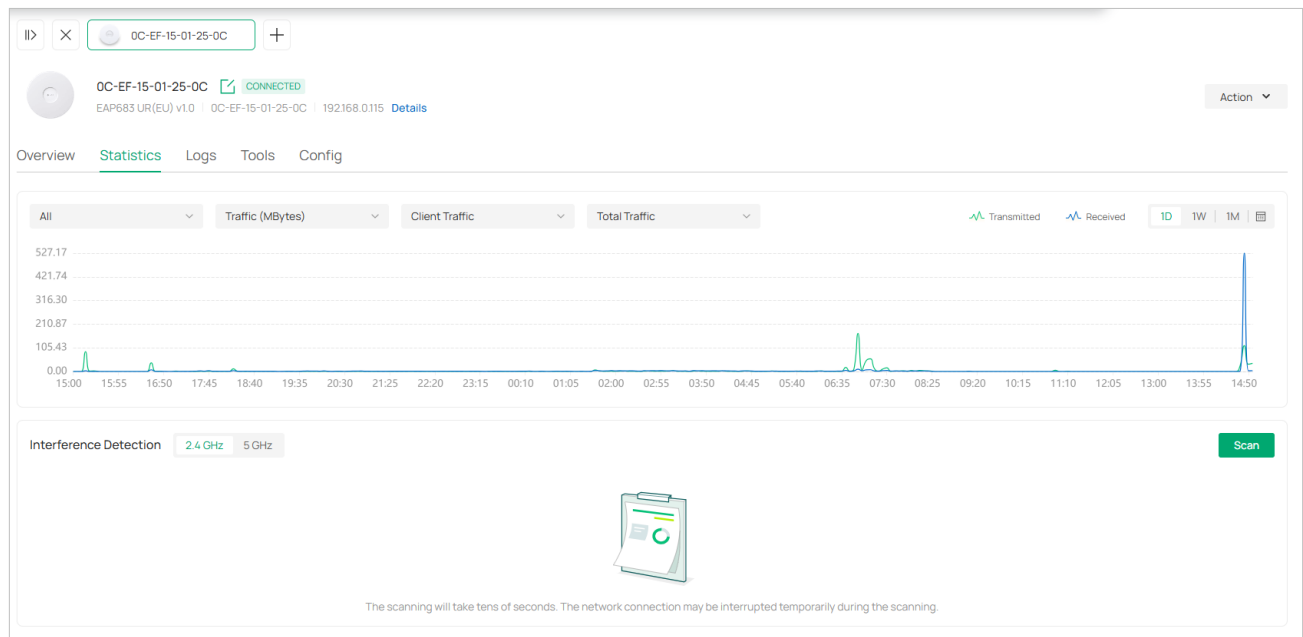

4. Wait for the scan to complete and the results will be displayed.

17.6 Maintain PoE Devices with IntelliRecover

Overview

IntelliRecover can help you monitor the status of PoE devices, automatically repairing abnormal devices.


Network Preparation:

- A PoE Switch that can be managed by Omada Controller;
- EAPs, security devices, or clients powered by the PoE switch.


Configuration

To configure IntelliRecover, follow these steps:


1. Launch the controller and access a site.
2. Go to **Devices**. After adopting the PoE switch, and the EAP or security device directly connected to the PoE switch, click the EAP or security device to open its Properties window. Click  then click **IntelliRecover** to enable the function for the device so that it can be added to the monitoring list.

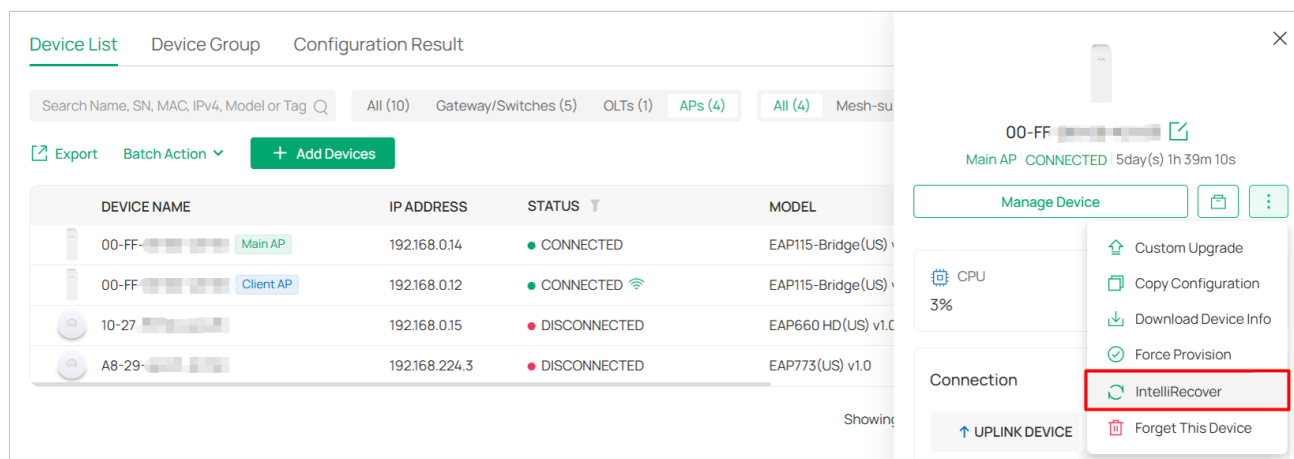


3. Go to **Clients**. Click the client device to open its Properties window. Click  then click **IntelliRecover** to enable the function for the client so that it can be added to the monitoring list.

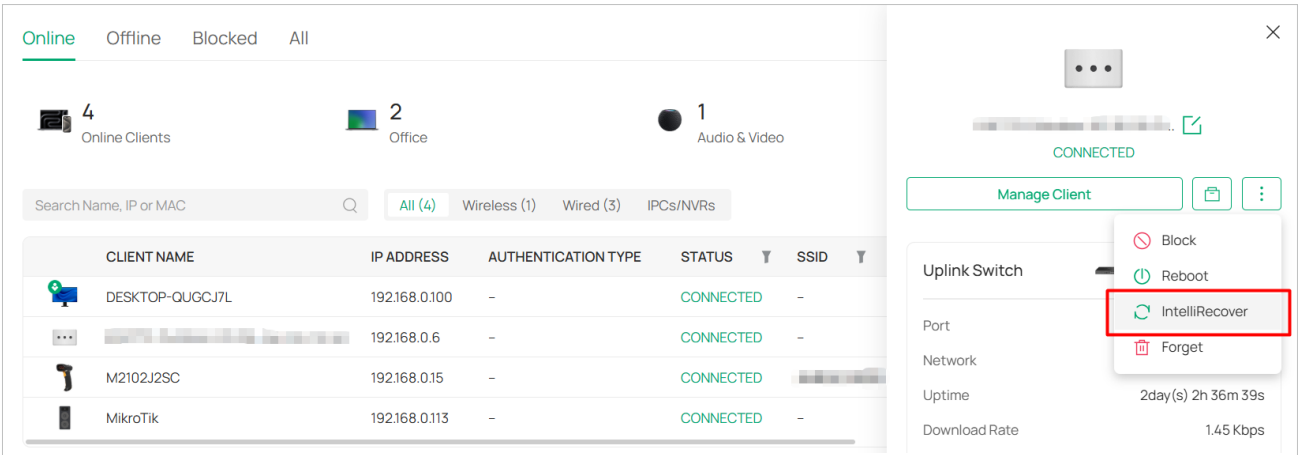


4. Go to the **IntelliRecover** page. Click **Add** to add the devices or clients to the monitoring list.

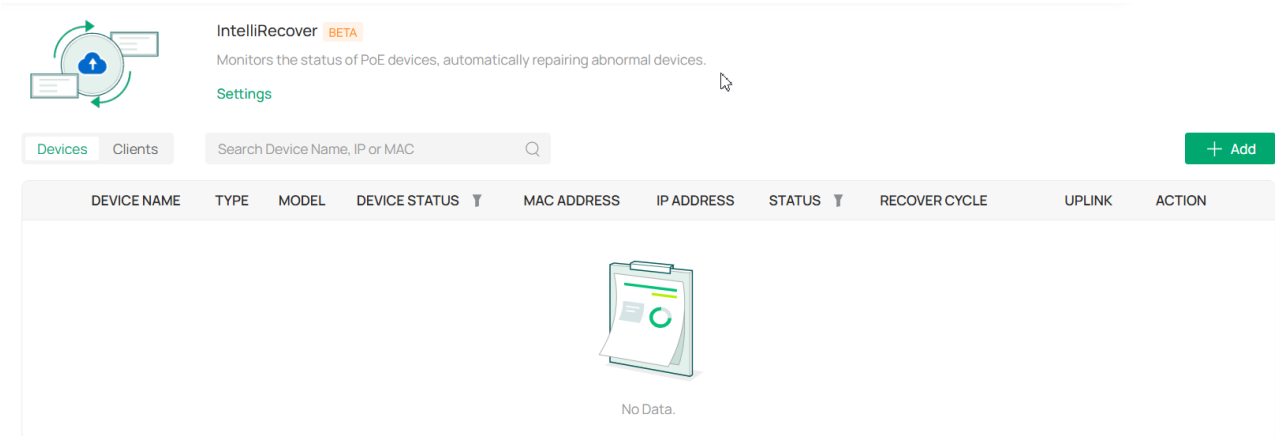

5. Select the devices or clients to be monitored and click **Apply**.

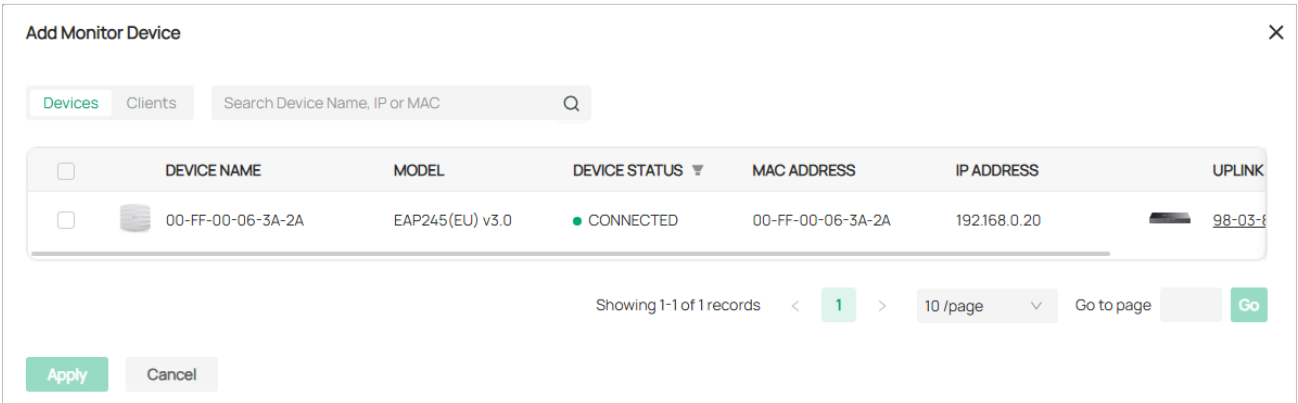

6. Click **Settings** on the **IntelliRecover** page and configure the parameters.

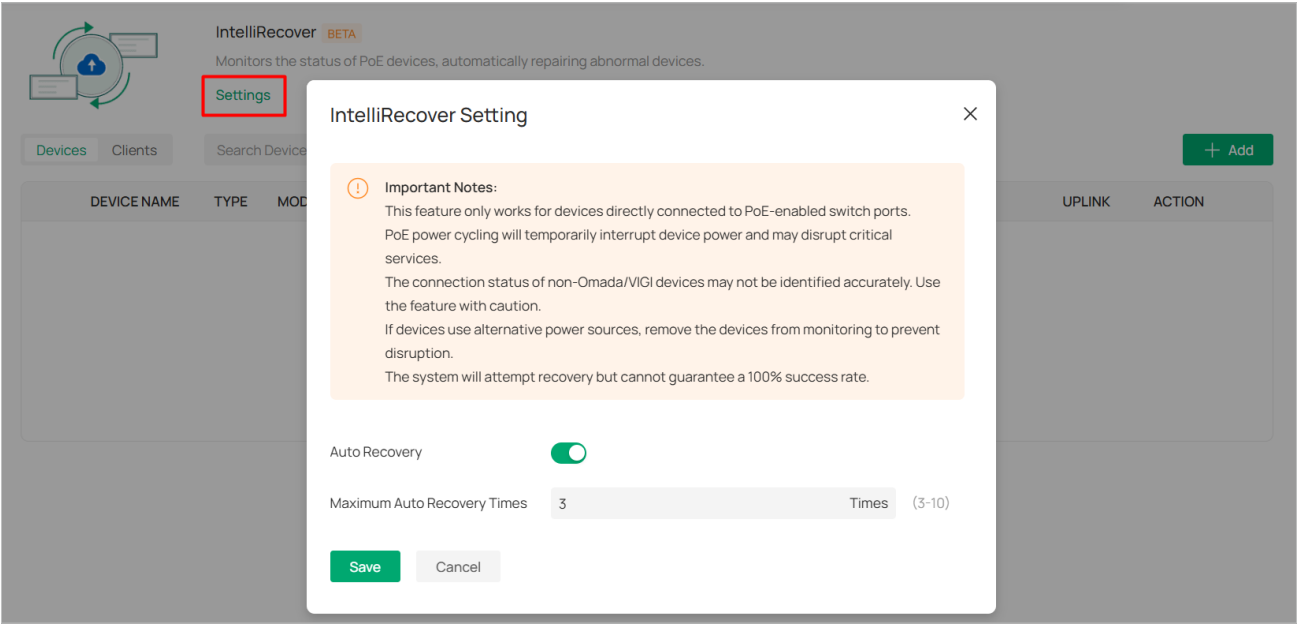


Auto Recovery

Click to enable or disable the Auto Recovery funtion.

Maximum Auto Recovery Times

Specify the maximum auto recovery times for the monitored devices. When the limit has been reached, the monitered devices will not be automatically rebooted.

7. After the configuration, when the monitored device goes offline, the switch PoE port connected to the device will be automatically rebooted and a log will be generated. You can also click the **Reboot PoE Port** icon in the Action column to manually reboot the PoE Port.

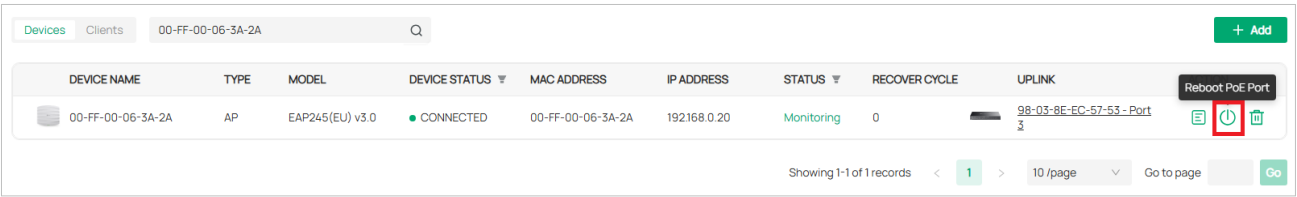

Chapter 18

Manage Customer Networks in MSP Mode

This chapter will introduce how to enable MSP mode and manage customer networks in MSP view. It includes the following sections:

- [18.1 Overview](#)
- [18.2 Quick Start](#)
- [18.3 Add and Manage MSP Accounts](#)

18.1 Overview

MSP (Managed Service Provider) mode allows you to know the status of your customers at a glance, and manage customers in the Omada platform.

- **Customer Monitoring**

Keep you informed of accurate, real-time status of every customer.

- **Customer Management**

Manage all customers to deploy the whole network.



- **Account Settings**

Manage all administrative accounts.

18.2 Quick Start


18.2.1 Enable the MSP Mode

1. Launch the controller and access the Global View.
2. Go to [Settings](#) > [Controller Settings](#). Enable [MSP Mode](#) and confirm the action to convert your standard controller system to an MSP system.

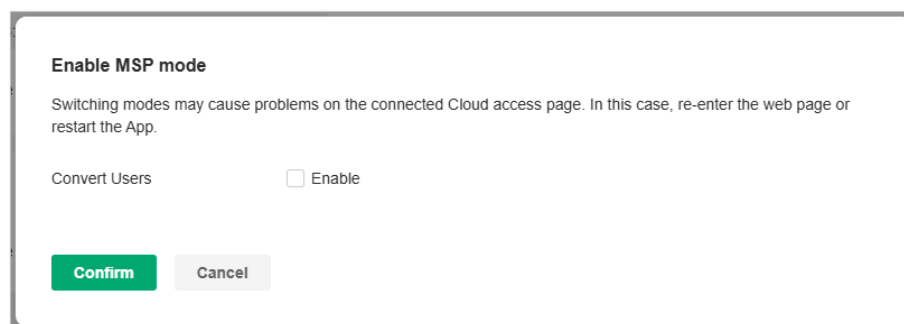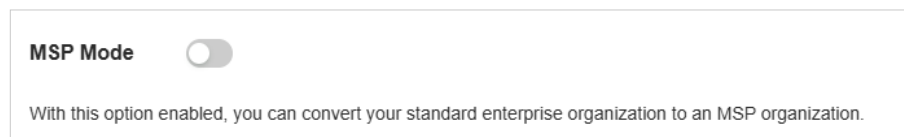

Note: Enabling or disabling MSP mode may cause problems on the connected Cloud access page. In this case, re-enter the web page.

You will enter the MSP view.

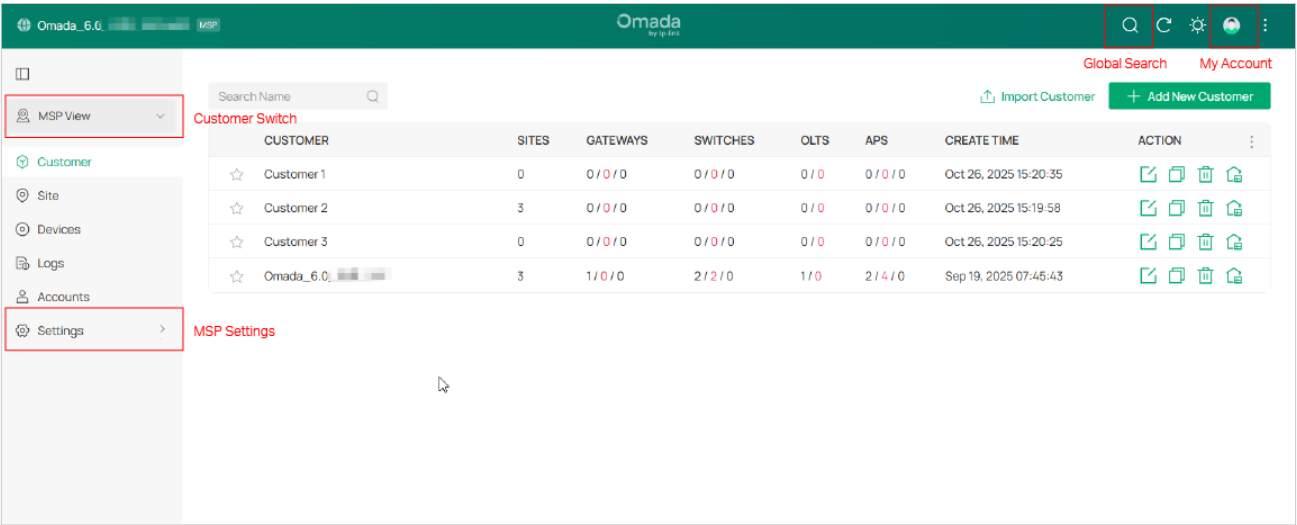

18. 2. 2 Add and Manage Customers

1. In MSP View, go to the **Customer** page.
2. Add customers by using one of the following methods:
- **Add a new customer**

Click **Add New Customer** above the customer list. Specify the customer name and enter a description. Then save the settings.

Add New Customer

Customer Name:

Description

(Optional)

Confirm

Cancel

- **Copy an existing customer**
- Click the Copy icon of a customer entry. Specify the customer name and enter a description. Then save the settings.

Copy New Customer

Customer Name:

Description

(Optional)

Confirm

Cancel

- **Import customers from another controller**

Click **Import Customer** above the customer list. Specify the customer name and enter a description. Determine whether to retain device info according to your needs. Then import customer from a local file or from a file server.

Import Customer

For controller v5.13.11.41 and above, only the configuration file from the controller with the same or smaller first-three-part version number (Major.Minor.Patch) can be imported.

Name

Description

(Optional)

Retain Device Info

☒ Enable

Import

☒ Import from Local File

☐ Import from File Server

Choose File

Please select a file.

Browse

Import

Cancel

3. The new customers will be added to the customer list and the drop-down list of **Customers**.
- In the customer list, you can view the customer information, and click the icons in the ACTION column to manage customer entries and launch the controller of each customer.

CUSTOMER	SITES	GATEWAYS	SWITCHES	OLTS	APS	CREATE TIME	ACTION	
☆ Customer_1	0	0 / 0	0 / 0	0 / 0	0 / 0	Feb 12, 2025 10:57:44 am	   	
☆ Customer_2	0	0 / 0	0 / 0	0 / 0	0 / 0	Feb 12, 2025 10:57:54 am	   	
☆ Customer_3	0	0 / 0	0 / 0	0 / 0	0 / 0	Feb 12, 2025 10:58:13 am	   	
☆ Omada Controller_Office	3	0 / 0	0 / 0	0 / 0	0 / 0	Feb 11, 2025 10:09:10 am	   	

Showing 1-4 of 4 records

< 1 >


10 / page

Go to page

Go

18.2.3 Add Sites and Devices

1. Select a customer then click Global from the Customer drop-down list in the left of the page.

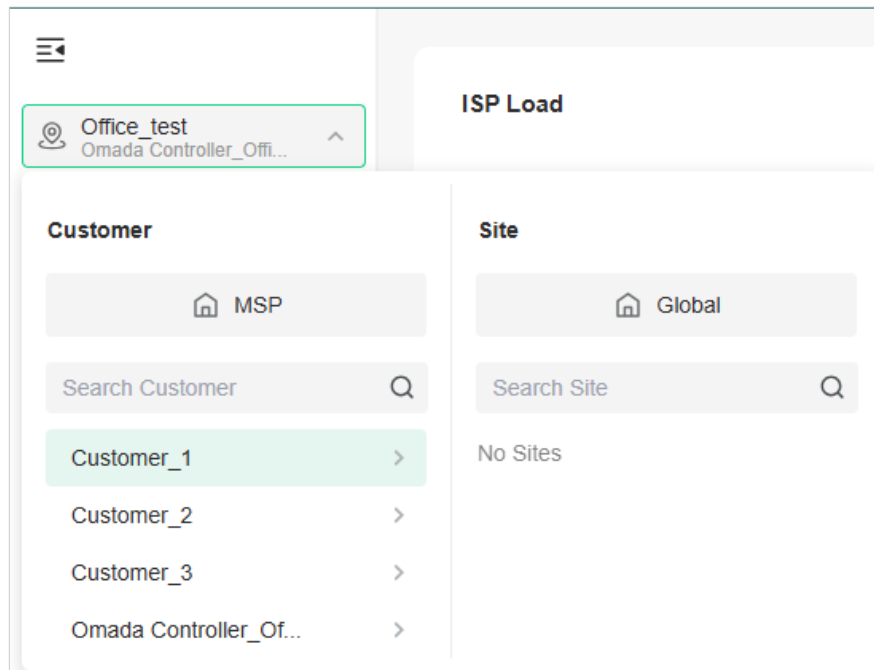

2. Add sites and adopt devices by referring to [3 Get Started with Omada Network](#).

18.3 Add and Manage MSP Accounts

Similar as a common controller, the controller in MSP mode offers multiple levels of access available for users: **MSP Owner**, **MSP Super Administrator**, **MSP Administrator**, and **MSP Viewer**. You can also create new account roles and customize their permissions to access different features.

You can use the MSP roles and user accounts on a controller in MSP mode in the same way as using the roles and user accounts on a standard controller. For more information, refer to [16 Manage Accounts](#).

Chapter 19

Configure the SD-WAN

This chapter will introduce how to configure the SD-WAN to easily connect multiple gateways of sites.

It includes the following sections:

- [19.1 Introduction to SD-WAN](#)
- [19.2 Configure the SD-WAN](#)

19.1 Introduction to SD-WAN

SD-WAN, or Software-Defined Wide Area Network, allows you to easily connect multiple gateways together without complicated VPN configuration. It helps reduce wide area network expenses, improve network connection flexibility, and provide secure and reliable interconnection services for enterprise networks and data center networks scattered across a wide geographical range.

Omada Controller implements SD-WAN networking based on the Hub-Spoke mode, which allows you to quickly establish network connections between multiple sites; it also supports setting up direct channels between specified sites to improve communication efficiency.

Requirements

To use SD-WAN, ensure the following:

- At least one gateway in your network is configured with a public IP address.
- The WAN networks of the gateways have not enable DMZ.
- The network segments in the network do not conflict with each other or the LAN of other sites.

19.2 Configure the SD-WAN

1. Adopt the gateway that is configured with a public IP address through the LAN side.
2. Configure port forwarding on the adopted gateway for adoption of other gateways.
 - a. Access the site where the gateway is adopted. Go to **Network Config > Transmission > NAT > Port**.
 - b. Add a Port Forwarding rule for the controller port, as shown in the following figure:

The screenshot shows the 'Port Forwarding' configuration window with the 'Create New Rule' tab selected. The configuration details are as follows:

- Name:** to_controller
- Status:** ☒ Enable
- Source IP:** ☒ Any ☐ Limited IP Address
- Interface:** WAN2 (selected) with a note 'WAN with public IP'
- WAN IP:** Please Select... (Optional)
- DMZ:** ☐ Enable
- Source Port:** 29810-29816 (labeled 'Controller port')
- Destination IP:** 192 . 168 . 0 . 2 (labeled 'Controller PC IP')
- Destination Port:** 29810-29816
- Protocol:** ☒ All ☐ TCP ☐ UDP

At the bottom, there are 'Create' and 'Cancel' buttons.

- c. If you need to upgrade devices through the controller, add a port forwarding rule for upgrade port 8043, as shown in the following figure:

Port Forwarding | ALG | One-to-One NAT | Disable NAT

Create New Rule

Name: to_upgrade

Status: ☒ Enable

Source IP: ☒ Any ☐ Limited IP Address

Interface: WAN2 x WAN with public IP

WAN IP: Please Select... (Optional) ⓘ

DMZ: ☐ Enable

Source Port: 8043 Upgrade port (1-65535, e.g. 80 or 80-100)

Destination IP: 192 . 168 . 0 . 2 Controller PC IP

Destination Port: 8043 (1-65535, e.g. 80 or 80-100)

Protocol: ☒ All ☐ TCP ☐ UDP

Create **Cancel**

3. Adopt other gateways through the WAN side.

- a. On the standalone page of each gateway, set the Controller Inform URL/IP to the public IP of the gateway adopted on the LAN side, as shown in the following figure:

Controller Settings

Cloud-Based Controller Management

Connection Status: Disabled

Cloud-Based Controller Management: ☐ Enable

☐ I accept the [Terms of Use](#) and confirm that I have fully read and understood the [Privacy Policy](#).

Save

Controller Inform URL

Inform URL/IP Address: 192.168.0.2 Public IP of the Gateway adopted on LAN side

Save

- b. On the controller page, create a site for each gateway and adopt them to the sites.

4. Configure SD-WAN.

- a. In Global View, go to **SD-WAN**. Click **Create SD-WAN Group**.
- b. Configure basic settings, then click **Next**.

← Add New SD-WAN group

1 Basic Settings

2 Set Network Topology

3 Select WAN & Network

Basic Info

Group Name

(1-64)

Description

Please enter no more than 50 characters.

(Optional)

SD-WAN IP Range

.

.

.

-

.

.

.

Check Availability

Select Gateway Devices

Hub Device

 Select

Spoke Device

 Select


Back



Next

Group Name	Specify the name of the group.
Description	Enter a description for identification.
SD-WAN IP Range	Specify the IP range for the controller to assign virtual IP addresses to VPN interfaces. Ensure the IP range contains at least 16 IP addresses. After filling in the information, click Check Availability to perform conflict detection on the IP range.
Hub Device	Click to select a hub device from the listed gateways. Only the gateways with public IP addresses will be listed.
Spoke Device	Click to select spoke devices from the listed gateways.

- c. Set the network topology. It is recommended to click [Manage Spoke-Spoke Connection](#) to create connections between spokes to reduce the pressure on the hub. Click [Next](#).

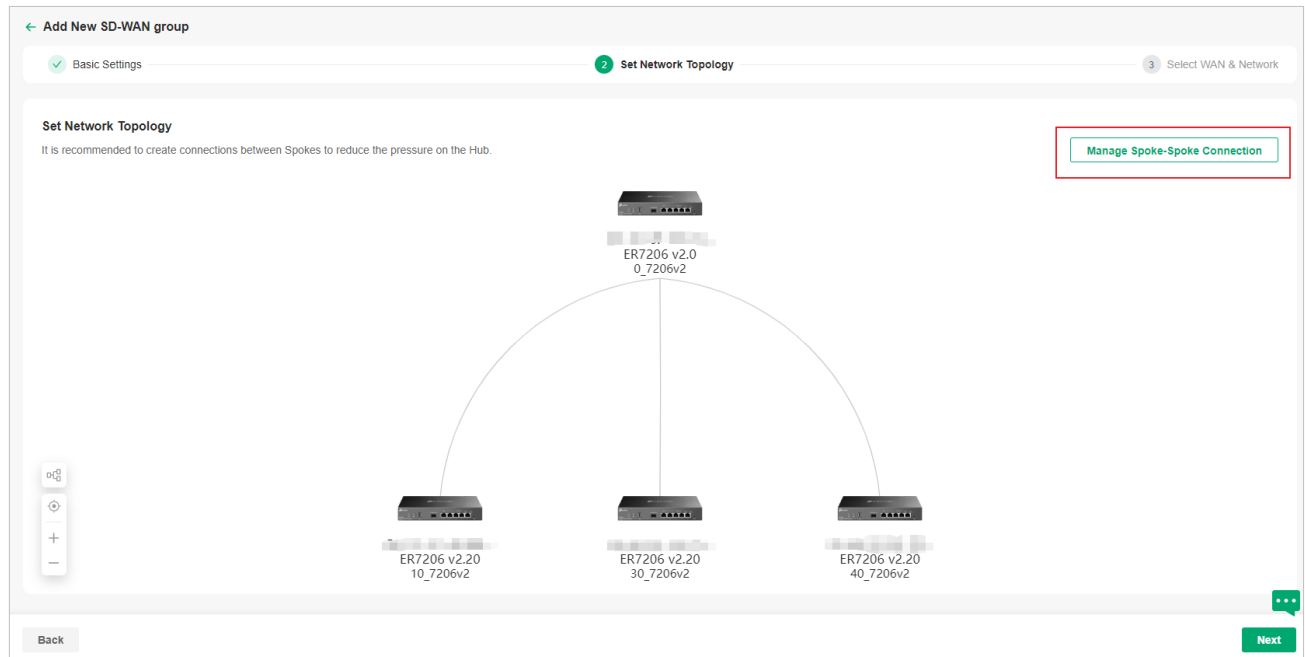

d. Select WAN and network. Then click **Next**.

WAN Port

Click **Auto Select WAN Port** and the controller will automatically select a WAN with a public IP or a WAN with the smallest number of ports and an IP for each gateway. You can also customize the configuration for each gateway.

Network Segment

This controller automatically adds the Default LAN of each gateway to the Network Segment. You can also customize the configuration for each gateway. Ensure all network segments in the network do not conflict with LANs in other sites.

← Add New SD-WAN group

Basic Settings Set Network Topology Select WAN & Network

Select WAN & Network

For interconnected spoke devices, it is recommended to select a WAN port with a public IP for at least one device.

Auto Select WAN Port

Hub 0_7206v2

WAN Port WAN2

Network Segment Default

10_7206v2

WAN Port WAN2

Network Segment Default

30_7206v2

WAN Port WAN2

Network Segment Default


40_7206v2

WAN Port WAN2

Network Segment Default

Back Save

e. Save the settings. The SD-WAN group will be added.

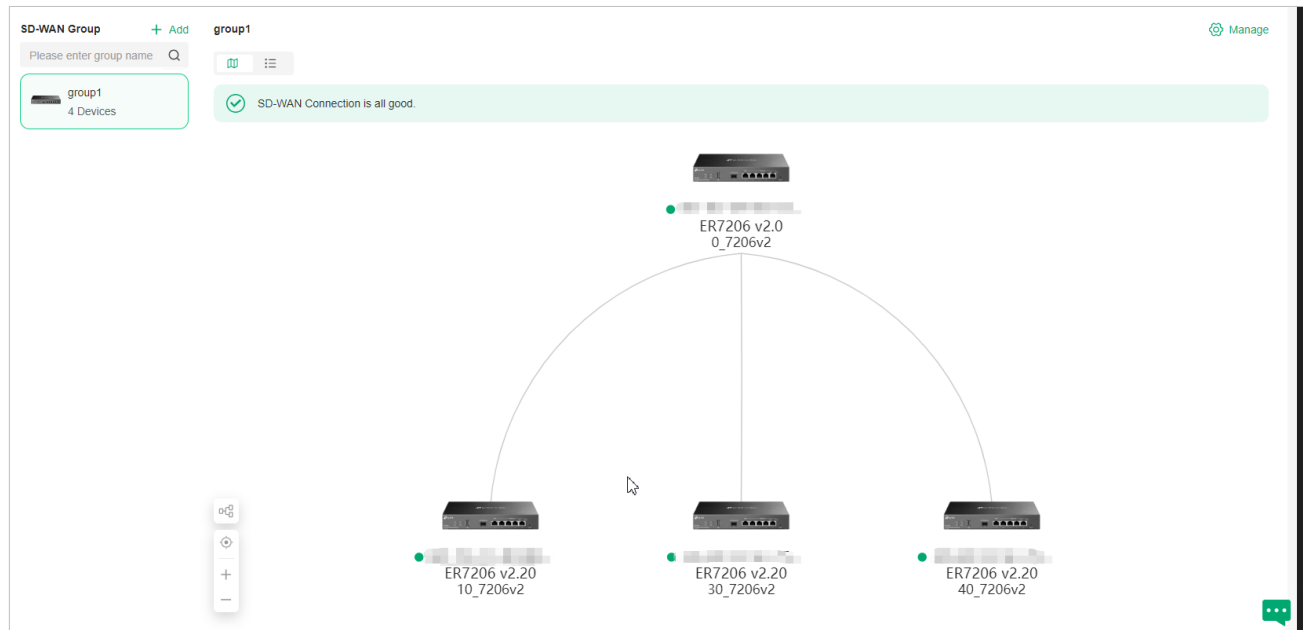

Chapter 20

Configure Multi-Controller Clusters

This chapter will introduce how to configure multi-controller clusters.

It includes the following sections:

- [20. 1 Introduction to Multi-Controller Clusters](#)
- [20. 2 Configure Hot-Standby Backup Clusters](#)
- [20. 3 Configure Distributed Clusters](#)

20.1 Introduction to Multi-Controller Clusters

A multi-controller cluster is a group of interconnected controllers that work together as a single system to enable high availability and can be recognized as a Cluster System. Each controller (node) in the cluster works on a part of the task. If one controller fails, others will take over tasks, preventing system interruptions. This reduces the impact of controller failures on authentication and other online services and facilitates centralized management across multiple controllers.

Omada Controller supports two cluster modes:

■ Hot-Standby Backup Mode

In this mode, there is a primary node and a secondary node. Generally, the primary node is responsible for network management and process running, while the secondary node synchronizes data with the primary node. If the primary node goes down, the secondary node will take over network and clients management. During the failover, the devices will go offline for a short time, then they will reconnect to the new primary node when the devices get connected again, all services will run normally. If the previous primary node recovers from failover, it will continue to run as a secondary node.


Notes:

- For OC300, the management scale will be reduced to half its original size after enabling Hot-Standby Backup Mode.
- For Linux system, ensure the primary node and secondary node server configurations are the same. The new primary node after switching nodes will remain unchanged until the next switch.

■ Distributed Cluster Mode.

In this mode, multiple nodes collaborate to manage Omada devices. This collaborative approach not only significantly increases the upper limit of the number of devices that the Controller can manage, but also, through the coordinated operation of multiple nodes, ensures the high - availability of the entire network. If a node failure occurs, automatic load balancing will be triggered, and the services of the failed node will be taken over by other nodes. During the failover period, the devices under the site managed by the original failed node will be briefly offline and then automatically reconnect to other nodes. Once the devices resume the "Connected" state, all services will operate normally.

Below is a typical distributed cluster deployment topology, where multiple nodes (three nodes or more) can jointly manage Omada devices.

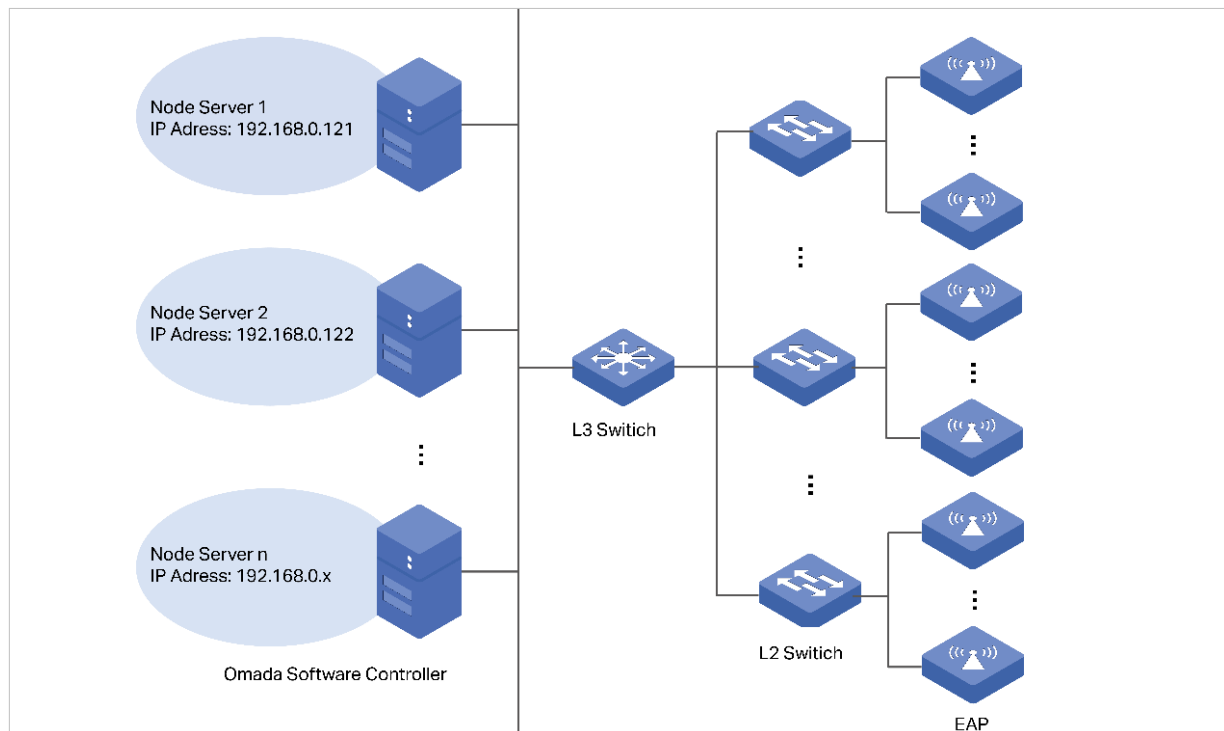

20.2 Configure Hot-Standby Backup Clusters

Requirements

- Omada Software Controller (Linux, v5.15.20 and above) / Omada Hardware Controller (OC300 / OC400, Built-in Controller v5.15.20 and above)
- Linux System (Ubuntu 20.04/22.04)

Prerequisites and Precautions

- Ensure the JDK and MongoDB versions are consistent across all nodes.
- Set static IP addresses for your controllers. For Linux Controller, it is recommended to set static IP before enabling Cluster Mode to avoid abnormalities in the connections between nodes due to dynamic IP changes. For Hardware Controller, it's a mandatory requirement that the IP of nodes should be static under Cluster Mode.
- It is recommended to deploy all nodes within the same network segment.
- The original data of the secondary node will be overwritten by the data of the primary node. The settings will take effect after rebooting. This process involves data synchronization and may take a long time.
- If you are using hardware controller, during startup, the secondary node needs to successfully connect to the primary node before it can continue to startup, and the web page of Hardware

Controller may be unresponsive for a long time.

Configuration

1. (For Linux Controller) Modifying the handle count of the system is a prerequisite for using the Controller Hot-Standby Backup Mode. Edit `/etc/security/limits.conf`, add the following parameters, save the file, log out and log back in to make the changes take effect.

*** soft nfile 65535**

*** hard nfile 65535**

Note: The methods of modifying handle number may vary by Linux version. Please modify the handle number according to Linux version.

2. Set static IP addresses for your controllers, and keep them in the same subnet.
 - For Linux Controller, it is recommended to set static IP before enabling Cluster Mode to avoid abnormalities in the connections between nodes due to dynamic IP changes.
 - For Hardware Controller, it's a mandatory requirement that the IP of nodes should be static under Cluster Mode.
3. Configure cluster settings.
 - a. In Global View, go to **Settings > Cluster**, and enable **Cluster**.
 - b. For the primary node, select the mode as **Hot-Standby Backup**. Input the IP address of the primary node in the Local IP/Hostname field and the IP address of the secondary node in the Remote IP/Hostname field. Choose **Primary** as **Initial Status**. Customize the **Key** and remember it.

- c. For the secondary node, select the mode as **Hot-Standby Backup**. Input the IP address of the secondary node in the Local IP/Hostname field and the IP address of the primary node in the Remote IP/Hostname field. Choose **Secondary** as **Initial Status**. Input the same **Key** as the primary node's.

Cluster Settings

Cluster ☒

Mode

☐ Distributed Cluster
In this mode, all cluster nodes work together to manage devices.

☒ Hot-Standby Backup
In this mode, the primary node manages all devices while the secondary node stands by.

1

2

Local IP-Hostname: Secondary Node's IP address

Local Device Management IP-Hostname: Secondary Device Management IP address (Optional)

Remote IP-Hostname: Primary Node's IP address

Initial Status: ☐ Primary ☒ Secondary **3**

4

Key: Random

5 Apply Cancel

Note: If you are going to set one running controller as the secondary node, migrate all the devices of this controller to the primary node or forget them all. It is recommended to back up your configuration before cluster configuration. After it's set as secondary node, its data will be overwritten by the data of the primary node.

4. Reboot the primary node and the secondary node.

- For Hardware Controller, just reboot the Controller with the Reboot feature.
- For Linux Controller, use the **sudo tpeap restart** command on your Linux System:

The cluster will be established after the nodes reboot.

For more instructions and related FAQs, refer to [How to Configure Hot-Standby Backup Mode on Omada Controller](#).

20.3 Configure Distributed Clusters

Requirements

- Omada Software Controller (Linux, v5.15.20 and above)
- Ubuntu 22.04
- JAVA17
- MongoDB v7.0

Prerequisites and Precautions

- The Distributed cluster mode requires at least three nodes. Prepare to deploy at least three controllers before setting it up.
- Installing the distributed cluster mode requires Java 17. Use the **sudo apt install openjdk-17-jre-headless** command to install Java 17.
- Modifying the handle count of the system is a prerequisite for using the Controller distributed cluster mode. Edit **/etc/security/limits.conf**, add the following parameters, save the file, log out and

log back in to make the changes take effect.

* **soft nofile 65535**

* **hard nofile 65535**

- The methods of modifying handle number may vary by Linux version. Please modify the handle number according to Linux version.
- Ensure the system time of each node is consistent, with a time difference of less than 20 seconds.
- Ensure the JDK and MongoDB versions are consistent across all nodes.
- Node IPs only support static IPs. If you need to modify the IP/port, you will need to re-initialize.
- It is recommended to deploy all nodes within the same network segment.

20.3.1 Configure an Existing Controller via Web

1. In **Global View**, go to **Settings > Cluster** and enable **Cluster**. Then select the mode as **Distributed Cluster**.
2. Click **Add Node** to add at least three nodes.

Cluster Node List Check Connection Add Node

NAME	NODE MANAGEMENT HOSTNAME/IP	DEVICE MANAGEMENT HOSTNAME/IP	DEVICE MANAGEMENT PORT	DEVICE DISCOVERY PORT	DEVICE MONITOR PORT	ROLE	ACTION
node1	192.168.0.189					Mixed	
node2	192.168.0.190					Mixed	
node3	192.168.0.191					Mixed	

Input these nodes' name and node management hostname/IP. Here, hostnames/IPs should correspond to different servers.

Specify the device management hostname/IP of the management device. This IP address will be used to establish a connection and communicate with the device. If it is not specified, the node management hostname/IP will be used by default.


Specify the device management port, device discovery port, and device monitor port. Ensure they don't conflict with ports already used by the PC.

Then click **Apply**.

After that, Controller will pop up a prompt window and the init properties file. Download the init properties file and reboot the Controller for the settings to take effect.

Notes:

- Please reboot nodes as soon as possible to prevent device disconnection or other problems.
- Nodes added offline will be considered down - state nodes, which will affect the disaster recovery capability. Please initiate them as soon as possible.

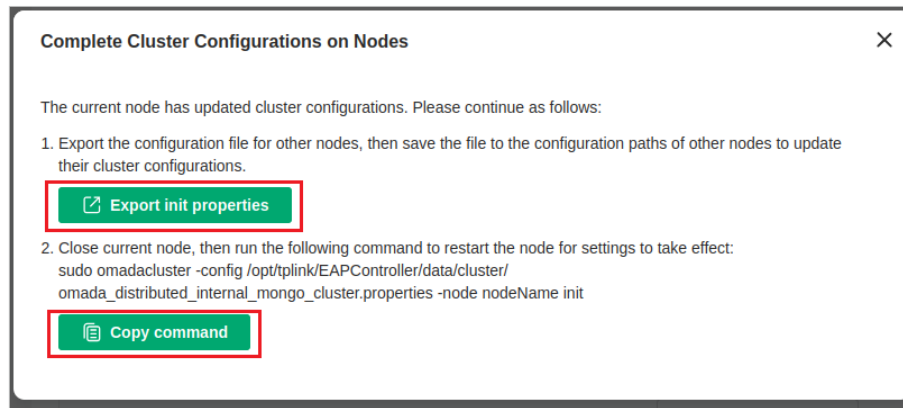

3. Replace the properties file you downloaded at each node respectively. The path to the properties file is:

/opt/tplink/EAPController/data/cluster/omada_distributed_internal_mongo_cluster.properties

4. Execute the initialization command on each node respectively. When initializing nodes, set the account and password for all nodes. When initializing nodes, first initialize the primary node (the one exporting init properties). Otherwise, initialization may fail.

sudo omadacluster -config

/opt/tplink/EAPController/data/cluster/omada_distributed_internal_mongo_cluster.properties -nodeName init

```
tplink@tplink-PC1:~$ sudo omadacluster -config /opt/tplink/EAPController/data/cluster/omada_distributed_internal_mongo_cluster.properties -node node1 init
check omada
Omada Controller is already running.
Stopping Omada Controller
Stop successfully.
Number of mixed members: 3
Check node ips: 192.168.0.189 192.168.0.190 192.168.0.191
Check node device hosts:
Please set the cluster account, which will be used for authentication between cluster nodes. Please keep it consistent on all nodes.
Please enter your cluster username: admin
Please enter your cluster password:
Please confirm your cluster username (admin), and enter your cluster password again:
```

5. After the deployment is successful, go to the Cluster page to confirm. And when the distributed cluster mode is running properly, you can access the Controller through any node.

Cluster Settings

Cluster ☒

Mode **Distributed Cluster**
In this mode, all cluster nodes work together to manage devices.

For configuration instructions, refer to [How to Configure Distributed Cluster Mode on Linux Controller](#). For the compatible device list, refer to [Omada Cluster Deployment Product List](#).

Load Balance ☒ Auto ☐ Custom

Cluster Account [Show Account](#)

Cluster Node List Rebalance Check Connection Add Node

NAME	NODE MANAGEMENT HOST NAME/IP	DEVICE MANAGEMENT HOST NAME/IP	ROLE	STATUS	MANAGED SITES	MANAGED DEVICES	CPU USE	ACTION
node3	192.168.0.201		Mixed	CONNECTED	0	0		
node2	192.168.0.200		Mixed	CONNECTED	0	0		
node1	192.168.0.199	Custom	Mixed	CONNECTED	0	0		

20.3.2 Configure a New Controller via Commands

- Select cluster mode installation (does not automatically start after installation).

- Install using deb

echo "omadac omadac/init-cluster-mode boolean true" | sudo debconf-set-selections

sudo dpkg -i /path/to/controller_installation_package

```
root@node3-VirtualBox:/home/node3# echo "omadac omadac/init-cluster-mode boolean true" | sudo debconf-set-selections
root@node3-VirtualBox:/home/node3# dpkg -i omada_v5.15.20.7_linux_x64_20250113193653.deb
```

- Install using tar.gz

After decompression, deploy the cluster mode via the shell installation script. Enter **./install.sh init - cluster - mode**, the system will not start automatically after installation, and relevant prompt information for setting up the cluster will be printed.

```
root@node3-VirtualBox:/home/node3/Omada_SDN_Controller_v5.15.20.7_x64# sudo ./install.sh init-cluster-mode
```

- Start installing the Controller and edit the properties file as prompted.

```
root@node1-VirtualBox:/home/node1# dpkg -i omada_v5.15.20.10_linux_x64_20250119195257.deb
Selecting previously unselected package omadac.
(Reading database ... 160648 files and directories currently installed.)
Preparing to unpack omada_v5.15.20.10_linux_x64_20250119195257.deb ...
Start controller distributed cluster mode.
Cannot locate Java Home
Unpacking omadac (5.15.20.10) ...
Setting up omadac (5.15.20.10) ...
Start controller distributed cluster mode.
Install Omada Controller succeeded!
=====
current data is empty
Before enabling the cluster mode, first configure the system environment by referring to the Cluster UG(https://www.omadanetworks.com/en/support/faq/4347/). Then please edit the properties file that specifies the cluster mode in directory /opt/tplink/EAPController/data/cluster and use command 'sudo omadacluster -config <properties_path> -node <node_name> init' to initialize the cluster node.
Controllers that have not completed cluster initialization will still start in normal mode.
Usage: /usr/bin/omadacluster [<option> ...] <command>

Commands:
  help                                - this screen
  -config <properties_file> -node <node_name> init - Initialize a specific cluster node using a specified configuration file

Options:
  -config                             - cluster properties file
  -node                               - node name
=====
Processing triggers for systemd (245.4-4ubuntu3.20) ...
```

Modify each node's properties file `/opt/tplink/EAPController/data/cluster/omada_distributed_internal_mongo_cluster.properties`

```

1 ## local cluster config
2 # Cluster mode, distributed: Distributed Cluster
3 omada.cluster.mode=distributed
4 # internal: internal mongodb server
5 omada.cluster.distributed.mongo.mode=internal
6
7 ## Distributed Cluster Config
8 ## Please edit:
9 omada.cluster.distributed.mongo.replset.name=omadaReplSet
10 # Cluster member names list
11 omada.cluster.distributed.names=node1,node2,node3
12
13 # To preserve the data node, if not configured, it defaults to 'node1'.
14 # It can only be a node with a mixed node role.
15 omada.cluster.distributed.primary.data.node=node1
16 omada.cluster.distributed.node1.host=192.168.0.189
17 # node1.role:mixed or service. mixed: node that provides service with data(At least 3 mixed
18 # nodes); service: node that only provides service without data
19 omada.cluster.distributed.node1.role=mixed
20 omada.cluster.distributed.node1.device.host=
21
22 omada.cluster.distributed.node2.host=192.168.0.190
23 omada.cluster.distributed.node2.role=mixed
24 omada.cluster.distributed.node2.device.host=
25
26 omada.cluster.distributed.node3.host=192.168.0.191
27 omada.cluster.distributed.node3.role=mixed
28 omada.cluster.distributed.node3.device.host=

```

3. Execute the initialization command on each node respectively.

sudo omadacluster -config /opt/tplink/EAPController/data/cluster/omada_distributed_internal_mongo_cluster.properties -node <nodeName> init

4. After the deployment is successful, log in to the Controller and set the username and password, and other nodes will synchronize the username and password.

Then go to the Cluster page to confirm. And when the distributed cluster mode is running properly, you can access the Controller through any node.

Cluster Settings

Cluster: ☒

Mode: Distributed Cluster
In this mode, all cluster nodes work together to manage devices.

For configuration instructions, refer to [How to Configure Distributed Cluster Mode on Linux Controller](#). For the compatible device list, refer to [Omada Cluster Deployment Product List](#).

Load Balance: ☒ Auto ☐ Custom

Cluster Account: [Show Account](#)

Cluster Node List

NAME	NODE MANAGEMENT HOST NAME/IP	DEVICE MANAGEMENT HOST NAME/IP	ROLE	STATUS	MANAGED SITES	MANAGED DEVICES	CPU US	ACTION
node3	192.168.0.201		Mixed	CONNECTED	0	0		
node2	192.168.0.200		Mixed	CONNECTED	0	0		
node1	192.168.0.199	Custom	Mixed	CONNECTED	0	0		

For more instructions and related FAQs, refer to [How to Configure Distributed Cluster Mode on Linux Controller](#).