

Omada Easy Managed Switch | Datasheet

ES205G




Omada 5-Port Gigabit Easy Managed Switch



Highlights

- 5× 10/100/1000Mbps RJ45 ports
- Easy to Use: Supports plug-and-play for instant connectivity and simple configuration for additional features
- Centralized Cloud Management via the web or the Omada app[†]
- Automatic Loop Prevention, VLAN, and IGMP Snooping
- Fanless design for silent operation
- Durable metal casing and desktop/wall mounting design

Product Pictures

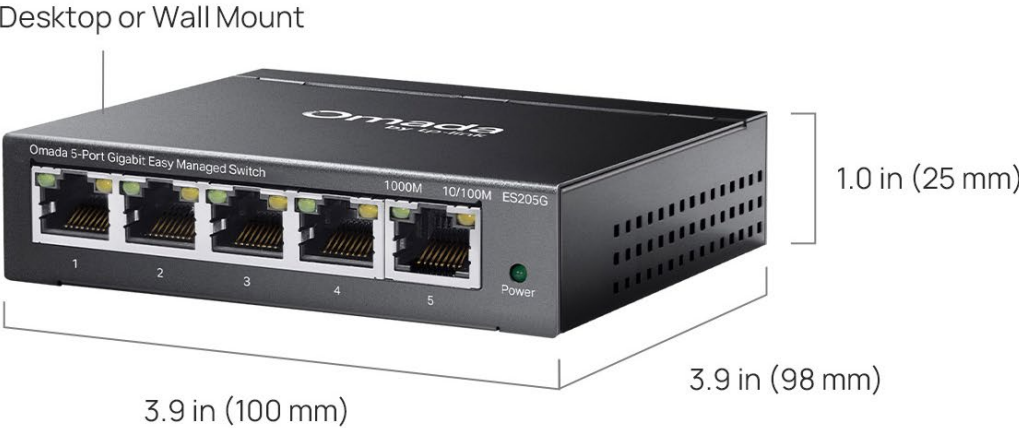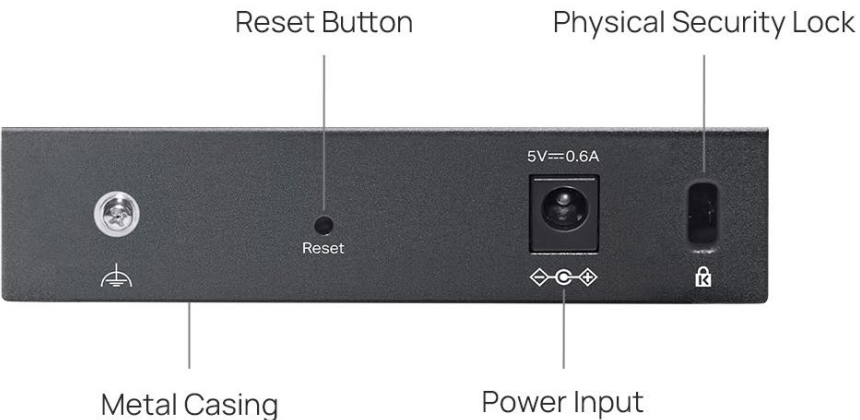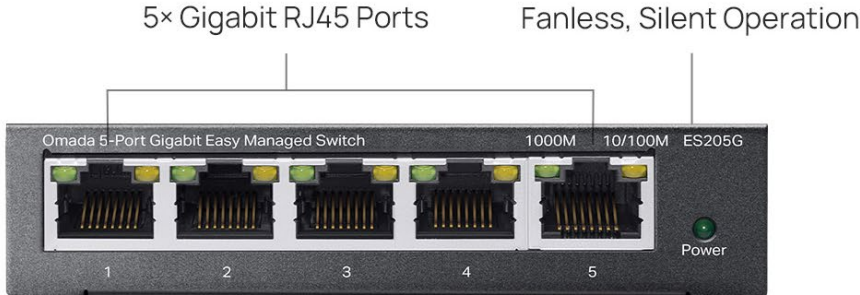

Specifications

Hardware Features & Performance		
	Model	ES205G
General	Interface	5× 10/100/1000 Mbps RJ45 Ports
	Flash	8 MB
	Port Standard	IEEE 802.3: Ethernet Media Access Control (MAC) Protocol IEEE 802.3i:10BASE-T Ethernet IEEE 802.3u:100BASE-X Fast Ethernet IEEE 802.3ab:1000BASE-T Gigabit Ethernet IEEE 802.3x: Flow Control IEEE 802.1p: Traffic Class Expediting and Dynamic Multicast Filtering IEEE 802.1q: Virtual Bridged Local Area Networks IEEE 802.1ab: Station and Media Access Control Connectivity Discovery (LLDP)
Performance	Switching Capacity	10 Gbps
	Packet Forwarding Rate	7.4 Mpps
	MAC Address Table	8K
	Packet Buffer	4 Mbit
	Transmission Method	Store and Forward
	Jumbo Frame	15 KB
Physical & Environment	Power Supply	AC/DC Adapter (Input: 100-240V AC; Output: 5VDC / 0.6A)
	Standby Power Consumption	1.7 W (220V/50 Hz) 1.5 W (110 V/60 Hz)
	Max Power Consumption	2.9 W (220V/50 Hz) 2.6 W (110 V/60 Hz)
	Max Heat Dissipation	9.76 BTU/hr (220 V/50 Hz) 8.84 BTU/hr (110 V/60 Hz)
	MTBF	1596664h @ 25°C
	Dimensions (W x D x H)	3.9 × 3.9 × 1.0 in (99.8 × 97.8 × 25 mm)
	Weight	0.21 kg (0.46 lbs)
	Fan Quantity	Fanless
	Installation	Desktop / Wall Mounting
	Operating Temperature	-5 °C to 40 °C (23 °F to 104 °F)
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
	Operation Humidity	10% to 90% RH, non-condensing
	Storage Humidity	5% to 90% RH, non-condensing
	Surge Protection	±6 kV in common mode for Ethernet Ports
	ESD Protection	Air: ±8 kV, Contact: ±4 kV
Certification	CE, FCC, RoHS	

Software Features

Model	ES205G
SDN Support	<ul style="list-style-type: none"> • Support Hardware Controller, Software Controller, Cloud-Based Controller • Automatic Device Discovery • Batch Configuration • Batch Firmware Upgrading • Unified Configuration
L2 Features	<ul style="list-style-type: none"> • Link Aggregation <ul style="list-style-type: none"> - Static Link Aggregation - Up to 2 aggregation groups and up to 4 ports per group • Port Isolation • Loopback Detection • Flow Control <ul style="list-style-type: none"> - 802.3x Flow Control • Mirroring <ul style="list-style-type: none"> - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics <ul style="list-style-type: none"> - Port Mirror Status - Traffic Statistics • 802.1ab LLDP • IEEE 802.3az EEE
L2 Multicast	<ul style="list-style-type: none"> • IGMP Snooping <ul style="list-style-type: none"> - IGMP v1/v2/v3 Snooping - Fast Leave / Report Suppression
VLAN	<ul style="list-style-type: none"> • 802.1Q Tag VLAN <ul style="list-style-type: none"> - Max 32 VLAN Groups - 4K VID
QoS	<ul style="list-style-type: none"> • 802.1p/DSCP QoS[†] • 8 Priority Queues • Priority Schedule Mode <ul style="list-style-type: none"> - Weighted Round Robin (WRR) • Queue Weight Config • Bandwidth Control <ul style="list-style-type: none"> - Port-Based Rating Limit • Storm Control <ul style="list-style-type: none"> - Multiple Control Modes (kbps/pps) - Broadcast/Multicast/Unknown-Unicast Control
Management Features	<ul style="list-style-type: none"> • HTTPS/HTTP • DHCP Client • Cable Diagnostics • ONVIF^{***}

[†]These functions require the use of the Omada Controller. Zero-Touch Provisioning requires the use of the Omada Cloud-Based Controller (Omada Cloud Standard or Omada Cloud Essentials). Go to the [Omada Cloud-Based Controller \(Omada Cloud Standard\) Product List](#) or [Omada Cloud Essentials Product List](#) to find all the supported models.

[△]802.1p/DSCP QoS are supported under Standalone Mode. QoS Rule is supported under Controller mode.

^{***}ONVIF is supported only in Controller mode.