



Omada Easy Managed Switch | Datasheet

ES210GP


Omada 10-Port Gigabit Easy Managed Switch with 8-Port PoE+



Highlights

- 9× 10/100/1000Mbps RJ45 ports (8× 802.3af/at-compliant PoE+)
- 1× Gigabit SFP/RJ45 Combo port
- 63W Power Budget, with up to 30W for each PoE port*
- Easy to Use: Supports plug-and-play for instant connectivity and simple configuration for additional features
- Centralized Cloud Management via the web or the Omada app[†]
- Up to 820ft PoE**, Remote Camera Reboot[†], QoS, and Port Isolation for reliable surveillance networking
- Automatic Loop Prevention, VLAN, and IGMP Snooping
- Fanless design for silent operation
- Durable metal casing and desktop/wall mounting design

Product Pictures

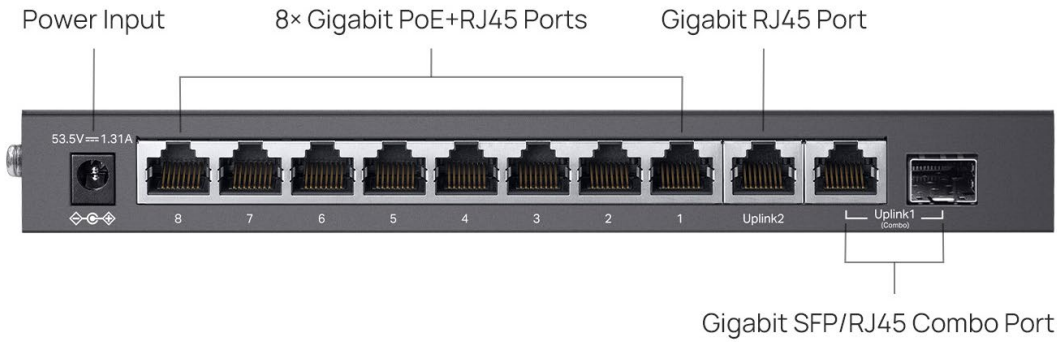

Specifications

Hardware Features & Performance		
Model		ES210GP
General	Interface	8× 10/100/1000 Mbps PoE+ RJ45 Ports 1× 10/100/1000 Mbps RJ45 Port 1× Gigabit SFP/RJ45 Combo Port
	Flash	8 MB
	Port Standard	IEEE 802.3: Ethernet Media Access Control (MAC) Protocol IEEE 802.3i:10BASE-T Ethernet IEEE 802.3u:100BASE-X Fast Ethernet IEEE 802.3ab:1000BASE-T Gigabit Ethernet IEEE 802.3x: Flow Control IEEE 802.1p: Traffic Class Expediting and Dynamic Multicast Filtering IEEE 802.1q: Virtual Bridged Local Area Networks IEEE 802.1ab: Station and Media Access Control Connectivity Discovery (LLDP)
PoE	PoE Standard	802.3af/at
	PoE Ports	8, up to 30 W per port
	PoE Power Budget	63 W
	Fast PoE	YES
	Perpetual PoE	YES
	PoE Pairing	Alternative A, 1/2(-) & 3/6(+)
Performance	Switching Capacity	20 Gbps
	Packet Forwarding Rate	14.88 Mpps
	MAC Address Table	8K
	Packet Buffer	4 Mbit
	Transmission Method	Store and Forward
	Jumbo Frame	15 KB
Physical & Environment	Power Supply	AC/DC Adapter (Input: 100-240V AC; Output: 53.5VDC / 1.31A)
	Standby Power Consumption	4.6 W (220 V/50 Hz)
		4.3 W (110 V/60 Hz)
	Max Power Consumption	74.1 W (220 V/50 Hz @ 25 °C) (with 63 W PD connected)
		76.6 W (110 V/60 Hz @ 25 °C) (with 63 W PD connected)
	Max Heat Dissipation	252.01 BTU/hr (220 V/50 Hz @ 25 °C) (with 63 W PD connected)
		260.41 BTU/hr (110 V/60 Hz @ 25 °C) (with 63 W PD connected)
	MTBF	347652h @ 25°C
	Dimensions (W x D x H)	8.2 × 5.0 × 1.0 in (209 × 126 × 26 mm)
	Weight	0.6 kg (1.32 lbs) (Adapter Included)
	Fan Quantity	Fanless
	Installation	Desktop / Wall Mounting
	Operating Temperature	-5 °C to 40 °C (23 °F to 104 °F)
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Operation Humidity	10% to 90% RH, non-condensing	
Storage Humidity	5% to 90% RH, non-condensing	
Surge Protection	±6 kV in common mode for Ethernet Ports	
ESD Protection	Air: ±8 kV, Contact: ±4 kV	
Certification	CE, FCC, RoHS	

Software Features

Model	ES210GP
SDN Support	<ul style="list-style-type: none"> • Support Hardware Controller, Software Controller, Cloud-Based Controller • Automatic Device Discovery • Batch Configuration • Batch Firmware Upgrading • Unified Configuration
L2 Features	<ul style="list-style-type: none"> • Link Aggregation <ul style="list-style-type: none"> - Static Link Aggregation - Up to 4 aggregation groups and up to 6 ports per group • Port Isolation • Loopback Detection • Flow Control <ul style="list-style-type: none"> - 802.3x Flow Control • Mirroring <ul style="list-style-type: none"> - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics <ul style="list-style-type: none"> - Port Mirror Status - Traffic Statistics • 802.1ab LLDP • IEEE 802.3az EEE
L2 Multicast	<ul style="list-style-type: none"> • IGMP Snooping <ul style="list-style-type: none"> - IGMP v1/v2/v3 Snooping - Fast Leave / Report Suppression
VLAN	<ul style="list-style-type: none"> • 802.1Q Tag VLAN <ul style="list-style-type: none"> - Max 32 VLAN Groups - 4K VID
QoS	<ul style="list-style-type: none"> • 802.1p/DSCP QoS[△] • 8 Priority Queues • Priority Schedule Mode <ul style="list-style-type: none"> - Weighted Round Robin (WRR) • Queue Weight Config • Bandwidth Control <ul style="list-style-type: none"> - Port-Based Rating Limit • Storm Control <ul style="list-style-type: none"> - Multiple Control Modes (kbps/pps) - Broadcast/Multicast/Unknown-Unicast Control
Management Features	<ul style="list-style-type: none"> • HTTPS/HTTP • DHCP Client • Cable Diagnostics • ONVIF^{***}

[†]These functions require the use of the Omada Controller. Zero-Touch Provisioning requires the use of the Omada Cloud-Based Controller (Omada Cloud Standard or Omada Cloud Essentials). Go to the [Omada Cloud-Based Controller \(Omada Cloud Standard\) Product List](#) or [Omada Cloud Essentials Product List](#) to find all the supported models.

[‡]This switch supports PoE Auto Recovery under Standalone Mode (managed separately without a controller) and supports manual PoE Recovery under Controller Mode (centrally managed with a controller).

[△]802.1p/DSCP QoS are supported under Standalone Mode. QoS Rule is supported under Controller mode.

*PoE budget calculations are based on laboratory testing. The actual PoE power budget is not guaranteed and will vary due to client limitations and environmental factors.

**The speed of the ports that support 250m PoE transmission will be downgraded to 10 Mbps. Actual transmission distance may vary depending on the quality of the cables.

***ONVIF is supported only in Controller mode.