


Omada Switch | Datasheet

SL2428P




Omada 24-Port 10/100Mbps + 4-Port Gigabit Switch with 24-Port PoE+

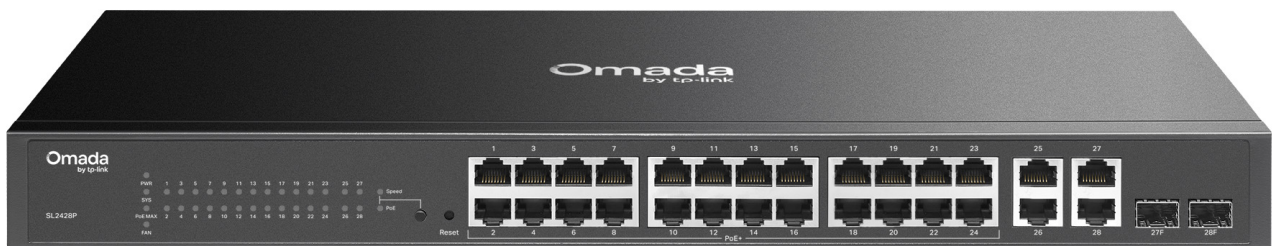


Highlights

- 24× 10/100 Mbps 802.3af/at PoE+ ports with up to 30 W PoE output per port*
- 2× Gigabit RJ45 ports and 2× Combo Gigabit RJ45/SFP ports
- 250 W total PoE budget*
- Centralized cloud management via the web or the Omada app[†]
- Standalone management via web, CLI, SNMP, and RMON
- Static Routing helps route internal traffic for higher efficiency
- VLAN, ACL, QoS, IGMP Snooping and DDM
- Durable metal casing and rackmountable design

Product Picture

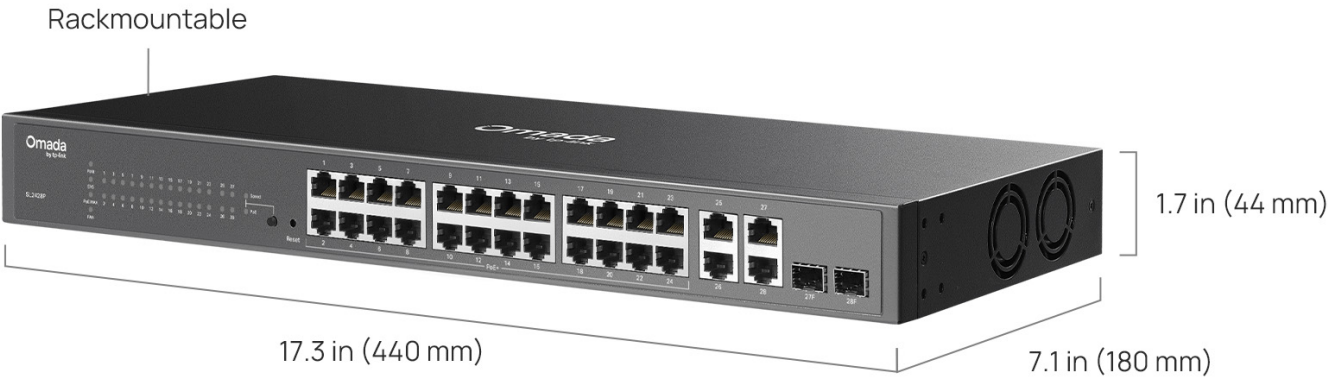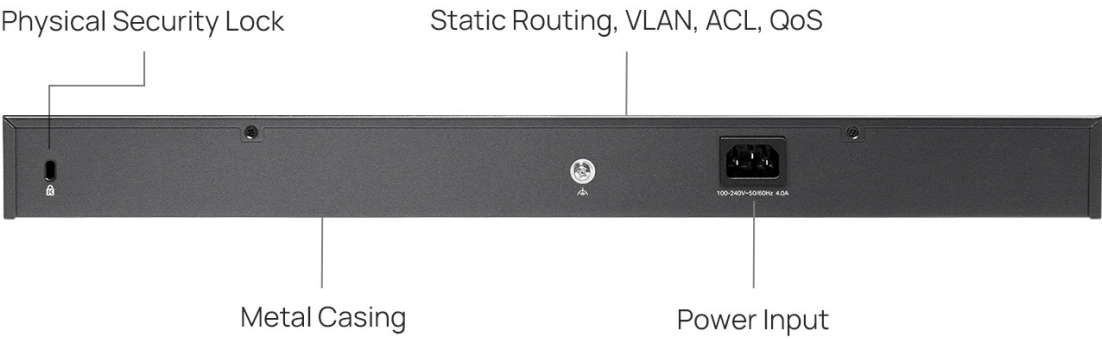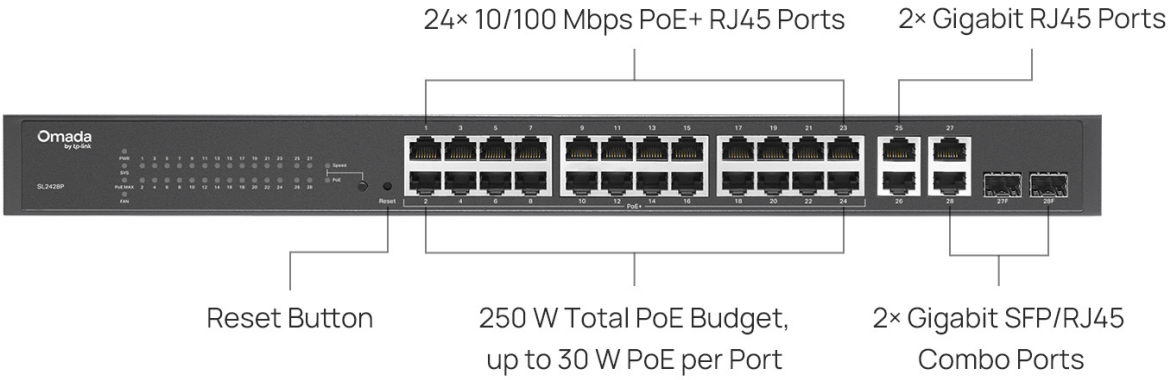

Omada Solution

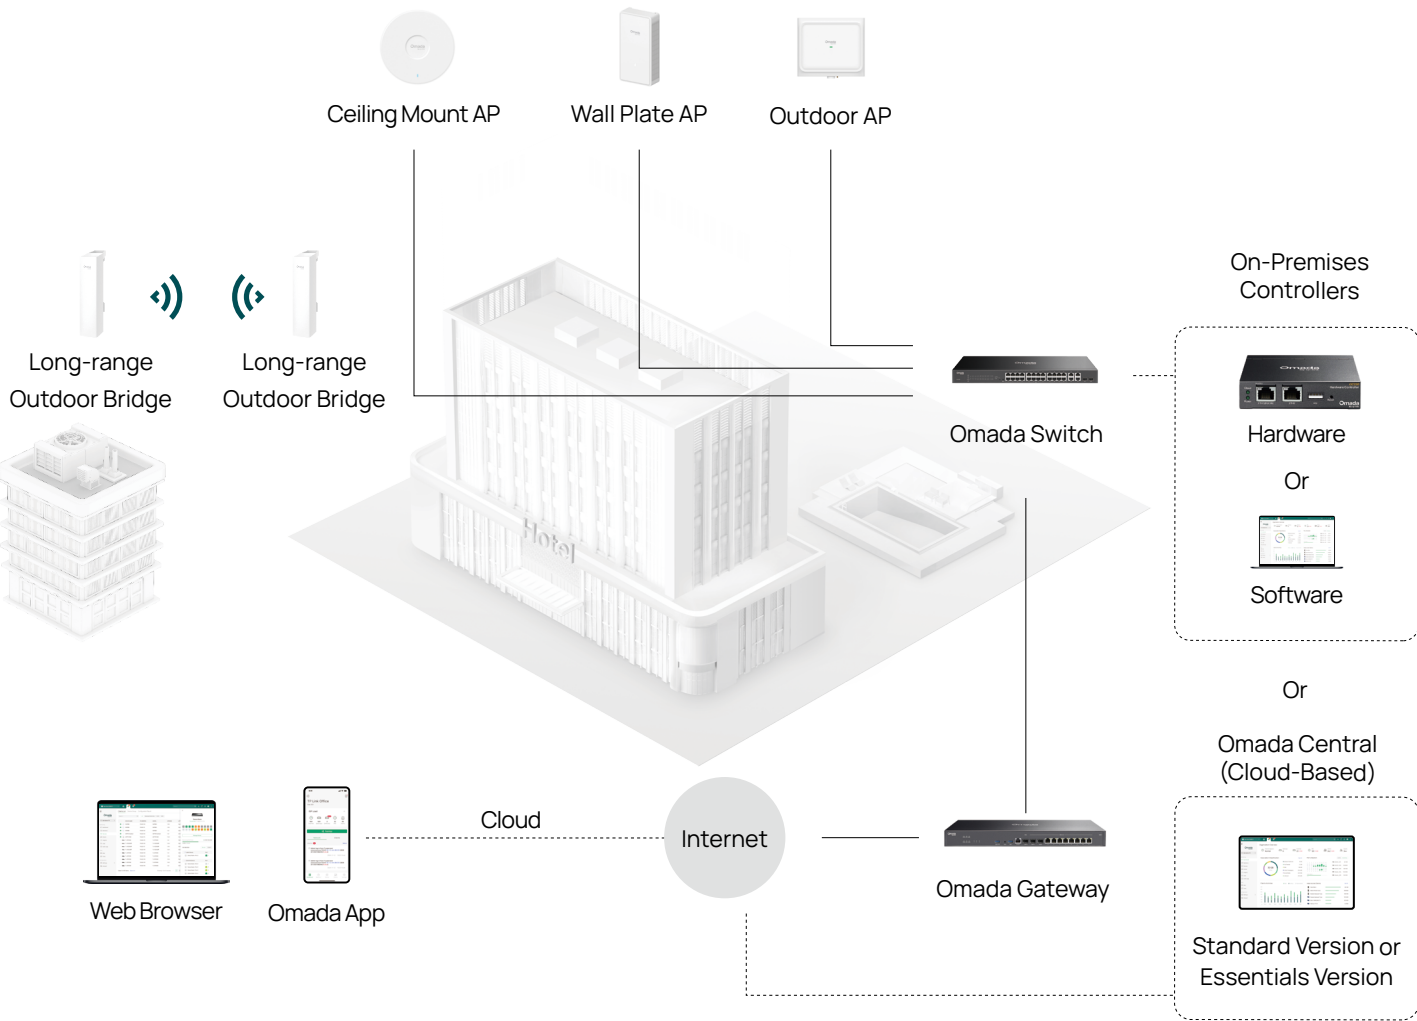

Hassle-Free Cloud or On-Premises Controllers



Multi-Site Cloud Management



Zero-Touch Provisioning (ZTP)[†]



Intelligent Monitoring

Specifications

Hardware Features & Performance			
Model		SL2428P	
General	Interface	24 × 10/100 Mbps RJ45 Ports 2 × 10/100/1000 Mbps RJ45 Ports 2 × Combo Gigabit RJ45/SFP Ports	
	Flash	32 MB	
	DRAM	256 MB	
	Port Standard	IEEE 802.3: Ethernet Media Access Control (MAC) Protocol IEEE 802.3i:10BASE-T Ethernet IEEE 802.3u:100BASE-X Fast Ethernet IEEE 802.3ab:1000BASE-T Gigabit Ethernet IEEE 802.3z:1000BASE-X Gigabit Ethernet (Optical fiber)	
PoE	PoE Standard	802.3af/at	
	PoE Ports	24, up to 30 W per port	
	PoE Power Budget	250 W	
	PoE Pinout	Alternative A, 1/2(-) & 3/6(+)	
	Perpetual PoE	YES	
	Fast PoE	YES	
	PoE Extend Mode	YES	
Performance	Switching Capacity	12.8 Gbps	
	Packet Forwarding Rate	9.52 Mpps	
	MAC Address Table	8K	
	Packet Buffer	4.1 Mbit	
	Transmission Method	Store and Forward	
	Number of IP Interfaces	32	
	Number of Static Routers	32 (IPv4, IPv6)	
	Jumbo Frame	9 KB	
Physical & Environment	Power Supply	100-240V AC, 50/60Hz	
	Max Power Consumption	278.5 W (220 V/50 Hz @ 25 °C) (with 250 W PD connected) 289.6 W (110 V/60 Hz @ 25 °C) (with 250 W PD connected)	
	Standby Power Consumption	8.9 W (220 V/50 Hz) 8.9 W (110 V/60 Hz)	
	Max Heat Dissipation	947.04 BTU/hr (220 V/50 Hz @ 25 °C) (with 250 W PD connected) 984.57 BTU/hr (110 V/60 Hz @ 25 °C) (with 250 W PD connected)	
	Noise	Max	35.4 dBA @ 1 m (100% load, 50°C ambient) 26.3 dBA @ 1 m (100% load, 25°C ambient)
		Typical	26.3 dBA @ 1 m (100% system load, 80% PoE load, 25°C ambient)
		Min	Fanless mode (PoE load < 150 W, 25°C ambient)
	Fan Quantity	2	
	Surge Protection	Service port: ±6 kV in common mode	
	ESD Protection	Air: ±8 kV, Contact: ±4 kV	
	MTBF	390043 h @ 25 °C	
	Dimensions (W x D x H)	17.3 × 7.1 × 1.7 in (440 × 180 × 44 mm)	
	Net Weight	2.5 kg (5.51 lbs)	
	Installation	Rack Mountable	
	Operating Temperature	-5 °C to 50 °C (23 °F to 122 °F).	
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)	
	Operation Humidity	10% to 90% RH, non-condensing	
	Storage Humidity	5% to 90% RH, non-condensing	
	Certification	CE, FCC	

Software Features[^]

Model	SL2428P	
SDN Support	• Support Omada Hardware Controller, Software Controller • Automatic Device Discovery • Batch Configuration • Batch Firmware Upgrading	• Intelligent Network Monitoring • Abnormal Event Warnings • Unified Configuration • Reboot Schedule
L3 Features	• 32 IPv4/IPv6 Interfaces • Static Routing - 32 IPv4/IPv6 Static Routes • DHCP Server • DHCP Relay - DHCP Interface Relay - DHCP VLAN Relay • DHCP L2 Relay	• Static ARP • Proxy ARP • Gratuitous ARP
L2 Features	• Link Aggregation - Static link aggregation - 802.3ad LACP - Up to 8 aggregation groups and up to 8 ports per group • Spanning Tree Protocol - 802.1d STP - 802.1w RSTP - 802.1s MSTP - STP Security: TC Protect, BPDU Filter, BPDU Protect, Root Protect • Loopback Detection - Port based - VLAN based	• Flow Control - 802.3x Flow Control • Mirroring - Port Mirroring - CPU Mirroring - One-to-One - Many-to-One - Flow-Based - Ingress/Egress/Both • Device Link Detect Protocol (DLDP) • 802.1ab LLDP/LLDP-MED
L2 Multicast	• Supports 511 (IPv4, IPv6) IGMP groups • IGMP Snooping - IGMP v1/v2/v3 Snooping - Fast Leave - IGMP Snooping Querier - Static Group Config • Multicast VLAN Registration (MVR) • Multicast Filtering	• Multicast Listener Discovery (MLD) Snooping - MLD v1/v2 Snooping - Fast Leave - MLD Snooping Querier - Static Group Config • Limited IP Multicast - 256 profiles and 16 entries per profile
VLAN	• VLAN Group - Max 4K VLAN Groups • 802.1Q Tagged VLAN • MAC VLAN (12 entries)	• Protocol VLAN (IEEE 802.1v) • Private VLAN (RFC 5517) • GVRP • Voice VLAN
QoS	• 802.1p CoS/DSCP priority • 8 priority queues • Priority Schedule Mode - Strict Priority (SP) - Weighted Round Robin (WRR) • Queue Weight Config	• Bandwidth Control - Port/Flow based Rating Limit • Smoother Performance • Storm Control - Multiple Control Modes (kbps/ratio) - Broadcast/Multicast/Unknown-Unicast Control

Software Features[^]

Model	SL2428P	
ACL	• Support up to 230 entries • Time-Range - Time Slice - Week Time-Range - Absolute Time-Range - Holiday • Time-based ACL • MAC ACL - Source MAC - Destination MAC - VLAN ID - User Priority - Ether Type • IP ACL - Source IP - Destination IP - IP Protocol - TCP Flag - TCP/UDP Source Port - TCP/UDP Destination Port - DSCP/IP TOS	
Security	• Authentication, Authorization, Accounting (AAA) • 802.1X - Port based authentication - MAC (Host) based authentication - Authentication Method includes PAP/EAP-MD5 - MAB - Guest VLAN - CoA & DM - Support Radius authentication and accountability • IP/IPv6-MAC Binding - 512 Binding Entries - DHCP Snooping - DHCPv6 Snooping - Dynamic ARP Inspection (DAI) - ND Detection - ND Snooping • IP Source Guard - 253 Entries - Source IP+Source MAC	
IPv6 Support	• IPv6 Static Routing and ACL • IPv4/IPv6 Dual Stack • IPv6 Interface • MLD Snooping • IPv6 neighbor discovery (ND) • Path maximum transmission unit (MTU) discovery • Internet Control Message Protocol (ICMP) version 6 • TCPv6/UDPv6	

Software Features [^]		
Model	SL2428P	
Management	• Web-based GUI • Command Line Interface (CLI) through telnet • SNMPv1/v2c/v3 • SNMP Trap/Inform • RMON (1,2,3,9 groups) • SDM Template • DHCP/BOOTP Client • Dual Image, Dual Configuration • CPU Monitoring • Cable Diagnostics • IEEE 802.1az Energy Efficient Ethernet (EEE)	• SNTP • System Log • Dying Gasp • ONVIF • Digital Diagnostic Monitoring (DDM) • IntelliRecover (Controller Mode Only) • Packet Capture • Syslog (UDP/TCP/DTLS/TLS) • DNS Lookup • Remote Access (NAT Traversal, Controller Mode Only)
MIBs	• MIB II (RFC1213) • Bridge MIB (RFC1493) • P/Q-Bridge MIB (RFC2674) • Radius Accounting Client MIB (RFC2620)	• Radius Authentication Client MIB (RFC2618) • Remote Ping, Traceroute MIB (RFC2925) • Support TP-Link private MIBs • RMON MIB(RFC1757, rmon 1,2,3,9)

Others	
Package Content	• SL2428P Switch • Power Cord • Rackmount Kit • Rubber Feet • Installation Guide
System Requirements	Microsoft® Windows® 98SE, NT, 2000, XP, Vista™ or Windows 7/8/10/11, MAC® OS, NetWare®, UNIX® or Linux.

Ordering Information

Host Switch	
Model	Description
SL2428P	Omada 24-Port 10/100Mbps + 4-Port Gigabit Switch with 24-Port PoE+

SFP Module	
Model	Description
SM311LS	Gigabit SFP module, Single-mode, LC interface, Up to 20km distance
SM311LM	Gigabit SFP module, Multi-mode, LC interface, Up to 550m distance
SM321A	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 20 km
SM321A-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 2 km
SM321B	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 20 km
SM321B-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 2 km

RJ45 SFP Module	
Model	Description
SM331T	1000BASE-T RJ45 SFP Module

MC Series Media Converter	
Model	Description
MC220L	Gigabit SFP Media Converter, up to 100 m, chassis mountable
MC210CS	Gigabit Single-Mode Media Converter, up to 20 km, chassis mountable
MC211CS-20	Gigabit WDM Media Converter, up to 20 km, chassis mountable
MC212CS-20	Gigabit WDM Media Converter, up to 20 km, chassis mountable
MC211CS-2	Gigabit WDM Media Converter, up to 2 km, chassis mountable
MC212CS-2	Gigabit WDM Media Converter, up to 2 km, chassis mountable
MC200CM	Gigabit Multi-Mode Media Converter, up to 550 m, chassis mountable

[†]These functions require the use of the Omada SDN Controller. Zero-Touch Provisioning requires the use of the Omada Cloud-Based Controller. Go to the Omada Cloud-Based Controller Product List to find all the models supported by the Omada Cloud-Based Controller.

*PoE budget calculations are based on laboratory testing. The actual PoE power budget is not guaranteed and will vary due to client limitations and environmental factors.

[^]Some features are available only after upgrading to the latest software version.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2026 TP-Link